

Relays

subminiature
miniature
industrial
interface
installation
programmable
time
monitoring
plug-in sockets



60 years of experience in production of highest-quality relays



1958 Relay Division of REFA Świebodzice founded in Żary



1982 Independent enterprise of Zakład Przekazników established



1991 Zakład Przekazników transformed into Relpol S.A. in Żary




1996 Relpol S.A. IPO at the Warsaw Stock Exchange



2018 Relpol's presence in markets worldwide

60 years
1958-2018

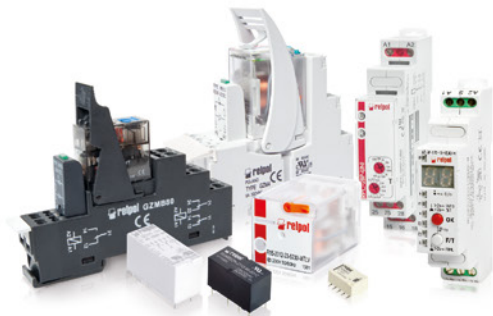


Applications, certifications

- **Areas of relay applications:**
 - for electronics – page 4
 - for industry – page 6
 - for photovoltaic systems – page 8
 - for railroad industry – page 9
- Programmable relays – page 10
- Time relays – page 11
- Monitoring relays – page 12



Innovative features of our technological solutions and reliability of our products are confirmed by numerous recognitions and certifications: VDE, UL, CSA, EAC, LR, CCCs, AUCOTEAM GmbH, IK and by prizes and awards.

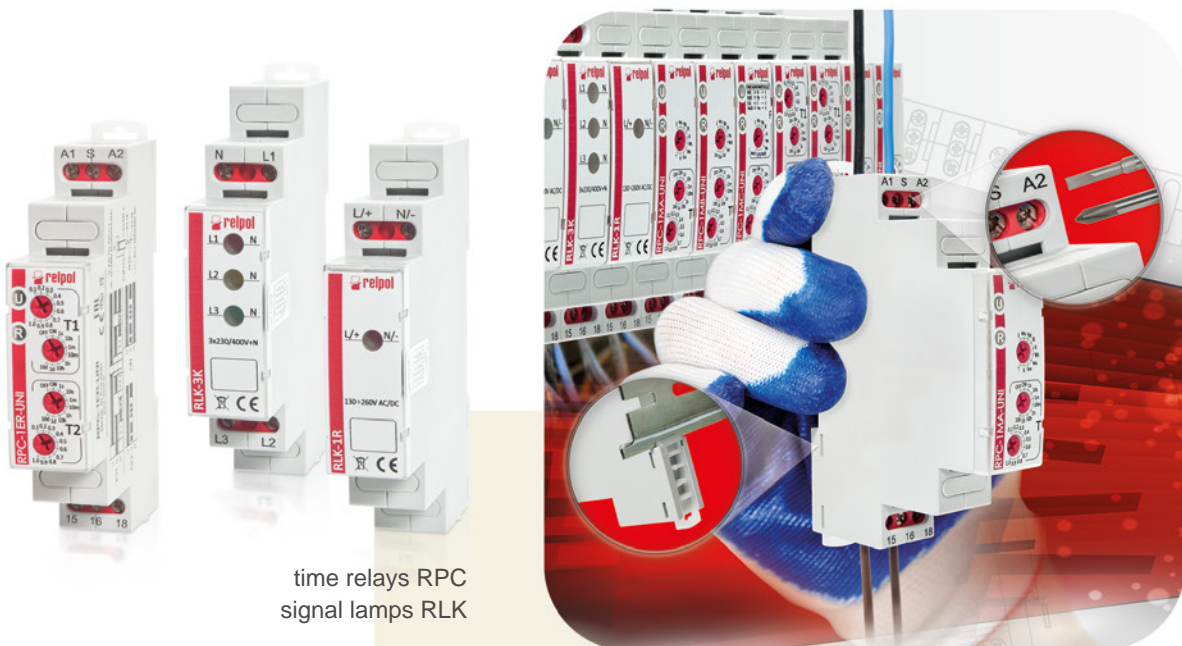

time relays RPC
signal lamps RLK

Relays for electronics

Subminiature signal relays

- I_n currents of contacts: 0,5 ... 3 A.
- Methods of mounting: THT, SMT
- depending on the type of relay.

Applications:

- telecommunication equipment,
- office equipment,
- measurement equipment and devices,
- medical apparatus and medical monitoring equipment,
- audiovisual equipment,
- driving simulators, flight simulators,
- slot machines,
- protection, monitoring and alarm equipment,
- industrial and consumer electronic goods.



RSM850	48
RSM850B ①	51
RSM822N	54
RSM954N	57
RSM957N	59

① RSM850B - bistable relays




Miniature relays

- I_n currents of contacts: 5 ... 20 A.
- Methods of mounting: THT, in plug-in sockets
- depending on the type of relay.

Applications:

- general control of electrical equipment,
- equipment for air-conditioning, refrigeration products, heating, ventilation, lighting,
- protection, monitoring and alarm equipment,
- control systems and devices for household equipment,
- time relays and time switches,
- monitoring relays,
- temperature controllers,
- PLCs,
- electrical automation systems - industrial and power-engineering automation,
- equipment for smart buildings and equipment for automation of buildings,
- other.

RM12	62
RM12N	65
RM32N	68
RM40	71
RM45N	74
RM50N	77
RM51	80
RM699B	83
RM84	88
RM85	93
RM85 for switching higher voltages ...	98
RM85 inrush	101
RM85 105 °C sensitive ..	105
RM85 faston	109

RM87, RM87 sensitive ..	112
RM96	118
RM83	122
RMP84	126
RMP85	130
RA2 	134

 RA2 - automotive relays



Bistable relays - subminiature

- I_n currents of contacts: 0,5 A.
- Method of mounting: THT.

Applications:

- for energy-saving control of electrical devices which are switched on and off with a change of the state of bistable relays via short supply of their coils,
- in electrical systems of battery-powered equipment,
- applications specified in description of subminiature relays.



Relays for industry

Miniature industrial relays

- In currents of contacts: 5 ... 12 A.
- Methods of mounting:
in plug-in sockets,
direct on panel mounting, THT
- depending on the type of relay.

R2N	138
R3N	143
R4N	148
RY2	154
R2M	158

R15 - 2 CO	162
R15 - 3 CO	162
R15 - 4 CO	167
RUC	171
RUC-M	177
RG25	182
R20	185
R30N	188
R40N	191
MT-PI-...	262


Industrial relays of small dimensions

- In currents of contacts: 10 ... 40 A.
- MT-PI-...: relays in modular covers.
- Methods of mounting:
in plug-in sockets,
direct on 35 mm rail mount,
direct on panel mounting, THT
- depending on the type of relay.

Applications:

- general control of electrical equipment,
- industrial control systems,
- equipment for air-conditioning, refrigeration products, heating, ventilation, lighting,
- protection, monitoring and alarm equipment,
- control systems and devices for household equipment,
- electrical automation systems - industrial and power-engineering automation,
- building automation equipment (BMS),
- other.



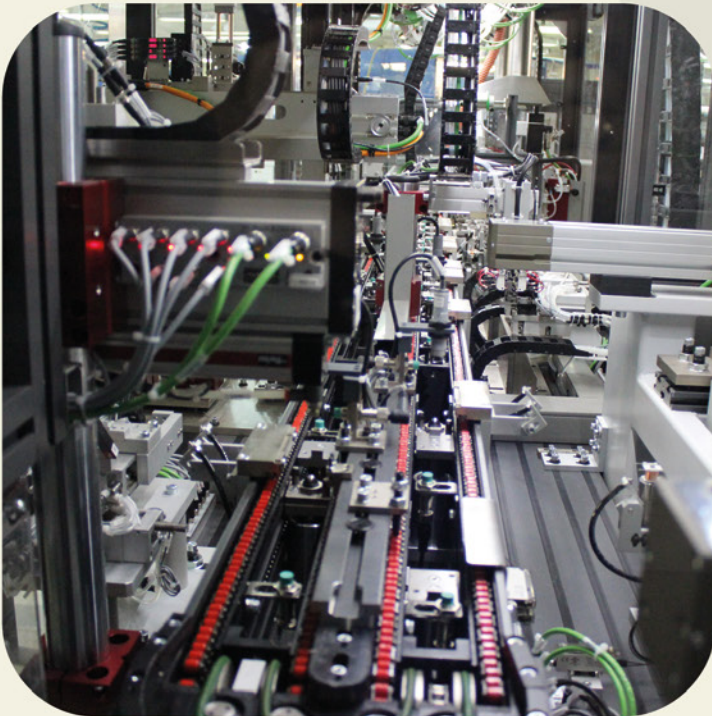

Interface relays (relay coupling modules)

- I_n currents of contacts: 1 ... 16 A.
- Connections of wiring: screw terminals, spring terminals - depending on the type of relay.
- Methods of mounting:
 - PI84, PI85, PIR2, PIR3, PIR4: on 35 mm rail mount or on panel mounting,
 - PI84P, PI85P, PI6, PIR6W, PIR6WB: on 35 mm rail mount.

Applications:

- in applications with PLCs as input / output [I/O] separators,
- in industrial automation applications for isolation of input signals from output circuits,
- in electrical applications as universal interfaces between control and load, for medium load switching,
- applications specified in descriptions of relays - miniature industrial and industrial of small dimensions.

PI84 with socket GZT80	198
PI84 with socket GZM80	202
PI84 with socket GZMB80	206
PI85 with socket GZT80	210
PI85 with socket GZM80	214
PI85 with socket GZMB80	218
PI85 inrush with socket GZT80	222
PI84P with socket GZMB80	226
PI85P with socket GZMB80	229
PIR2 with socket GZM2	232
PIR3 with socket GZM3	236
PIR4 with socket GZM4	240
PI6-1P	244
PI6-1T	247
PIR6W-1P-...	249
PIR6W-1PS-...	253
PIR6WB-1PS-...	257

Relays for photovoltaic systems



- I_n currents of contacts:
16 ... 48 A.
- Methods of mounting:
THT, direct on 35 mm rail mount, in plug-in sockets, direct on panel mounting - depending on the type of relay.

Applications:

- there are two major applications of electromagnetic relays in solar systems, i.e. at the DC side they connect/disconnect the DC voltage generated by photovoltaic cells; at the AC side they connect/disconnect the entire system to/from power network,
- delivery of power to a public network is subject to special requirements as for the relays applied - the major ones are: contact clearance of min. 1,5 mm and resistance of the contact clearance to surge voltage of 2 500 V; all the requirements are set out by the Standard DIN VDE 0126-1-1,
- for safety reasons solar systems must be equipped with an automatic system to disconnect the generator section from the AC network; the protection system is usually built in the DC/AC inverter and double-break disconnected - thus, these must be relays of the 2 NO contact configuration (each contact disconnects one line - one the phase line and the other the neutral line); two contacts connected in series are required for each line - thus, the circuit separation is performed by two two-contact electromagnetic relays,
- the RUC-M relays are designed for connecting high DC currents.

RUC	171
RUC-M	177
RG25	182
R20	185
RS35	194
RS50	194

 **relpol**® S.A.

Relays for railroad industry




NEW

- I_n currents of contacts: 6 ... 16 A.
- Available versions:
 - PI84T/85T series,
 - PIR2T/3T/4T series,
 - PIR152T/153T series,
 - PRUCT series,
 - PRUCT-M series,
 - PIR6WB-1PS-...-R series,
 - MT-W...M series.
- Compliance with standards:
 - EN 45545-2 (category EL10 ③, requirement set R26 ③ - flammability class V-0 as per EN 60695-11-10);
 - EN 61373:2011 category 1, class B ③ (mechanical shock and vibration resistance);
 - EN 50155:2007;
 - EN 60077-1; EN 61810-1.
- Methods of mounting: on 35 mm rail mount, on panel mounting - depending on the type of relay.

③ MT-W...M: category EL5, requirement set R23
 PIR6WB-1PS-...-R: EN 61373:2011 category 1, class A



Applications:

- electrical control systems,
- signalling systems,
- lighting systems,
- air-conditioning systems.


Detailed informations
 - see catalog "Relays for railroad industry"
 and www.repol.com.pl

Programmable relays

- I_n currents of outputs: 0,5 ... 10 A.
- Available versions of NEED relays:
 - with LCD display:
8 inputs / 4 outputs, 16 inputs / 8 outputs,
 - without display:
8 inputs / 4 outputs, 16 inputs / 8 outputs,
 - with relay outputs,
 - with transistor outputs:
 $I_n = 0,5$ A (version 24 V DC),
 - with supply voltage:
230 V AC, 12 V DC, 24 V DC, 220 V DC.
- NEED-MODBUS: communication modules
NEED Master / ModBus RTU Slave.
- Methods of mounting:
 - NEED: on 35 mm rail mount or on panel mounting,
 - NEED-MODBUS: on 35 mm rail mount.



NEED-...-08-4.....	266
NEED-...-16-8.....	270
NEED-MODBUS	276

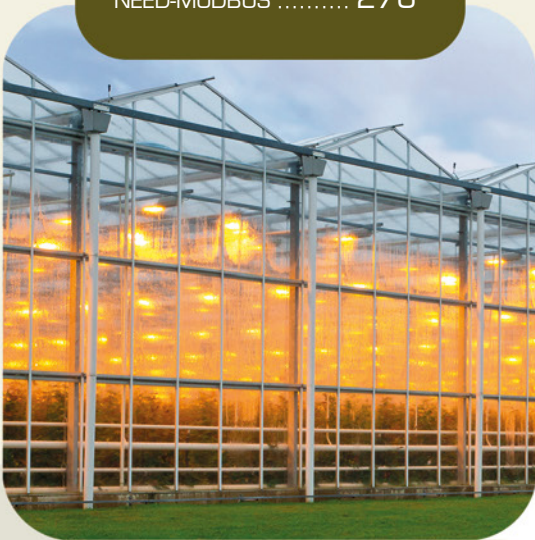

Applications:

- in industrial automation (device and process control),
- in ARC automation
- in BMS automation,
- in production management systems,
- in water systems,
- in air-conditioning, ventilation, heating systems,
- in lighting systems,
- various other applications.



Time relays



- In currents of outputs: 6 ... 16 A.
- Available versions:
 - in modular covers: MT-W...M (with LED display), RPC series,
 - in industrial covers: TR4N series, T-R4, PIR15...T.
- Design features:
 - multifunctions,
 - single-functions,
 - with settings of T interval,
 - with independent settings of T1 and T2 intervals,
 - with independent settings of T1, T2 and T3 intervals (MT-W...M),
 - contacts / outputs: 1 CO, 2 CO, 3 CO, 4 CO
 - depending on the type of relay,
 - supply: universal AC/DC; specified voltage
 - depending on the type of relay.
- Methods of mounting: on 35 mm rail mount, on panel mounting, in plug-in sockets
 - depending on the type of relay.

Applications in low voltage systems:

- in industrial automation,
- in BMS automation,
- in air-conditioning, ventilation, heating systems,
- in protection, signalling, alarm systems,
- in lighting systems,
- various other applications.

MT-W...M	278
RPC-.MA-...	285
RPC-.MB-...	289
RPC-1MC-UNI	293
RPC-.E-...	297
RPC-.WU-...	297
RPC-.BP-...	297
RPC-1ER-...	300
RPC-1EA-...	300
RPC-1ES-...	300
RPC-1EU-...	300

RPC-1IP-...	300
RPC-1SA-...	300
RPC-1WT-...	300
RPC-2SD-UNI	304
TR4N 1 CO	307
TR4N 2 CO	307
TR4N 4 CO	311
T-R4	315
PIR15...T with time module COM3	319
COM3	324



Monitoring relays

- I_n currents of outputs: 5 A.
- Available versions:
 - in modular covers: MR-E series,
 - in industrial covers: MR-G series.
- Method of mounting: on 35 mm rail mount.



MR-EU1W1P	328
MR-EU31UW1P	331
MR-EU3M1P	334
MR-EI1W1P	337
MR-ET1P	340
MR-GU32P-TR2	343
MR-GU3M2P-TR2	346
MR-GU3M2P	349
MR-GI1M2P-TR2	352
MR-GT2P-TR2	355

Applications in low voltage systems:

- DC voltage monitoring,
- AC voltage monitoring in 1- and 3-phase network,
- DC current monitoring,
- AC current monitoring in 1-phase network,
- motor temperature monitoring.



 **repol**® S.A.

Automation is our passion 2

Applications, certifications 3

Areas of relay applications 4

Contents 13

Relay selection table 16

Relay mounting options 19

Plug-in sockets and accessories availability index 22

Plug-in sockets technical data 24

Overview of relay production 28

Trade offer of Relpol S.A. 414

Declaration of conformity RoHS 415

Subminiature signal relays

Pages 47 - 60

RSM850 48

RSM850B ❶ 51

RSM822N 54

RSM954N 57

RSM957N 59

❶ RSM850B - bistable relays
 ❷ RA2 - automotive relays

Miniature relays

Pages 61 - 136

RM12 62

RM12N 65

RM32N 68

RM40 71

RM45N 74

RM50N 77

RM51 80

RM699B 83

RM84 88

RM85 93

RM85
for switching higher voltages 98

RM85 inrush 101

RM85 105 °C sensitive 105

RM85 faston 109

RM87, RM87 sensitive 112

RM96 118

RM83 122

RMP84 126

RMP85 130

RA2 ❷ 134

Industrial relays

Pages 137 - 196

R2N	138
R3N	143
R4N	148
RY2	154
R2M	158
R15 - 2 CO, 3 CO	162
R15 - 4 CO	167
RUC	171
RUC-M	177
RG25	182
R20	185
R30N	188
R40N	191
RS35, RS50	194

Interface relays

Pages 197 - 260

PI84 with socket GZT80	198
PI84 with socket GZM80	202
PI84 with socket GZMB80	206
PI85 with socket GZT80	210
PI85 with socket GZM80	214
PI85 with socket GZMB80	218
PI85 inrush with socket GZT80 ..	222
PI84P with socket GZMB80	226
PI85P with socket GZMB80	229
PIR2 with socket GZM2	232
PIR3 with socket GZM3	236
PIR4 with socket GZM4	240
PI6-1P	244
PI6-1T	247
PIR6W-1P-...	249
PIR6W-1PS-...	253
PIR6WB-1PS-...	257

Installation relays

Pages 261 - 264

MT-PI-...	262
-----------------	-----

Programmable relays

Pages 265 - 276

NEED-...-08-4	266
NEED-...-16-8	270
NEED-MODBUS	276

Time relays

Pages 277 - 326

MT-W...M	278
RPC-MA-.....	285
RPC-MB-.....	289
RPC-1MC-UNI	293
RPC-E/WU/BP-.....	297
RPC-1ER/EA/ES/ EU/IP/SA/WT-.....	300
RPC-2SD-UNI	304
TR4N 1 CO, 2 CO.....	307
TR4N 4 CO	311
T-R4	315
PIR15...T with time module COM3	319
COM3	324

Monitoring relays

Pages 327 - 358

MR-EU1W1P	328
MR-EU31UW1P	331
MR-EU3M1P.....	334
MR-EI1W1P.....	337
MR-ET1P.....	340
MR-GU32P-TR2	343
MR-GU3M2P-TR2.....	346
MR-GU3M2P	349
MR-GI1M2P-TR2	352
MR-GT2P-TR2.....	355
TR2.....	358

Plug-in sockets and accessories

Pages 359 - 380

GZT80, GZM80, GZS80	360
GZF80, GZMB80	361
EC 50, PW80, GD50, GZT92	362
GZM92, GZS92, EC 35, GD35	363
ES 32, EC 32, GZT2, GZM2	364
GZMB2, SU4/2D, SU4/2L	365
G4/2, GZT3, GZM3, GZT4	366
GZM4, GZMB4, GZ4	367
GS4, SU4D, SU4L, G4	368
GZY2G, GZ2, S2M, G2M	369
PZ8, GZU8, GZ8, GZP8	370
GOP8, PZ11, GZU11, GZ11	371
GZP11, GOP11, GZ14U, GZ14	372
GZ14Z, GOP14	373
GUC11, GUC11S, PI6W-1P	374

Mounting and sub-assemblies of the relay and accessories in the socket 375

Signalling / protecting modules type M... .. 376

Interconnection strips ZGGZ80
 377 |

Interconnection strips ZGGZ4
 378 |

Additional features for industrial relays
 379 |

Test buttons (no latching) and plugs ... 380

Relays basic information

Pages 381 - 410

Relay selection table

Electrical terminals						Coil / input		Type of relay	Number and type of contacts / outputs	Rated current						
for PCB	SMT	for sockets	connectors	screw terminals	spring terminals	AC	DC			AC/DC	bistable DC	[A]	5	10	15	20
Subminiature signal relays																
								RSM850	2 CO	2 A						
								RSM850B	2 CO	2 A						
								RSM822N	2 CO			3 A / 2 A (NO/NC)				
								RSM954N	1 CO	3 A						
								RSM957N	1 CO	1 A						
Miniature relays																
								RM12	1 CO, 1 NO, 1 NC		8 A					
								RM12N	1 CO, 1 NO		1 CO: 8 A, 1 NO: 10 A					
								RM32N	1 CO, 1 NO		1 CO: 5 A / 5 A (NO/NC)		1 NO: 5 A, 10 A ⑤			
								RM40	1 CO, 1 NO		1 CO: 5 A, 1 NO: 8 A					
								RM45N	1 CO, 1 NO		1 CO: 5 A / 5 A (NO/NC)		1 NO: 5 A, 10 A ⑤			
								RM50N	1 CO, 1 NO		6 A, 12 A ⑤					
								RM51	1 CO, 1 NO		1 CO: 10 A / 7 A (NO/NC), 20 A ⑤, 1 NO: 10 A, 20 A ⑤					
								RM699B	1 CO, 1 NO		AgSnO ₂ , AgNi: 6 A					
								RM84	2 CO, 2 NO		8 A					
								RM85	1 CO, 1 NO				16 A			
								RM85 ①	1 NO				16 A			
								RM85 inrush	1 NO				16 A			
								RM85 105 °C sensitive	1 NO				16 A			
								RM85 faston	1 NO					20 A		
								RM87	1 CO, 1 NO		12 A					
								RM87 sensitive	1 NO		10 A					
								RM96	1 CO, 1 NO, 1 NC		8 A					
								RM83	1 CO, 1 NO, 1 NC				16 A			
								RMP84	2 CO		8 A					
								RMP85	1 CO				16 A			
								RA2 ②	1 CO, 1 NO, 2 NO				1 CO: 20 A / 12 A (NO/NC), 1 NO: 20 A			

① RM85 for switching higher voltages ② RA2 - automotive relays (2 NO: 2 x 12,5 A) ⑤ At lowered voltage

How to use the table: select the number and type of contacts, please; then, select a relay depending on its rated current, type of terminals and coil voltage.

The ordering code structure provides for formulation of **numerous variants**. Not all of them are defined as standard ones and, thus, not all of them are included in the product line. However, **deliveries of special versions according to the customer's specification are possible**. Please, contact with Relpol S.A. or our local representatives for details. The data of the devices may be changed with no prior notice.

Electrical terminals						Coil / input		Type of relay	Number and type of contacts / outputs	Rated current					
for PCB	SMT	for sockets	connectors	screw terminals	spring terminals	AC	DC			AC/DC	bistable DC	[A]	5	10	15
Industrial relays															
								R2N	2 CO				12 A		
								R3N	3 CO				10 A		
								R4N	4 CO			7 A			
								RY2	2 CO				12 A		
								R2M	2 CO		5 A				
								R15 - 2 CO	2 CO				10 A		
								R15 - 3 CO	3 CO				10 A		
								R15 - 4 CO	4 CO				10 A		
								RUC	2 CO, 3 CO, 2 NO, 3 NO					16 A	
								RUC-M	1 NO, 2 NO					16 A	
								RG25	2 NO						25 A
								R20	1 NO, 2 NO					2 NO: 25 A, 1 NO: 30 A	
								R30N	1 CO, 1 NO					1 CO: 30 A / 20 A (NO/NC), 1 NO: 30 A	
								R40N	1 CO, 1 NO					1 CO: 40 A / 30 A (NO/NC), 1 NO: 40 A	
								RS35	2 NO						35 A
								RS50	2 NO						48 A
Interface relays															
								PI84 with socket GZT80	2 CO				8 A		
								PI84 with socket GZM80	2 CO				8 A		
								PI84 with socket GZMB80	2 CO				8 A		
								PI85 with socket GZT80	1 CO					16 A ⑤	
								PI85 with socket GZM80	1 CO					16 A ⑤	
								PI85 with socket GZMB80	1 CO				10 A, 16 A ⑤		
								PI85 inrush with socket GZT80	1 NO					16 A ⑤	
								PI84P with socket GZMB80	2 CO				8 A		
								PI85P with socket GZMB80	1 CO					16 A ⑤	
								PIR2 with socket GZM2	2 CO					12 A	
								PIR3 with socket GZM3	3 CO					10 A	
								PIR4 with socket GZM4	4 CO				7 A		
								PI6-1P	1 CO			AgSnO ₂ : 6 A			
								PI6-1T	1 NO			1,2 A			
								PIR6W-1P-...	1 CO			AgSnO ₂ : 6 A			
								PIR6W-1PS-... ④	1 CO, 1 NO					T, C: 1 A, O: 2 A, R (AgSnO ₂): 6 A	
								PIR6WB-1PS-... ④	1 CO, 1 NO					T, C: 1 A, O: 2 A, R (AgSnO ₂): 6 A	
Installation relays															
								MT-PI-...	1 CO, 2 CO, 1 NO, 2 NO					2 CO, 2 NO: 8 A, 1 CO, 1 NO: 16 A	

④ R - operational electromagnetic relay type **RM699BV** in PIR6W.-1PS-...-R. T/C/O - operational solid state relays type **RSR30** in PIR6W.-1PS-...-T (or C or O) - see pages 83-87 and www.repol.com.pl ⑤ See pages 210, 214, 218, 222, 229.

How to use the table: select the number and type of contacts, please; then, select a relay depending on its rated current, type of terminals and coil voltage.

The ordering code structure provides for formulation of **numerous variants**. Not all of them are defined as standard ones and, thus, not all of them are included in the product line. However, **deliveries of special versions according to the customer's specification are possible**. Please, contact with Relpol S.A. or our local representatives for details. The data of the devices may be changed with no prior notice.

Relay selection table

Electrical terminals					Coil / input				Type of relay	Number and type of contacts / outputs	Rated current					
for PCB	SMT	for sockets	connectors	screw terminals	spring terminals	AC	DC	AC/DC			bistable DC	[A]	5	10	15	20
Programmable relays																
										NEED-...-08-4R-	4 NO		10 A			
										NEED-...-08-4T-	4 NO	0,5 A				
										NEED-...-16-8R-	8 NO		10 A			
										NEED-...-16-8T-	8 NO	0,5 A				
										NEED-MODBUS						
Time relays																
										MT-W...M	1 CO		10 A			
										RPC-.MA-...	1 CO, 2 CO		2 CO: 8 A, 1 CO: 16 A			
										RPC-.MB-...	1 CO, 2 CO		2 CO: 8 A, 1 CO: 16 A			
										RPC-1MC-UNI	1 CO		16 A			
										RPC-.E-...	1 CO, 2 CO		2 CO: 8 A, 1 CO: 16 A			
										RPC-.WU-...	1 CO, 2 CO		2 CO: 8 A, 1 CO: 16 A			
										RPC-.BP-...	1 CO, 2 CO		2 CO: 8 A, 1 CO: 16 A			
										RPC-1ER-...	1 CO		16 A			
										RPC-1EA-...	1 CO		16 A			
										RPC-1ES-...	1 CO		16 A			
										RPC-1EU-...	1 CO		16 A			
										RPC-1IP-...	1 CO		16 A			
										RPC-1SA-...	1 CO		16 A			
										RPC-1WT-...	1 CO		16 A			
										RPC-2SD-UNI	2 CO		8 A			
										TR4N 1 CO	1 CO		16 A			
										TR4N 2 CO	2 CO		8 A			
										TR4N 4 CO	4 CO	6 A				
										T-R4	4 CO	6 A				
										PIR15...T with time module COM3	2 CO, 3 CO		10 A			
										COM3						
Monitoring relays																
										MR-EU1W1P	1 CO	5 A				
										MR-EU31UW1P	1 CO	5 A				
										MR-EU3M1P	1 CO	5 A				
										MR-EI1W1P	1 CO	5 A				
										MR-ET1P	1 CO	5 A				
										MR-GU32P-TR2	2 CO	3 A / 5 A ⑥				
										MR-GU3M2P-TR2	2 CO	3 A / 5 A ⑥				
										MR-GU3M2P	2 CO	3 A / 5 A ⑥				
										MR-GI1M2P-TR2	2 CO	3 A / 5 A ⑥				
										MR-GT2P-TR2	2 CO	3 A / 5 A ⑥				

⑥ 3 A - if the distance between the relays mounted side by side is less than 5 mm; 5 A - if the distance between the relays mounted side by side is greater than 5 mm.

How to use the table: select the number and type of contacts, please; then, select a relay depending on its rated current, type of terminals and coil voltage.

The ordering code structure provides for formulation of **numerous variants**. Not all of them are defined as standard ones and, thus, not all of them are included in the product line. However, **deliveries of special versions according to the customer's specification are possible**. Please, contact with Relpol S.A. or our local representatives for details. The data of the devices may be changed with no prior notice.

Type of relay	Method of mounting				
	For PCB mounting	On panel mounting	35 mm rail mount (EN 60715)	Cover with mounting flange - on panel mounting	Flat insert - faston (connectors)
Subminiature signal relays					
RSM850	direct	–	–	–	–
RSM850B	direct	–	–	–	–
RSM822N	direct	–	–	–	–
RSM954N	direct	–	–	–	–
RSM957N	direct	–	–	–	–
Miniature relays					
RM12	direct	–	–	–	–
RM12N	direct	–	–	–	–
RM32N	direct	–	–	–	–
RM40	direct	–	–	–	–
RM45N	direct	–	–	–	–
RM50N	direct	–	–	–	–
RM51	direct	–	–	–	–
RM699BV, RSR30 ❶	direct	–	with socket	–	–
RM699BH	direct	–	–	–	–
RM84	direct, with socket	with socket	with socket	–	–
RM85	direct, with socket	with socket	with socket	–	–
RM85 ❷	direct	–	–	–	–
RM85 inrush	direct, with socket	with socket	with socket	–	–
RM85 105 °C sensitive	direct, with socket	with socket	with socket	–	–
RM85 faston	direct	–	–	–	6,3 x 0,8 mm
RM87	direct, with socket	with socket	with socket	–	–
RM87 sensitive	direct, with socket	with socket	with socket	–	–
RM96 1 CO	direct	with socket	with socket	–	–
RM96 1 NO, 1 NC	direct	–	–	–	–
RM83	direct, with socket	–	–	–	–
RMP84	with socket	with socket	with socket	–	–
RMP85	with socket	with socket	with socket	–	–
RA2 ❸	direct	–	–	–	–

❶ Solid state relays type RSR30 - see www.repol.com.pl ❷ RM85 for switching higher voltages ❸ RA2 - automotive relays



Relay mounting options

Type of relay	Method of mounting				
	For PCB mounting	On panel mounting	35 mm rail mount (EN 60715)	Cover with mounting flange - on panel mounting	Flat insert - faston (connectors)
Industrial relays					
R2N	with socket	with socket	with socket	–	–
R3N	–	with socket	with socket	–	–
R4N	direct, with socket	with socket	with socket	–	–
RY2	–	with socket	with socket	on request	4,8 x 0,5 mm
R2M	direct, with socket	with socket	with socket	–	–
R15 - 2 CO	direct	with socket	with socket	–	–
R15 - 3 CO	direct	with socket	with socket	–	–
R15 - 4 CO	–	with socket ④	with socket	–	–
RUC faston 4,8x0,5	direct	with socket ⑤ direct	with socket ⑤ direct ⑥	on request	4,8 x 0,5 mm
RUC faston 6,3x0,8	–	direct	direct ⑥	on request	6,3 x 0,8 mm
RUC-M	direct	with socket ⑤ direct	with socket ⑤ direct ⑥	on request	4,8 x 0,5 mm
RG25	–	–	direct	–	–
R20	–	direct	–	standard	6,3 x 0,8 mm
R30N	direct	–	–	–	–
R40N	direct	–	–	–	–
RS35	direct	–	–	–	–
RS50	direct	–	–	–	–
Interface relays					
PI84 with socket GZT80	–	direct	direct	–	–
PI84 with socket GZM80	–	direct	direct	–	–
PI84 with socket GZMB80	–	–	direct	–	–
PI85 with socket GZT80	–	direct	direct	–	–
PI85 with socket GZM80	–	direct	direct	–	–
PI85 with socket GZMB80	–	–	direct	–	–
PI85 inrush with socket GZT80	–	direct	direct	–	–
PI84P with socket GZMB80	–	–	direct	–	–
PI85P with socket GZMB80	–	–	direct	–	–
PIR2 with socket GZM2	–	direct	direct	–	–
PIR3 with socket GZM3	–	direct	direct	–	–
PIR4 with socket GZM4	–	direct	direct	–	–
PI6-1P	–	–	direct	–	–
PI6-1T	–	–	direct	–	–
PIR6W-1P-...	–	–	direct	–	–
PIR6W-1PS-...	–	–	direct	–	–
PIR6WB-1PS-...	–	–	direct	–	–
Installation relays					
MT-PI-...	–	–	direct	–	–

④ Available socket to be mounted behind the assembly panel - **GZ14Z** ⑤ For RUC faston 4,8 x 0,5 and RUC-M, with GUC11 or GUC11S socket, max. switching voltages and coil voltages of relays are limited to 250 V AC / DC ⑥ Version with adaptor (V) or (H)

Type of relay	Method of mounting				
	For PCB mounting	On panel mounting	35 mm rail mount (EN 60715)	Cover with mounting flange - on panel mounting	Flat insert - faston (connectors)
Programmable relays					
NEED-...-08-4...	–	direct	direct	–	–
NEED-...-16-8...	–	direct	direct	–	–
NEED-MODBUS	–	–	direct	–	–
Time relays					
MT-W...M	–	–	direct	–	–
RPC-.MA-...	–	–	direct	–	–
RPC-.MB-...	–	–	direct	–	–
RPC-1MC-UNI	–	–	direct	–	–
RPC-.E-...	–	–	direct	–	–
RPC-.WU-...	–	–	direct	–	–
RPC-.BP-...	–	–	direct	–	–
RPC-1ER-...	–	–	direct	–	–
RPC-1EA-...	–	–	direct	–	–
RPC-1ES-...	–	–	direct	–	–
RPC-1EU-...	–	–	direct	–	–
RPC-1IP-...	–	–	direct	–	–
RPC-1SA-...	–	–	direct	–	–
RPC-1WT-...	–	–	direct	–	–
RPC-2SD-UNI	–	–	direct	–	–
TR4N 1 CO	–	–	direct	–	–
TR4N 2 CO	–	–	direct	–	–
TR4N 4 CO	–	–	direct	–	–
T-R4	–	with socket	with socket	–	–
PIR15...T with time module COM3	–	direct	direct	–	–
COM3	–	–	with socket	–	–
Monitoring relays					
MR-EU1W1P	–	–	direct	–	–
MR-EU31UW1P	–	–	direct	–	–
MR-EU3M1P	–	–	direct	–	–
MR-EI1W1P	–	–	direct	–	–
MR-ET1P	–	–	direct	–	–
MR-GU32P-TR2	–	–	direct	–	–
MR-GU3M2P-TR2	–	–	direct	–	–
MR-GU3M2P	–	–	direct	–	–
MR-GI1M2P-TR2	–	–	direct	–	–
MR-GT2P-TR2	–	–	direct	–	–

The relays not specified in the table are designed for other manners of mounting.

Type of relay	Plug-in sockets			
	Screw terminals		Spring terminals	For PCB
on panel mounting	35 mm rail mount acc. to EN 60715			
Miniature relays				
RM699BV, RSR30 ❶	–	PI6W-1P	–	–
RM84, RM85, RM85 inrush, RM85 105 °C sensitive, RM87L, RM87L sensitive, RM87P, RM87P sensitive	(GZT80, GZM80 ❷), (GZS80, GZF80 ❸)	(GZT80, GZM80 ❷), (GZS80, GZF80 ❸)	GZMB80 ❹	(EC 50, PW80, GD50 ❺)
RM87N, RM87N sensitive	(GZT92, GZM92 ❷), GZS92 ❸	(GZT92, GZM92 ❷), GZS92 ❸	–	(EC 35, GD35 ❺)
RM96 1 CO	ES 32	ES 32	–	–
RM83	–	–	–	(EC 50, PW80, GD50 ❺)
RMP84, RMP85	GZF80 ❸	GZF80 ❸	GZMB80 ❹	(EC 50, GD50 ❺)
Miniature industrial relays				
R2N	(GZT2, GZM2 ❷)	(GZT2, GZM2 ❷)	GZMB2 ❹	SU4/2D ❻
R3N	GZT3, GZM3	GZT3, GZM3	–	–
R4N	(GZT4, GZM4 ❷) GZ4 ❷, GS4 ❸	(GZT4, GZM4 ❷) GZ4 ❷, GS4 ❸	GZMB4 ❹	SU4D ❻
RY2	GZY2G	GZY2G	–	–
R2M	GZ2 ❶	GZ2 ❶	–	S2M ❷
Industrial relays of small dimensions				
R15 - 2 CO	PZ8 ❸, GZ8 ❹, GZP8 ❺	PZ8 ❸, GZU8 ❹, GZP8 ❺	–	–
R15 - 3 CO	PZ11 ❸, GZ11 ❹, GZP11 ❺	PZ11 ❸, GZU11 ❹, GZP11 ❺	–	–
R15 - 4 CO	GZ14, GZ14Z	GZ14U	–	–
RUC faston 4,8x0,5, RUC-M	GUC11	GUC11, GUC11S	–	–
Time relays				
T-R4	GZT4, GZM4 ❷	GZT4, GZM4 ❷	GZMB4 ❷	–

❶ Solid state relays type **RSR30** - see www.repol.com.pl ❷ For sockets GZT80, GZT92, GZM80, GZM92 apply retainer / retractor clips GZT80-0040 or spring wire clips GZM80-0041 and description plates GZT80-0035 ❸ For sockets GZS80, GZS92 apply retainer / retractor clips GZS-0040 or spring wire clips GZM80-0041 and description plates TR. For sockets GZF80 apply spring wire clips GZM80-0041, GZ80-1001. For sockets GZF80 not applicable modules type M... and interconnection strips ZGGZ80 ❹ For sockets GZMB80 apply retainer / retractor clips GZMB80-0040, GZMB80-0025 or spring wire clips GZM80-0041, GZM80-0025 and description plates TR. For sockets GZMB80 not applicable interconnection strips ZGGZ80 ❺ For sockets EC 35, EC 50, GD35, GD50 apply: plastic clips MP16-2, MP25-2; spring wire clips MH16-2, MH25-2. For sockets GD35, GD50 apply also spring wire clips GD-0016. For sockets PW80 apply spring wire clips MH16-2, MH25-2 ❻ For sockets GZT2, GZT4, GZM2, GZM4 apply retainer / retractor clips GZT4-0040 or spring wire clips G4 1052 and description plates GZT4-0035 ❼ For sockets GZ4 apply spring wire clips G4 1052 ❽ For sockets GS4 apply spring wire clips GS4-0036 and description plates GS4-0035 ❾ For sockets GZMB2, GZMB4 apply retainer / retractor clips GZMB4-0040 or spring wire clips G4 1052 and description plates TR. For sockets GZMB2, GZMB4 not applicable interconnection strips ZGGZ4 ❿ For sockets SU4/2D, SU4D, SU4/2L, SU4L, G4/2, G4 apply spring wire clips G4 1053. For sockets SU4/2L, SU4L apply also spring clamps G4 1040

Relays mounting options are specified in the table - see pages 19-21.

Sockets		Accessories		
Solder terminals	Retainer / retractor clips	Spring wire clips	Description plates	Additional features
–	–	–	PI6W-1246	ZG20
–	GZT80-0040 ②, GZS-0040 ③, GZMB80-0040 ④	GZM80-0041 ② ③ ④, (MP16-2, MH16-2, GD-0016 ⑤)	GZT80-0035 ②, TR ③ ④	M... ③, ZGGZ80 ③ ④
–	GZT80-0040 ②, GZS-0040 ③	GZM80-0041 ② ③, (MP16-2, MH16-2, GD-0016 ⑤)	GZT80-0035 ②, TR ③	M..., ZGGZ80
–	MS 16, GZMB80-0040	GZM80-0041	TR	M..., ZGGZ80
–	–	(MP25-2, MH25-2 ⑥)	–	–
–	GZMB80-0025 ④	GZ80-1001 ③, GZM80-0025 ④, MH25-2 ⑥	TR ④	M... ③
SU4/2L, G4/2 ⑩	GZT4-0040 ⑥, GZMB4-0040 ⑨	G4 1052 ⑥ ⑦ ⑧, G4 1053 ⑩	GZT4-0035 ⑥, TR ⑨	M..., ZGGZ4 ⑥, R4P-0001, R4W-0003
–	GZT4-0040	G4 1052	GZT4-0035	M..., ZGGZ4, R4P-0001, R4W-0003
SU4L, G4 ⑩	GZT4-0040 ⑥, GZMB4-0040 ⑨	G4 1052 ⑥ ⑦ ⑧, GS4-0036 ⑥, G4 1053 ⑩	GZT4-0035 ⑥, GS4-0035 ⑧, TR ⑨	M... ⑦, ZGGZ4 ⑥, R4P-0001, R4W-0003
–	–	–	–	–
G2M ②	–	GZ2 1060 ①, G4 1050 ②	–	–
GOP8 ⑥	–	PZ11 0031 ③, (GZ 1050, GZU 1052 ④), GZP-0054 ⑤, R159 1051 ⑥	GZP-0035 ⑤	R15-M404, R15-M203, COM3 ⑤
GOP11 ⑥	–	PZ11 0031 ③, (GZ 1050, GZU 1052 ④), GZP-0054 ⑤, R159 1051 ⑥	GZP-0035 ⑤	R15-M404, R15-M203, COM3 ⑤
GOP14 ⑥	–	GZ14 0737, R15 0736 ⑥	–	–
–	–	MBA	–	–
–	–	TR4-2000	GZT4-0035, TR ⑦	ZGGZ4 ⑦

① For sockets GZ2 apply spring wire clips GZ2 1060 and spring clamps GZ2 1111 ② For sockets S2M, G2M apply spring wire clips G4 1050. For sockets G2M apply also spring clamps G2M 1020 ③ For sockets PZ8, PZ11 apply spring wire clips PZ11 0031 ④ For sockets GZ8, GZ11 apply spring wire clips GZ 1050. For sockets GZU8, GZU11 apply spring wire clips GZU 1052 ⑤ For sockets GZP8, GZP11 apply spring wire clips GZP-0054, description plates GZP-0035 and time modules COM3 ⑥ For sockets GOP8, GOP11 apply spring wire clips R159 1051 and spring clamps R15 5922. For sockets GOP14 apply spring wire clips R15 0736 and spring clamps R15 5922 ⑦ For sockets GZT4, GZM4 apply description plates GZT4-0035. For sockets GZMB4 apply description plates TR. For sockets GZMB4 not applicable interconnection strips ZGGZ4

Type	Terminals	Signs credits	Rated load	Insulation (EN 60664-1)	
				Dielectric strength 50/60 Hz, 1 min.	
				between coil and contacts	pole - pole
For RM699BV, RSR30 ①					
PI6W-1P	screw terminals	сЯUus, VDE, CE, EAC	6 A / 250 V AC	4 000 V AC	–
For RM84, RM85..., RM87L..., RM87P...					
GZT80	screw terminals	ЯUus, CSA, CE, EAC	12 A / 300 V AC	5 000 V AC	3 000 V AC
GZM80	screw terminals	сЯUus, CSA, CE, EAC	12 A / 300 V AC	5 000 V AC	3 000 V AC
GZS80	screw terminals	сЯUus, CE, EAC	10 A / 300 V AC	4 000 V AC	2 500 V AC
For RM84, RM85..., RM87L..., RM87P..., RM83, RMP84, RMP85					
GZF80	screw terminals	CE, EAC	10 A / 250 V AC	2 000 V AC	3 000 V AC
GZMB80	spring terminals	сЯUus, CE, EAC	10 A / 300 V AC	4 000 V AC	3 000 V AC
EC 50	for PCB	EAC	12 A / 250 V AC	2 500 V AC	2 500 V AC
PW80	for PCB	EAC	12 A / 250 V AC	2 000 V AC	2 000 V AC
GD50	for PCB	ЯU, EAC	8 A / 300 V AC	2 000 V AC	2 000 V AC
For RM87N...					
GZT92	screw terminals	сЯUus, CSA, CE, EAC	12 A / 300 V AC	5 000 V AC	–
GZM92	screw terminals	сЯUus, CSA, CE, EAC	12 A / 300 V AC	5 000 V AC	–
GZS92	screw terminals	сЯUus, CE, EAC	12 A / 300 V AC	4 000 V AC	–
EC 35	for PCB	EAC	12 A / 300 V AC	2 500 V AC	–
GD35	for PCB	ЯU, EAC	12 A / 300 V AC	2 000 V AC	–
For RM96 1 CO					
ES 32	screw terminals	CE, EAC	12 A / 300 V AC	2 500 V AC	–
For miniature relays					
EC 32	for PCB	EAC	12 A / 300 V AC	2 500 V AC	–
For R2N					
GZT2	screw terminals	сЯUus, CSA, CE, EAC	12 A / 300 V AC	3 000 V AC	3 000 V AC
GZM2	screw terminals	сЯUus, CSA, CE, EAC	12 A / 300 V AC	4 000 V AC	3 000 V AC
GZMB2	spring terminals	ЯU, CSA, CE, EAC	10 A / 300 V AC	3 000 V AC	2 500 V AC
SU4/2D	for PCB	сЯUus, CSA, EAC	12 A / 250 V AC	2 500 V AC	2 500 V AC
SU4/2L	solder terminals	сЯUus, CSA, CE, EAC	12 A / 250 V AC	2 500 V AC	2 500 V AC
G4/2	solder terminals	сЯUus, CSA, CE, EAC	12 A / 250 V AC	2 500 V AC	2 500 V AC
For R3N					
GZT3	screw terminals	сЯUus, CSA, CE, EAC	10 A / 300 V AC	3 000 V AC	3 000 V AC
GZM3	screw terminals	сЯUus, CSA, CE, EAC	10 A / 300 V AC	4 000 V AC	3 000 V AC






① Solid state relays type **RSR30** - see www.repol.com.pl






General data			Connections (mounting)			
Number of poles	Weight	Ambient temperature - operating (non-condensation and/or icing)	Protection category (EN 60529)	Max. cross section of the cables (stranded)	Stripping length	Max. tightening moment for the terminal
1	40 g	-40...+55 °C	IP 20	1 x 2,5 / 2 x 1,5 mm ²	9 mm	0,3 Nm
2	45 g	-40...+70 °C	IP 20	2 x 2,5 mm ²	6,5 mm	0,7 Nm
2	44 g	-40...+70 °C	IP 20	2 x 2,5 mm ²	6,5 mm	0,7 Nm
2	37 g	-40...+85 °C	IP 20	2 x 2,5 mm ²	6,5 mm	–
2	30 g	-40...+70 °C	IP 20	1 x 4 / 2 x 2,5 mm ²	7 mm	0,5 Nm
2	41,8 g	-25...+85 °C	IP 20	1 x 0,2...1,5 mm ²	9...11 mm	0,5 Nm
2	4 g	-40...+85 °C	–	–	–	–
2	4 g	-40...+85 °C	–	–	–	–
2	4 g	-40...+85 °C	–	–	–	–
1	38 g	-40...+70 °C	IP 20	2 x 2,5 mm ²	6,5 mm	0,7 Nm
1	40 g	-40...+70 °C	IP 20	2 x 2,5 mm ²	6,5 mm	0,7 Nm
1	33 g	-40...+85 °C	IP 20	2 x 2,5 mm ²	6,5 mm	0,5 Nm
1	4 g	-40...+85 °C	–	–	–	–
1	4 g	-40...+85 °C	–	–	–	–
1	37 g	-40...+85 °C	IP 20	2 x 2,5 mm ²	6,5 mm	0,5 Nm
1	4 g	-40...+85 °C	–	–	–	–
2	52 g	-40...+70 °C	IP 20	2 x 2,5 mm ²	6,5 mm	0,7 Nm
2	68 g	-40...+70 °C	IP 20	2 x 2,5 mm ²	6,5 mm	0,7 Nm
2	65 g	-25...+85 °C	IP 20	1 x 0,2...1,5 mm ²	9...11 mm	–
2	6 g	-40...+70 °C	–	–	–	–
2	6 g	-40...+70 °C	–	2 x 0,75 mm ²	–	–
2	6 g	-40...+70 °C	–	2 x 0,75 mm ²	–	–
3	60 g	-40...+70 °C	IP 20	2 x 2,5 mm ²	6,5 mm	0,7 Nm
3	68 g	-40...+70 °C	IP 20	2 x 2,5 mm ²	6,5 mm	0,7 Nm






Plug-in sockets technical data


Type	Terminals	Signs credits	Rated load	Insulation (EN 60664-1)	
				Dielectric strength 50/60 Hz, 1 min.	
				between coil and contacts	pole - pole
For R4N, T-R4					
GZT4	screw terminals	сЯUus, CSA, CE, EAC, LR	6 A / 300 V AC	3 000 V AC	3 000 V AC
GZM4	screw terminals	сЯUus, CSA, CE, EAC	6 A / 300 V AC	4 000 V AC	3 000 V AC
GZMB4	spring terminals	ЯU, CSA, CE, EAC	10 A / 300 V AC	3 000 V AC	2 000 V AC
For R4N					
GZ4	screw terminals	CE, EAC	10 A / 300 V AC	2 500 V AC	2 000 V AC
GS4	screw terminals	сЯUus, CE, EAC	10 A / 300 V AC	2 500 V AC	2 000 V AC
SU4D	for PCB	сЯUus, CSA, EAC	6 A / 250 V AC	2 500 V AC	2 000 V AC
SU4L	solder terminals	сЯUus, CSA, CE, EAC	6 A / 250 V AC	2 500 V AC	2 000 V AC
G4	solder terminals	сЯUus, CSA, CE, EAC	6 A / 250 V AC	2 500 V AC	2 000 V AC
For RY2					
GZY2G	screw terminals	CE, EAC	12 A / 250 V AC	2 000 V AC	2 000 V AC
For R2M					
GZ2	screw terminals	CE, EAC	7 A / 250 V AC	2 000 V AC	2 000 V AC
S2M	for PCB	сЯUus, EAC	5 A / 250 V AC	2 000 V AC	2 000 V AC
G2M	solder terminals	сЯUus, CE, EAC	5 A / 250 V AC	2 000 V AC	2 000 V AC
For R15 - 2 CO					
PZ8	screw terminals	ЯU, CSA, CE, EAC, LR	10 A / 250 V AC	2 500 V AC	2 500 V AC
GZU8	screw terminals	ЯU, CSA, CE, EAC	10 A / 250 V AC	2 500 V AC	2 500 V AC
GZ8	screw terminals	CSA, CE, EAC	10 A / 250 V AC	2 500 V AC	2 500 V AC
GZP8	screw terminals	сЯUus, CE, EAC	12 A / 300 V AC	4 000 V AC	2 500 V AC
GOP8	solder terminals	CE, EAC	10 A / 250 V AC	2 000 V AC	2 000 V AC
For R15 - 3 CO					
PZ11	screw terminals	ЯU, CSA, CE, EAC, LR	10 A / 250 V AC	2 000 V AC	2 000 V AC
GZU11	screw terminals	ЯU, CSA, CE, EAC	10 A / 250 V AC	2 000 V AC	2 000 V AC
GZ11	screw terminals	CSA, CE, EAC	10 A / 250 V AC	2 000 V AC	2 000 V AC
GZP11	screw terminals	сЯUus, CE, EAC	12 A / 300 V AC	2 500 V AC	2 000 V AC
GOP11	solder terminals	CE, EAC	10 A / 250 V AC	2 000 V AC	2 000 V AC
For R15 - 4 CO					
GZ14U	screw terminals	CSA, CE, EAC	10 A / 250 V AC	2 000 V AC	2 000 V AC
GZ14	screw terminals	CSA, CE, EAC	10 A / 250 V AC	2 000 V AC	2 000 V AC
GOP14	solder terminals	CE, EAC	10 A / 250 V AC	2 000 V AC	2 000 V AC
GZ14Z	screw terminals	CE, EAC	10 A / 250 V AC	2 000 V AC	2 000 V AC
For RUC faston 4,8 x 0,5, RUC-M					
GUC11	screw terminals	CE, EAC	16 A / 250 V AC	2 500 V AC	2 500 V AC
GUC11S	screw terminals	CE, EAC	16 A / 250 V AC	2 500 V AC	2 500 V AC




General data			Connections (mounting)			
Number of poles	Weight	Ambient temperature - operating (non-condensation and/or icing)	Protection category (EN 60529)	Max. cross section of the cables (stranded)	Stripping length	Max. tightening moment for the terminal
4	64 g	-40...+70 °C	IP 20	2 x 2,5 mm ²	6,5 mm	0,7 Nm
4	74 g	-40...+70 °C	IP 20	2 x 2,5 mm ²	6,5 mm	0,7 Nm
4	75 g	-25...+85 °C	IP 20	1 x 0,2...1,5 mm ²	9...11 mm	–
4	40 g	-40...+70 °C	IP 20	2 x 1,5 mm ²	7 mm	0,7 Nm
4	40 g	-40...+70 °C	IP 20	2 x 1,5 mm ²	7 mm	0,7 Nm
4	7 g	-40...+70 °C	–	–	–	–
4	7 g	-40...+70 °C	–	–	–	–
4	8 g	-40...+70 °C	–	2 x 0,75 mm ²	–	–
2	54 g	-25...+55 °C	IP 20	2 x 2,5 mm ²	7 mm	0,7 Nm
2	35 g	-40...+70 °C	IP 00	2 x 2,5 mm ²	7 mm	0,7 Nm
2	8 g	-40...+70 °C	–	–	–	–
2	8 g	-40...+70 °C	–	–	–	–
2	55 g	-40...+70 °C	IP 20	2 x 2,5 mm ²	7 mm	0,7 Nm
2	70 g	-40...+70 °C	IP 00	2 x 2,5 mm ²	9,5 mm	0,7 Nm
2	80 g	-40...+70 °C	IP 00	2 x 2,5 mm ²	9,5 mm	0,7 Nm
2	50 g	-40...+70 °C	IP 20	2 x 2,5 mm ²	6,5 mm	0,5 Nm
2	25 g	-40...+70 °C	–	–	–	–
3	55 g	-40...+70 °C	IP 20	2 x 2,5 mm ²	7 mm	0,7 Nm
3	70 g	-40...+70 °C	IP 00	2 x 2,5 mm ²	9,5 mm	0,7 Nm
3	80 g	-40...+70 °C	IP 00	2 x 2,5 mm ²	9,5 mm	0,7 Nm
3	55 g	-40...+70 °C	IP 20	2 x 2,5 mm ²	6,5 mm	0,5 Nm
3	27 g	-40...+70 °C	–	–	–	–
4	120 g	-40...+70 °C	IP 20	2 x 2,5 mm ²	9,5 mm	0,7 Nm
4	120 g	-40...+70 °C	IP 20	2 x 2,5 mm ²	9,5 mm	0,7 Nm
4	35 g	-40...+70 °C	–	–	–	–
4	120 g	-40...+55 °C	IP 00	2 x 2,5 mm ²	9,5 mm	0,7 Nm
3	75 g	-40...+70 °C	IP 00	1 x 4 mm ² / 2 x 2,5 mm ²	9 mm	0,7 Nm
3	72 g	-40...+70 °C	IP 00	1 x 4 mm ² / 2 x 2,5 mm ²	9 mm	0,7 Nm

RSM850 version THT	Subminiature relays - electromagnetic
 <p>page 48</p>	Contacts: 2 CO Rated load: AC1 - 0,5 A / 125 V AC; DC1 - 2 A / 30 V DC Coils: DC - 3, 5, 6, 9, 12, 24 V Mounting: for PCB
RSM850 version SMT	Subminiature relays - electromagnetic
 <p>page 48</p>	Contacts: 2 CO Rated load: AC1 - 0,5 A / 125 V AC; DC1 - 2 A / 30 V DC Coils: DC - 3, 5, 6, 9, 12, 24 V Mounting: for surface mounting SMT
RSM850B	Subminiature relays - electromagnetic; bistable with one coil
 <p>page 51</p>	Contacts: 2 CO Rated load: AC1 - 0,5 A / 125 V AC; DC1 - 2 A / 30 V DC Coils: DC - 3, 5, 6, 9, 12, 24 V Mounting: for PCB
RSM822N	Subminiature relays - electromagnetic
 <p>page 54</p>	Contacts: 2 CO Rated load: AC1 - 0,6 A / 125 V AC; DC1 - 3 A / 2 A (NO/NC) / 30 V DC Coils: DC - 3, 5, 6, 9, 12, 24 V (sensitive coil), 48 V (standard coil) Mounting: for PCB
RSM954N	Subminiature relays - electromagnetic
 <p>page 57</p>	Contacts: 1 CO Rated load: AC1 - 3 A / 125 V AC; DC1 - 3 A / 30 V DC Coils: DC - 3, 5, 6, 9, 12, 24 V Mounting: for PCB

<p>RSM957N</p>  <p>page 59</p>	<p>Subminiature relays - electromagnetic</p> <p>Contacts: 1 CO</p> <p>Rated load: AC1 - 0,5 A / 125 V AC; DC1 - 1 A / 30 V DC</p> <p>Coils: DC - 3, 5, 6, 9, 12, 24 V (sensitive coil)</p> <p>Mounting: for PCB</p>
<p>RM12</p>  <p>page 62</p>	<p>Miniature relays - electromagnetic</p> <p>Contacts: 1 CO, 1 NO, 1 NC</p> <p>Rated load: AC1 - 8 A / 250 V AC; DC1 - 8 A / 24 V DC</p> <p>Coils: DC - 5, 6, 9, 12, 18, 24, 48, 60 V</p> <p>Mounting: for PCB</p>
<p>RM12N</p>  <p>page 65</p>	<p>Miniature relays - electromagnetic</p> <p>Contacts: 1 CO, 1 NO</p> <p>Rated load:</p> <p>1 CO - AC1 - 8 A / 250 V AC; DC1 - 8 A / 30 V DC</p> <p>1 NO - AC1 - 10 A / 250 V AC; DC1 - 10 A / 30 V DC</p> <p>Coils: DC - 5, 9, 12, 18, 24 V</p> <p>Mounting: for PCB</p>
<p>RM32N</p>  <p>page 68</p>	<p>Miniature relays - electromagnetic</p> <p>Contacts: 1 CO, 1 NO</p> <p>Rated load:</p> <p>1 CO (NO/NC) - AC1 - 5 A / 5 A / 250 V AC; DC1 - 5 A / 5 A / 28 V DC</p> <p>1 NO - AC1 - 5 A / 250 V AC, 10 A / 125 V AC; DC1 - 5 A / 28 V DC</p> <p>Coils: DC - 5, 9, 12, 18, 24 V (sensitive coil, standard coil)</p> <p>Mounting: for PCB</p>
<p>RM40</p>  <p>page 71</p>	<p>Miniature relays - electromagnetic</p> <p>Contacts: 1 CO, 1 NO</p> <p>Rated load:</p> <p>1 CO - AC1 - 5 A / 250 V AC; DC1 - 5 A / 30 V DC</p> <p>1 NO - AC1 - 8 A / 250 V AC; DC1 - 8 A / 30 V DC</p> <p>Coils: DC - 3, 5, 6, 9, 12, 24, 48 V</p> <p>Mounting: for PCB</p>

<p>RM45N</p>  <p>page 74</p>	<p>Miniature relays - electromagnetic</p> <p>Contacts: 1 CO, 1 NO</p> <p>Rated load: 1 CO (NO/NC) - AC1 - 5 A / 5 A / 250 V AC; DC1 - 5 A / 5 A / 28 V DC 1 NO - AC1 - 5 A / 250 V AC, 10 A / 125 V AC; DC1 - 5 A / 28 V DC</p> <p>Coils: DC - 5, 9, 12, 24 V (sensitive coil, standard coil)</p> <p>Mounting: for PCB</p>
<p>RM50N</p>  <p>page 77</p>	<p>Miniature relays - electromagnetic</p> <p>Contacts: 1 CO, 1 NO</p> <p>Rated load: AC1 - 6 A / 250 V AC, 12 A / 125 V AC; DC1 - 12 A / 28 V DC</p> <p>Coils: DC - 5, 9, 12, 24, 48 V</p> <p>Mounting: for PCB</p>
<p>RM51</p>  <p>page 80</p>	<p>Miniature relays - electromagnetic</p> <p>Contacts: 1 CO, 1 NO</p> <p>Rated load: 1 CO (NO/NC) - AC1 - 10 A / 7 A / 250 V AC; DC1 - 10 A / 7 A / 30 V DC 1 NO - AC1 - 10 A / 250 V AC, 20 A / 125 V AC; DC1 - 10 A / 30 V DC</p> <p>Coils: DC - 5, 9, 12, 24, 48 V</p> <p>Mounting: for PCB</p>
<p>RM699B</p>  <p>page 83</p>	<p>Miniature relays - electromagnetic</p> <p>Contacts: 1 CO, 1 NO</p> <p>Rated load: AC1 - 6 A / 250 V AC; DC1 - 6 A / 30 V DC</p> <p>Coils: DC - 5, 6, 9, 12, 24, 48, 60 V</p> <p>Mounting: RM699BV - for PCB, for plug-in sockets RM699BH - for PCB</p> <p>Accessories: sockets - PI6W-1P (page 374)</p>
<p>RM84</p>  <p>page 88</p>	<p>Miniature relays - electromagnetic</p> <p>Contacts: 2 CO, 2 NO</p> <p>Rated load: AC1 - 8 A / 250 V AC; DC1 - 8 A / 24 V DC</p> <p>Coils: DC - 3, 5, 6, 9, 12, 18, 24, 36, 48, 60, 110 V AC - 12, 24, 48, 60, 110, 115, 120, 220, 230, 240 V</p> <p>Available special versions: with increased contact gap, in transparent cover</p> <p>Mounting: for PCB, for plug-in sockets</p> <p>Accessories: screw terminals sockets - GZT80, GZM80, GZS80, GZF80; spring terminals sockets - GZMB80; sockets for PCB - EC 50, PW80, GD50 (pages 360-361); signalling / protecting modules type M... for sockets: GZT80, GZM80, GZS80, GZMB80</p>

<p>RM85</p>	<p>Miniature relays - electromagnetic</p>
 <p>page 93</p>	<p>Contacts: 1 CO, 1 NO Rated load: AC1 - 16 A / 250 V AC; DC1 - 16 A / 24 V DC Coils: DC - 3, 5, 6, 9, 12, 18, 24, 36, 48, 60, 110 V AC - 12, 24, 48, 60, 110, 115, 120, 220, 230, 240 V Available special versions: with increased contact gap, in transparent cover Mounting: for PCB, for plug-in sockets Accessories: screw terminals sockets - GZT80, GZM80, GZS80, GZF80; spring terminals sockets - GZMB80; sockets for PCB - EC 50, PW80, GD50 (pages 360-361); signalling / protecting modules type M... for sockets: GZT80, GZM80, GZS80, GZMB80</p>
<p>RM85 special version</p>	<p>Miniature relays - electromagnetic, for switching higher voltages - up to 480 V AC</p>
 <p>page 98</p>	<p>Contacts: 1 NO Rated load: AC1 - 5 A / 480 V AC; DC1 - 16 A / 24 V DC Coils: DC - 3, 5, 6, 9, 12, 18, 24, 36, 48, 60, 110 V Mounting: for PCB</p>
<p>RM85 inrush</p>	<p>Miniature relays - electromagnetic</p>
 <p>page 101</p>	<p>Contacts: 1 NO Rated load: AC1 - 16 A / 250 V AC; DC1 - 16 A / 24 V DC Coils: DC - 3, 5, 6, 9, 12, 18, 24, 36, 48, 60, 110 V Mounting: for PCB, for plug-in sockets Accessories: screw terminals sockets - GZT80, GZM80, GZS80, GZF80; spring terminals sockets - GZMB80; sockets for PCB - EC 50, PW80, GD50 (pages 360-361); signalling / protecting modules type M... for sockets: GZT80, GZM80, GZS80, GZMB80</p>
<p>RM85 105 °C sensitive</p>	<p>Miniature relays - electromagnetic, ambient temperature up to 105 °C</p>
 <p>page 105</p>	<p>Contacts: 1 NO Rated load: AC1 - 16 A / 250 V AC; DC1 - 16 A / 24 V DC Coils: DC - 5, 6, 9, 10, 12, 18, 24, 48 V (sensitive coil) Mounting: for PCB, for plug-in sockets Accessories: screw terminals sockets - GZT80, GZM80, GZS80, GZF80; spring terminals sockets - GZMB80; sockets for PCB - EC 50, PW80, GD50 (pages 360-361); signalling / protecting modules type M... for sockets: GZT80, GZM80, GZS80, GZMB80</p>
<p>RM85 faston</p>	<p>Miniature relays - electromagnetic</p>
 <p>page 109</p>	<p>Contacts: 1 NO Rated load: AC1 - 20 A / 250 V AC; DC1 - 20 A / 24 V DC Coils: DC - 5, 6, 9, 10, 12, 18, 24, 48 V (sensitive coil) Mounting: for PCB, for flat insert connectors - faston 250 (6,3 x 0,8 mm)</p>

RM87	Miniature relays - electromagnetic
 <p>page 112</p>	<p>Contacts: 1 CO, 1 NO</p> <p>Rated load: AC1 - 12 A / 250 V AC; DC1 - 12 A / 24 V DC</p> <p>Coils: DC - 3, 5, 6, 9, 12, 18, 24, 36, 48, 60, 110 V AC - 12, 24, 48, 60, 110, 115, 120, 220, 230, 240 V</p> <p>Available special versions: with increased contact gap, in transparent cover</p> <p>Mounting: for PCB, for plug-in sockets; Accessories: screw terminals sockets - GZT80, GZM80, GZS80, GZF80, GZT92, GZM92, GZS92; spring terminals sockets - GZMB80; sockets for PCB - EC 50, PW80, GD50, EC 35, GD35 (pages 360-363); signalling / protecting modules type M... for sockets: GZT80, GZM80, GZS80, GZT92, GZM92, GZS92, GZMB80</p>
RM87 sensitive	Miniature relays - electromagnetic
 <p>page 112</p>	<p>Contacts: 1 NO</p> <p>Rated load: AC1 - 10 A / 250 V AC; DC1 - 10 A / 24 V DC</p> <p>Coils: DC - 5, 6, 9, 10, 12, 18, 24, 48 V (sensitive coil)</p> <p>Mounting: for PCB, for plug-in sockets</p> <p>Accessories: screw terminals sockets - GZT80, GZM80, GZS80, GZF80, GZT92, GZM92, GZS92; spring terminals sockets - GZMB80; sockets for PCB - EC 50, PW80, GD50, EC 35, GD35 (pages 360-363); signalling / protecting modules type M... for sockets: GZT80, GZM80, GZS80, GZT92, GZM92, GZS92, GZMB80</p>
RM96	Miniature relays - electromagnetic
 <p>page 118</p>	<p>Contacts: 1 CO, 1 NO, 1 NC</p> <p>Rated load: AC1 - 8 A / 250 V AC; DC1 - 8 A / 24 V DC</p> <p>Coils: DC - 5, 6, 9, 12, 18, 24, 48 V</p> <p>Mounting: 1 CO - for PCB, for plug-in sockets 1 NO, 1 NC - for PCB</p> <p>Accessories: screw terminals sockets - ES 32 (page 364); signalling / protecting modules type M... for sockets ES 32</p>
RM83	Miniature relays - electromagnetic
 <p>page 122</p>	<p>Contacts: 1 CO, 1 NO, 1 NC</p> <p>Rated load: AC1 - 16 A / 250 V AC; DC1 - 16 A / 24 V DC</p> <p>Coils: DC - 5, 6, 9, 12, 18, 24, 36, 48, 60, 110 V (standard coil), 110 V (sensitive coil)</p> <p>Available special versions: in transparent cover</p> <p>Mounting: for PCB, for plug-in sockets</p> <p>Accessories: sockets for PCB - EC 50, PW80, GD50 (page 362)</p>
RMP84	Miniature relays - electromagnetic
 <p>page 126</p>	<p>Contacts: 2 CO</p> <p>Rated load: AC1 - 8 A / 250 V AC</p> <p>Coils: DC - 12, 24, 48, 110 V; AC - 24, 115, 230 V</p> <p>Additional features: standard - mechanical indicator (W), lockable front test button (T) option - light indicator - LED diode (L)</p> <p>Mounting: for PCB, for plug-in sockets</p> <p>Accessories: screw terminals sockets - GZF80; spring terminals sockets - GZMB80; sockets for PCB - EC 50, GD50 (pages 361-362); signalling / protecting modules type M... for sockets: GZMB80</p>

RMP85


page 130

Miniature relays - electromagnetic

Contacts: 1 CO


 Rated load: **AC1 - 16 A / 250 V AC**

Coils: DC - 12, 24, 48, 110 V; AC - 24, 115, 230 V

 Additional features: standard - mechanical indicator (W), lockable front test button (T)
 option - light indicator - LED diode (L)

Mounting: for PCB, for plug-in sockets

 Accessories: screw terminals sockets - GZF80; spring terminals sockets - GZMB80; sockets for PCB - EC 50, GD50 (**pages 361-362**); signalling / protecting modules type M... for sockets: GZMB80

RA2


page 134

Miniature relays - automotive relays

Contacts: 1 CO, 1 NO, 2 NO

 Rated current: 1 CO (NO/NC) - **20 A / 12 A**; 1 NO - **20 A**; 2 NO - **2 x 12,5 A**

Coils: DC - 5, 6, 9, 12, 15, 18, 24, 48 V

Mounting: for PCB

R2N - contacts 2 CO


page 138

Industrial relays - electromagnetic

Contacts: 2 CO, 3 CO, 4 CO

Rated load:

 2 CO - **AC1 - 12 A / 250 V AC**; **DC1 - 12 A / 24 V DC**

 3 CO - **AC1 - 10 A / 250 V AC**; **DC1 - 10 A / 24 V DC**

 4 CO - **AC1 - 7 A / 230 V AC (VDE), 6 A / 250 V AC**; **DC1 - 6 A / 24 V DC**

Coils: DC - 5, 6, 12, 24, 48, 60, 80, 110, 125, 220 V

AC - 6, 12, 24, 42, 48, 60, 80, 110, 115, 120, 127, 220, 230, 240 V

Additional features:

standard - mechanical indicator (W), lockable front test button (T)

option - light indicator - LED diode (L), surge suppression element - diode (D)

Mounting:

R2N, R3N - for plug-in sockets

R4N - for plug-in sockets, for PCB

Accessories:

R2N - screw terminals sockets - GZT2, GZM2;

spring terminals sockets - GZMB2;

sockets for PCB - SU4/2D;

 solder terminals sockets - SU4/2L, G4/2 (**pages 365-366**)

R3N - screw terminals sockets - GZT3, GZM3 (**page 366**)

R4N - screw terminals sockets - GZT4, GZM4, GZ4, GS4;

spring terminals sockets - GZMB4;

sockets for PCB - SU4D;

 solder terminals sockets - SU4L, G4 (**pages 366-368**)

signalling / protecting modules type M... for sockets:






GZT2, GZM2, GZMB2, GZT3, GZM3, GZT4, GZM4, GZMB4



R3N - contacts 3 CO







page 143

R4N - contacts 4 CO


page 148

<p>RY2</p>	<p>Industrial relays - electromagnetic</p>
 <p>page 154</p>	<p>Contacts: 2 CO</p> <p>Rated load: AC1 - 12 A / 250 V AC; DC1 - 12 A / 30 V DC</p> <p>Coils: DC - 5, 6, 12, 24, 48, 60, 80, 110, 125, 220 V AC - 6, 12, 24, 42, 48, 60, 80, 110, 120, 127, 220, 230, 240 V</p> <p>Additional features: option - light indicator - LED diode (L), surge suppression element - diode (D); Mounting: for plug-in sockets, for flat insert connectors - faston 187 (4,8 x 0,5 mm) - direct on panel (cover with mounting flange)</p> <p>Accessories: screw terminals sockets - GZY2G (page 369)</p>
<p>R2M</p>	<p>Industrial relays - electromagnetic</p>
 <p>page 158</p>	<p>Contacts: 2 CO</p> <p>Rated load: AC1 - 5 A / 250 V AC; DC1 - 5 A / 24 V DC</p> <p>Coils: DC - 6, 12, 24, 48, 60, 80, 110 V AC - 6, 12, 24, 50, 100, 110, 115, 120, 220, 230, 240 V</p> <p>Mounting: for plug-in sockets, for PCB</p> <p>Accessories: screw terminals sockets - GZ2; sockets for PCB - S2M; solder terminals sockets - G2M (page 369)</p>
<p>R15 - contacts 2 CO</p>	<p>Industrial relays - electromagnetic</p>
 <p>page 162</p>	<p>Contacts: 2 CO, 3 CO, 4 CO</p> <p>Rated load: AC1 - 10 A / 250 V AC; DC1 - 10 A / 24 V DC</p> <p>Coils: R15 - 2 CO, 3 CO, 4 CO - DC - 6, 12, 24, 48, 60, 110, 120, 220 V R15 - 2 CO, 3 CO - AC - 6, 12, 24, 48, 60, 115, 120, 220, 230, 240 V R15 - 4 CO - AC - 6, 12, 24, 48, 60, 115, 120, 220, 230, 240, 400 V (50 Hz) R15 - 4 CO - AC - 6, 12, 24, 48, 60, 110, 120, 220, 230, 240 V (60 Hz)</p> <p>Additional features: R15 - 2 CO, 3 CO standard - mechanical indicator (W), lockable front test button (T) R15 - 2 CO, 3 CO option - light indicator - LED diode (L), surge suppression element - diode (D), varistor (V) R15 - 4 CO option - test button without block functions (K), light indicator - LED diode (L), surge suppression element - diode (D)</p> <p>Mounting: for plug-in sockets</p> <p>Accessories: R15 - 2 CO - screw terminals sockets, for mounting: on 35 mm rail mount or on panel - PZ8, GZP8; on 35 mm rail mount - GZU8; on panel - GZ8; solder terminals sockets - GOP8 (pages 370-371) R15 - 3 CO - screw terminals sockets, for mounting: on 35 mm rail mount or on panel - PZ11, GZP11; on 35 mm rail mount - GZU11; on panel - GZ11; solder terminals sockets - GOP11 (pages 371-372) R15 - 4 CO - screw terminals sockets, for mounting: on 35 mm rail mount - GZ14U; on panel - GZ14; on panel, behind: GZ14Z; solder terminals sockets - GOP14 (pages 372-373)</p>
<p>R15 - contacts 3 CO</p>	
 <p>page 162</p>	
<p>R15 - contacts 4 CO</p>	
 <p>page 167</p>	

<p>RUC faston 4,8 x 0,5</p>	<p>Industrial relays - electromagnetic</p>
 <p>page 171</p>	<p>Contacts: 2 CO, 3 CO, 2 NO, 3 NO (available special versions 2 NO, 3 NO with contact gap ≥ 3 mm)</p> <p>Rated load: AC1 - 16 A / 250 V AC; DC1 - 16 A / 24 V DC</p> <p>Coils: DC - 6, 12, 24, 42, 48, 60, 110, 120, 220 V (standard coil) DC - 12, 24, 48, 110, 220 V (reinforced coil) AC - 6, 12, 24, 115, 120, 220, 230, 240 V (50/60 Hz) AC - 400 V (50 Hz)</p> <p>Additional features: option - test button without block functions (K), light indicator - LED diode (L)</p>
<p>RUC faston 6,3 x 0,8</p>  <p>page 171</p>	<p>Mounting: RUC faston 4,8 x 0,5 - for plug-in sockets, direct on panel (cover with mounting flange), direct on 35 mm rail mount (cover with adaptors: vertical V, horizontal H) RUC faston 6,3 x 0,8 - direct on panel (cover with mounting flange), direct on 35 mm rail mount (cover with adaptors: vertical V, horizontal H) RUC - for PCB</p> <p>Accessories: screw terminals sockets - GUC11, GUC11S (page 374)</p>
<p>RUC-M faston 4,8 x 0,5</p>	<p>Industrial relays - electromagnetic; with permanent magnet whose magnetic field blows the electric arc between the contacts; for high DC loads</p>
 <p>page 177</p>	<p>Contacts: 1 NO (double-break), 2 NO</p> <p>Rated load: AC1 - 16 A / 250 V AC; DC1 - 12 A (1 NO); 4,5 A (2 NO) / 220 V DC</p> <p>Coils: DC - 12, 24, 48, 110, 220 V (reinforced coil) AC - 12, 24, 48, 115, 120, 230, 240 V</p> <p>Additional features: option - light indicator - LED diode (L)</p> <p>Mounting: for plug-in sockets, direct on panel (cover with mounting flange), direct on 35 mm rail mount (cover with adaptors: vertical V, horizontal H), for PCB</p> <p>Accessories: screw terminals sockets - GUC11, GUC11S (page 374)</p>
<p>RG25</p>	<p>Industrial relays - electromagnetic</p>
 <p>page 182</p>	<p>Contacts: 2 NO</p> <p>Rated load: AC1 - 25 A / 400 V AC; DC1 - 25 A / 24 V DC</p> <p>Coils: DC - 12, 24, 48, 110, 220 V; AC - 12, 24, 110, 230, 400 V</p> <p>Mounting: direct on 35 mm rail mount</p>
<p>R20</p>	<p>Industrial relays - electromagnetic</p>
 <p>page 185</p>	<p>Contacts: 1 NO, 2 NO</p> <p>Rated load: 1 NO - AC1 - 30 A / 250 V AC 2 NO - AC1 - 25 A / 250 V AC</p> <p>Coils: DC - 12, 24, 110 V; AC - 24, 48, 115, 230 V</p> <p>Mounting: for flat insert connectors - faston 250 (6,3 x 0,8 mm) - direct on panel (cover with mounting flange)</p>

<p>R30N</p>  <p>page 188</p>	<p>Industrial relays - electromagnetic</p> <p>Contacts: 1 CO, 1 NO</p> <p>Rated load: 1 CO (NO/NC) - AC1 - 30 A / 20 A / 240 V AC; DC1 - 30 A / 20 A / 14 V DC 1 NO - AC1 - 30 A / 240 V AC; DC1 - 30 A / 14 V DC</p> <p>Coils: DC - 5, 12, 24, 48, 110 V</p> <p>Mounting: for PCB</p>
<p>R40N</p>  <p>page 191</p>	<p>Industrial relays - electromagnetic</p> <p>Contacts: 1 CO, 1 NO</p> <p>Rated load: 1 CO (NO/NC) - AC1 - 40 A / 30 A / 240 V AC; DC1 - 40 A / 30 A / 30 V DC 1 NO - AC1 - 40 A / 240 V AC; DC1 - 40 A / 30 V DC</p> <p>Coils: DC - 5, 12, 24, 48, 110 V; AC - 12, 24, 110, 120, 220 V</p> <p>Mounting: for PCB</p>
<p>RS35, RS50</p>  <p>page 194</p>	<p>Industrial relays - electromagnetic; to control power in photovoltaic systems which generate electric energy</p> <p>Contacts: 2 NO</p> <p>Rated load: RS35 - AC1 - 35 A / 250 V AC; DC1 - 35 A / 24 V DC RS50 - AC1 - 48 A / 250 V AC; DC1 - 48 A / 24 V DC</p> <p>Coils: DC - 5, 9, 12, 18, 24, 110 V</p> <p>Mounting: for PCB</p>
<p>PI84 - GZT80</p>  <p>page 198</p>	<p>Interface relays; with plug-in socket GZT80</p> <p>Contacts: 2 CO</p> <p>Rated load: AC1 - 8 A / 250 V AC; DC1 - 8 A / 24 V DC</p> <p>Coils: DC - 12, 24, 48, 110 V; AC - 12, 24, 48, 120, 230, 240 V</p> <p>Set: electromagnetic relay RM84, plug-in socket GZT80, module type M..., clip GZT80-0040, description plate GZT80-0035</p> <p>Mounting: direct on 35 mm rail mount or on panel</p> <p>Accessories: interconnection strip ZGGZ80</p>
<p>PI84 - GZM80</p>  <p>page 202</p>	<p>Interface relays; with plug-in socket GZM80</p> <p>Contacts: 2 CO</p> <p>Rated load: AC1 - 8 A / 250 V AC; DC1 - 8 A / 24 V DC</p> <p>Coils: DC - 12, 24, 48, 60, 110 V; AC - 12, 24, 120, 230, 240 V</p> <p>Set: electromagnetic relay RM84, plug-in socket GZM80, module type M..., clip GZT80-0040, description plate GZT80-0035</p> <p>Mounting: direct on 35 mm rail mount or on panel</p> <p>Accessories: interconnection strip ZGGZ80</p>

PI84 - GZMB80

Interface relays; with plug-in socket GZMB80; spring terminals



page 206

Contacts: 2 CO
 Rated load: **AC1 - 8 A / 250 V AC; DC1 - 8 A / 24 V DC**
 Coils: DC - 12, 24, 110 V; AC - 12, 24, 110, 120, 230 V
 Set: electromagnetic relay RM84, plug-in socket GZMB80,
 module type M..., clip GZMB80-0040, description plate TR
 Mounting: direct on 35 mm rail mount

PI85 - GZT80

Interface relays; with plug-in socket GZT80



page 210

Contacts: 1 CO
 Rated load: **AC1 - 16 A / 250 V AC; DC1 - 16 A / 24 V DC**
 Coils: DC - 12, 24, 48, 110 V; AC - 12, 24, 48, 120, 230, 240 V
 Set: electromagnetic relay RM85, plug-in socket GZT80,
 module type M..., clip GZT80-0040, description plate GZT80-0035
 Mounting: direct on 35 mm rail mount or on panel
 Accessories: interconnection strip ZGGZ80

PI85 - GZM80

Interface relays; with plug-in socket GZM80



page 214

Contacts: 1 CO
 Rated load: **AC1 - 16 A / 250 V AC; DC1 - 16 A / 24 V DC**
 Coils: DC - 12, 24, 48, 60, 110 V; AC - 12, 24, 120, 230, 240 V
 Set: electromagnetic relay RM85, plug-in socket GZM80,
 module type M..., clip GZT80-0040, description plate GZT80-0035
 Mounting: direct on 35 mm rail mount or on panel
 Accessories: interconnection strip ZGGZ80

PI85 - GZMB80

Interface relays; with plug-in socket GZMB80; spring terminals



page 218

Contacts: 1 CO
 Rated load: **AC1 - 10 A, 16 A / 250 V AC; DC1 - 16 A / 24 V DC**
 Coils: DC - 12, 24, 110 V; AC - 12, 24, 110, 120, 230 V
 Set: electromagnetic relay RM85, plug-in socket GZMB80,
 module type M..., clip GZMB80-0040, description plate TR
 Mounting: direct on 35 mm rail mount

PI85 inrush - GZT80

Interface relays; with plug-in socket GZT80



page 222

Contacts: 1 NO
 Rated load: **AC1 - 16 A / 250 V AC; DC1 - 16 A / 24 V DC**
 Coils: DC - 12, 24, 110 V
 Set: electromagnetic relay RM85 inrush, plug-in socket GZT80,
 module type M..., clip GZT80-0040, description plate GZT80-0035
 Mounting: direct on 35 mm rail mount or on panel
 Accessories: interconnection strip ZGGZ80

PI84P - GZMB80

page 226

Interface relays; with plug-in socket GZMB80; spring terminals

Contacts: 2 CO
 Rated load: **AC1 - 8 A / 250 V AC**
 Coils: DC - 12, 24, 48, 110 V; AC - 24, 115, 230 V
 Set: electromagnetic relay RMP84, plug-in socket GZMB80, module type M..., clip GZMB80-0025, description plate TR
 Mounting: direct on 35 mm rail mount

PI85P - GZMB80

page 229

Interface relays; with plug-in socket GZMB80; spring terminals

Contacts: 1 CO
 Rated load: **AC1 - 16 A / 250 V AC**
 Coils: DC - 12, 24, 48, 110 V; AC - 24, 115, 230 V
 Set: electromagnetic relay RMP85, plug-in socket GZMB80, module type M..., clip GZMB80-0025, description plate TR
 Mounting: direct on 35 mm rail mount

PIR2 - GZM2

page 232

Interface relays; with plug-in socket GZM2

Contacts: 2 CO
 Rated load: **AC1 - 12 A / 250 V AC; DC1 - 12 A / 24 V DC**
 Coils: DC - 12, 24, 48, 110 V; AC - 12, 24, 48, 120, 230 V
 Set: electromagnetic relay R2N, plug-in socket GZM2, module type M..., clip GZT4-0040, description plate GZT4-0035
 Mounting: direct on 35 mm rail mount or on panel
 Accessories: interconnection strip ZGGZ4

PIR3 - GZM3

page 236

Interface relays; with plug-in socket GZM3

Contacts: 3 CO
 Rated load: **AC1 - 10 A / 250 V AC; DC1 - 10 A / 24 V DC**
 Coils: DC - 12, 24, 48, 110 V; AC - 12, 24, 48, 120, 230 V
 Set: electromagnetic relay R3N, plug-in socket GZM3, module type M..., clip GZT4-0040, description plate GZT4-0035
 Mounting: direct on 35 mm rail mount or on panel
 Accessories: interconnection strip ZGGZ4

PIR4 - GZM4

page 240

Interface relays; with plug-in socket GZM4

Contacts: 4 CO
 Rated load: **AC1 - 7 A / 230 V AC, 6 A / 250 V AC; DC1 - 6 A / 24 V DC**
 Coils: DC - 12, 24, 48, 110 V; AC - 12, 24, 48, 120, 230 V
 Set: electromagnetic relay R4N, plug-in socket GZM4, module type M..., clip GZT4-0040, description plate GZT4-0035
 Mounting: direct on 35 mm rail mount or on panel
 Accessories: interconnection strip ZGGZ4

PI6-1P

Interface relays



page 244

Output circuit - contacts: 1 CO (AgSnO₂)
 Rated load: **AC1 - 6 A / 250 V AC; DC1 - 6 A / 24 V DC**
 Input circuit: DC - 12, 24, 36 V; AC/DC - 24, 42, 115, 230 V
 Indicator: LED diode
 Mounting: direct on 35 mm rail mount
 Accessories: interconnection strip ZG20

PI6-1T

Interface relays



page 247

Output circuit - triac: 1 NO
 Rated load: **AC1 - 1,2 A / 400 V AC**
 Input circuit: DC - 5...32 V; AC/DC - 24, 230 V
 Indicator: LED diode
 Mounting: direct on 35 mm rail mount
 Accessories: interconnection strip ZG20

PIR6W-1P

Interface relays; with socket PI6W-1P -...



page 249

Output circuit - contacts: 1 CO (RM699BV - AgSnO₂)
 Rated load: **AC1 - 6 A / 250 V AC; DC1 - 6 A / 24 V DC**
 Input circuit: AC - 230 V; DC - 12, 24, 36 V; AC/DC - 24, 42, 115, 230 V
 Indicator: LED diode
 Mounting: direct on 35 mm rail mount
 Accessories: interconnection strip ZG20

PIR6W-1PS

Interface relays; with universal socket PI6W-1PS -...



page 253

Output circuit - contacts: 1 CO (RM699BV - AgSnO₂); triac, transistor: 1 NO (RSR30)
 Rated load:
 1 CO - **AC1 - 6 A / 250 V AC; DC1 - 6 A / 24 V DC**
 1 NO (triac) - **AC1 - 1 A / 240 V AC**; 1 NO (transistor) - **DC1 - 1 A / 48 V DC, 2 A / 24 V DC**
 Input circuit: AC - 230 V; DC - 6, 12, 24, 36, 48, 60 V; AC/DC - 24, 42, 115, 230 V
 Indicator: LED diode
 Mounting: direct on 35 mm rail mount
 Accessories: interconnection strip ZG20

PIR6WB-1PS

Interface relays; with universal socket PI6WB-1PS -...; spring terminals






CAGE CLAMP®













page 257






Output circuit - contacts: 1 CO (RM699BV - AgSnO₂); triac, transistor: 1 NO (RSR30)
 Rated load:
 1 CO - **AC1 - 6 A / 250 V AC; DC1 - 6 A / 24 V DC**
 1 NO (triac) - **AC1 - 1 A / 240 V AC**; 1 NO (transistor) - **DC1 - 1 A / 48 V DC, 2 A / 24 V DC**
 Input circuit: AC - 230 V; DC - 6, 12, 24, 36, 48, 60 V; AC/DC - 24, 42, 115, 230 V
 Indicator: LED diode
 Mounting: direct on 35 mm rail mount
 Accessories: interconnection strip ZG20






MT-PI	Installation relays; modular cover
 <p>page 262</p>	Contacts: 1 CO, 2 CO, 1 NO, 2 NO Rated load: 1 CO, 1 NO - AC1 - 16 A / 250 V AC; DC1 - 16 A / 24 V DC 2 CO, 2 NO - AC1 - 8 A / 250 V AC; DC1 - 8 A / 24 V DC Coils: 1 CO, 2 CO - DC - 12, 24, 48 V; AC - 24, 115, 230 V 1 NO, 2 NO - AC - 230 V; AC/DC - 12, 24, 48, 115 V Indicator: LED diode Mounting: direct on 35 mm rail mount
NEED-...-08-4...	Programmable relays
 <p>page 266</p>	Outputs: 4 NO, relay or transistor Rated load: contacts - AC1 - 10 A / 250 V AC; transistor - DC1 - 0,5 A / 24 V DC Inputs: 6 digital + 2 analog-digital Supply: DC - 12, 24, 220 V; AC - 230 V Indicator: LCD display, LED diode Mounting: direct on 35 mm rail mount or on panel Accessories: cable NEED-PC-15B (or 15C), memory card NEED-M-4KB, software PC NEED (language LAD and STL)
NEED-...-16-8...	Programmable relays
 <p>page 270</p>	Outputs: 8 NO, relay or transistor Rated load: contacts - AC1 - 10 A / 250 V AC; transistor - DC1 - 0,5 A / 24 V DC Inputs: 13 digital + 3 analog-digital Supply: DC - 12, 24, 220 V; AC - 230 V Indicator: LCD display, LED diode Mounting: direct on 35 mm rail mount or on panel Accessories: cable NEED-PC-15B (or 15C), memory card NEED-M-4KB, software PC NEED (language LAD and STL)
NEED-MODBUS	Communication modules NEED Master / ModBus RTU Slave
 <p>page 276</p>	Input circuit: DC - 7...35 V; AC - 7...26 V Mounting: direct on 35 mm rail mount Appropriation: cooperation with NEED-... relays (reading and availability of the data, transmission of control commands, RTC clock setting)
MT-W...M	Time relays; modular cover; programming with two buttons only
 <p>page 278</p>	Multifunctions - 25 time functions (Es, E, E(S), E(r), R, Wu, Wu(S), Wu(r), Ws, Wa, B, Wi, ER, EWs, EWa, EWu, WsWa, EWf, Wt, Pi, Pi(S), Pp, Pp(S), Est, Esp) + functions ON, OFF Independent settings of T1, T2, T3 intervals (0,1 s ... 99 h 59 min. 59,9 s) Output circuit - contacts: 1 CO Rated load: AC1 - 10 A / 250 V AC; DC1 - 10 A / 24 V DC Input circuit: AC/DC - 12...240 V; external control contact Indicator: two digit LED display, LED diode Mounting: direct on 35 mm rail mount

RPC-MA-...	Time relays; modular cover
 <p>page 285</p>	<p>Multifunctions - 10 time functions (E, Wu, Bp, Bi, R, Ws, Wa, Esa, B, T) 8 time ranges - settings of T interval (0,1 s ... 10 d) + ON / OFF</p> <p>Output circuit - contacts: 1 CO, 2 CO</p> <p>Rated load: 1 CO - AC1 - 16 A / 250 V AC; DC1 - 16 A / 24 V DC 2 CO - AC1 - 8 A / 250 V AC; DC1 - 8 A / 24 V DC</p> <p>Input circuit: AC - 230 V; AC/DC - 12...240 V; external control contact</p> <p>Indicator: LED diode; Mounting: direct on 35 mm rail mount</p>
RPC-MB-...	Time relays; modular cover
 <p>page 289</p>	<p>Multifunctions - 10 time functions (E, Wu, Bp, Bi, Ra, Wst, Wi, Esf, Esp, Est) 8 time ranges - settings of T interval (0,1 s ... 10 d) + ON / OFF</p> <p>Output circuit - contacts: 1 CO, 2 CO</p> <p>Rated load: 1 CO - AC1 - 16 A / 250 V AC; DC1 - 16 A / 24 V DC 2 CO - AC1 - 8 A / 250 V AC; DC1 - 8 A / 24 V DC</p> <p>Input circuit: AC - 230 V; AC/DC - 12...240 V; external control contact</p> <p>Indicator: LED diode; Mounting: direct on 35 mm rail mount</p>
RPC-1MC-UNI	Time relays; modular cover
 <p>page 293</p>	<p>Multifunctions - 14 time functions (E, E(S), Wu, Wu(S), Bp, Bp(S), Bi, Bi(S), R, Ws, Wa, Esa(R), E(R), Wu(R)); 8 time ranges - settings of T interval (0,1 s ... 10 d) + ON / OFF</p> <p>Output circuit - contacts: 1 CO</p> <p>Rated load: AC1 - 16 A / 250 V AC; DC1 - 16 A / 24 V DC</p> <p>Input circuit: AC/DC - 12...240 V; external control contact</p> <p>Indicator: LED diode</p> <p>Mounting: direct on 35 mm rail mount</p>
RPC-E-...	Time relays; modular cover
 <p>page 297</p>	<p>Single-functions (E) 8 time ranges - settings of T interval (0,1 s ... 10 d) + ON / OFF</p> <p>Output circuit - contacts: 1 CO, 2 CO</p> <p>Rated load: 1 CO - AC1 - 16 A / 250 V AC; DC1 - 16 A / 24 V DC 2 CO - AC1 - 8 A / 250 V AC; DC1 - 8 A / 24 V DC</p> <p>Input circuit: AC - 230 V; AC/DC - 12...240 V</p> <p>Indicator: LED diode; Mounting: direct on 35 mm rail mount</p>
RPC-WU-...	Time relays; modular cover
 <p>page 297</p>	<p>Single-functions (Wu) 8 time ranges - settings of T interval (0,1 s ... 10 d) + ON / OFF</p> <p>Output circuit - contacts: 1 CO, 2 CO</p> <p>Rated load: 1 CO - AC1 - 16 A / 250 V AC; DC1 - 16 A / 24 V DC 2 CO - AC1 - 8 A / 250 V AC; DC1 - 8 A / 24 V DC</p> <p>Input circuit: AC - 230 V; AC/DC - 12...240 V</p> <p>Indicator: LED diode; Mounting: direct on 35 mm rail mount</p>

RPC-BP-...	Time relays; modular cover
 <p>page 297</p>	Single-functions (Bp) 8 time ranges - settings of T interval (0,1 s ... 10 d) + ON / OFF Output circuit - contacts: 1 CO, 2 CO Rated load: 1 CO - AC1 - 16 A / 250 V AC; DC1 - 16 A / 24 V DC 2 CO - AC1 - 8 A / 250 V AC; DC1 - 8 A / 24 V DC Input circuit: AC - 230 V; AC/DC - 12...240 V Indicator: LED diode; Mounting: direct on 35 mm rail mount
RPC-1ER-...	Time relays; modular cover
 <p>page 300</p>	Single-functions (ER) 8 time ranges - independent settings of T1 and T2 intervals (0,1 s ... 10 d) + ON / OFF Output circuit - contacts: 1 CO Rated load: AC1 - 16 A / 250 V AC; DC1 - 16 A / 24 V DC Input circuit: AC - 230 V; AC/DC - 12...240 V; external control contact Indicator: LED diode Mounting: direct on 35 mm rail mount
RPC-1EA-...	Time relays; modular cover
 <p>page 300</p>	Single-functions (EWa) 8 time ranges - independent settings of T1 and T2 intervals (0,1 s ... 10 d) + ON / OFF Output circuit - contacts: 1 CO Rated load: AC1 - 16 A / 250 V AC; DC1 - 16 A / 24 V DC Input circuit: AC - 230 V; AC/DC - 12...240 V; external control contact Indicator: LED diode Mounting: direct on 35 mm rail mount
RPC-1ES-...	Time relays; modular cover
 <p>page 300</p>	Single-functions (EWs) 8 time ranges - independent settings of T1 and T2 intervals (0,1 s ... 10 d) + ON / OFF Output circuit - contacts: 1 CO Rated load: AC1 - 16 A / 250 V AC; DC1 - 16 A / 24 V DC Input circuit: AC - 230 V; AC/DC - 12...240 V; external control contact Indicator: LED diode Mounting: direct on 35 mm rail mount
RPC-1EU-...	Time relays; modular cover
 <p>page 300</p>	Single-functions (EWu + NWu) 8 time ranges - independent settings of T1 and T2 intervals (0,1 s ... 10 d) + ON / OFF Output circuit - contacts: 1 CO Rated load: AC1 - 16 A / 250 V AC; DC1 - 16 A / 24 V DC Input circuit: AC - 230 V; AC/DC - 12...240 V; external control contact Indicator: LED diode Mounting: direct on 35 mm rail mount


RPC-1IP-...	Time relays; modular cover
 <p>page 300</p>	<p>Single-functions (li + lp) 8 time ranges - independent settings of T1 and T2 intervals (0,1 s ... 10 d) + ON / OFF Output circuit - contacts: 1 CO Rated load: AC1 - 16 A / 250 V AC; DC1 - 16 A / 24 V DC Input circuit: AC - 230 V; AC/DC - 12...240 V; external control contact Indicator: LED diode Mounting: direct on 35 mm rail mount</p>
RPC-1SA-...	Time relays; modular cover
 <p>page 300</p>	<p>Single-functions (WsWa) 8 time ranges - independent settings of T1 and T2 intervals (0,1 s ... 10 d) + ON / OFF Output circuit - contacts: 1 CO Rated load: AC1 - 16 A / 250 V AC; DC1 - 16 A / 24 V DC Input circuit: AC - 230 V; AC/DC - 12...240 V; external control contact Indicator: LED diode Mounting: direct on 35 mm rail mount</p>
RPC-1WT-...	Time relays; modular cover
 <p>page 300</p>	<p>Single-functions (Wt) 8 time ranges - independent settings of T1 and T2 intervals (0,1 s ... 10 d) + ON / OFF Output circuit - contacts: 1 CO Rated load: AC1 - 16 A / 250 V AC; DC1 - 16 A / 24 V DC Input circuit: AC - 230 V; AC/DC - 12...240 V; external control contact Indicator: LED diode Mounting: direct on 35 mm rail mount</p>
RPC-2SD-UNI	Time relays; modular cover
 <p>page 304</p>	<p>Star-Delta start-up 10 time ranges - settings of T1 interval: 0,1 s ... 1 h; T2 interval: 0,05 s ... 0,9 s Output circuit - contacts: 2 CO Rated load: AC1 - 8 A / 250 V AC; DC1 - 8 A / 24 V DC Input circuit: AC/DC - 12...240 V Indicator: LED diode Mounting: direct on 35 mm rail mount</p>
TR4N - 1 CO	Time relays; compact cover
 <p>page 307</p>	<p>Multifunctions - 10 time functions (E, Wu, Bp, Bi, PWM, R, Ws, Wa, Esa, B) + function ON / OFF; 8 time ranges - settings of T interval (0,1 s ... 10 d) Output circuit - contacts: 1 CO Rated load: AC1 - 16 A / 250 V AC; DC1 - 16 A / 24 V DC Input circuit: AC - 115, 230 V; AC/DC - 12, 24 V; external control contact Indicator: LED diode Mounting: direct on 35 mm rail mount</p>

TR4N - 2 CO	Time relays; compact cover
 <p>page 307</p>	<p>Multifunctions - 10 time functions (E, Wu, Bp, Bi, PWM, R, Ws, Wa, Esa, B) + function ON / OFF; 8 time ranges - settings of T interval (0,1 s ... 10 d)</p> <p>Output circuit - contacts: 2 CO</p> <p>Rated load: AC1 - 8 A / 250 V AC; DC1 - 8 A / 24 V DC</p> <p>Input circuit: AC - 115, 230 V; AC/DC - 12, 24 V; external control contact</p> <p>Indicator: LED diode</p> <p>Mounting: direct on 35 mm rail mount</p>
TR4N - 4 CO	Time relays; compact cover
 <p>page 311</p>	<p>Multifunctions - 10 time functions (E, Wu, Bp, Bi, PWM, R, Ws, Wa, Esa, B) + function ON / OFF; 8 time ranges - settings of T interval (0,1 s ... 10 d)</p> <p>Output circuit - contacts: 4 CO</p> <p>Rated load: AC1 - 6 A / 250 V AC; DC1 - 6 A / 24 V DC</p> <p>Input circuit: AC - 115, 230 V; AC/DC - 12, 24 V; external control contact</p> <p>Indicator: LED diode</p> <p>Mounting: direct on 35 mm rail mount</p>
T-R4 - GZM4	Time relays; with plug-in socket GZM4 or GZT4 or GZMB4
 <p>page 315</p>	<p>Single-functions - 4 versions (time functions: E, Wu, Bp, Bi)</p> <p>7 time ranges - settings of T interval (0,1 s ... 100 h)</p> <p>Output circuit - contacts: 4 CO</p> <p>Rated load: AC1 - 6 A / 230 V AC</p> <p>Input circuit: DC - 12, 24 V; AC - 24, 115, 230 V</p> <p>Indicator: LED diode; Mounting: for plug-in sockets</p> <p>Accessories: screw terminals sockets, for mounting on 35 mm rail mount or on panel - GZM4, GZT4; spring terminals sockets, for mounting on 35 mm rail mount - GZMB4 (pages 366-367)</p>
PIR15...T	Time relays; with time module COM3
 <p>page 319</p>	<p>Multifunctions - 8 time functions (E, Wu, Bp, Bi, R, Ws, Wa, Es)</p> <p>8 time ranges - settings of T interval (0,1 s ... 10 d)</p> <p>Output circuit - contacts: 2 CO, 3 CO</p> <p>Rated load: AC1 - 10 A / 250 V AC; DC1 - 10 A / 24 V DC</p> <p>Input circuit: DC - 24, 48, 60, 110, 120, 220 V; AC - 24, 48, 60, 110, 120, 230, 240 V; external control contact</p> <p>Set: electromagnetic relay R15 - 3 CO (2 CO), plug-in socket GZP11 (GZP8), time module COM3, clip GZP-0054, description plate GZP-0035</p> <p>Indicator: LED diode; Mounting: direct on 35 mm rail mount or on panel</p>
COM3	Universal time modules
 <p>page 324</p>	<p>Multifunctions - 8 time functions (E, Wu, Bp, Bi, R, Ws, Wa, Es)</p> <p>8 time ranges - settings of T interval (0,1 s ... 10 d)</p> <p>Output circuit - contacts: according to relays R15 - 3 CO (2 CO)</p> <p>Input circuit: AC/DC - 12...240 V; external control contact</p> <p>Indicator: LED diode</p> <p>Mounting: combinable to relay R15 - 3 CO (2 CO) with plug-in socket GZP11 (GZP8)</p>

MR-EU1W1P	Monitoring relays; modular cover
 <p>page 328</p>	<p>Multifunctions (DC and AC voltage monitoring in 1-phase network, with adjustable thresholds) - 2 functions (UNDER, WIN)</p> <p>Output circuit - contacts: 1 CO</p> <p>Rated load: AC1 - 5 A / 250 V AC</p> <p>Measuring circuits: AC - 24, 230 V; DC - 24 V</p> <p>Input circuit (supply) = Measuring circuits (monitoring voltages)</p> <p>Indicator: LED diode</p> <p>Mounting: direct on 35 mm rail mount</p>
MR-EU31UW1P	Monitoring relays; modular cover
 <p>page 331</p>	<p>Multifunctions (AC voltage monitoring in 1-phase network and 3-phase - 3(N)~ 400/230 V, with adjustable thresholds) - 5 functions (UNDER, UNDER+SEQ, WIN, WIN+SEQ, SEQ)</p> <p>Output circuit - contacts: 1 CO</p> <p>Rated load: AC1 - 5 A / 250 V AC</p> <p>Measuring circuits: AC - 230 V, 3(N)~ 400/230 V</p> <p>Input circuit (supply) = Measuring circuits (monitoring voltages)</p> <p>Indicator: LED diode</p> <p>Mounting: direct on 35 mm rail mount</p>
MR-EU3M1P	Monitoring relays; modular cover
 <p>page 334</p>	<p>Multifunctions (AC voltage monitoring in 3-phase network - 3(N)~ 400/230 V) - 2 functions (SEQ, ASYM)</p> <p>Output circuit - contacts: 1 CO</p> <p>Rated load: AC1 - 5 A / 250 V AC</p> <p>Measuring circuits: AC - 3(N)~ 400/230 V</p> <p>Input circuit (supply) = Measuring circuits (monitoring voltages)</p> <p>Indicator: LED diode</p> <p>Mounting: direct on 35 mm rail mount</p>
MR-EI1W1P	Monitoring relays; modular cover
 <p>page 337</p>	<p>Multifunctions (AC current monitoring in 1-phase network, with adjustable thresholds and adjustable hysteresis) - 6 functions (OVER, OVER+LATCH, UNDER, UNDER+LATCH, WIN, WIN+LATCH)</p> <p>Output circuit - contacts: 1 CO</p> <p>Rated load: AC1 - 5 A / 250 V AC</p> <p>Measuring circuit: AC - 230 V; Monitoring current: max. 10 A / 230 V AC</p> <p>Input circuit (supply) = Measuring circuit</p> <p>Indicator: LED diode; Mounting: direct on 35 mm rail mount</p>
MR-ET1P	Monitoring relays; modular cover
 <p>page 340</p>	<p>Single-functions (motor temperature monitoring)</p> <p>Output circuit - contacts: 1 CO</p> <p>Rated load: AC1 - 5 A / 250 V AC</p> <p>Measuring circuit: accompanied by motor PTC sensors or thermal switch</p> <p>Input circuit (supply): AC - 230 V</p> <p>Indicator: LED diode</p> <p>Mounting: direct on 35 mm rail mount</p>

MR-GU32P-TR2	Monitoring relays; industrial cover
 <p>page 343</p>	<p>Multifunctions (AC voltages monitoring in phases - 230 V, 3-phase network 3(N)~ 400/230 V, with adjustable thresholds) - 6 functions (OVER, OVER+LATCH, UNDER, UNDER+LATCH, WIN, WIN+LATCH)</p> <p>Output circuit - contacts: 2 CO</p> <p>Rated load: AC1 - 3 A, 5 A / 250 V AC</p> <p>Measuring circuit: AC - 230 V</p> <p>Input circuit: AC - 12, 24, 42, 48, 110, 127, 230, 400 V AC (supply via TR2 transformer)</p> <p>Indicator: LED diode; Mounting: direct on 35 mm rail mount</p>
MR-GU3M2P-TR2	Monitoring relays; industrial cover
 <p>page 346</p>	<p>Multifunctions (AC voltage monitoring in 3-phase network, with adjustable thresholds) - 6 functions (UNDER, UNDER+SEQ, WIN, WIN+SEQ, SEQ, ASYM)</p> <p>Output circuit - contacts: 2 CO</p> <p>Rated load: AC1 - 3 A, 5 A / 250 V AC</p> <p>Measuring circuits: AC - 3(N)~ 400/230 V</p> <p>Input circuit: AC - 12, 24, 42, 48, 110, 127, 230, 400 V AC (supply via TR2 transformer)</p> <p>Indicator: LED diode</p> <p>Mounting: direct on 35 mm rail mount</p>
MR-GU3M2P	Monitoring relays; industrial cover
 <p>page 349</p>	<p>Multifunctions (AC voltage monitoring in 3-phase network) - 2 functions (SEQ, ASYM)</p> <p>Output circuit - contacts: 2 CO</p> <p>Rated load: AC1 - 3 A, 5 A / 250 V AC</p> <p>Measuring circuits: AC - 3(N)~ 400/230 V</p> <p>Input circuit (supply) = Measuring circuits (monitoring voltage)</p> <p>Indicator: LED diode</p> <p>Mounting: direct on 35 mm rail mount</p>
MR-G11M2P-TR2	Monitoring relays; industrial cover
 <p>page 352</p>	<p>Multifunctions (DC and AC current monitoring in 1-phase network, with adjustable thresholds) - 6 functions (OVER, OVER+LATCH, UNDER, UNDER+LATCH, WIN, WIN+LATCH)</p> <p>Output circuit - contacts: 2 CO</p> <p>Rated load: AC1 - 3 A, 5 A / 250 V AC</p> <p>Measuring circuits: AC/DC - 0,1 A, 1 A, 10 A</p> <p>Input circuit: AC - 12, 24, 42, 48, 110, 127, 230, 400 V AC (supply via TR2 transformer)</p> <p>Indicator: LED diode; Mounting: direct on 35 mm rail mount</p>
MR-GT2P-TR2	Monitoring relays; industrial cover
 <p>page 355</p>	<p>Single-functions (motor temperature monitoring)</p> <p>Output circuit - contacts: 2 CO</p> <p>Rated load: AC1 - 3 A, 5 A / 250 V AC</p> <p>Measuring circuit: accompanied by motor PTC sensors</p> <p>Input circuit: AC - 12, 24, 42, 48, 110, 127, 230, 400 V AC (supply via TR2 transformer)</p> <p>Indicator: LED diode</p> <p>Mounting: direct on 35 mm rail mount</p>

Relays subminiature signal

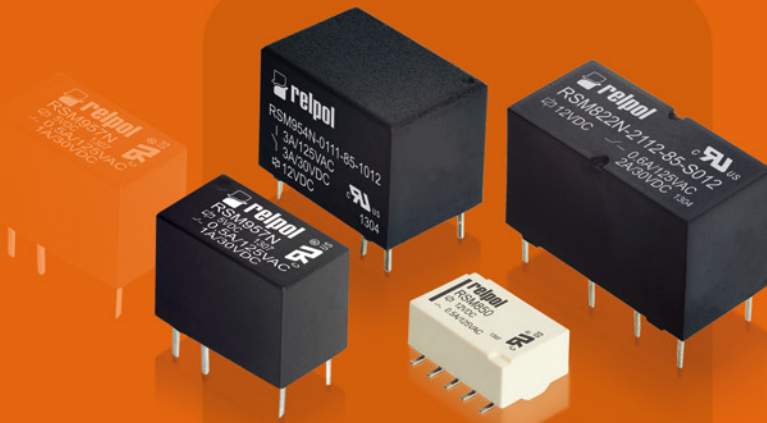

Subminiature relays are applied in e.g. telecommunication devices, office equipment, alarm systems, measurement devices, medical monitoring devices, AV devices, control sensors.



Their major features which provide for their applications in electronic circuits as interface-control units are: miniature dimensions, high switching capacity, high resistance of the cover to difficult operating conditions, wide range of control voltages.



Space-saving of the electronic plates, low power consumption of the control circuits, a few applicable mounting technologies are only few of the advantages offered by the aforementioned features.



They meet the requirements of REACH and RoHS Directive. The relays are recognized and certified by:



RSM850	48
RSM850B	51
RSM822N	54
RSM954N	57
RSM957N	59

RSM850


subminiature signal relays

version THT ②



version SMT ③



- Polarized, monostable relays
- DC coils of up to 24 V DC, low coil power 0,14 ... 0,20 W
- For PCB • Sealed, for wave soldering and cleaning; for reflow soldering • Dielectric strength 1000 Vrms
- Applications: for telecommunication devices, office equipment, alarm systems, measuring instruments, medical monitoring devices, AV devices, control sensors
- Conforms to FCC Part 68 - 1500 V - lightning surge
- Recognitions, certifications, directives: RoHS, 

Contact data

Number and type of contacts		2 CO
Contact material		AgPd/Au flash gold plating
Rated / max. switching voltage	AC	125 V / 250 V
Min. switching voltage		10 mV ①
Rated load	AC1 DC1	0,5 A / 125 V AC 2 A / 30 V DC
Min. switching current		0,01 mA ①
Rated current		2 A
Max. breaking capacity	AC1	62,5 VA
Contact resistance		≤ 50 mΩ

Coil data

Rated voltage	DC	3, 5, 6, 9, 12, 24 V
Must release voltage		DC: ≥ 0,1 U _n
Operating range of supply voltage		see Table 1
Rated power consumption	DC	0,14 W 3 ... 12 V 0,20 W 24 V

Insulation according to EN 60664-1


Insulation resistance		1 000 MΩ	500 V DC, 60 s
Dielectric strength			
• between coil and contacts		1 000 V AC	type of insulation: basic
• contact clearance		1 000 V AC	type of clearance: micro-disconnection
• pole - pole		1 000 V AC	type of insulation: basic
Contact - coil distance			
• clearance		≥ 0,5 mm	
• creepage		≥ 0,9 mm	

General data


Operating / release time (typical values)		3 ms / 3 ms	
Electrical life			
• resistive AC1	1 200 cycles/hour	10 ⁵	0,5 A, 125 V AC
• resistive DC1	1 200 cycles/hour	2 x 10 ⁵	1 A, 30 V DC
Mechanical life	10 800 cycles/hour	10 ⁸	
Dimensions (L x W x H)		THT: 14,3 x 9,3 x 5,4 mm ②	SMT: 14,3 x 9,3 x 6,6 mm ③
Weight		1,5 g	
Ambient temperature (non-condensation and/or icing)	• operating	THT: -40...+70 °C	SMT: -40...+85 °C
Cover protection category		IP 67	EN 60529
Environmental protection		RTIII	EN 61810-7
Shock resistance		50 g (500 m/s ²)	11 ms - functional
Vibration resistance		3 mm DA (constant amplitude)	10...55 Hz
Solder temperature			
• for wave		THT: max. 260 °C	
• manual soldering with the tool of max. 60 W		THT: max. 350 °C	
• reflow		SMT: see "Reflow soldering profiles"	
Soldering time			
• for wave		THT: max. 5 s	
• manual soldering with the tool of max. 60 W		THT: max. 3 s	
• reflow		SMT: see "Reflow soldering profiles"	

The data in bold type relate to the standard versions of the relays. ① Values refer to new relays, which have not been used for signals exceeding the maximum 10 mA and/or 6 V (DC or AC). After the current exceeds 10 mA and/or 6 V (DC or AC) relay can not be used for signals with the minimum values indicated in the technical data sheet. ② For version THT: cover - black colour. ③ For version SMT: cover - white colour.

Dimensions


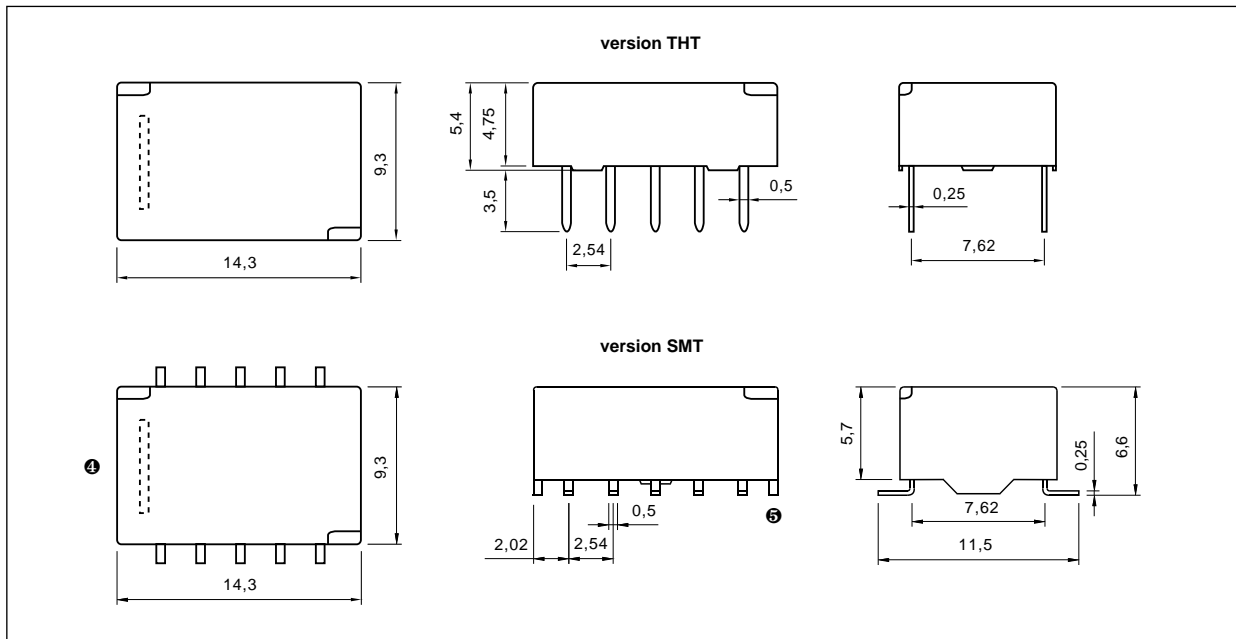


Connection diagrams (pin side view)

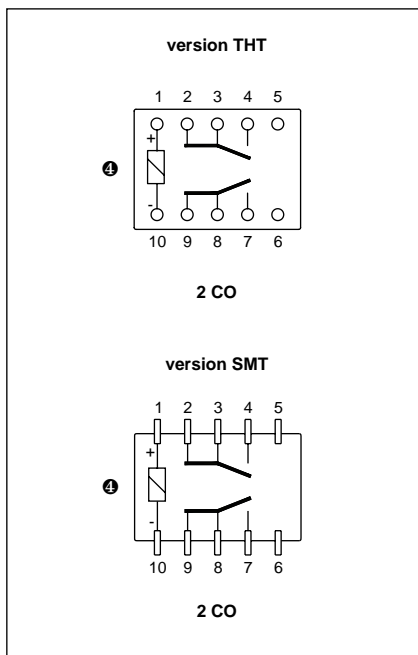

④ Coil terminals position is indicated by the vertical strip on the relay cover.

SMT reflow soldering profiles

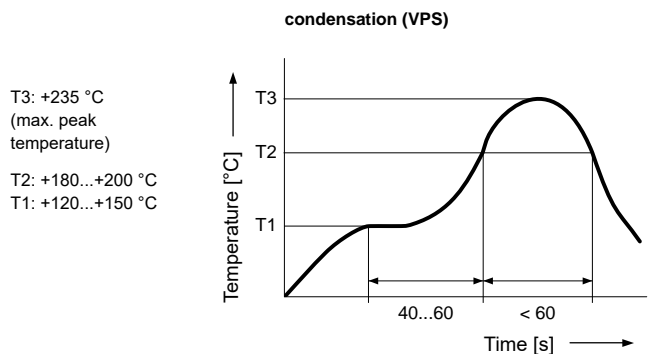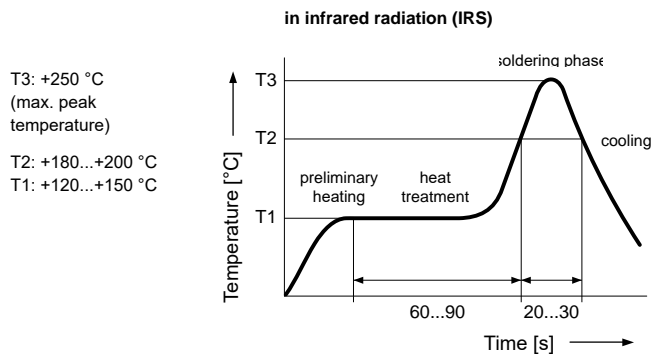


1. Do not exceed the admissible parameters of reflow soldering (otherwise the relay might become damaged). 2. Following soldering process, the soldering areas shall be cooled as soon as possible in order to avoid relay damage. Cooling rate should not be higher than 5 °C/s. 3. Following the soldering process, the relays may have the printed board washed. Immediately after soldering, application of cold washing agent should be avoided. The relays shall be cooled to the ambient temperature before they are washed. Mild washing agents, e.g. alcohol-based ones, are recommended. Aggressive washing detergents shall be avoided as they may react with the sealing and housing of the relay and damage it. The relays shall not be washed in ultrasonic cleaners.


RSM850

subminiature signal relays

Pinout - version THT (solder side view)

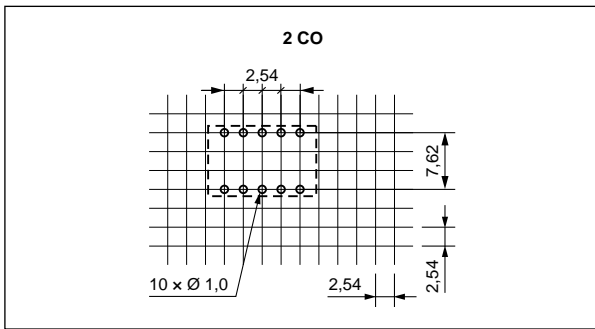

Soldering areas - version SMT (solder side view)

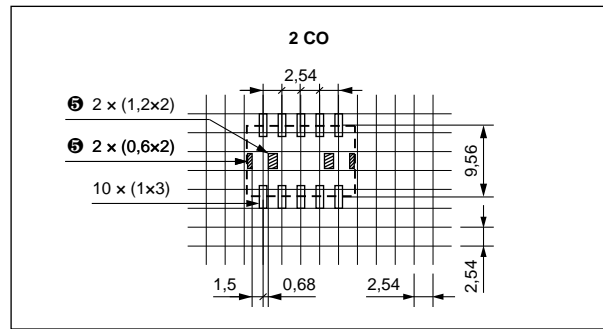

⑤ Temporary glue pad on PCB.

Mounting


Relays **RSM850** are designed for: • direct PCB mounting - THT (Through-Hole Technology) • surface mounting - SMT (Surface Mounting Technology).

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
1003	3	64,3	± 10%	2,25	7,5
1005	5	178	± 10%	3,75	12,5
1006	6	257	± 10%	4,50	15,0
1009	9	579	± 10%	6,75	22,5
1012	12	1 028	± 10%	9,00	30,0
1024	24	2 880	± 10%	18,00	48,0

Ordering codes

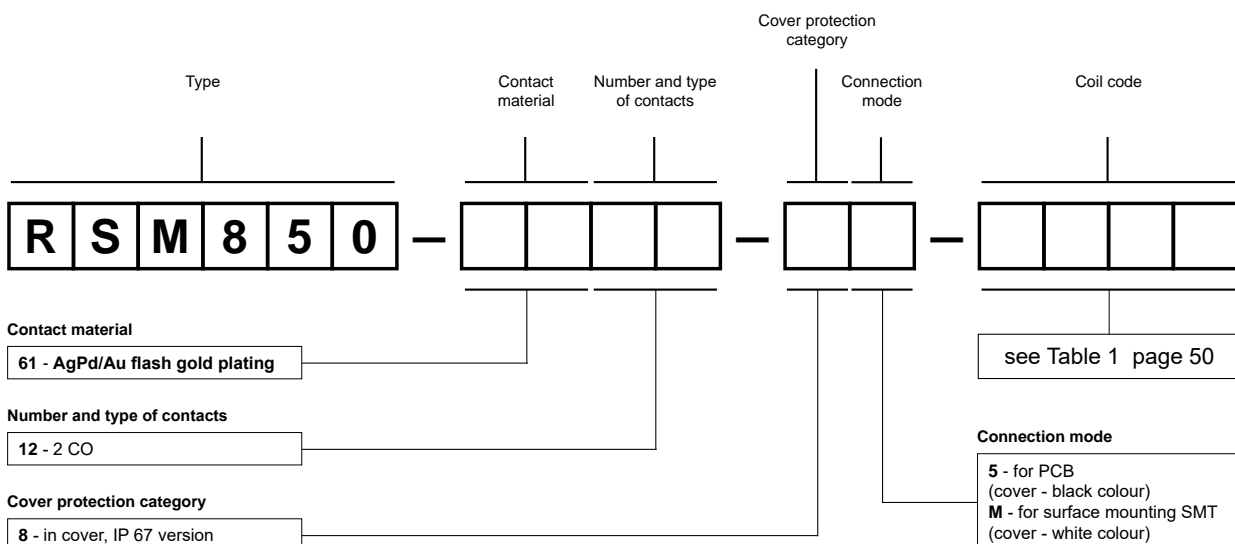


Examples of ordering codes:

- RSM850-6112-85-1012** relay **RSM850**, for PCB, two changeover contacts, contact material AgPd/Au flash gold plating, coil voltage 12 V DC, in cover (black colour) IP 67
- RSM850-6112-8M-1048** relay **RSM850**, for surface mounting SMT, two changeover contacts, contact material AgPd/Au flash gold plating, coil voltage 48 V DC, in cover (white colour) IP 67



**BISTABLE
1-COIL**

- Polarized, bistable relays with one coil
- DC coils of up to 24 V DC, low coil power 0,10 ... 0,15 W
- For PCB • Sealed, for wave soldering and cleaning
- Dielectric strength 1000 Vrms
- Applications: for telecommunication devices, office equipment, alarm systems, measuring instruments, medical monitoring devices, AV devices, control sensors
- Conforms to FCC Part 68 - 1500 V - lightning surge
- Recognitions, certifications, directives: RoHS, 

Contact data

Number and type of contacts		2 CO
Contact material		AgPd/Au flash gold plating
Rated / max. switching voltage	AC	125 V / 250 V
Min. switching voltage		10 mV ①
Rated load	AC1 DC1	0,5 A / 125 V AC 2 A / 30 V DC
Min. switching current		0,01 mA ①
Rated current		2 A
Max. breaking capacity	AC1	62,5 VA
Contact resistance		≤ 50 mΩ

Coil data

Rated voltage	DC	3, 5, 6, 9, 12, 24 V
Must release voltage		-0,75 U _n ... -U _{max.} ②
Operating range of supply voltage		see Table 1
Rated power consumption	DC	0,10 W 3 ... 12 V 0,15 W 24 V

Insulation according to EN 60664-1

Insulation resistance		1 000 MΩ	500 V DC, 60 s
Dielectric strength			
• between coil and contacts		1 000 V AC	type of insulation: basic
• contact clearance		1 000 V AC	type of clearance: micro-disconnection
• pole - pole		1 000 V AC	type of insulation: basic
Contact - coil distance			
• clearance		≥ 0,5 mm	
• creepage		≥ 0,9 mm	

General data


Operating / release time (typical values)		3 ms / 3 ms	
Electrical life			
• resistive AC1	1 200 cycles/hour	10 ⁵	0,5 A, 125 V AC
• resistive DC1	1 200 cycles/hour	2 x 10 ⁵	1 A, 30 V DC
Mechanical life	10 800 cycles/hour	10 ⁸	
Dimensions (L x W x H)		14,3 x 9,3 x 5,4 mm	
Weight		1,5 g	
Ambient temperature (non-condensation and/or icing)	• operating	-40...+70 °C	
Cover protection category		IP 67 EN 60529	
Environmental protection		RTIII EN 61810-7	
Shock resistance		50 g (500 m/s ²) 11 ms - functional	
Vibration resistance		3 mm DA (constant amplitude) 10...55 Hz	
Solder bath temperature			
• for wave		max. 260 °C	
• manual soldering with the tool of 60 W max.		max. 350 °C	
Soldering time			
• for wave		max. 5 s	
• manual soldering with the tool of 60 W max.		max. 3 s	

The data in bold type relate to the standard versions of the relays. ① Values refer to new relays, which have not been used for signals exceeding the maximum 10 mA and/or 6 V (DC or AC). After the current exceeds 10 mA and/or 6 V (DC or AC) relay can not be used for signals with the minimum values indicated in the technical data sheet. ② Must release voltage are the values of the operating supply voltage range of opposite polarization, specified in Table 1. ③ Coil terminals position is indicated by the vertical strip on the relay cover.


RSM850B

subminiature signal relays


Dimensions

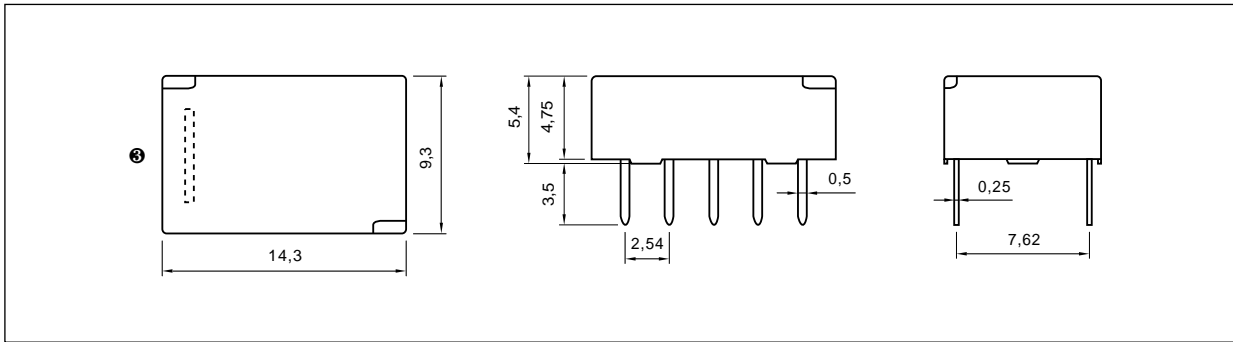

Connection diagram (pin side view)

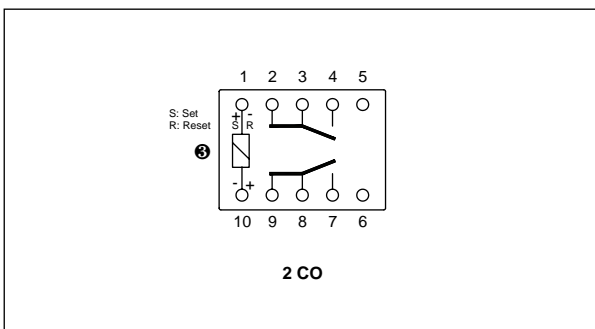

Pinout (solder side view)

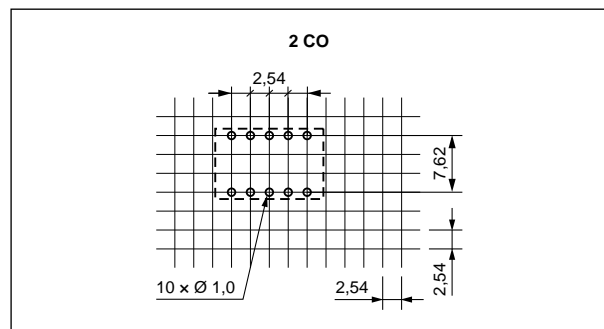


⊕ Coil terminals position is indicated by the vertical strip on the relay cover.

Mounting

Relays **RSM850B** are designed for direct PCB mounting - THT (Through-Hole Technology).

Subminiature relays RSM850

versions: THT, SMT
- see page 48-50

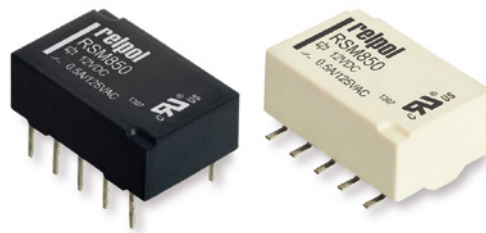


Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
1003	3	90	± 10%	2,25	8,7
1005	5	250	± 10%	3,75	14,5
1006	6	360	± 10%	4,50	17,4
1009	9	810	± 10%	6,75	26,1
1012	12	1 440	± 10%	9,00	34,8
1024	24	3 840	± 10%	18,00	57,6

Ordering codes

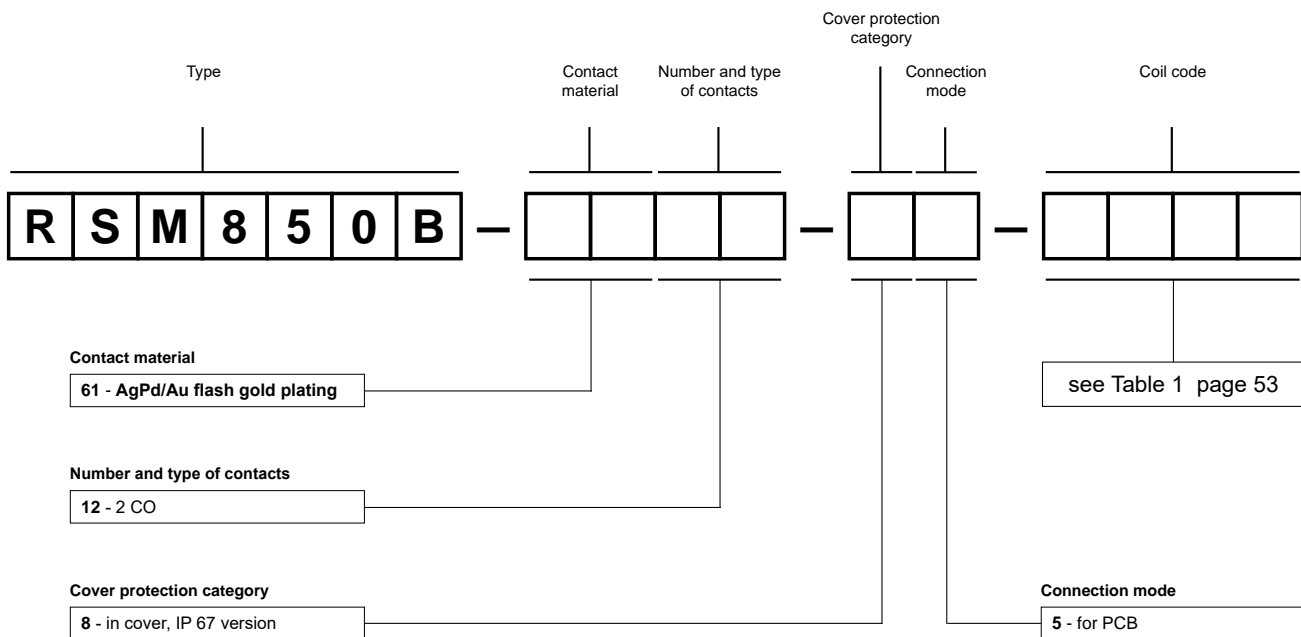

Example of ordering code:



RSM850B-6112-85-1012

bistable relay **RSM850B** with one coil, for PCB, two changeover contacts, contact material AgPd/Au flash gold plating, coil voltage 12 V DC, in cover IP 67

RSM822N

subminiature signal relays



- Subminiature monostable relays for switching low loads
- DC coils - standard and sensitive of up to 48 V DC, low coil power 0,20 W (sensitive coil) or 0,30 W (standard coil) • For PCB
- Sealed, for wave soldering and cleaning • Double bifurcated contact
- Applications: for telecommunication devices, office equipment, alarm systems, measuring instruments, medical monitoring devices, AV devices, control sensors
- Conforms to FCC Part 68 - 1500 V - lightning surge
- Recognitions, certifications, directives: RoHS,  

Contact data

Number and type of contacts		2 CO
Contact material		AgNi/Au flash gold plating
Rated / max. switching voltage	AC	125 V / 250 V
Min. switching voltage		10 mV ①
Rated load	AC1 DC1	0,6 A / 125 V AC 3 A / 2 A (NO/NC) / 30 V DC
Min. switching current		1 mA ①
Rated current		0,6 A / 125 V AC 2 A / 30 V DC
Max. breaking capacity	AC1	125 VA
Contact resistance		≤ 100 mΩ

Coil data

Rated voltage	DC	3, 5, 6, 9, 12, 24 V	sensitive coil
		48 V	standard coil
Must release voltage		DC: ≥ 0,1 U _n	
Operating range of supply voltage		see Tables 1, 2	
Rated power consumption	DC	0,20 W sensitive coil	0,30 W standard coil

Insulation according to EN 60664-1

Insulation resistance		> 1 000 MΩ	500 V DC, 60 s
Dielectric strength			
• between coil and contacts		1 000 V AC	type of insulation: basic (1500 V AC; 1,2 / 50 μs)
• contact clearance		1 000 V AC	type of clearance: micro-disconnection (1500 V AC; 1,2 / 50 μs)
• pole - pole		1 000 V AC	type of insulation: basic (1500 V AC; 1,2 / 50 μs)
Contact - coil distance			
• clearance		≥ 1,3 mm	
• creepage		≥ 1,5 mm	


General data

Operating / release time (typical values)		4,5 ms / 1,5 ms	
Electrical life (number of cycles)			
• resistive AC1	1 800 cycles/hour	10 ⁵	0,6 A, 125 V AC
• resistive DC1	1 800 cycles/hour	10 ⁵	2 A, 30 V DC
Mechanical life	18 000 cycles/hour	10 ⁸	
Dimensions (L x W x H)		20,5 x 10,2 x 12,5 mm	
Weight		4,5 g	
Ambient temperature (non-condensation and/or icing)	• operating	-40...+90 °C sensitive coil	-40...+80 °C standard coil
Cover protection category		IP 67	EN 60529
Environmental protection		RTIII	EN 61810-7
Shock resistance		10 g	
Vibration resistance		1,5 mm DA (constant amplitude)	10...55 Hz
Solder bath temperature		max. 260 °C	
Soldering time		max. 5 s	


The data in bold type relate to the standard versions of the relays.

① Reference value, relays previously tested and used at the resistance load of more than 10 mA / 6 V DC or at the peak AC voltage are not recommended for later switching of low level signals.

Dimensions

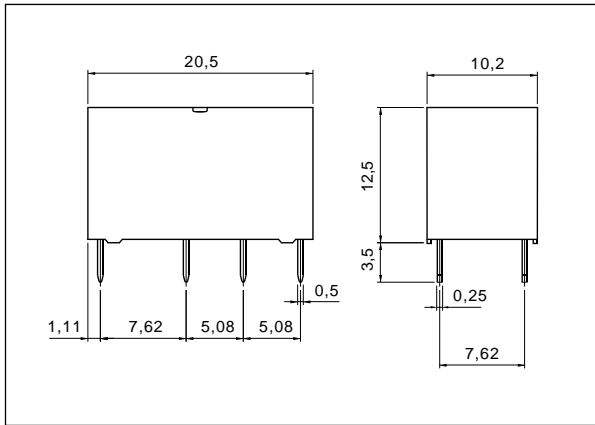


Connection diagram (pin side view)

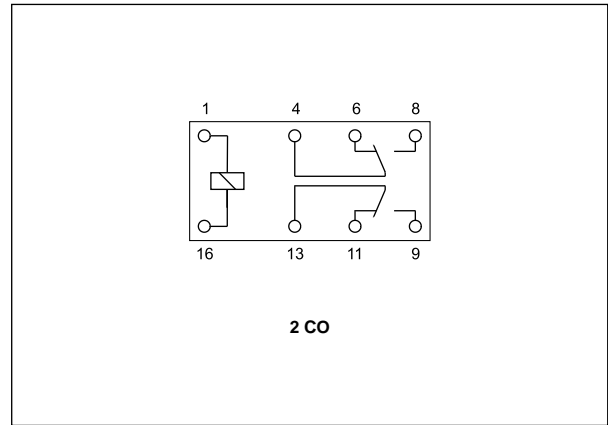


Electrical life at AC resistive current. Switching frequency: 1 800 cycles/hour

Fig. 1

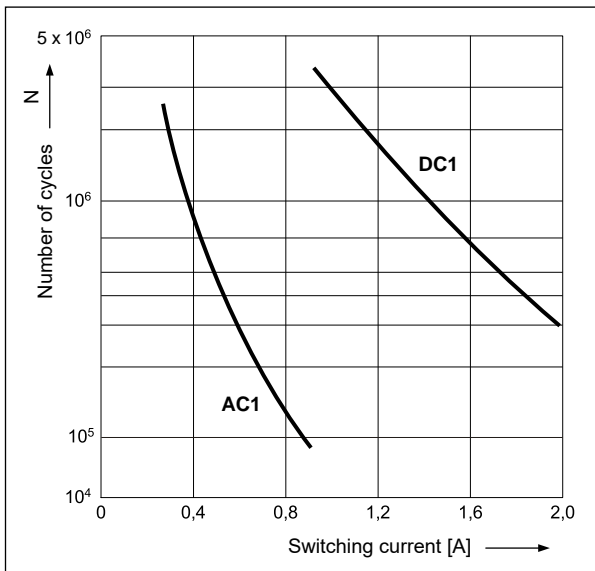


Max. DC resistive load breaking capacity

Fig. 2

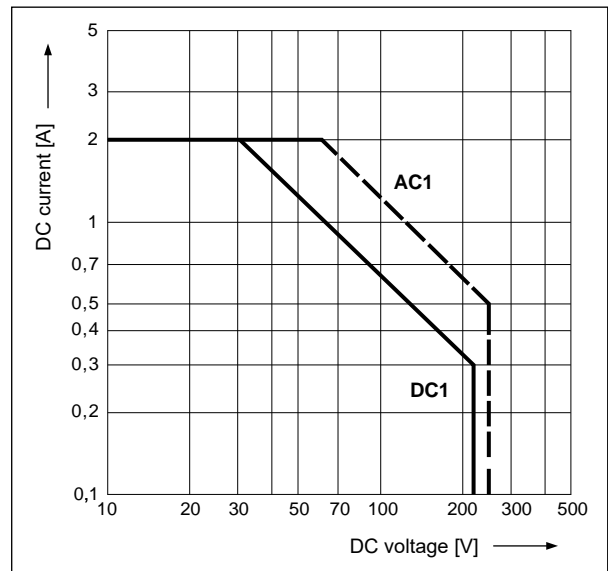

Pinout (solder side view)

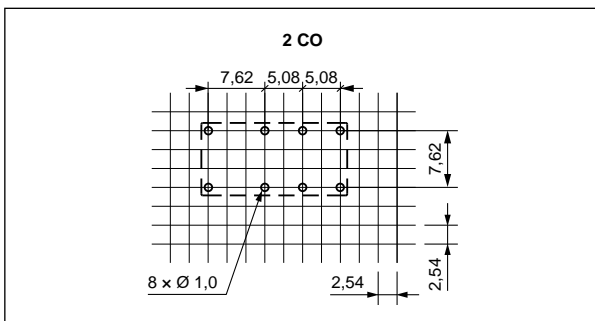

Mounting

Relays **RSM822N** are designed for direct PCB mounting.

RSM822N

subminiature signal relays

Coil data - DC voltage version, sensitive

Table 1


Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
S003	3	45	$\pm 10\%$	2,1	6,5
S005	5	125	$\pm 10\%$	3,5	10,8
S006	6	180	$\pm 10\%$	4,2	13,0
S009	9	405	$\pm 10\%$	6,3	19,5
S012	12	720	$\pm 10\%$	8,4	26,5
S024	24	2 880	$\pm 10\%$	16,8	52,9

Coil data - DC voltage version, standard

Table 2

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
1048	48	7 680	$\pm 10\%$	33,6	84,9

Ordering codes

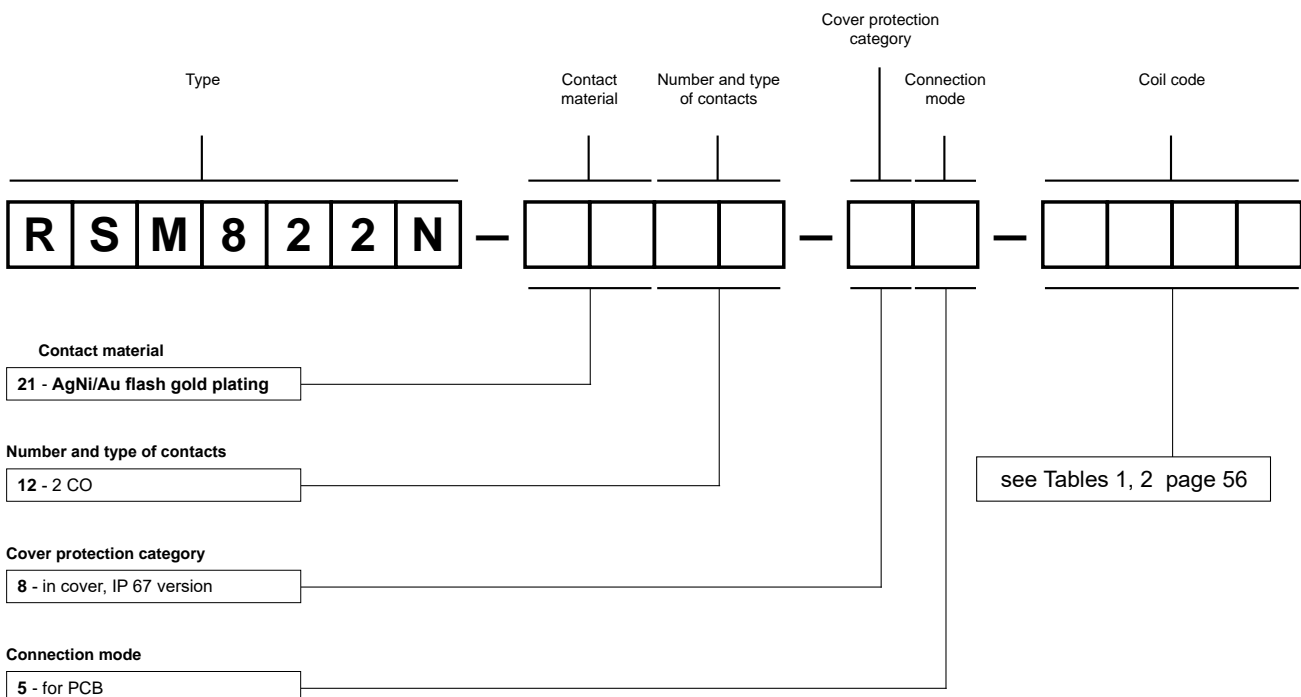

Examples of ordering codes:

RSM822N-2112-85-S005

relay **RSM822N**, for PCB, two changeover contacts, contact material AgNi/Au flash gold plating, sensitive coil voltage 5 V DC, in cover IP 67

RSM822N-2112-85-1048

relay **RSM822N**, for PCB, two changeover contacts, contact material AgNi/Au flash gold plating, standard coil voltage 48 V DC, in cover IP 67



- Subminiature monostable relays
- DC coils of up to 24 V DC, low coil power 0,36 W
- For PCB
- Sealed, for wave soldering and cleaning
- Small dimensions, light weight
- Applications: for telecommunication devices, household electrical appliance, office equipment, etc.
- Recognitions, certifications, directives: RoHS,

Contact data

Number and type of contacts		1 CO
Contact material		Ag/Au flash gold plating
Rated / max. switching voltage	AC	125 V / 220 V
Min. switching voltage		6 V
Rated load	AC1	3 A / 125 V AC
	DC1	3 A / 30 V DC
Min. switching current		50 mA
Rated current		3 A
Max. breaking capacity	AC1	375 VA
Contact resistance		≤ 50 mΩ

Coil data

Rated voltage	DC	3, 5, 6, 9, 12, 24 V
Must release voltage		DC: ≥ 0,1 U _n
Operating range of supply voltage		see Table 1
Rated power consumption	DC	0,36 W

Insulation according to EN 60664-1


Insulation resistance		100 MΩ	500 V DC, 60 s
Dielectric strength			
• between coil and contacts		1 000 V AC	type of insulation: basic
• contact clearance		500 V AC	type of clearance: micro-disconnection
Contact - coil distance			
• clearance		≥ 1,2 mm	
• creepage		≥ 2 mm	

General data

Operating / release time (typical values)		5 ms / 5 ms	
Electrical life (number of cycles)			
• resistive AC1	1 800 cycles/hour	10 ⁵	3 A, 125 V AC
• resistive DC1	1 800 cycles/hour	10 ⁵	3 A, 30 V DC
Mechanical life	18 000 cycles/hour	10 ⁷	
Dimensions (L x W x H)		15,5 x 11 x 11,5 mm	
Weight		3,5 g	
Ambient temperature			
(non-condensation and/or icing)	• operating	-25...+55 °C	
Cover protection category		IP 67	EN 60529
Environmental protection		RTIII	EN 61810-7
Shock resistance		10 g	
Vibration resistance		1,5 mm DA (constant amplitude)	10...55 Hz
Solder bath temperature		max. 260 °C	
Soldering time		max. 5 s	

The data in bold type relate to the standard versions of the relays.


Dimensions

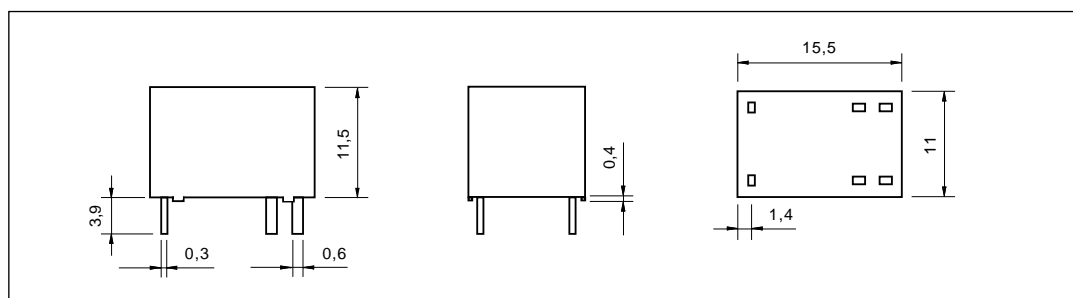


RSM954N

subminiature signal relays

Connection diagram (pin side view)

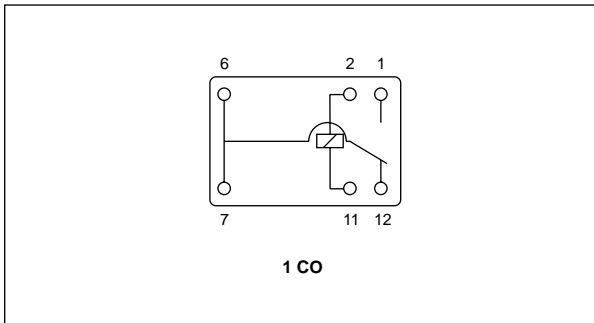

Pinout (solder side view)

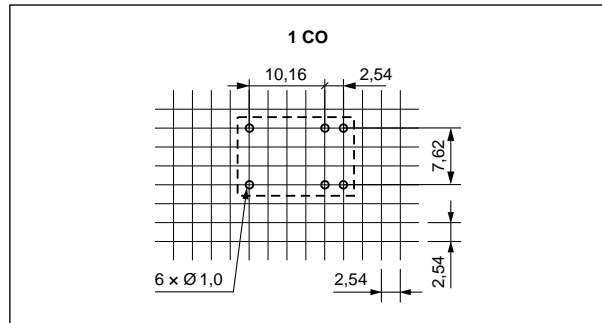

Mounting


Relays **RSM954N** are designed for direct PCB mounting.

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
1003	3	25	± 10%	2,25	3,3
1005	5	75	± 10%	3,75	5,5
1006	6	100	± 10%	4,50	6,6
1009	9	225	± 10%	6,75	9,9
1012	12	400	± 10%	9,00	13,2
1024	24	1 600	± 10%	18,00	26,5

Ordering codes

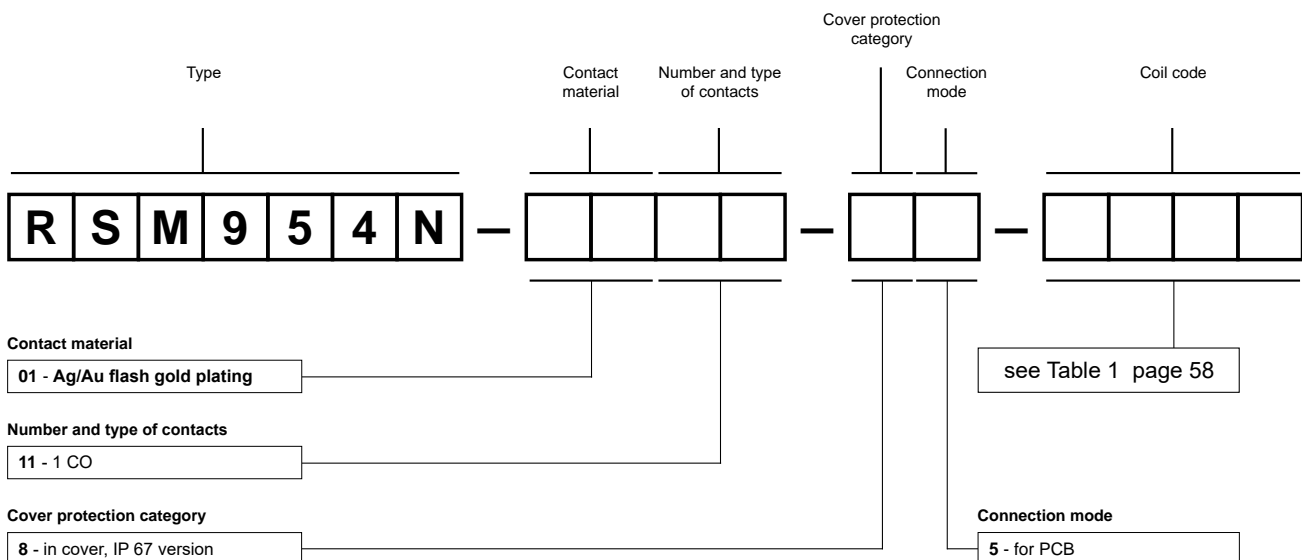




Example of ordering code:

RSM954N-0111-85-1005

relay **RSM954N**, for PCB, one changeover contact, contact material Ag/Au flash gold plating, coil voltage 5 V DC, in cover IP 67



- Subminiature monostable relays
- DC coils - sensitive of up to 24 V DC, low coil power 0,15 W
- For PCB
- Sealed, for wave soldering and cleaning
- Small dimensions, light weight
- Applications: for telecommunication devices, household electrical appliance, office equipment, etc.
- Recognitions, certifications, directives: RoHS,   

Contact data

Number and type of contacts		1 CO
Contact material		Ag/Au flash gold plating
Rated / max. switching voltage	AC	125 V / 220 V
Min. switching voltage		6 V
Rated load	AC1	0,5 A / 125 V AC
	DC1	1 A / 30 V DC
Min. switching current		50 mA
Rated current		1 A
Max. breaking capacity	AC1	62,5 VA
Contact resistance		≤ 100 mΩ

Coil data

Rated voltage	DC	3, 5, 6, 9, 12, 24 V
Must release voltage		DC: ≥ 0,1 U _n
Operating range of supply voltage		see Table 1
Rated power consumption	DC	0,15 W

Insulation according to EN 60664-1


Insulation resistance		> 1 000 MΩ	500 V DC, 60 s
Dielectric strength			
• between coil and contacts		1 000 V AC	type of insulation: basic
• contact clearance		400 V AC	type of clearance: micro-disconnection
Contact - coil distance			
• clearance		≥ 0,6 mm	
• creepage		≥ 0,6 mm	

General data

Operating / release time (typical values)		5 ms / 5 ms	
Electrical life (number of cycles)			
• resistive AC1	1 800 cycles/hour	10 ⁵	0,5 A, 125 V AC
• resistive DC1	1 800 cycles/hour	10 ⁵	1 A, 30 V DC
Mechanical life	18 000 cycles/hour	5 x 10 ⁶	
Dimensions (L x W x H)		12,5 x 7,5 x 10 mm	
Weight		2,2 g	
Ambient temperature			
(non-condensation and/or icing)	• operating	-30...+70 °C	
Cover protection category		IP 67	EN 60529
Environmental protection		RTIII	EN 61810-7
Shock resistance		10 g	
Vibration resistance		3,3 mm DA (constant amplitude)	10...55 Hz
Solder bath temperature		max. 260 °C	
Soldering time		max. 5 s	

The data in bold type relate to the standard versions of the relays.


Dimensions

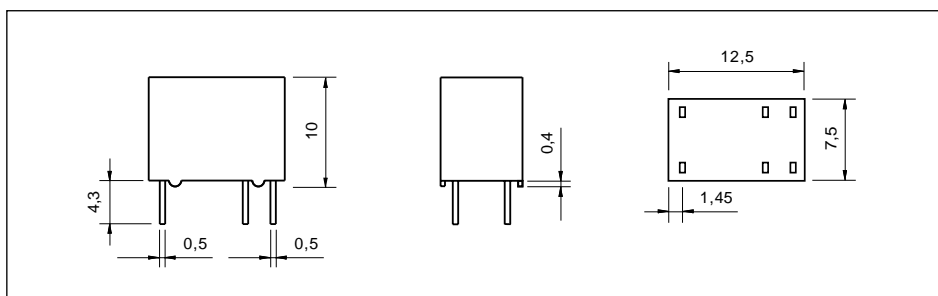


RSM957N

subminiature signal relays

Connection diagram (pin side view)

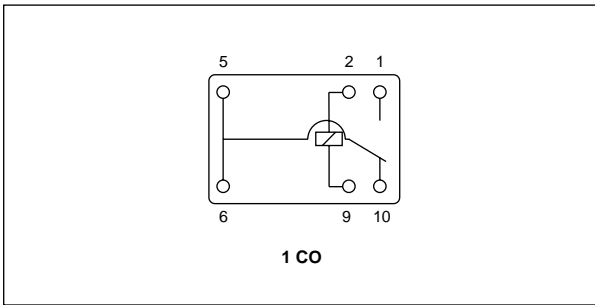

Pinout (solder side view)

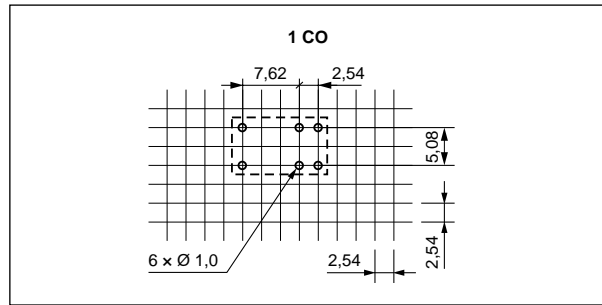

Mounting


Relays **RSM957N** are designed for direct PCB mounting.

Coil data - DC voltage version, sensitive

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
S003	3	60	± 10%	2,4	6
S005	5	166,7	± 10%	4,0	10
S006	6	240	± 10%	4,8	12
S009	9	540	± 10%	7,2	18
S012	12	960	± 10%	9,6	24
S024	24	3 840	± 10%	19,2	48

Ordering codes

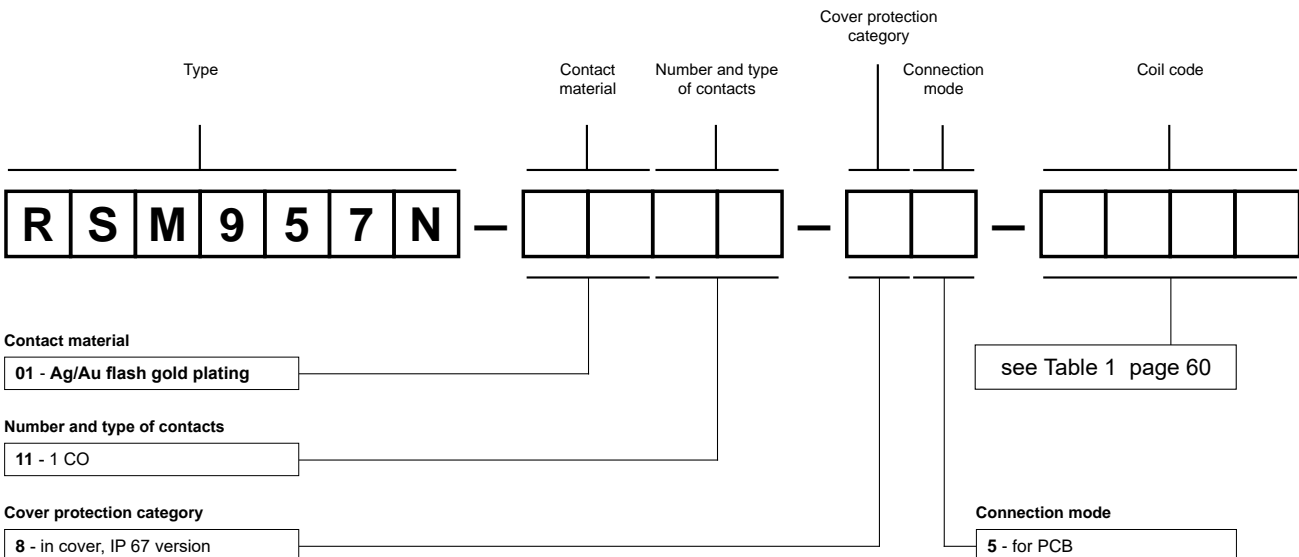

Example of ordering code:

RSM957N-0111-85-S005

relay **RSM957N**, for PCB, one changeover contact, contact material Ag/Au flash gold plating, sensitive coil voltage 5 V DC, in cover IP 67

Relays miniature



 **repol**® S.A.

Owing to their universality, miniature relays may be applied in alarm systems, as interface systems in industrial automation, power-electric systems, lighting control systems (e.g. in daylight-saving switches), staircase lighting control systems, emergency lighting control systems, time relays as their output terminals, control systems of household and catering industry equipment, and in numerous electric systems. This type of relay is of high quality and reliability.



The basic features of the miniature relays are: wide range of coil voltages, AC and DC coils, rated contact switching currents up to 20 A (depending on the relay type), height from 10,5 to 26 mm (depending on the relay type), high electric strength of the insulation, possibility of mounting on THT and in plug-in sockets. RM84/RM85 and RMP84/RMP85 relays are the basis for the interface relays of PI84/PI85 and PI84P/PI85P types which are described in the section of "Interface relays".



They meet the requirements of REACH and RoHS Directive. The relays are recognized and certified by:



RM12	62
RM12N	65
RM32N	68
RM40	71
RM45N	74
RM50N	77
RM51	80
RM699B	83
RM84	88
RM85	93
RM85 for switching higher voltages ...	98
RM85 inrush	101
RM85 105 °C sensitive ..	105
RM85 faston	109
RM87, RM87 sensitive ..	112
RM96	118
RM83	122
RMP84	126
RMP85	130
RA2	134

RM12




miniature relays

62

RM12 1 CO

RM12 1 NO / 1 NC



- DC coils - of up to 60 V DC, insulation class F: 155 °C
- CTI 250 • 5000 V / 8 mm reinforced insulation
- For PCB
- Terminals: 3,2 mm for version 1 CO, 5,04 mm for version 1 NO and 1 NC
- Compliance with standards: EN 61810-1, EN 60730-1, EN 60335-1, UL 508, CSA 22.2 No.14-95
- Recognitions, certifications, directives: RoHS,   

Contact data

Number and type of contacts		1 CO, 1 NO, 1 NC
Contact material		AgNi , AgNi/Au hard gold plating, AgSnO ₂ , AgSnO ₂ /Au hard gold plating
Rated / max. switching voltage	AC	250 V / 400 V
Min. switching voltage		5 V AgNi, 5 V AgNi/Au hard gold plating 10 V AgSnO ₂ , 5 V AgSnO ₂ /Au hard gold plating
Rated load (capacity)	AC1 DC1	8 A / 250 V AC 8 A / 24 V DC
Motor load	acc. to UL 508	1/2 HP 240 V AC, 4,9 FLA, single-phase motor ①
Min. switching current		5 mA AgNi, 2 mA AgNi/Au hard gold plating 10 mA AgSnO ₂ , 2 mA AgSnO ₂ /Au hard gold plating
Max. inrush current		10 A
Rated current		8 A
Max. breaking capacity	AC1	2000 VA
Min. breaking capacity		0,3 W AgNi, 0,05 W AgNi/Au hard gold plating 1 W AgSnO ₂ , 0,05 W AgSnO ₂ /Au hard gold plating
Contact resistance		≤ 100 mΩ 100 mA, 24 V
Max. operating frequency	• at rated load AC1 • no load	360 cycles/hour 18 000 cycles/hour

Coil data

Rated voltage	DC	5, 6, 9, 12, 18, 24, 48, 60 V
Must release voltage		DC: ≥ 0,1 U _n
Operating range of supply voltage		see Table 1
Rated power consumption	DC	0,25 W

Insulation according to EN 60664-1


Insulation rated voltage		400 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III IEC 61810-5
Insulation pollution degree		3
Flammability class		V-0 UL 94
Insulation group (contact plate)		IIIa
Tracking resistance category		2 UL 508
Dielectric strength	• between coil and contacts • contact clearance	5 000 V AC 1 min., type of insulation: reinforced 1 000 V AC 1 min., type of clearance: micro-disconnection
Contact - coil distance	• clearance • creepage	≥ 8 mm ≥ 8 mm

General data


Operating / release time (typical values)		10 ms / 5 ms
Electrical life (number of cycles)	• resistive AC1	10 ⁵ 1 NO, 8 A, 250 V AC, 70 °C (VDE) 6,5 x 10 ⁴ 1 CO (NO side), 8 A, 250 V AC, 70 °C (VDE) 5 x 10 ⁴ 1 NO, 8 A, 250 V AC, 85 °C (VDE)
	• resistive DC1	> 10 ⁵ 8 A, 24 V DC
Mechanical life	18 000 cycles/hour	10 ⁷
Load according to UL 508		10 A 277 V AC, general purpose B300 inductive load (Pilot Duty)
Dimensions (L x W x H)		28,5 x 10,1 x 12,5 mm
Weight		8 g
Ambient temperature (non-condensation and/or icing)	• storage • operating	-40...+85 °C -40...+85 °C
Cover protection category		IP 40 or IP 67 EN 60529
Environmental protection		RTII EN 61810-7
Shock resistance	(NO/NC)	10 g / 5 g EN 60068-2-27, Test Ea
Vibration resistance	(NO/NC)	10 g / 5 g 10...150 Hz EN 60068-2-6, Test Fc

The data in bold type relate to the standard versions of the relays. ① For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.


Dimensions

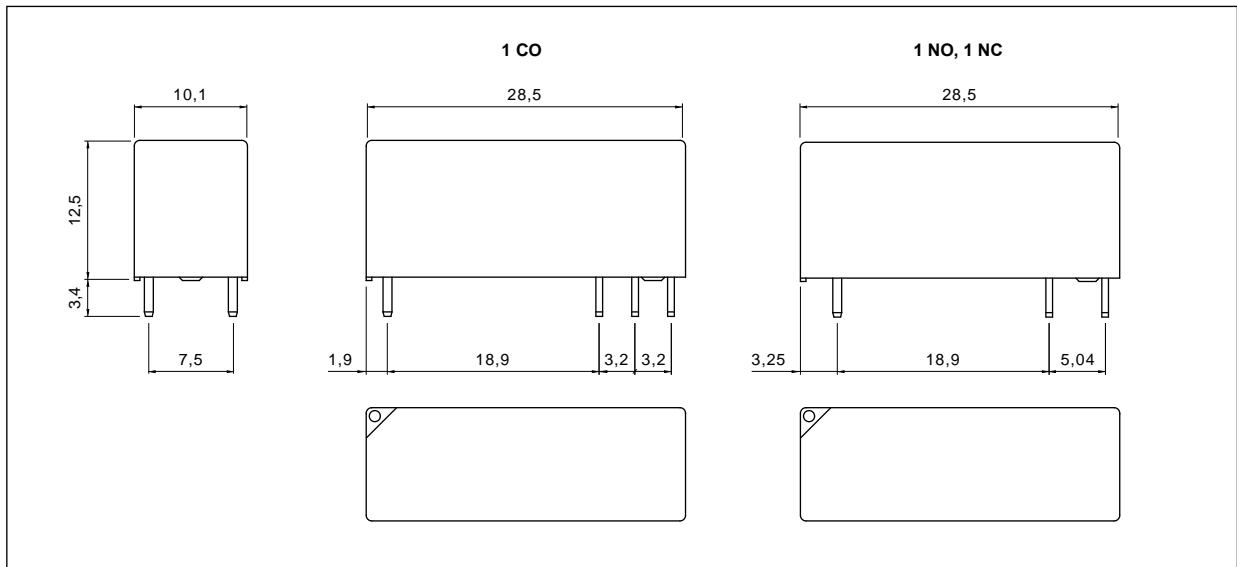


Max. DC resistive load breaking capacity Fig. 1

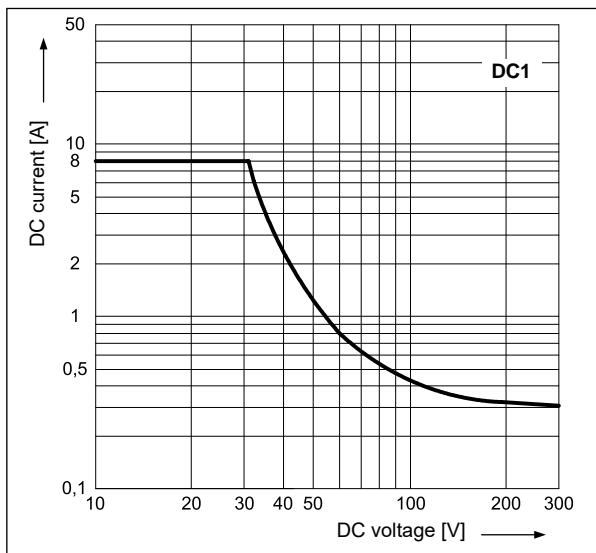

Coil operating range - DC Fig. 2

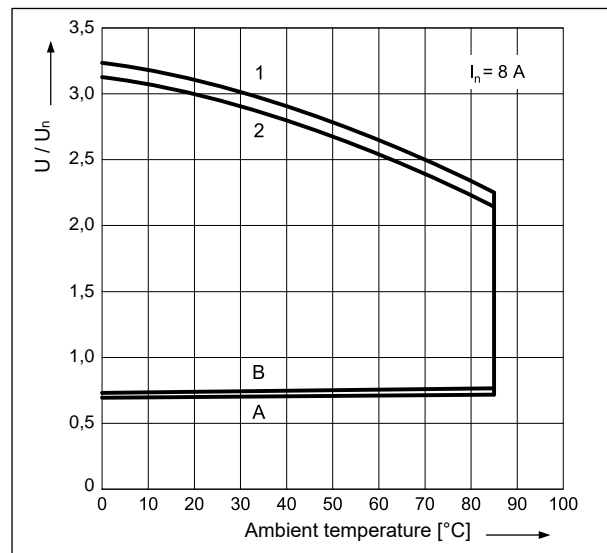

Connection diagrams (pin side view)

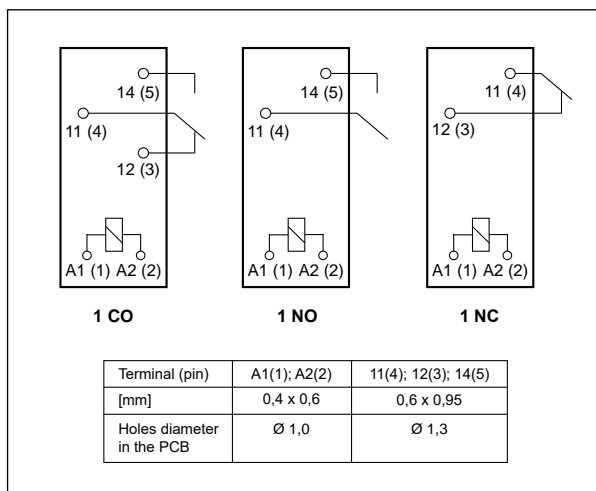

Description of Fig. 2


A - relations between make voltage and ambient temperature at no load on contacts. Coil temperature and ambient temperature are equal before coil energizing. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).

B - relations between make voltage and ambient temperature after initial coil heating up with 1,1 U_n, at continues load of I_n on contacts. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).

1, 2 - values on Y axis represent allowed overvoltage on coil at certain ambient temperature and contact load:

- 1** - no load
- 2** - rated load

Pinout (solder side view)

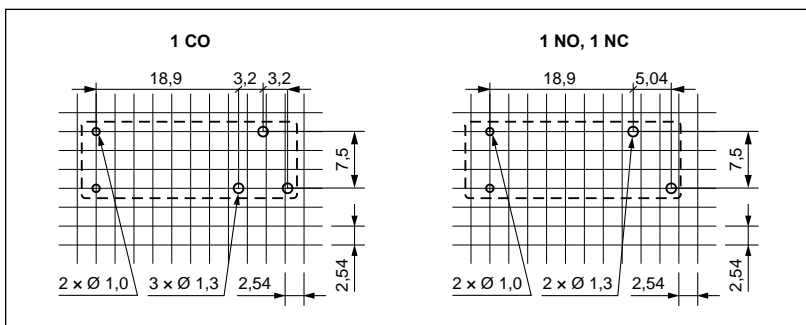

Mounting


Relays **RM12** are designed for direct PCB mounting.

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
1005	5	102	± 10%	3,5	15,0
1006	6	144	± 10%	4,2	18,0
1009	9	330	± 10%	6,3	27,0
1012	12	580	± 10%	8,4	36,0
1018	18	1 300	± 10%	12,6	54,0
1024	24	2 300	± 10%	16,8	72,0
1048	48	9 340	± 10%	33,6	144,0
1060	60	14 000	± 10%	42,0	180,0

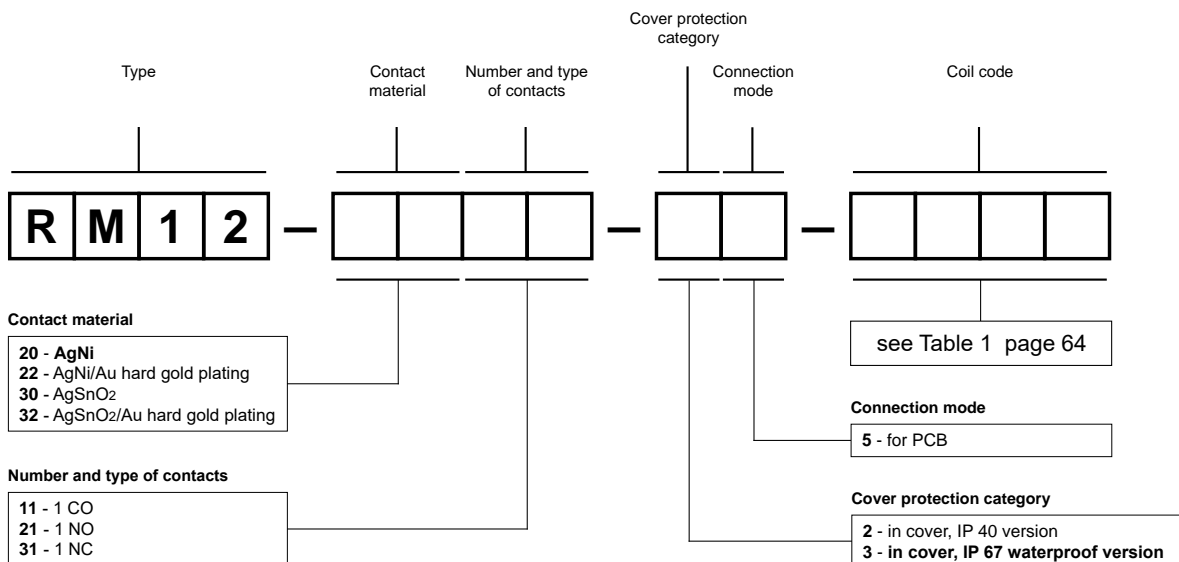

Ordering codes



Examples of ordering codes:

- RM12-2011-35-1012** relay **RM12**, for PCB, one changeover contact, contact material AgNi, coil voltage 12 V DC, in cover IP 67
- RM12-3031-25-1024** relay **RM12**, for PCB, one normally closed contact, contact material AgSnO₂, coil voltage 24 V DC, in cover IP 40



- DC coils - of up to 24 V DC, low coil power 0,22 ... 0,25 W
- For PCB
- Small dimensions, light weight
- Applications: for household electrical appliance, automation systems, electrical equipment, instrument and meter, telecommunication devices, remote control facilities
- Recognitions, certifications, directives: RoHS,  

Contact data

Number and type of contacts	1 CO, 1 NO		
Contact material	AgNi , AgSnO ₂		
Rated / max. switching voltage	AC	250 V / 440 V	
Min. switching voltage	6 V		
Rated load	AC1	1 CO: 8 A / 250 V AC	1 NO: 10 A / 250 V AC
	DC1	1 CO: 8 A / 30 V DC	1 NO: 10 A / 30 V DC
Min. switching current	100 mA		
Rated current	10 A		
Max. breaking capacity	AC1	2 500 VA	
Contact resistance	≤ 100 mΩ		

Coil data

Rated voltage	DC	5, 9, 12, 18, 24 V
Must release voltage	DC: ≥ 0,1 U _n	
Operating range of supply voltage	see Table 1	
Rated power consumption	DC	0,22 ... 0,25 W

Insulation according to EN 60664-1


Insulation resistance	> 1 000 MΩ	500 V DC, 60 s
Dielectric strength		
• between coil and contacts	5 000 V AC	type of insulation: reinforced
• contact clearance	1 000 V AC	type of clearance: micro-disconnection
Contact - coil distance		
• clearance	≥ 8 mm	
• creepage	≥ 8 mm	

General data


Operating / release time (typical values)	10 ms / 5 ms		
Electrical life (number of cycles)			
• resistive AC1	1 800 cycles/hour	10 ⁵	10 A, 250 V AC
• resistive DC1	1 800 cycles/hour	10 ⁵	10 A, 30 V DC
Mechanical life	18 000 cycles/hour	10 ⁷	
Dimensions (L x W x H)	28,7 x 10,3 x 12,7 mm		
Weight	8 g		
Ambient temperature (non-condensation and/or icing)	• operating	-40...+85 °C	
Cover protection category	IP 40 or IP 67		EN 60529
Environmental protection	RTII or RTIII		EN 61810-7
Shock resistance	10 g		
Vibration resistance	1 NO: 0,80 mm DA (without coil voltage)		10...55 Hz
	1 NC: 1,65 mm DA (constant amplitude)		10...55 Hz
Solder bath temperature	max. 260 °C		
Soldering time	max. 5 s		

The data in bold type relate to the standard versions of the relays.


Dimensions

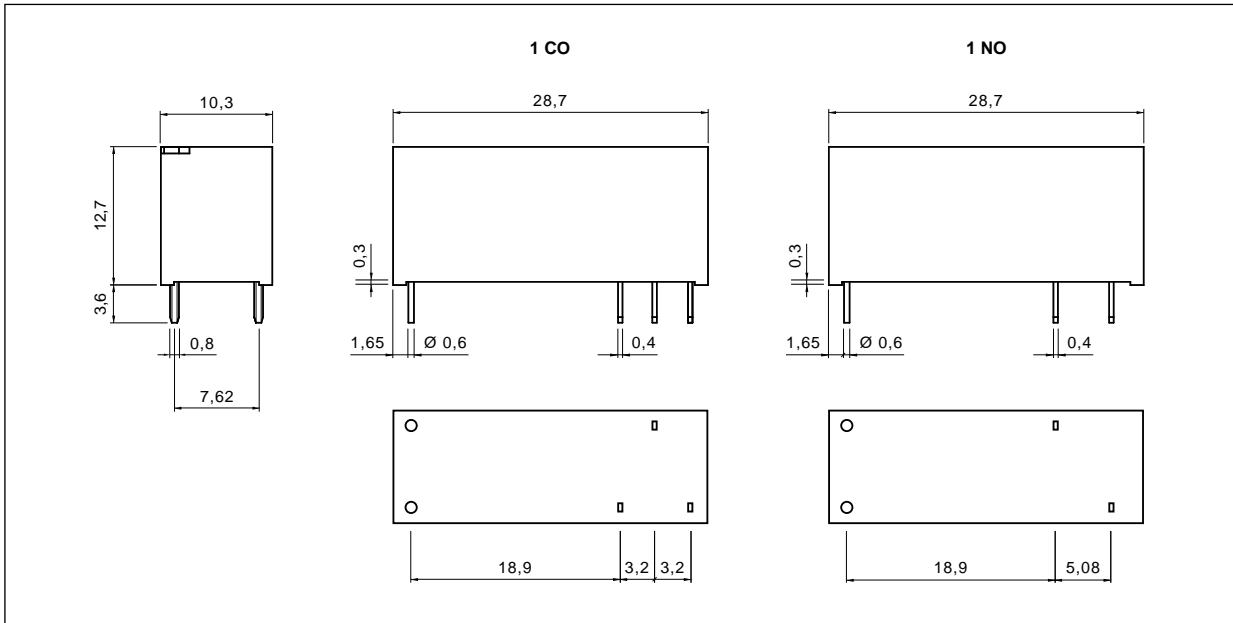

Connection diagrams (pin side view)

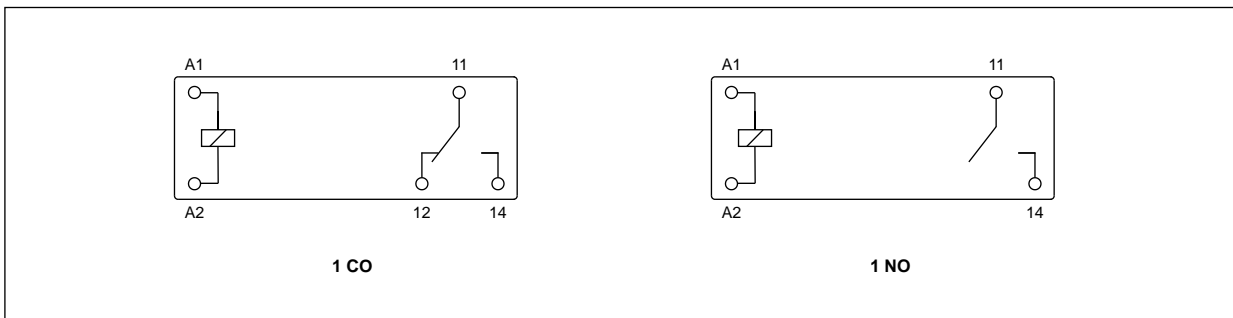

Pinout (solder side view)

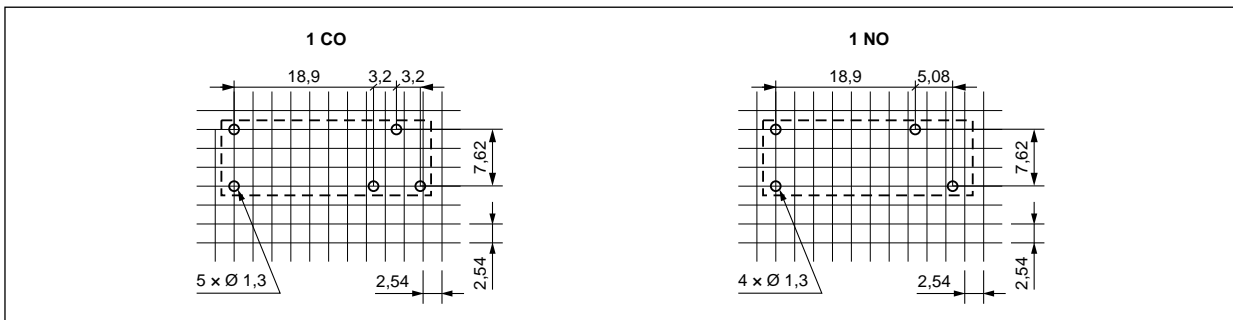

Mounting


Relays **RM12N** are designed for direct PCB mounting.

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
1005	5	113	± 10%	3,5	6,5
1009	9	360	± 10%	6,3	11,7
1012	12	620	± 10%	8,4	15,6
1018	18	1 295	± 10%	12,7	23,4
1024	24	2 350	± 10%	16,8	31,2

Ordering codes

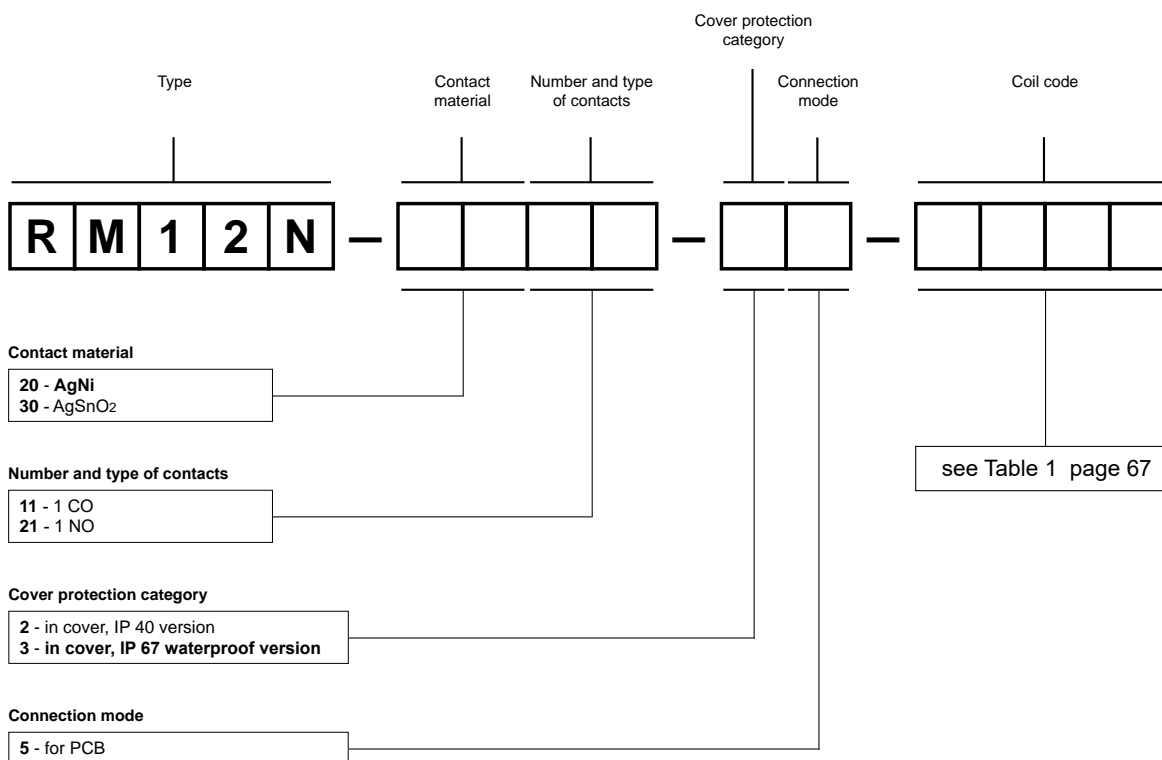

Examples of ordering codes:



RM12N-2011-35-1012

relay **RM12N**, for PCB, one changeover contact, contact material AgNi, coil voltage 12 V DC, in cover IP 67

RM12N-3021-25-1024

relay **RM12N**, for PCB, one normally open contact, contact material AgSnO₂, coil voltage 24 V DC, in cover IP 40



- DC coils - of up to 24 V DC, low coil power 0,20 W (sensitive coil) or 0,45 W (standard coil)
- For PCB • Very small dimensions, light weight
- High load up to 10 A / 125 V AC ❶
- Applications: for household electrical appliance, automation systems, electrical equipment, instrument and meter, telecommunication devices, remote control facilities, light controllers, etc.
- Recognitions, certifications, directives: RoHS,  

Contact data

Number and type of contacts		1 CO, 1 NO	
Contact material		AgSnO₂	
Rated / max. switching voltage	AC	250 V / 277 V	
Min. switching voltage		5 V	
Rated load	AC1	1 CO: 5 A / 5 A (NO/NC) / 250 V AC 1 CO: 10 A / 125 V AC ❶	1 NO: 5 A / 250 V AC 1 NO: 10 A / 125 V AC
	DC1	1 CO: 5 A / 5 A (NO/NC) / 28 V DC	1 NO: 5 A / 28 V DC
Motor load	acc. to UL 508	1/4 HP	250 V AC, single-phase motor
Rated current		5 A	
Max. breaking capacity	AC1	1 250 VA	
Contact resistance		≤ 100 mΩ	

Coil data

Rated voltage	DC	5, 9, 12, 18, 24 V
Must release voltage		DC: ≥ 0,05 U _n
Operating range of supply voltage		see Tables 1, 2
Rated power consumption	DC	0,20 W sensitive coil ❶ 0,45 W standard coil

Insulation according to EN 60664-1

Insulation resistance		100 MΩ	500 V DC, 60 s
Dielectric strength	• between coil and contacts	2 500 V AC	type of insulation: basic
	• contact clearance	1 000 V AC	type of clearance: micro-disconnection


General data

Operating / release time (typical values)		8 ms / 5 ms	
Electrical life (number of cycles)			
• resistive AC1	1 800 cycles/hour	10 ⁵ 1 CO: 5 A / 5 A (NO/NC), 250 V AC	1 NO: 5 A, 250 V AC
• resistive DC1	1 800 cycles/hour	10 ⁵ 1 CO: 5 A / 5 A (NO/NC), 28 V DC	1 NO: 5 A, 28 V DC
Mechanical life	18 000 cycles/hour	10 ⁷	
Dimensions (L x W x H)		18,8 x 10,6 x 15,3 mm	
Weight		6 g	
Ambient temperature		-40...+70 °C	
(non-condensation and/or icing)	• operating		
Cover protection category		IP 67	EN 60529
Environmental protection		RTIII	EN 61810-7
Shock resistance		10 g	
Vibration resistance		1,5 mm DA (constant amplitude)	10...55 Hz
Solder bath temperature		max. 260 °C	
Soldering time		max. 5 s	


The data in bold type relate to the standard versions of the relays.

❶ Only for contacts 1 NO


Dimensions

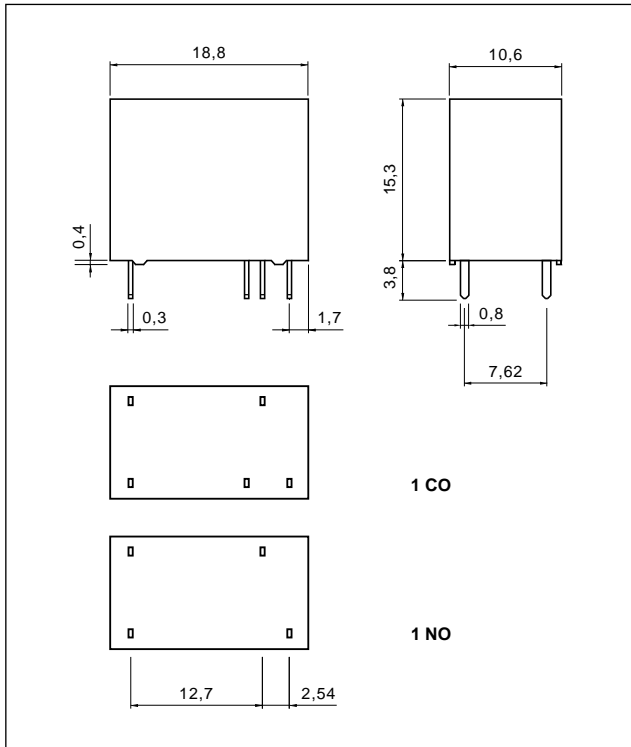

Connection diagrams (pin side view)

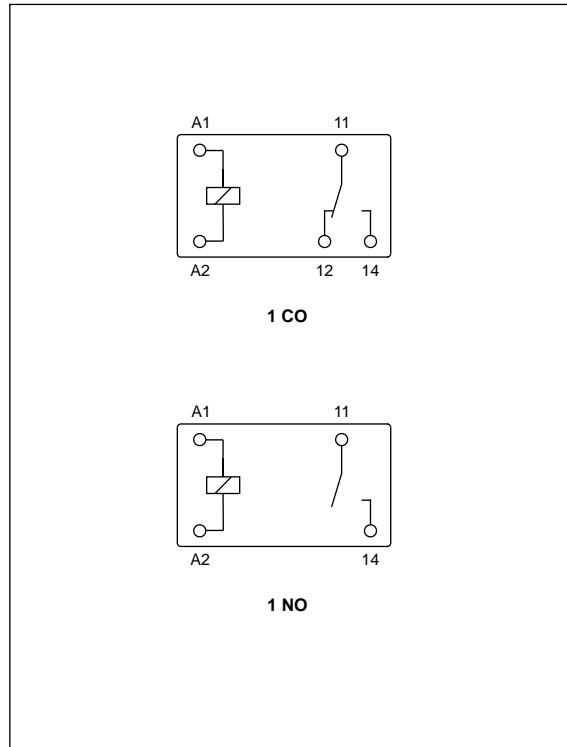

Pinout (solder side view)

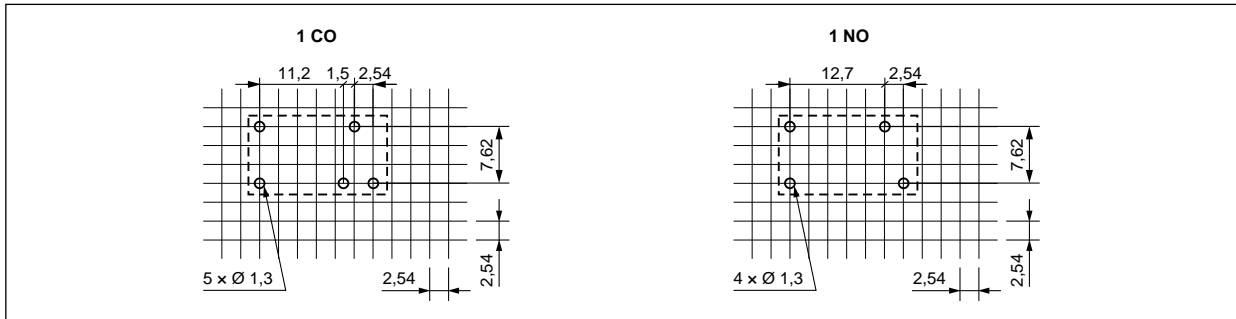

Mounting

Relays **RM32N** are designed for direct PCB mounting.

Coil data - DC voltage version, sensitive

Table 1

Coil code ❶	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
S005	5	125	± 10%	3,75	6,5
S009	9	405	± 10%	6,75	11,7
S012	12	720	± 10%	9,00	15,6
S018	18	1 620	± 10%	13,50	23,4
S024	24	2 880	± 10%	18,00	31,2


❶ Only for contacts 1 NO

Coil data - DC voltage version, standard

Table 2

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
1005	5	56	± 10%	3,75	6,5
1009	9	180	± 10%	6,75	11,7
1012	12	320	± 10%	9,00	15,6
1018	18	720	± 10%	13,50	23,4
1024	24	1 280	± 10%	18,00	31,2

Ordering codes

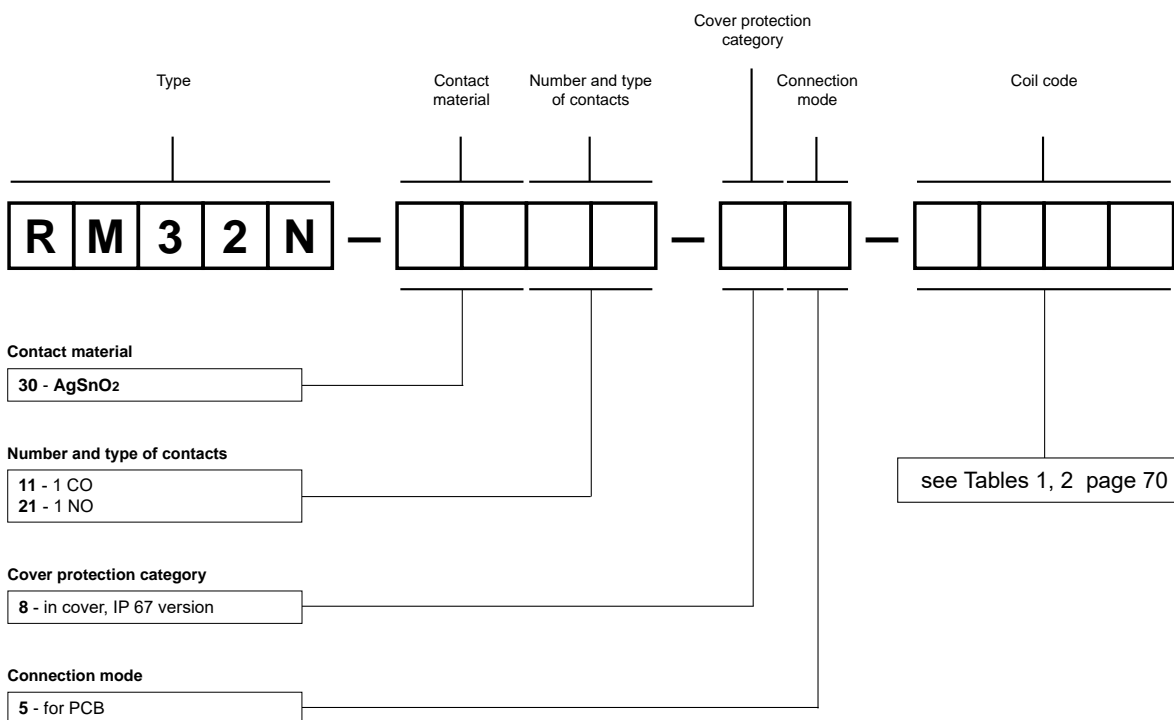

Examples of ordering codes:

RM32N-3021-85-S018

relay **RM32N**, for PCB, one normally open contact, contact material AgSnO₂, sensitive coil voltage 18 V DC, in cover IP 67

RM32N-3011-85-1024

relay **RM32N**, for PCB, one changeover contact, contact material AgSnO₂, standard coil voltage 24 V DC, in cover IP 67



- Very small dimensions
- High switching capacity up to 5 A or 8 A
- Sealed, for wave soldering and cleaning
- Available special versions: halogen-free
- Applications: for household equipment, office machines, control devices, alarm systems, in industrial control, monitoring systems, industrial controllers
- Recognitions, certifications, directives : RoHS, : UL, : VDE, : EAC

Contact data

Number and type of contacts		1 CO	1 NO
Contact material		1 CO: AgNi , AgNi/Au hard gold plating	1 NO: AgSnO₂
Rated / max. switching voltage	AC	1 CO: 250 V / 380 V	1 NO: 250 V / 440 V
Min. switching voltage		5 V AgNi, 1 V AgNi/Au hard gold plating	5 V AgSnO ₂
Rated load	AC1 DC1	1 CO: 5 A / 250 V AC 1 CO: 5 A / 30 V DC	1 NO: 8 A / 250 V AC 1 NO: 8 A / 30 V DC
Min. switching current		10 mA AgNi, 1 mA AgNi/Au hard gold plating	10 mA AgSnO ₂
Rated current		1 CO: 5 A	1 NO: 8 A
Max. breaking capacity	AC1	1 CO: 1 250 VA	1 NO: 2 000 VA
Min. breaking capacity		50 mW AgNi, 1 mW AgNi/Au hard gold plating	50 mW AgSnO ₂
Contact resistance		≤ 100 mΩ	

Coil data

Rated voltage	DC	3, 5, 6, 9, 12, 24, 48 V
Must release voltage		DC: ≥ 0,05 U _n
Operating range of supply voltage		see Table 1
Rated power consumption	DC	0,20 W

Insulation according to EN 60664-1

Rated surge voltage		10 000 V	1,2 / 50 μs
Insulation resistance		> 100 MΩ	500 V DC
Dielectric strength		4 000 V AC	type of insulation: reinforced
• between coil and contacts		1 000 V AC	type of clearance: micro-disconnection
• contact clearance			
Contact - coil distance		≥ 5 mm	
• clearance		≥ 5 mm	
• creepage			

General data


Operating / release time (typical values)		8 ms / 4 ms		
Electrical life (number of cycles)				
• resistive AC1	360 cycles/hour	> 10 ⁵	1 CO: 5 A, 250 V AC	1 NO: 8 A, 250 V AC
• resistive DC1	360 cycles/hour	> 10 ⁵	1 CO: 5 A, 30 V DC	1 NO: 8 A, 30 V DC
Mechanical life	18 000 cycles/hour	> 10 ⁷		
Dimensions (L x W x H)		20 x 10 x 10,5 mm		
Weight		6 g		
Ambient temperature		-40...+85 °C		
(non-condensation and/or icing)	• operating			
Cover protection category		IP 67	EN 60529	
Environmental protection		RTIII	EN 61810-7	
Shock resistance		10 g		
Vibration resistance		1,5 mm DA (double amplitude)	10...55 Hz	
Solder bath temperature		max. 260 °C		
Soldering time		max. 5 s		

The data in bold type relate to the standard versions of the relays.

The VDE certificate includes only standard versions.


Coil temperature rise at 85 °C

Fig. 1

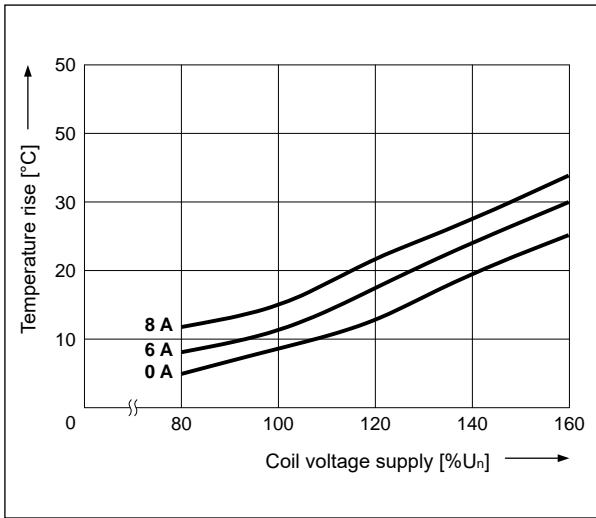


Operating time

Fig. 2

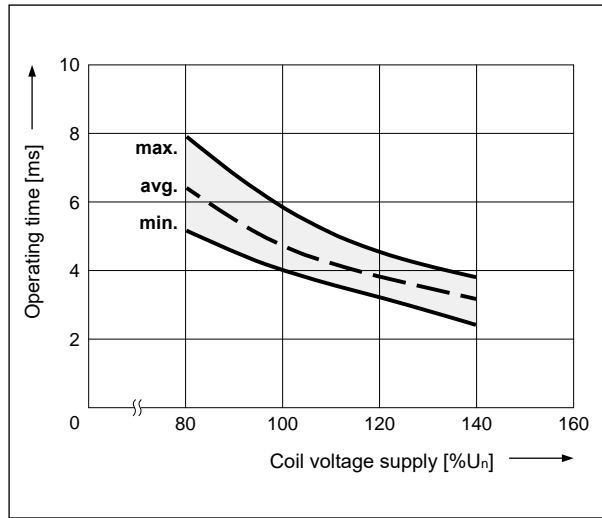


Release time


Fig. 3

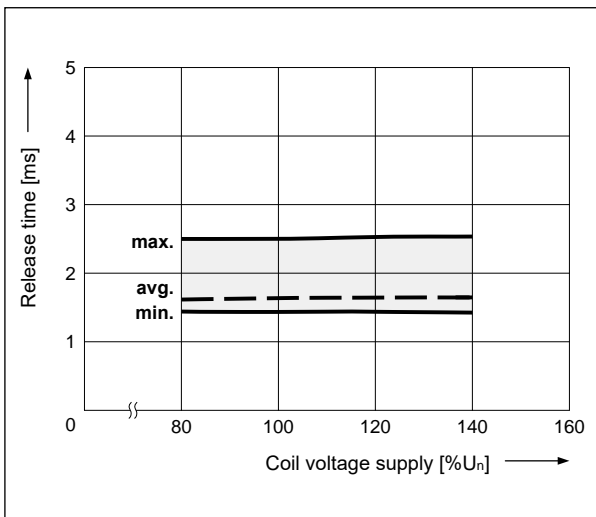

Connection diagrams (pin side view)

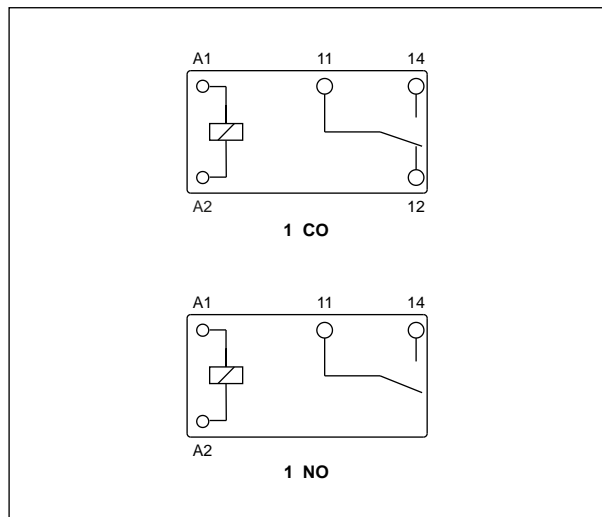


Dimensions

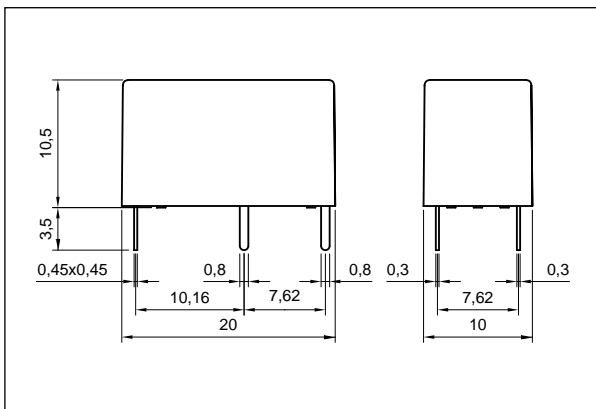

Mounting

Relays **RM40** are designed for direct PCB mounting.

Pinout (solder side view)

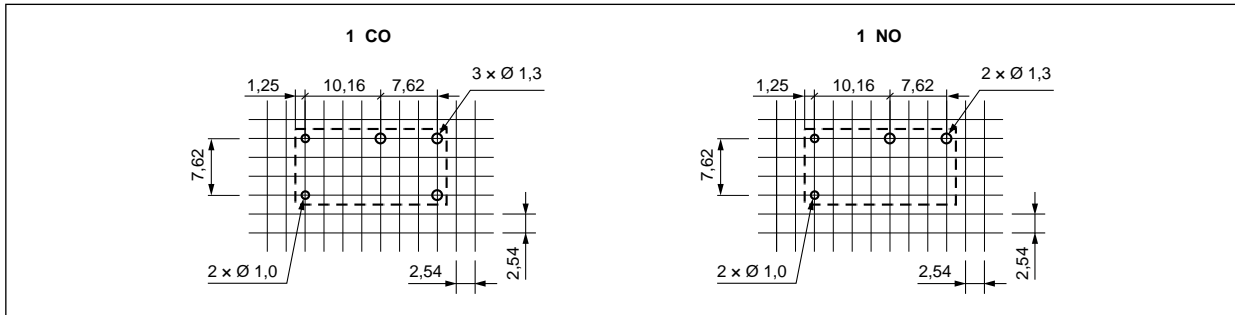


Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
1003	3	45	± 10%	2,25	4,5
1005	5	125	± 10%	3,75	7,5
1006	6	180	± 10%	4,50	9,0
1009	9	405	± 10%	6,75	13,5
1012	12	720	± 10%	9,00	18,0
1024	24	2 880	± 10%	18,00	36,0
1048	48	11 520	± 10%	36,00	72,0

Ordering codes

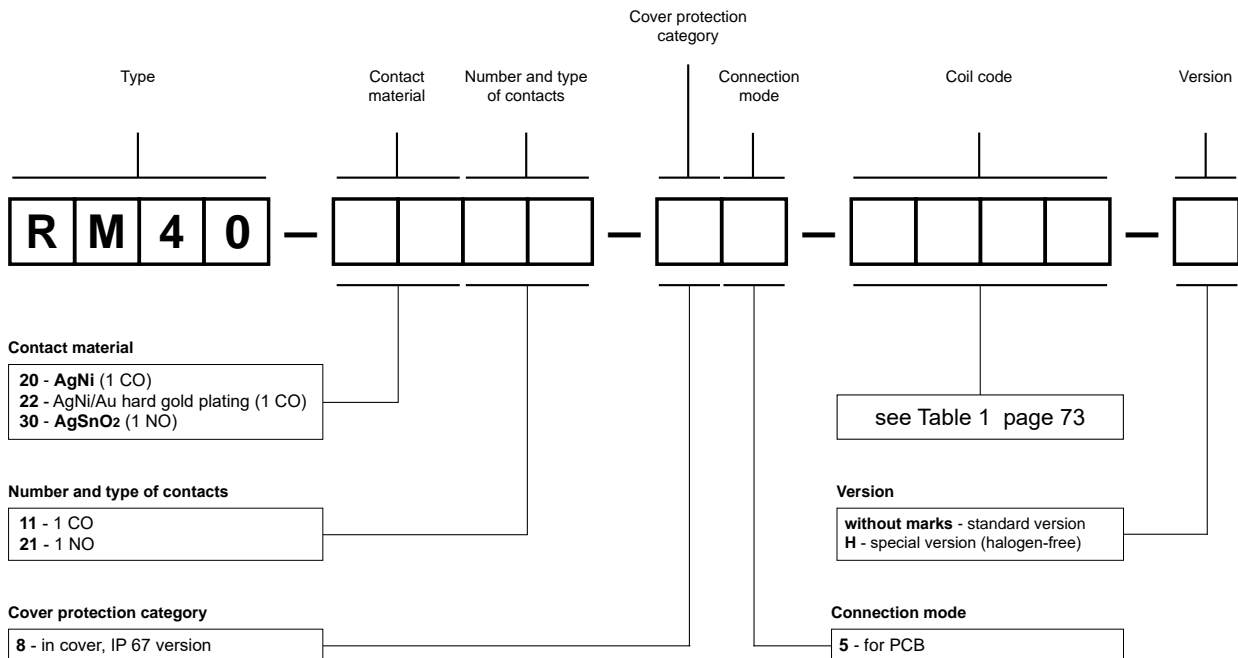



Examples of ordering codes:

RM40-2011-85-1003 relay **RM40**, for PCB, one changeover contact, contact material AgNi, coil voltage 3 V DC, in cover IP 67, standard version

RM40-3021-85-1024-H relay **RM40**, for PCB, one normally open contact, contact material AgSnO₂, coil voltage 24 V DC, in cover IP 67, special version (halogen-free)



- DC coils - of up to 24 V DC, low coil power 0,20 W (sensitive coil) or 0,45 W (standard coil)
- For PCB • Very small dimensions, light weight
- High load up to 10 A / 125 V AC ❶
- Applications: for household electrical appliance, automation systems, electrical equipment, instrument and meter, telecommunication devices, remote control facilities, light controllers, etc.
- Recognitions, certifications, directives: RoHS,  

Contact data

Number and type of contacts		1 CO, 1 NO	
Contact material		AgSnO₂	
Rated / max. switching voltage	AC	250 V / 277 V	
Min. switching voltage		5 V	
Rated load	AC1	1 CO: 5 A / 5 A (NO/NC) / 250 V AC 1 CO: 10 A / 125 V AC ❶	1 NO: 5 A / 250 V AC 1 NO: 10 A / 125 V AC
	DC1	1 CO: 5 A / 5 A (NO/NC) / 28 V DC	1 NO: 5 A / 28 V DC
Motor load	acc. to UL 508	1/4 HP 250 V AC, single-phase motor	
Rated current		5 A	
Max. breaking capacity	AC1	1 250 VA	
Contact resistance		≤ 100 mΩ	

Coil data

Rated voltage	DC	5, 9, 12, 24 V	
Must release voltage		DC: ≥ 0,05 U _n	
Operating range of supply voltage		see Tables 1, 2	
Rated power consumption	DC	0,20 W sensitive coil ❶	0,45 W standard coil

Insulation according to EN 60664-1

Insulation resistance		100 MΩ	500 V DC, 60 s
Dielectric strength			
• between coil and contacts		4 000 V AC	type of insulation: reinforced
• contact clearance		1 000 V AC	type of clearance: micro-disconnection


General data

Operating / release time (typical values)		8 ms / 5 ms	
Electrical life (number of cycles)			
• resistive AC1	1 800 cycles/hour	10 ⁵ 1 CO: 5 A / 5 A (NO/NC), 250 V AC	1 NO: 5 A, 250 V AC
• resistive DC1	1 800 cycles/hour	10 ⁵ 1 CO: 5 A / 5 A (NO/NC), 28 V DC	1 NO: 5 A, 28 V DC
Mechanical life	18 000 cycles/hour	10 ⁷	
Dimensions (L x W x H)		20,5 x 10,6 x 15,6 mm	
Weight		7 g	
Ambient temperature		-40...+70 °C	
(non-condensation and/or icing)	• operating		
Cover protection category		IP 67	EN 60529
Environmental protection		RTIII	EN 61810-7
Shock resistance		10 g	
Vibration resistance		1,5 mm DA (constant amplitude)	10...55 Hz
Solder bath temperature		max. 260 °C	
Soldering time		max. 5 s	


The data in bold type relate to the standard versions of the relays.

❶ Only for contacts 1 NO


Dimensions

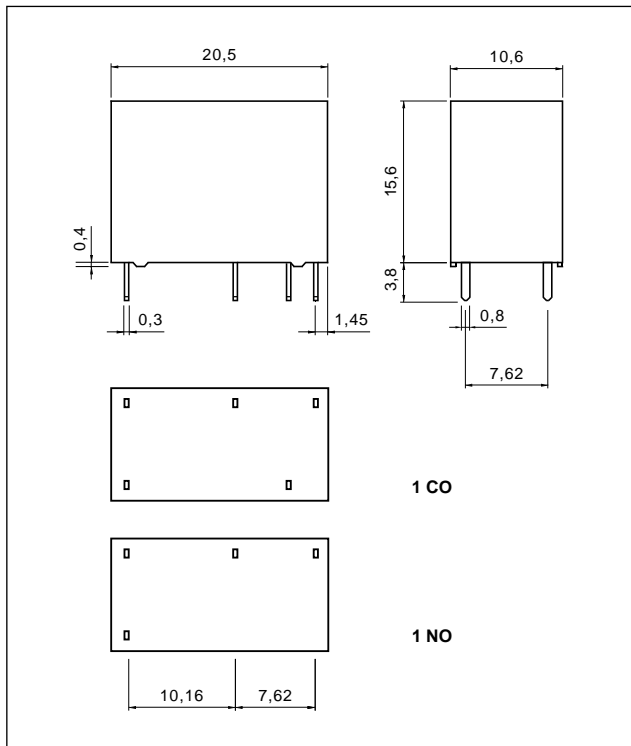

Connection diagrams (pin side view)

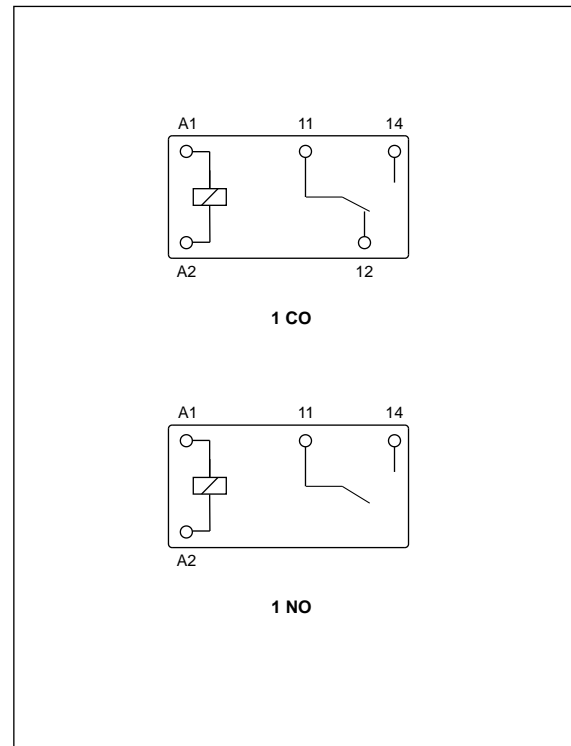

Pinout (solder side view)

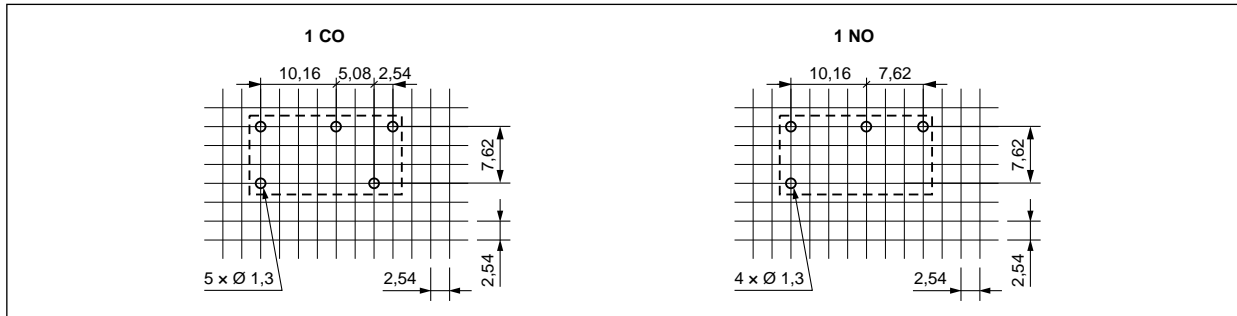

Mounting

Relays **RM45N** are designed for direct PCB mounting.

Coil data - DC voltage version, sensitive

Table 1

Coil code ❶	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
S005	5	125	± 10%	3,75	5,5
S009	9	405	± 10%	6,75	9,9
S012	12	720	± 10%	9,00	13,2
S024	24	2 880	± 10%	18,00	26,4


❶ Only for contacts 1 NO

Coil data - DC voltage version, standard

Table 2

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
1005	5	56	± 10%	3,75	5,5
1009	9	180	± 10%	6,75	9,9
1012	12	320	± 10%	9,00	13,2
1024	24	1 280	± 10%	18,00	26,4

Ordering codes

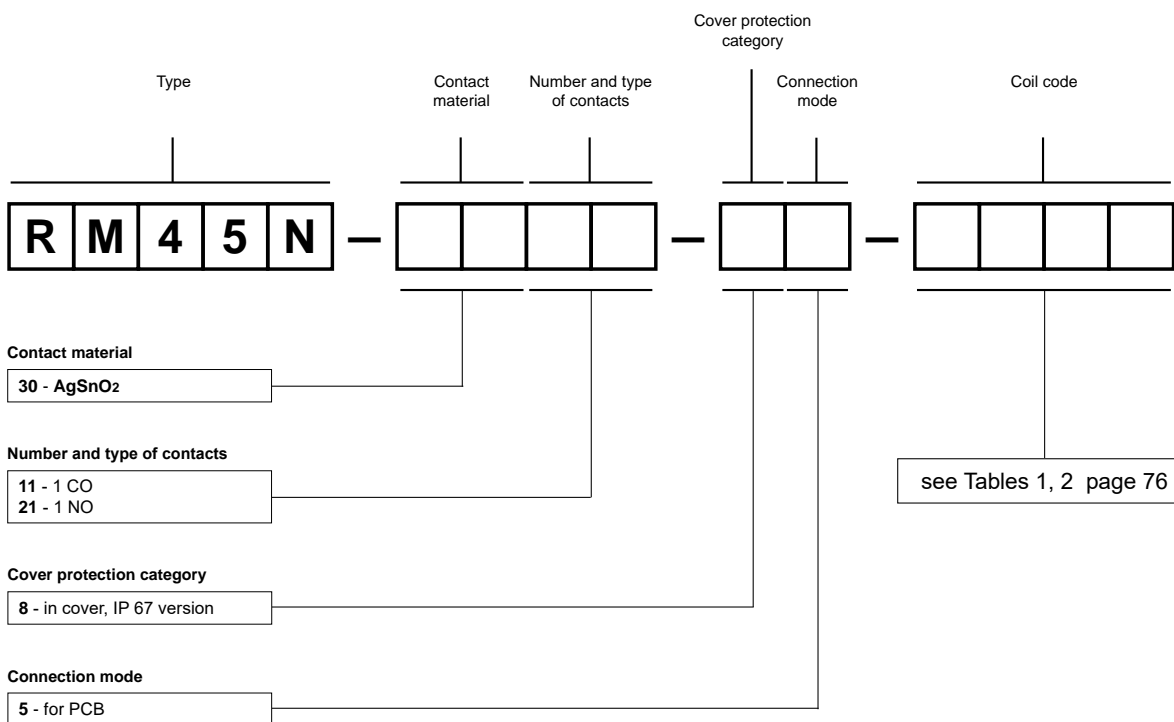

Examples of ordering codes:



RM45N-3021-85-S012

relay **RM45N**, for PCB, one normally open contact, contact material AgSnO₂, sensitive coil voltage 12 V DC, in cover IP 67

RM45N-3011-85-1024

relay **RM45N**, for PCB, one changeover contact, contact material AgSnO₂, standard coil voltage 24 V DC, in cover IP 67



- DC coils - of up to 48 V DC, low coil power 0,36 W
- For PCB
- Small dimensions, light weight
- Applications: for household electrical appliance, automation control, telecommunication devices, machinery electrical equipment
- Recognitions, certifications, directives: RoHS,  

Contact data

Number and type of contacts	1 CO, 1 NO	
Contact material	AgSnO₂, AgCdO ①	
Max. switching voltage	AC	277 V
	DC	110 V
Min. switching voltage	5 V	
Rated load	AC1	6 A / 250 V AC
	DC1	12 A / 125 V AC 12 A / 28 V DC
Motor load	acc. to UL 508	1/3 HP 250 V AC, single-phase motor
Min. switching current	15 mA	
Rated current	12 A	
Max. breaking capacity	AC1	1 500 VA
Contact resistance	≤ 100 mΩ	

Coil data

Rated voltage	DC	5, 9, 12, 24, 48 V
Must release voltage	DC: ≥ 0,1 U _n	
Operating range of supply voltage	see Table 1	
Rated power consumption	DC	0,36 W

Insulation according to EN 60664-1


Insulation resistance	250 MΩ	500 V DC, 60 s
Dielectric strength	<ul style="list-style-type: none"> • between coil and contacts 1 500 V AC type of insulation: basic • contact clearance 750 V AC type of clearance: micro-disconnection 	
Contact - coil distance	<ul style="list-style-type: none"> • clearance ≥ 1,9 mm • creepage ≥ 1,9 mm 	

General data


Operating / release time (typical values)	10 ms / 5 ms	
Electrical life (number of cycles)	<ul style="list-style-type: none"> • resistive AC1 1 800 cycles/hour 10⁵ 6 A, 250 V AC 10⁵ 12 A, 125 V AC (UL) • resistive DC1 1 800 cycles/hour 10⁵ 12 A, 28 V DC (UL) 	
Mechanical life	18 000 cycles/hour	10 ⁷
Dimensions (L x W x H)	19,5 x 15,6 x 15,3 mm	
Weight	9,5 g	
Ambient temperature (non-condensation and/or icing)	• operating	-55...+85 °C
Cover protection category	IP 67	EN 60529
Environmental protection	RTIII	EN 61810-7
Shock resistance	10 g	
Vibration resistance	1,5 mm DA (constant amplitude) 10...55 Hz	
Solder bath temperature	max. 260 °C	
Soldering time	max. 5 s	

The data in bold type relate to the standard versions of the relays. ① AgCdO contact material in electrical contacts is only for use in electrical and electronic equipment (EEE) in compliance with directive RoHS2 2011/65/EU in restricted categories of EEE covered by this directive. Relpol S.A. is not responsible for usage relays with AgCdO contact material in categories of EEE where it is prohibited by the directive RoHS2 2011/65/EU.


Dimensions

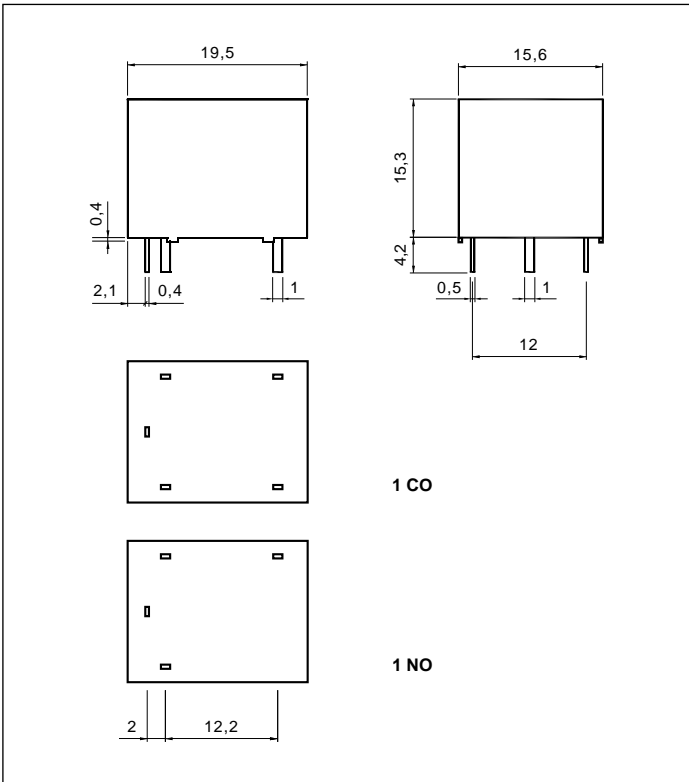

Connection diagrams (pin side view)

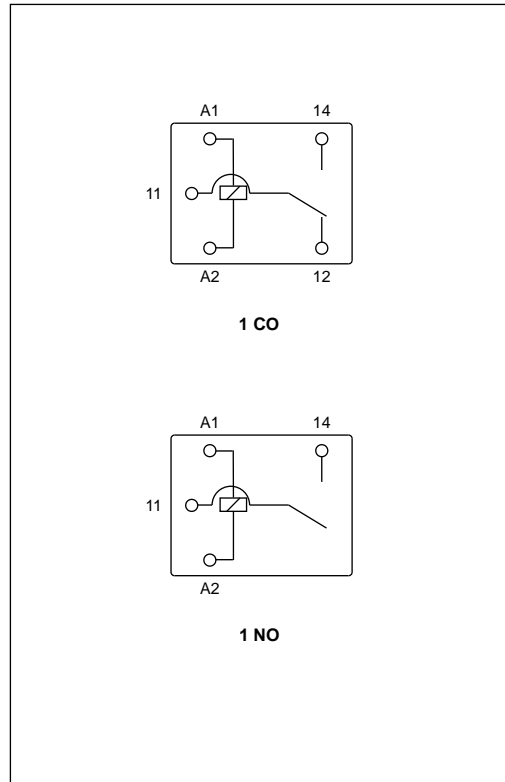

Pinout (solder side view)

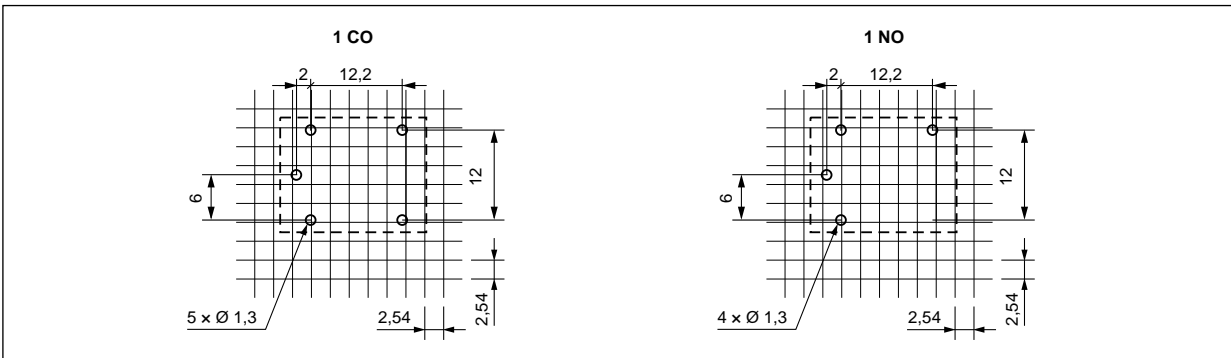

Mounting


Relays **RM50N** are designed for direct PCB mounting.

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
1005	5	70	± 10%	3,75	6,5
1009	9	225	± 10%	6,75	11,7
1012	12	400	± 10%	9,00	15,6
1024	24	1 600	± 10%	18,00	31,2
1048	48	6 400	± 10%	36,00	62,4

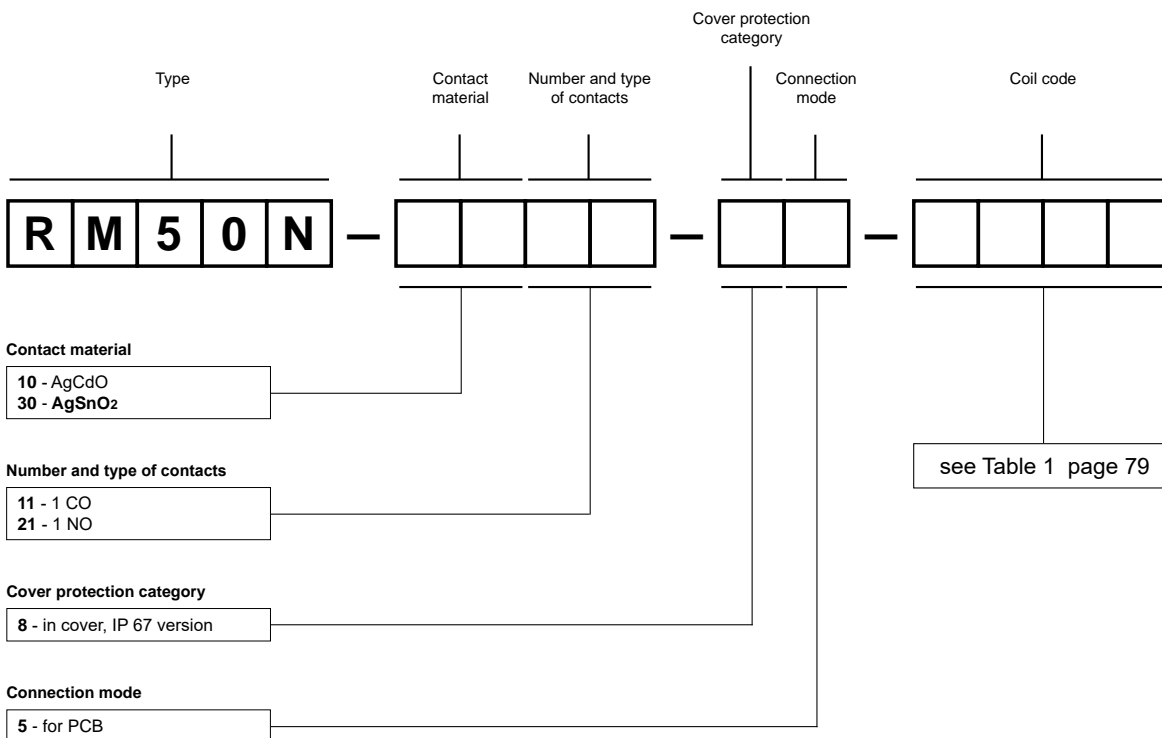

Ordering codes



Examples of ordering codes:

- RM50N-3011-85-1012** relay **RM50N**, for PCB, one changeover contact, contact material AgSnO₂, coil voltage 12 V DC, in cover IP 67
- RM50N-1021-85-1024** relay **RM50N**, for PCB, one normally open contact, contact material AgCdO, coil voltage 24 V DC, in cover IP 67




- DC coils - of up to 48 V DC, insulation class F: 155 °C
- For PCB
- Small dimensions
- High switching capacity
- Applications: for household electrical appliance, automation systems, electronic equipment, instrument and meter, telecommunication devices, remote control facilities
- Recognitions, certifications, directives: RoHS,  

Contact data


Number and type of contacts		1 CO, 1 NO	
Contact material		AgSnO₂	
Rated / max. switching voltage	AC	250 V / 277 V	
Min. switching voltage		5 V	
Rated load	AC1	1 CO: 10 A / 7 A (NO/NC) / 250 V AC 1 CO: 20 A / 20 A (NO/NC) / 125 V AC	1 NO: 10 A / 250 V AC 1 NO: 20 A / 125 V AC
	DC1	1 CO: 10 A / 7 A (NO/NC) / 30 V DC	1 NO: 10 A / 30 V DC
Motor load	acc. to UL 508	1 CO: 1 HP / 1/2 HP 1 NO: 1 HP	250 V AC, (NO/NC), single-phase motor 250 V AC, single-phase motor
	AC3 acc. to IEC 60947-4-1	1 CO: 0,75 kW / 0,375 kW 1 NO: 0,75 kW	250 V AC, (NO/NC), single-phase motor 250 V AC, single-phase motor
Min. switching current		15 mA	
Rated current		10 A	
Max. breaking capacity	AC1	3 000 VA	
Contact resistance		≤ 100 mΩ	
Coil data			
Rated voltage	DC	5, 9, 12, 24, 48 V	
Must release voltage		DC: ≥ 0,05 U _n	
Operating range of supply voltage		see Table 1	
Rated power consumption	DC	0,36 W	
Insulation according to EN 60664-1			
Rated surge voltage		4 000 V	1,2 / 50 μs
Insulation resistance		250 MΩ	500 V DC, 60 s
Dielectric strength	• between coil and contacts	2 500 V AC	type of insulation: basic
	• contact clearance	1 000 V AC	type of clearance: micro-disconnection
Contact - coil distance	• clearance	≥ 1,9 mm	
	• creepage	≥ 1,9 mm	
General data			
Operating / release time (typical values)		15 ms / 10 ms	
Electrical life (number of cycles)			
• resistive AC1	1 800 cycles/hour	10 ⁵	1 CO: 10 A / 7 A (NO/NC), 250 V AC 1 NO: 10 A, 250 V AC
• resistive DC1	1 800 cycles/hour	10 ⁵	1 CO: 10 A / 7 A (NO/NC), 30 V DC 1 NO: 10 A, 30 V DC
Mechanical life	18 000 cycles/hour	10 ⁷	
Dimensions (L x W x H)		19,5 x 16 x 17,1 mm	
Weight		10 g	
Ambient temperature		-40...+85 °C	
(non-condensation and/or icing)	• operating		
Cover protection category		IP 67	EN 60529
Environmental protection		RTIII	EN 61810-7
Shock resistance		10 g	
Vibration resistance		1,0 mm DA (constant amplitude)	10...55 Hz
Solder bath temperature		max. 260 °C	
Soldering time		max. 5 s	

The data in bold type relate to the standard versions of the relays.


Dimensions

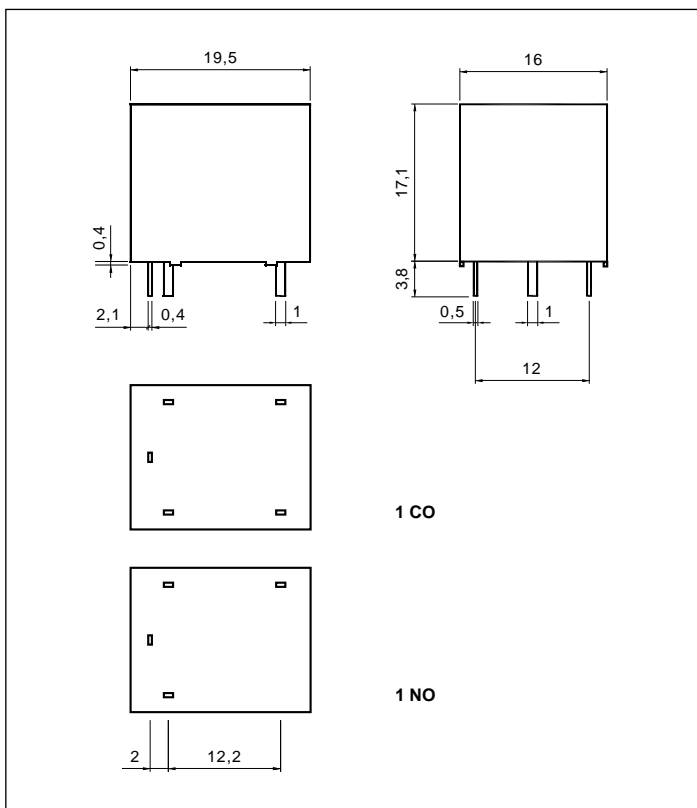

Connection diagrams (pin side view)

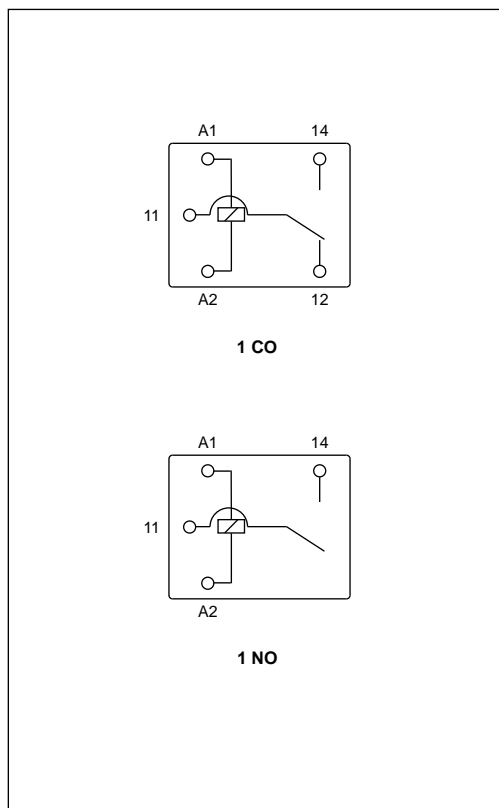

Pinout (solder side view)

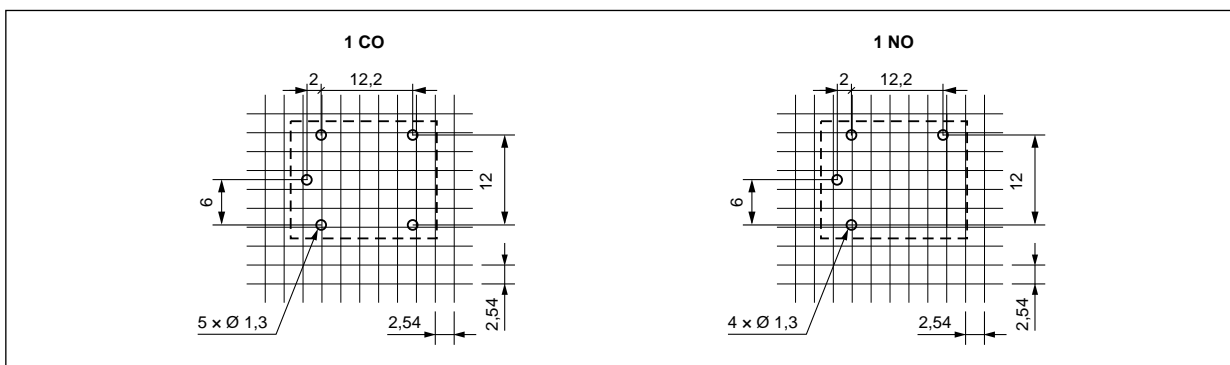

Mounting


Relays **RM51** are designed for direct PCB mounting.

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
1005	5	69	± 10%	3,75	6,5
1009	9	225	± 10%	6,75	11,7
1012	12	400	± 10%	9,00	15,6
1024	24	1 600	± 10%	18,00	31,2
1048	48	6 400	± 10%	36,00	62,4

Ordering codes

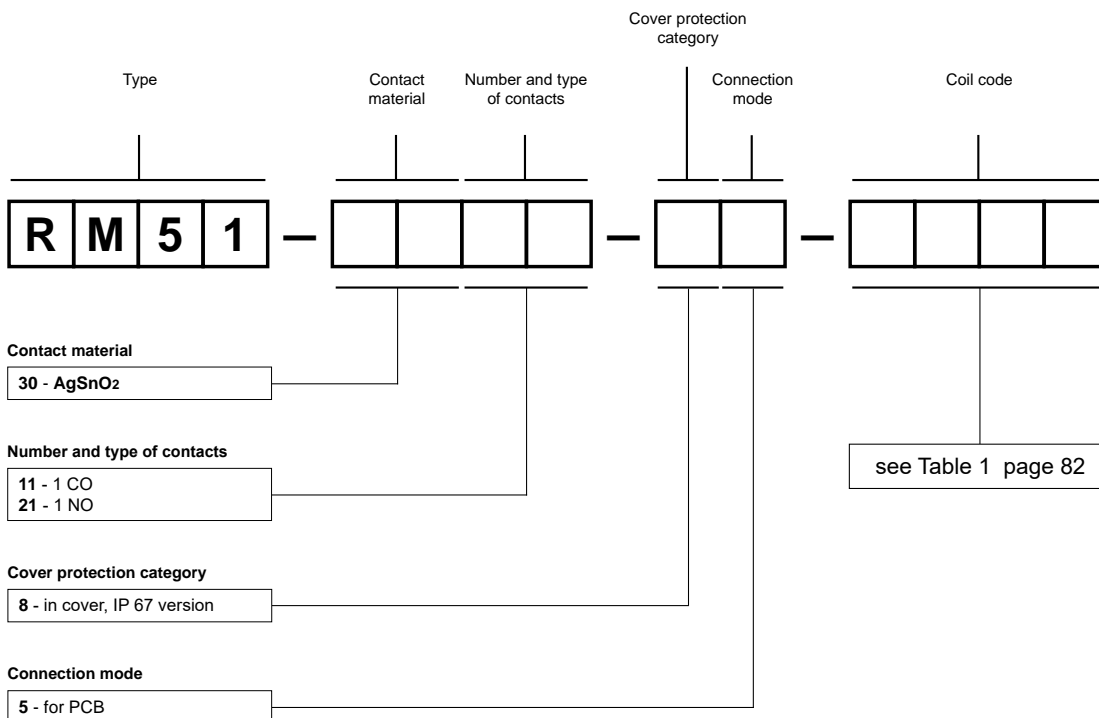

Examples of ordering codes:

- RM51-3011-85-1012** relay **RM51**, for PCB, one changeover contact, contact material AgSnO₂, coil voltage 12 V DC, in cover IP 67
- RM51-3021-85-1048** relay **RM51**, for PCB, one normally open contact, contact material AgSnO₂, coil voltage 48 V DC, in cover IP 67

RM699B




miniature relays

Version (V)






Version (H)




- Cover width only 5,0 mm
- Sealed for soldering and cleaning
- **Terminals arrangement: vertical version (V) and horizontal version (H)**
- Applications: for PLC's, industrial machinery, time relays, counters, temperature adjusters, measurement instruments, office equipment, etc.
- Recognitions, certifications, directives: RoHS,   

Contact data

Number and type of contacts	1 CO, 1 NO	
Contact material	AgSnO₂, AgNi	AgSnO ₂ /Au hard gold plating  AgNi/Au hard gold plating 
Max. switching voltage	400 V AC / 250 V DC	
Min. switching voltage	10 V	
Rated load	AC1 DC1	6 A / 250 V AC 6 A / 30 V DC; 0,15 A / 250 V DC
Motor load	AC3 acc. to IEC 60947-4-1	0,186 kW 250 V AC, single-phase motor
Min. switching current	100 mA	
Max. inrush current	10 A 20 ms	
Rated current	6 A	
Max. breaking capacity	AC1	1 500 VA
Min. breaking capacity	1 W	
Contact resistance	≤ 100 mΩ 100 mA, 24 V	
Max. operating frequency	≤ 30 mΩ 10 mA, 5 V	
• at rated load	AC1	360 cycles/hour
• no load	72 000 cycles/hour	
Coil data		
Rated voltage	DC	5, 6, 9, 12, 24, 48, 60 V
Must release voltage	DC: ≥ 0,05 U _n	
Operating range of supply voltage	see Table 1	
Rated power consumption	DC	0,17 W 5 ... 24 V 0,21 W 48, 60 V
Insulation according to EN 60664-1		
Insulation rated voltage	250 V AC	
Rated surge voltage	6 000 V 1,2 / 50 μs	
Overvoltage category	III	
Dielectric strength	4 000 V AC type of insulation: reinforced	
• between coil and contacts	1 000 V AC type of clearance: micro-disconnection	
• contact clearance		
Contact - coil distance		
• clearance	≥ 6 mm	
• creepage	≥ 8 mm	
General data		
Operating / release time (typical values)	8 ms / 4 ms	
Electrical life (number of cycles)		
• resistive AC1	the NO and NC contact loaded (bilateral load): see Fig. 1 the NO contact loaded: > 3 x 10 ⁴ 6 A, 250 V AC	
• inductive AC3	6 x 10 ³ 186 W (single-phase motor), AgNi	
Mechanical life (cycles)	> 10 ⁷	
Dimensions (L x W x H)	28 x 5 x 15 mm	
Weight	6 g	
Ambient temperature	• storage	-40...+85 °C
(non-condensation and/or icing)	• operating	-40...+85 °C
Cover protection category	IP 67 EN 60529	
Environmental protection	RTIII EN 61810-7	
Relative humidity	5...85%	
Shock resistance	5 g	
Vibration resistance	5 g 10...55 Hz	
Solder bath temperature	max. 260 °C	
Soldering time	max. 5 s	

The data in bold type relate to the standard versions of the relays.  For gold-plated contacts - when the maximum values given have been exceeded, the gold layer is destroyed. Then, the advantages of gold-plating disappear and the values are as for AgSnO₂, AgNi contacts (see beside), and electrical life of these contacts may be shorter than of normal contacts.

Dimensions

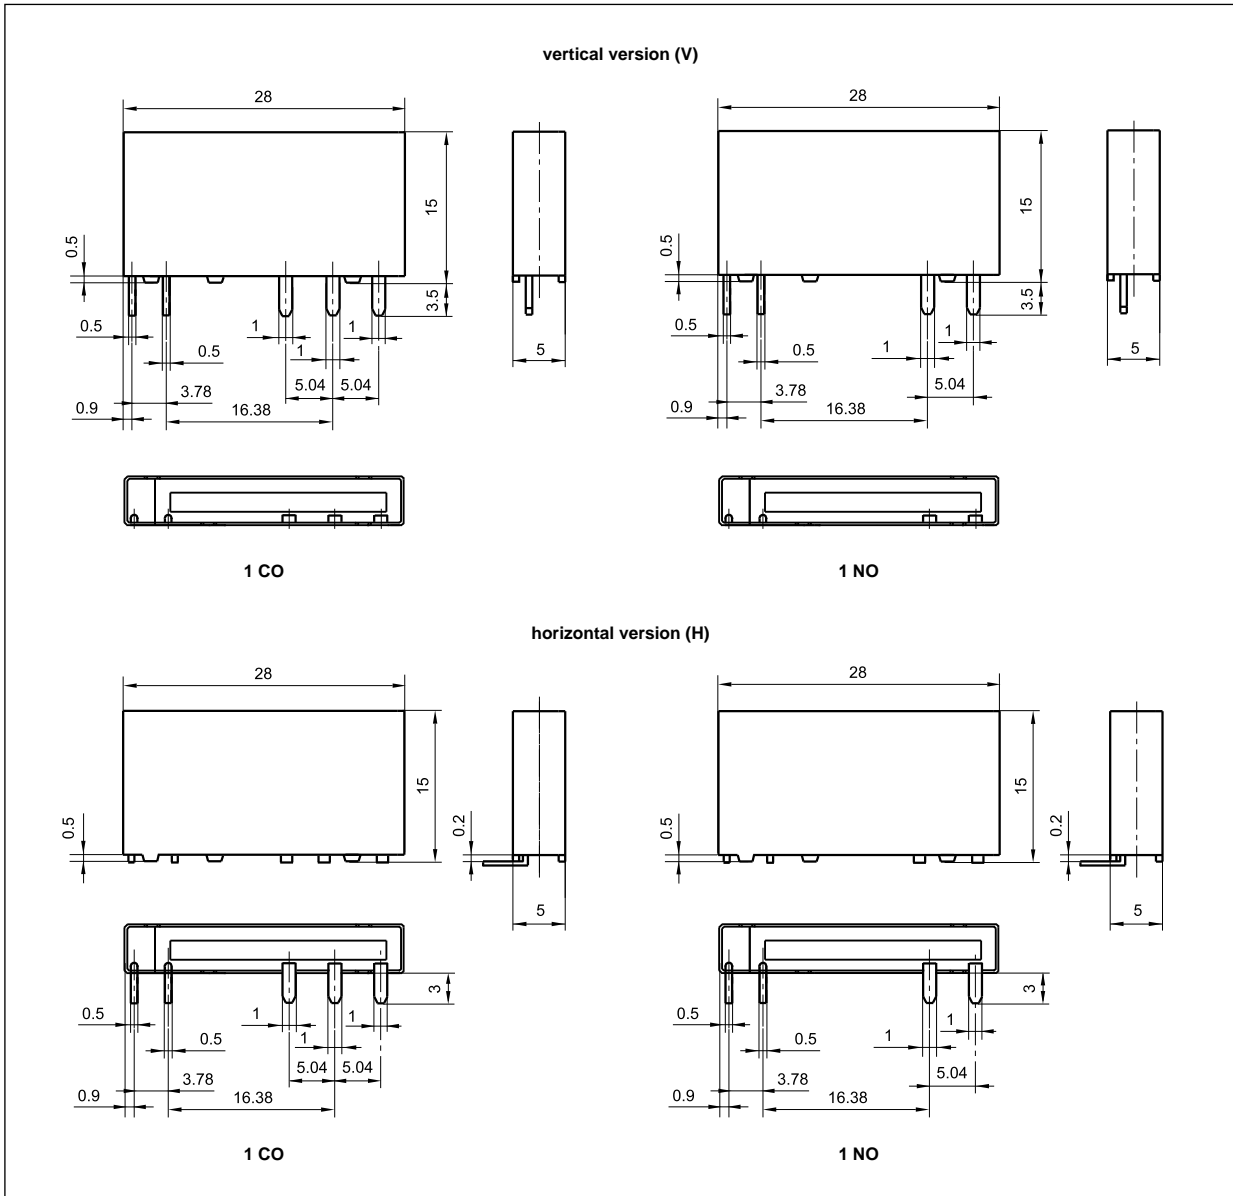

Mounting


Relays **RM699B vertical version (V)** are designed for:

- direct PCB mounting
- sockets **PI6W-1P**, 35 mm rail mount acc. to EN 60715 (see page 374).


Relays **RM699B horizontal version (H)** are designed for direct PCB mounting.

PI6W-1P


Plug-in sockets
for relays
RM699BV
or RSR30

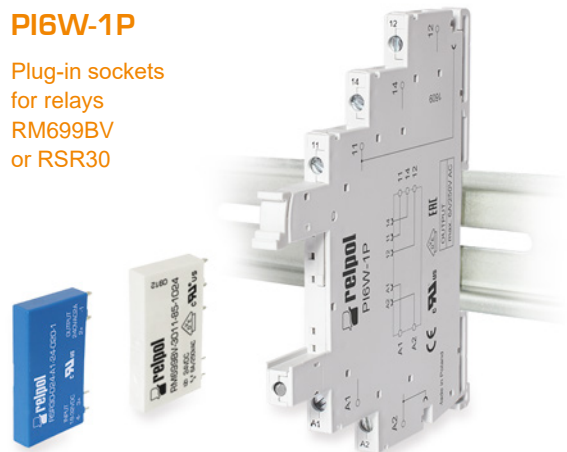


Connection diagrams (pin side view)

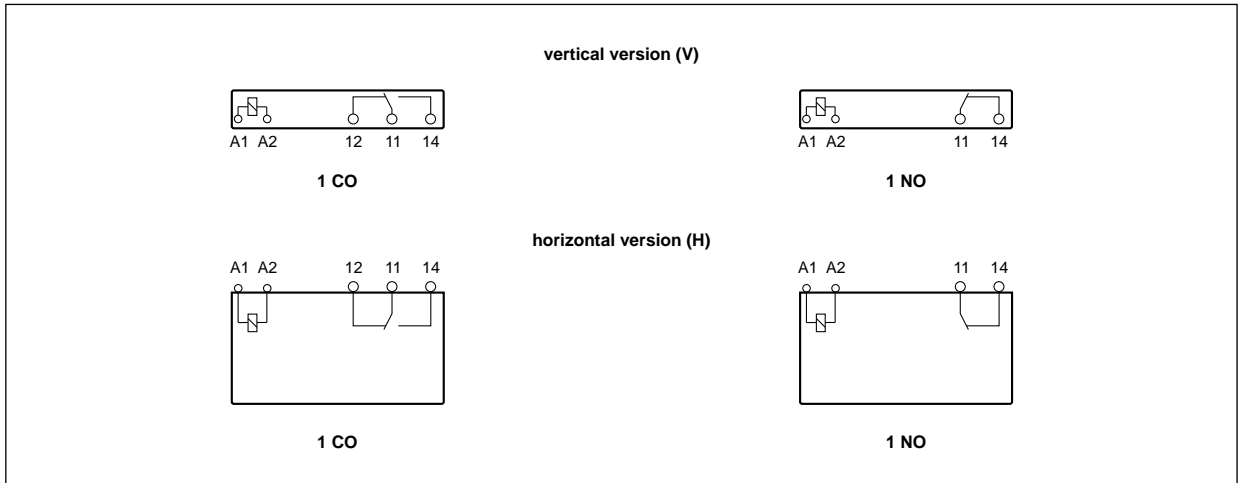


Pinout (solder side view)

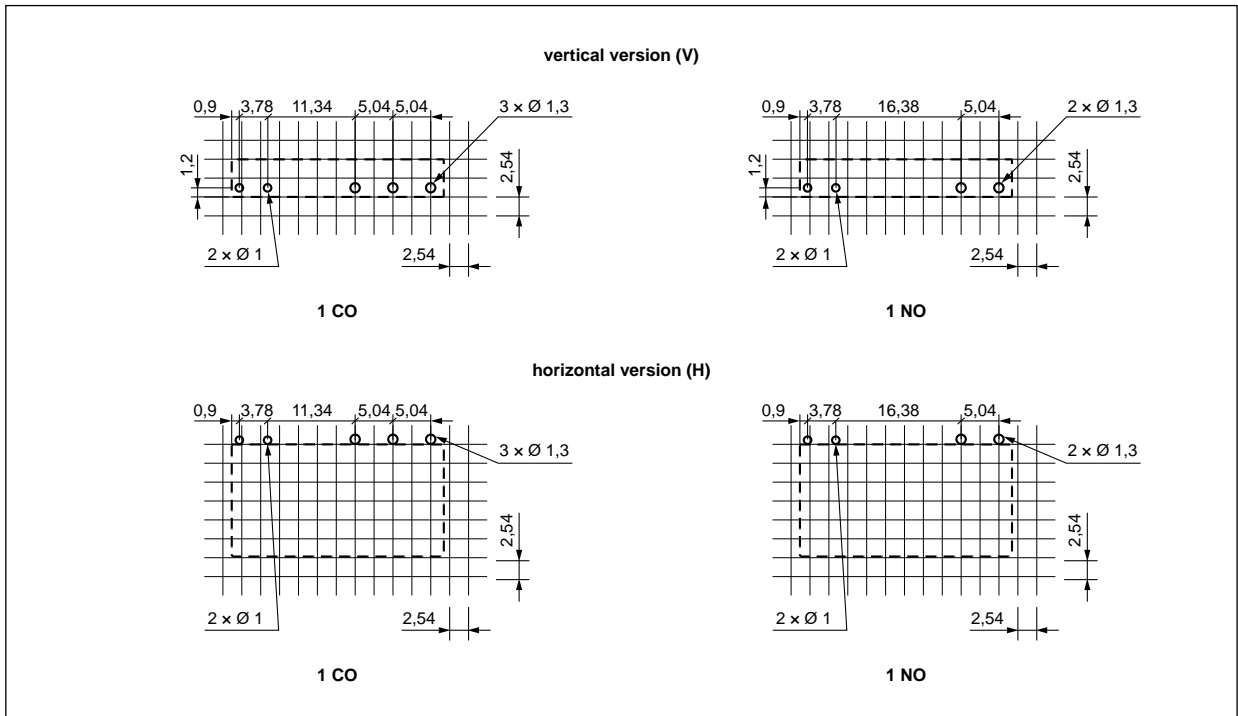


Electrical life at AC resistive current. Fig. 1
Switching frequency: 360 cycles/hour

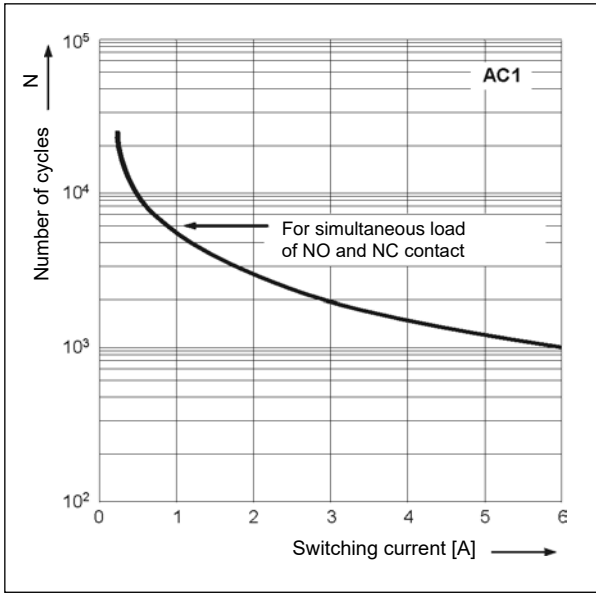

Max. DC resistive load breaking capacity Fig. 2

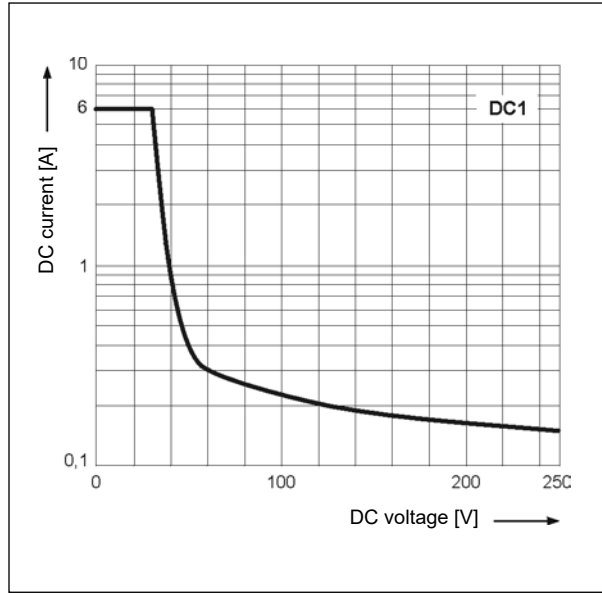

Coil operating range - DC Fig. 3

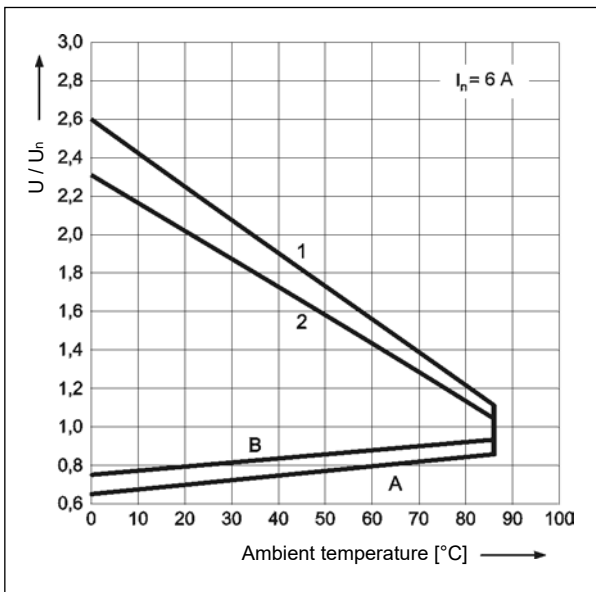

Description of Fig. 3

A - relations between make voltage and ambient temperature at no load on contacts. Coil temperature and ambient temperature are equal before coil energizing. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).

B - relations between make voltage and ambient temperature after initial coil heating up with $1,1 U_n$, at continues load of I_n on contacts. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).

1, 2 - values on Y axis represent allowed overvoltage on coil at certain ambient temperature and contact load:


- 1** - no load
- 2** - rated load

Coil data - DC voltage version

Table 1

Coil code		Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
1005	5	147	± 10%	3,75	7,5
1006	6	212	± 10%	4,5	9,0
1009	9	476	± 10%	6,75	13,0
1012	12	848	± 10%	9,0	18,0
1024	24	3 390	± 15%	18,0	36,0
1048	48	10 600	± 15%	36,0	72,0
1060	60	16 600	± 15%	45,0	90,0

Ordering codes

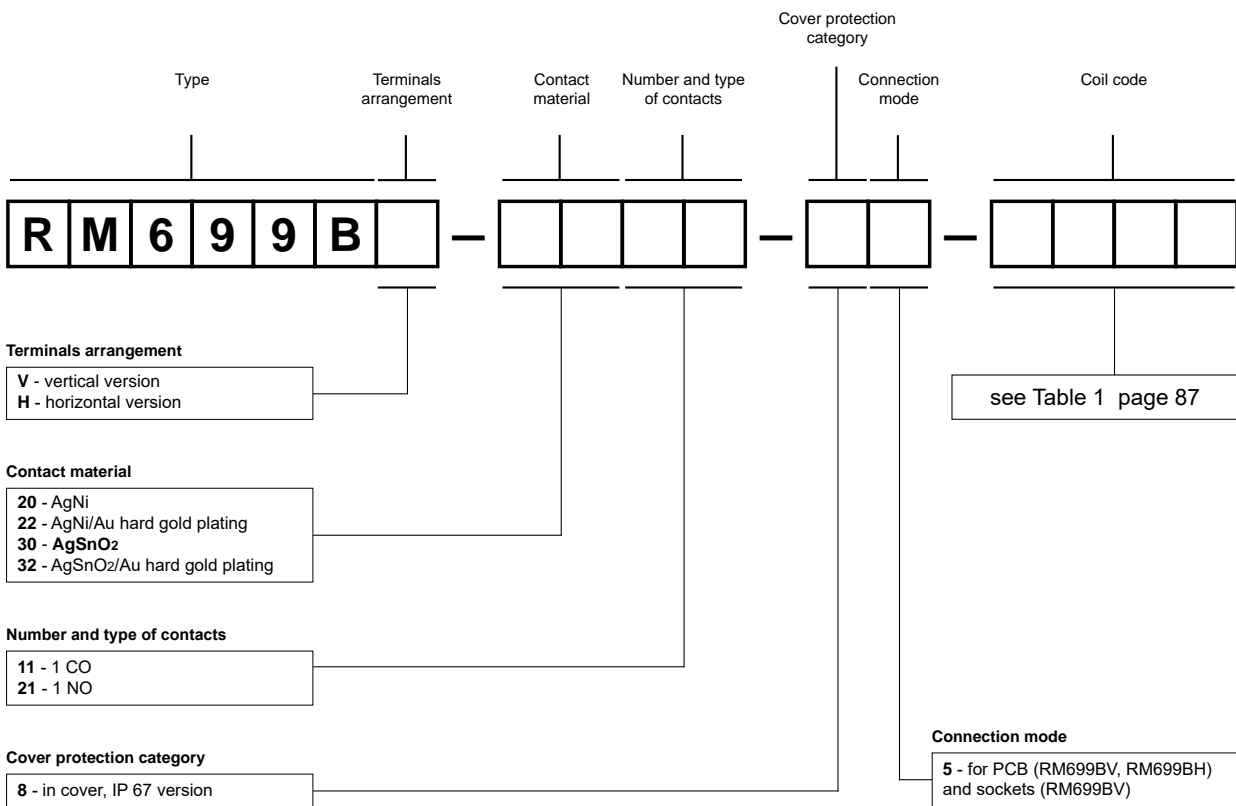

Examples of ordering code:

RM699BV-3011-85-1012

relay **RM699B**, vertical version, for PCB and sockets, one changeover contact, contact material AgSnO₂, coil voltage 12 V DC, in cover IP 67

RM699BH-2021-85-1005

relay **RM699B**, horizontal version, for PCB, one normally open contact, contact material AgNi, coil voltage 5 V DC, in cover IP 67


RM84






miniature relays

88

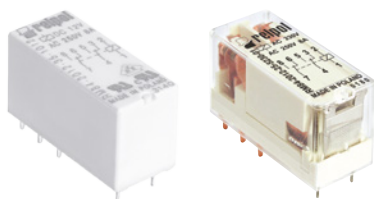RM84

RM84-...-01 ①



- CTI 250
- 5000 V / 10 mm reinforced insulation
- For PCB and plug-in sockets
- AC and DC coils, insulation class F: 155 °C
- Available special versions: with transparent cover ①;
with the increased dielectric strength of the contact clearance ②
- Compliance with standard EN 60335-1
- Recognitions, certifications, directives: RoHS,     

Contact data

Number and type of contacts		2 CO, 2 NO ②
Contact material		AgNi , AgNi/Au hard gold plating, AgSnO ₂
Rated / max. switching voltage	AC	250 V / 400 V
Min. switching voltage		5 V AgNi, 5 V AgNi/Au hard gold plating, 10 V AgSnO ₂
Rated load (capacity)	AC1	8 A / 250 V AC
	AC15	3 A / 120 V 1,5 A / 240 V (B300)
	DC1	8 A / 24 V DC (see Fig. 3)
	DC13	0,22 A / 120 V 0,1 A / 250 V (R300)
Motor load	acc. to UL 508	1/3 HP 240 V AC, 3,6 FLA, single-phase motor ③
	AC3 acc. to IEC 60947-4-1	0,37 kW 240 V AC, single-phase motor
Min. switching current		5 mA AgNi, 2 mA AgNi/Au hard gold plating, 10 mA AgSnO ₂
Max. inrush current		15 A AgSnO ₂
Rated current		8 A
Max. breaking capacity	AC1	2 000 VA
Min. breaking capacity		0,3 W AgNi, 0,05 W AgNi/Au hard gold plating, 1 W AgSnO ₂
Contact resistance		≤ 100 mΩ
Max. operating frequency	• at rated load AC1	600 cycles/hour
	• no load	72 000 cycles/hour

Coil data

Rated voltage	50/60 Hz AC	12, 24 , 48, 60, 110, 115, 120, 220, 230 , 240 V
	DC	3, 5, 6, 9, 12 , 18, 24 , 36, 48, 60, 110 V
Must release voltage		AC: ≥ 0,15 U _n DC: ≥ 0,1 U _n
Operating range of supply voltage		see Tables 1, 2 and Fig. 4, 5
Rated power consumption	AC	0,75 VA
	DC	0,4 ... 0,48 W

Insulation according to EN 60664-1


Insulation rated voltage		400 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		3
Dielectric strength	• between coil and contacts	5 000 V AC type of insulation: reinforced
	• contact clearance	1 000 V AC type of clearance: micro-disconnection
		2 000 V AC contacts 2 NO, type of clearance: full-disconnection ②
	• pole - pole	2 500 V AC type of insulation: basic
Contact - coil distance	• clearance	≥ 10 mm
	• creepage	≥ 10 mm

General data


Operating / release time (typical values)		7 ms / 3 ms
Electrical life (number of cycles)	• resistive AC1	> 10 ⁵ 8 A, 250 V AC
	• cosφ	see Fig. 2
	• DC L/R=40 ms	> 10 ⁵ 0,15 A, 220 V DC
Mechanical life (cycles)		> 3 x 10 ⁷
Dimensions (L x W x H) / Weight		29 x 12,7 x 15,7 mm / 14 g
Ambient temperature (non-condensation and/or icing)	• storage	-40...+85 °C
	• operating	AC: -40...+70 °C DC: -40...+85 °C -20...+70 °C ①
Cover protection category		IP 40 ① or IP 67 EN 60529
Environmental protection		RTII ① or RTIII EN 61810-7
Shock resistance		20 g
Vibration resistance	(NO/NC)	10 g / 5 g 10...150 Hz
Solder bath temperature		max. 270 °C
Soldering time		max. 5 s

The data in bold type relate to the standard versions of the relays. ① Relate to the special versions - relays with transparent cover, only available with IP 40 and RTII, operating temperature -20...+70 °C. See "Ordering codes". ② Relate to the special versions - relays with two normally open contacts 2 NO, with increased contact gap - dielectric strength 2000 V AC, only available with DC coils. See "Ordering codes". ③ For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.


Dimensions

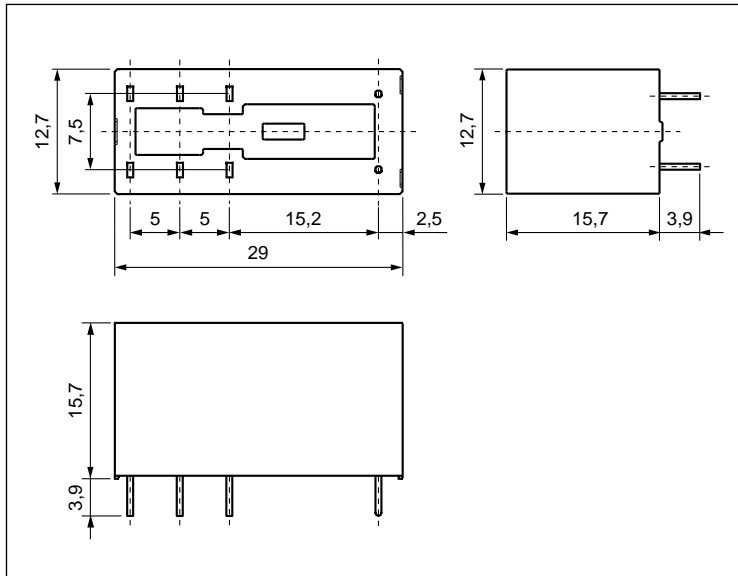

Connection diagrams (pin side view)

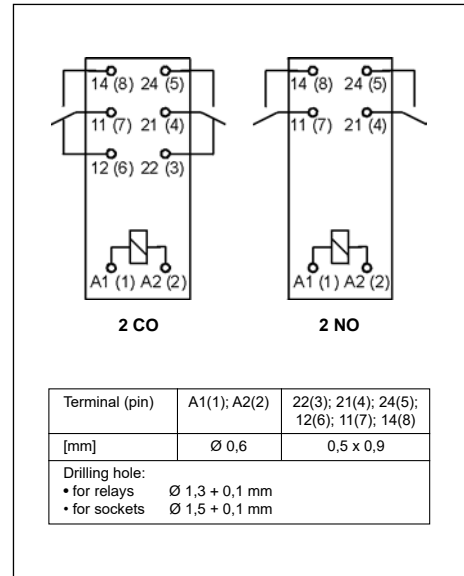

Pinout (solder side view)

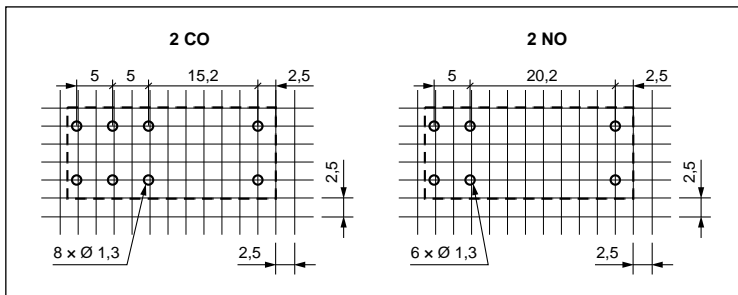


Mounting, sockets and accessories for relays

Relays **RM84** are designed for: • direct PCB mounting • plug-in sockets.


Sockets for RM84	Accessories			Additional features
	Retainer / retractor clips	Spring wire clips	Description plates	
Screw terminals sockets, 35 mm rail mount (acc. to EN 60715) or on panel mounting (one M3 screw)				
GZT80	GZT80-0040	GZM80-0041	GZT80-0035	modules ⑥, strips ⑦
GZM80	GZT80-0040	GZM80-0041	GZT80-0035	modules ⑥, strips ⑦
GZS80	GZS-0040	GZM80-0041	TR	modules ⑥, strips ⑦
GZF80	–	GZM80-0041	–	–
Spring terminals sockets, 35 mm rail mount (acc. to EN 60715)				
GZMB80 ⑥	GZMB80-0040	GZM80-0041	TR	modules ⑥
Sockets for PCB				
EC 50	–	MP16-2 ⑧, MH16-2	–	–
PW80	–	MH16-2	–	–
GD50	–	MP16-2 ⑧, MH16-2, GD-0016	–	–

① For relays with transparent cover: the distance at least 5 mm between the relays mounted side by side. ⑥ Sockets GZMB80: wire connection - see page 361. ⑧ Signalling / protecting modules type M... - see page 376. ⑦ Interconnection strips ZGGZ80 - see page 377. ⑧ Plastic clips MP16-2.


Electrical life at AC resistive load.
Switching frequency: 600 cycles/hour Fig. 1

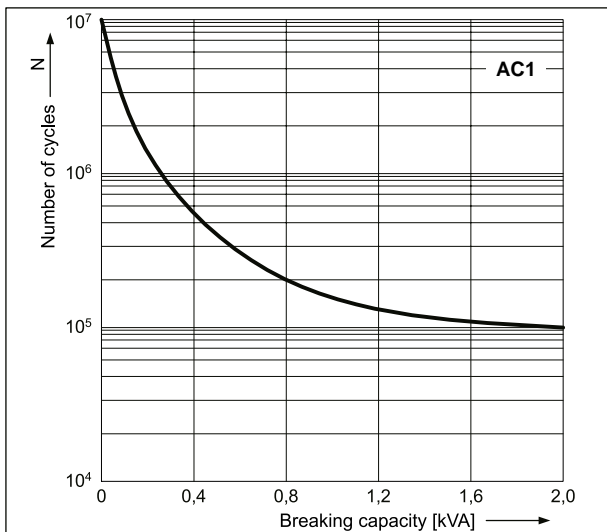


Electrical life reduction factor at AC inductive load Fig. 2

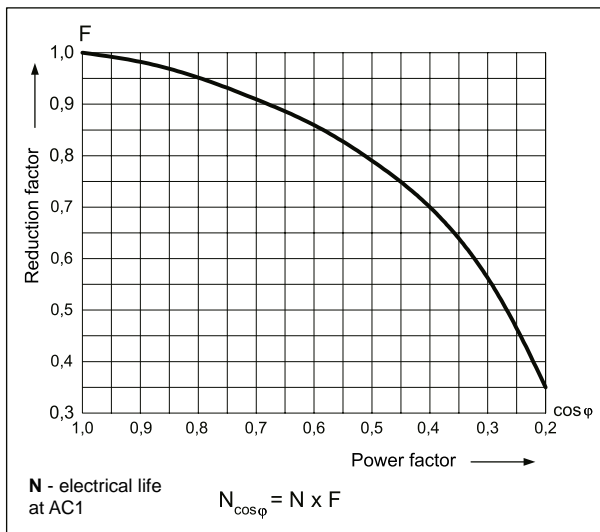


Max. DC resistive load breaking capacity Fig. 3

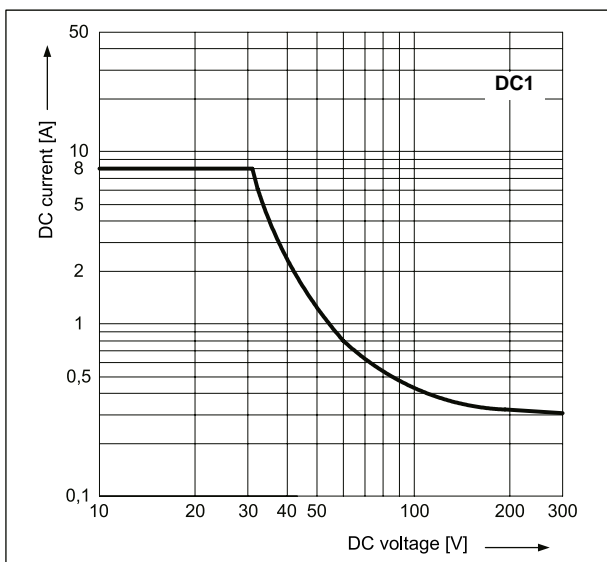

Coil operating range - DC Fig. 4

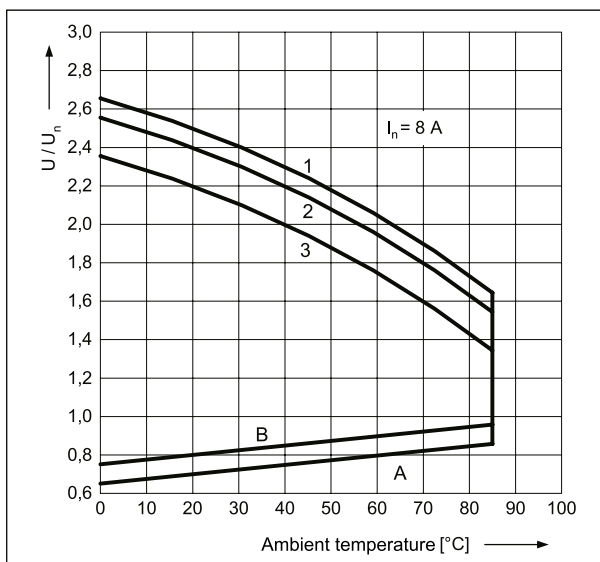

Coil operating range - AC 50 Hz Fig. 5

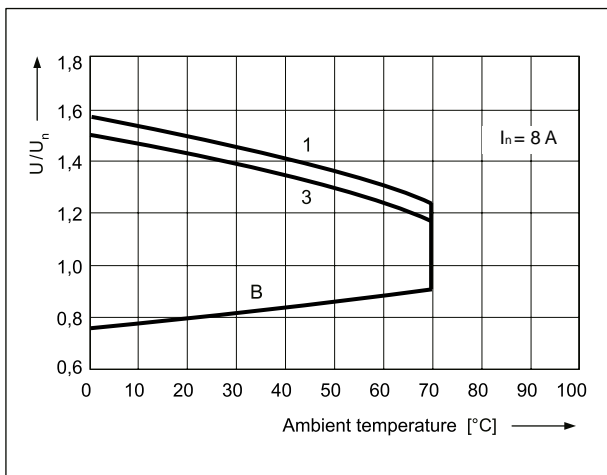

Description of Fig. 4 and 5

- A** - relations between make voltage and ambient temperature at no load on contacts. Coil temperature and ambient temperature are equal before coil energizing. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).
- B** - relations between make voltage and ambient temperature after initial coil heating up with 1,1 U_n , at continues load of I_n on contacts. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).
- 1, 2, 3** - values on Y axis represent allowed overvoltage on coil at certain ambient temperature and contact load:
 - 1 - no load
 - 2 - 50% of rated load
 - 3 - rated load

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
1003	3	22	± 10%	2,1	7,6
1005	5	60	± 10%	3,5	12,7
1006	6	90	± 10%	4,2	15,3
1009	9	200	± 10%	6,3	22,9
1012	12	360	± 10%	8,4	30,6
1018	18	710	± 10%	12,6	45,9
1024	24	1 440	± 10%	16,8	61,2
1036	36	3 140	± 10%	25,2	91,8
1048	48	5 700	± 10%	33,6	122,4
1060	60	7 500	± 10%	42,0	153,0
1110	110	25 200	± 10%	77,0	280,0

The data in bold type relate to the standard versions of the relays.

Coil data - AC 50/60 Hz voltage version


Table 2

Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC 50 Hz	
				min. (at 20 °C)	max. (at 20 °C)
5012	12	100	± 10%	9,6	13,2
5024	24	400	± 10%	19,2	28,8
5048	48	1 550	± 10%	38,4	57,6
5060	60	2 600	± 10%	48,0	72,0
5110	110	8 900	± 10%	88,0	132,0
5115	115	9 600	± 10%	92,0	138,0
5120	120	10 200	± 10%	96,0	144,0
5220	220	35 500	± 10%	176,0	264,0
5230	230	38 500	± 10%	184,0	276,0
5240	240	42 500	± 15%	192,0	288,0


The data in bold type relate to the standard versions of the relays.

Interface relays PI84 (PI85)

- set: relay RM84 (RM85)
- + socket GZT80
- (GZM80, GZMB80)
- see pages 198-225

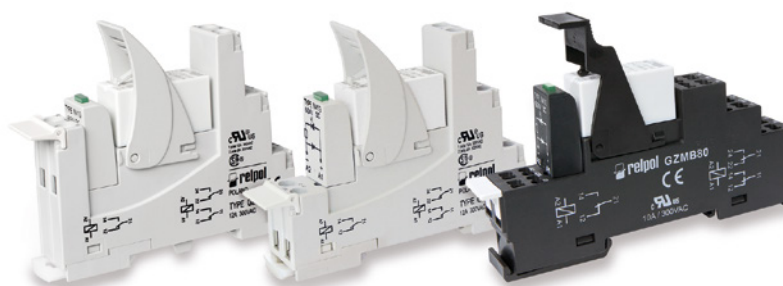


Ordering codes

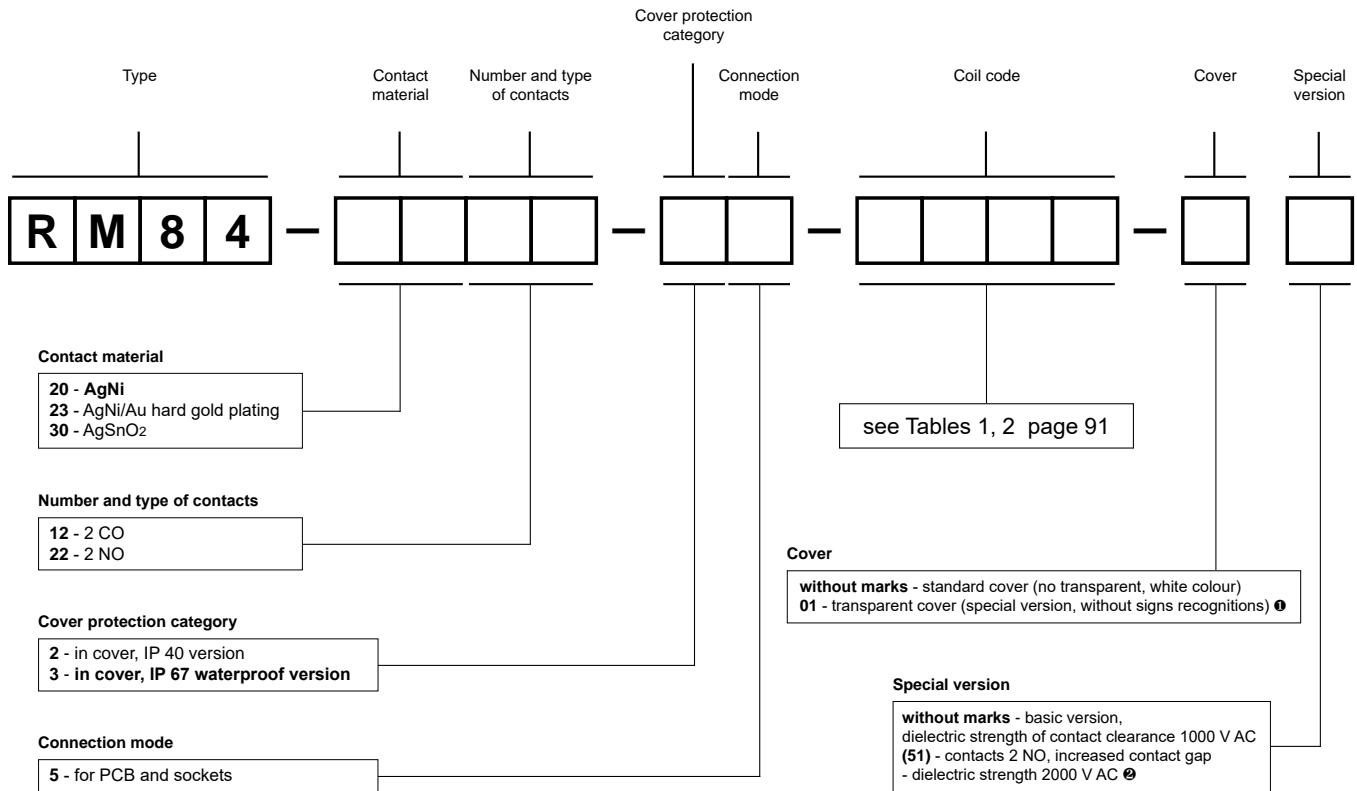






① 01: special version - relay with transparent cover, only available with IP 40 and RTII, operating temperature -20...+70 °C ② (51): special version - relay with two normally open contacts 2 NO, with increased contact gap - dielectric strength 2000 V AC, only available with DC coil

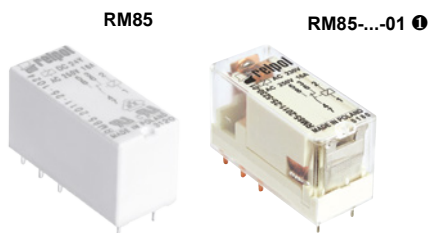Examples of ordering code:

- RM84-3012-25-5024** relay **RM84**, for PCB and sockets, two changeover contacts, contact material AgSnO₂, coil voltage 24 V AC 50/60 Hz, in standard cover (no transparent, white colour) IP 40
- RM84-2012-25-1012-01** relay **RM84**, for PCB and sockets, two changeover contacts, contact material AgNi, coil voltage 12 V DC with transparent cover (special version, without signs recognitions) IP 40
- RM84-2322-35-1024 (51)** relay **RM84**, special version with increased contact gap, for PCB and sockets, two normally open contacts, contact material AgNi/Au hard gold plating, coil voltage 24 V DC, in standard cover (no transparent, white colour) IP 67



- CTI 250
- 5000 V / 10 mm reinforced insulation
- For PCB and plug-in sockets
- AC and DC coils, insulation class F: 155 °C
- Available special versions: with transparent cover ①; with the increased dielectric strength of the contact clearance ②
- Compliance with standard EN 60335-1
- Recognitions, certifications, directives: RoHS,     

Contact data

Number and type of contacts	1 CO, 1 NO ②
Contact material	AgNi , AgNi/Au hard gold plating, AgSnO ₂
Rated / max. switching voltage	AC 250 V / 400 V
Min. switching voltage	5 V AgNi, 5 V AgNi/Au hard gold plating, 10 V AgSnO ₂
Rated load (capacity)	AC1 16 A / 250 V AC AC15 3 A / 120 V 1,5 A / 240 V (B300) DC1 16 A / 24 V DC (see Fig. 3) DC13 0,22 A / 120 V 0,1 A / 250 V (R300)
Motor load	acc. to UL 508 1/2 HP 240 V AC, 4,9 FLA, single-phase motor ③ AC3 acc. to IEC 60947-4-1 0,5 kW 240 V AC, single-phase motor
Min. switching current	5 mA AgNi, 2 mA AgNi/Au hard gold plating, 10 mA AgSnO ₂
Max. inrush current	30 A AgSnO ₂
Rated current	16 A
Max. breaking capacity	AC1 4 000 VA
Min. breaking capacity	0,3 W AgNi, 0,05 W AgNi/Au hard gold plating, 1 W AgSnO ₂
Contact resistance	≤ 100 mΩ
Max. operating frequency	• at rated load AC1 600 cycles/hour • no load 72 000 cycles/hour

Coil data

Rated voltage	50/60 Hz AC 12, 24 , 48, 60, 110, 115, 120, 220, 230 , 240 V DC 3, 5, 6, 9, 12 , 18, 24 , 36, 48, 60, 110 V
Must release voltage	AC: ≥ 0,15 U _n DC: ≥ 0,1 U _n
Operating range of supply voltage	see Tables 1, 2 and Fig. 4, 5
Rated power consumption	AC 0,75 VA DC 0,4 ... 0,48 W

Insulation according to EN 60664-1


Insulation rated voltage	400 V AC
Rated surge voltage	4 000 V 1,2 / 50 μs
Overtoltage category	III
Insulation pollution degree	3
Dielectric strength	• between coil and contacts 5 000 V AC type of insulation: reinforced • contact clearance 1 000 V AC type of clearance: micro-disconnection 2 000 V AC contact 1 NO, type of clearance: full-disconnection ②
Contact - coil distance	• clearance ≥ 10 mm • creepage ≥ 10 mm

General data


Operating / release time (typical values)	7 ms / 3 ms
Electrical life (number of cycles)	• resistive AC1 > 0,7 x 10 ⁵ 16 A, 250 V AC > 10 ⁴ 20 A, 250 V AC, 85 °C (RM85-3021-25-1...) • motor load acc. to UL 508 10 ⁵ 5 FLA / 7 LRA, 240 V AC, 65 °C (RM85-3021-.5-1...) 10 ⁵ 5 FLA / 12 LRA, 24 V DC, 65 °C (RM85-3021-.5-1...) 3 x 10 ⁴ 5 FLA / 30 LRA, 240 V AC, 70 °C (RM85-2021-..5-1...) • cosφ see Fig. 2 • DC L/R=40 ms > 10 ⁵ 0,15 A, 220 V DC
Mechanical life (cycles)	> 3 x 10 ⁷
Dimensions (L x W x H) / Weight	29 x 12,7 x 15,7 mm / 14 g
Ambient temperature (non-condensation and/or icing)	• storage -40...+85 °C • operating AC: -40...+70 °C DC: -40...+85 °C -20...+70 °C ①
Cover protection category	IP 40 ① or IP 67 EN 60529
Environmental protection	RTII ① or RTIII EN 61810-7
Shock / vibration resistance	30 g / 10 g 10...150 Hz
Solder bath temperature / Soldering time	max. 270 °C / max. 5 s

The data in bold type relate to the standard versions of the relays. ① Relate to the special versions - relays with transparent cover, only available with IP 40 and RTII, operating temperature -20...+70 °C. See "Ordering codes". ② Relate to the special versions - relays with one normally open contact 1 NO, with increased contact gap - dielectric strength 2000 V AC, only available with DC coils. See "Ordering codes". ③ For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.

Dimensions

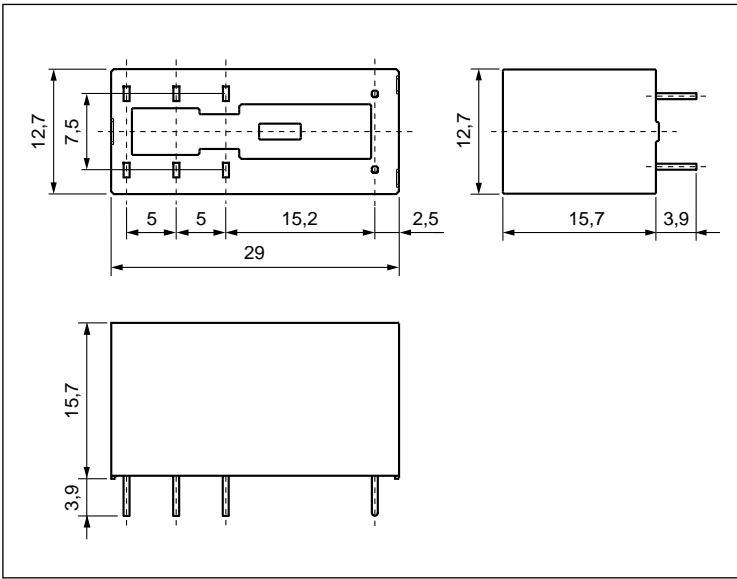

Pinout (solder side view)

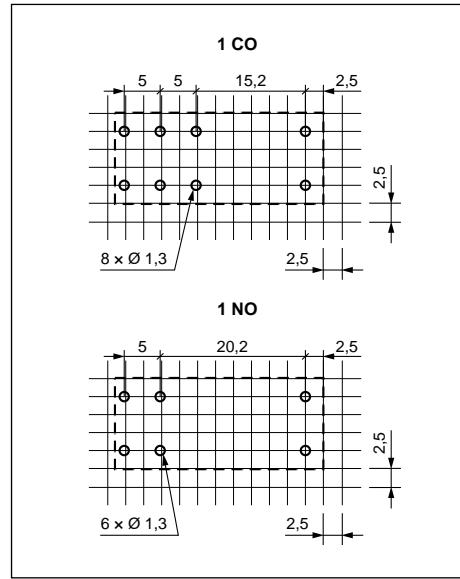

Connection diagrams (pin side view)

1 CO

1 NO

Terminal (pin)	A1(1); A2(2)	22(3); 21(4); 24(5); 12(6); 11(7); 14(8)
[mm]	Ø 0,6	0,5 x 0,9
Drilling hole:		
• for relays	Ø 1,3 + 0,1 mm	
• for sockets	Ø 1,5 + 0,1 mm	


RM85 terminals are doubled for each contact.
Both terminals are to be used while connecting to load.

Connection of GZ.80 sockets

Note: Loads above 12 A (GZT80, GZM80) or 10 A (GZS80, GZF80, GZMB80) require bridging pairs of terminals: 11 with 21, 12 with 22, 14 with 24. Loads up to 12 A or 10 A do not require bridging of common terminals (such bridges may be fixed, however).


Electrical life at AC resistive load.
Switching frequency: 600 cycles/hour

Fig. 1

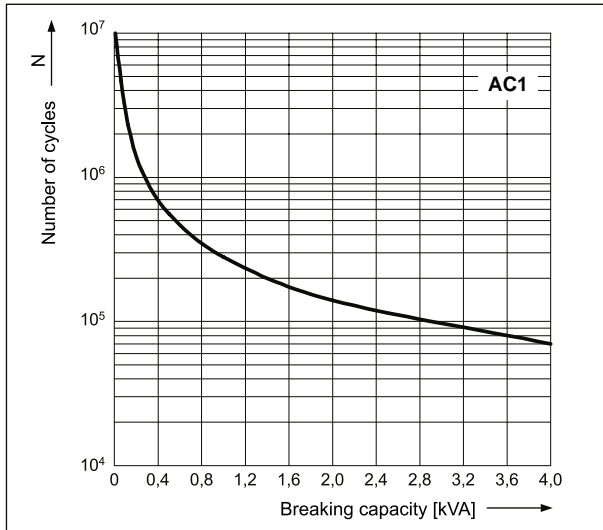


Electrical life reduction factor at AC inductive load

Fig. 2

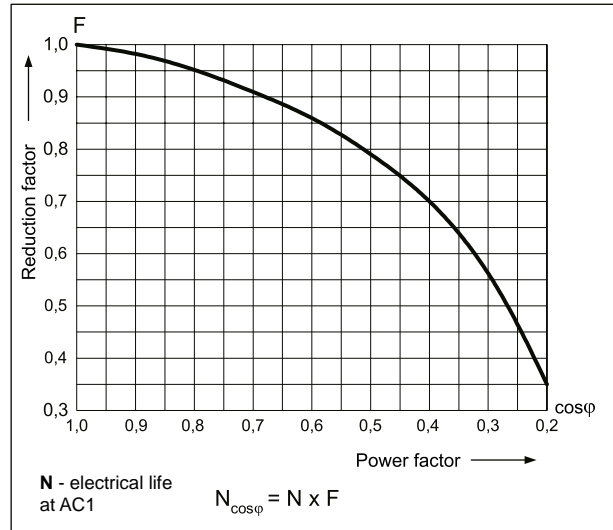


Max. DC resistive load breaking capacity

Fig. 3

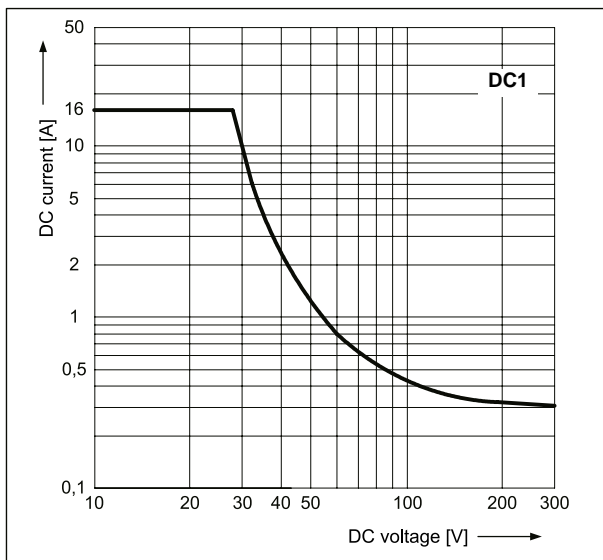


Coil operating range - DC

Fig. 4

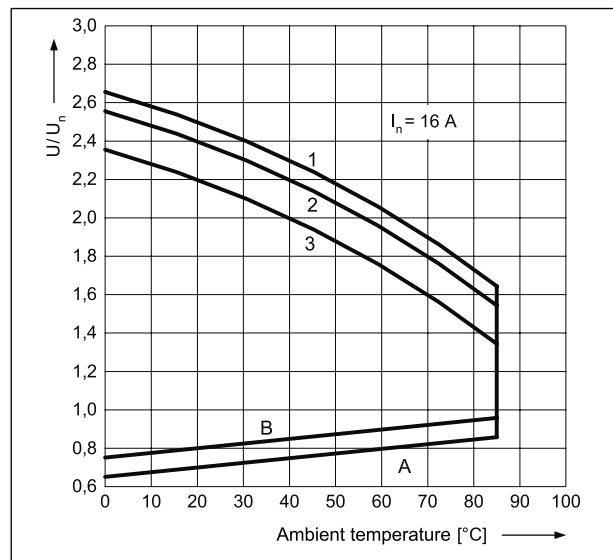

Coil operating range - AC 50 Hz

Fig. 5

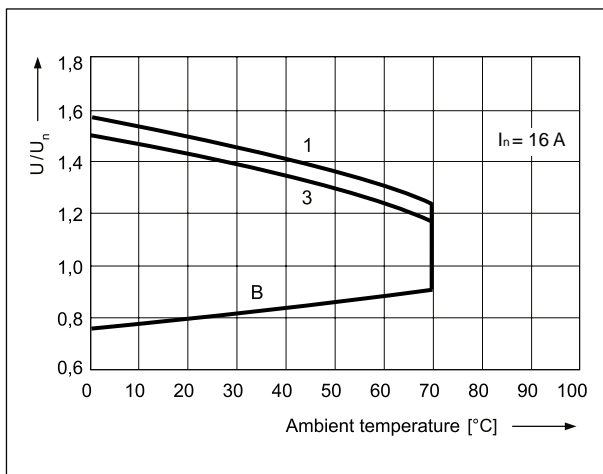

Description of Fig. 4 and 5

A - relations between make voltage and ambient temperature at no load on contacts. Coil temperature and ambient temperature are equal before coil energizing. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).

B - relations between make voltage and ambient temperature after initial coil heating up with $1,1 U_n$, at continues load of I_n on contacts. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).

1, 2, 3 - values on Y axis represent allowed overvoltage on coil at certain ambient temperature and contact load:

- 1** - no load
- 2** - 50% of rated load
- 3** - rated load

Mounting, sockets and accessories for relays

Relays **RM85** are designed for: • direct PCB mounting • plug-in sockets.

Sockets for RM85	Accessories			Additional features
	Retainer / retractor clips	Spring wire clips	Description plates	
Screw terminals sockets , 35 mm rail mount (acc. to EN 60715) or on panel mounting (one M3 screw)				
GZT80	GZT80-0040	GZM80-0041	GZT80-0035	modules, strips
GZM80	GZT80-0040	GZM80-0041	GZT80-0035	modules, strips
GZS80	GZS-0040	GZM80-0041	TR	modules, strips
GZF80	–	GZM80-0041	–	–
Spring terminals sockets , 35 mm rail mount (acc. to EN 60715)				
GZMB80	GZMB80-0040	GZM80-0041	TR	modules
Sockets for PCB				
EC 50	–	MP16-2, MH16-2	–	–
PW80	–	MH16-2	–	–
GD50	–	MP16-2, MH16-2, GD-0016	–	–

For relays with transparent cover: the distance at least 5 mm between the relays mounted side by side. Sockets GZ.80: load connection - see page 94. Sockets GZMB80: wire connection - see page 361. Signalling / protecting modules type M... - see page 376. Interconnection strips ZGGZ80 - see page 377. Plastic clips MP16-2.

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
1003	3	22	± 10%	2,1	7,6
1005	5	60	± 10%	3,5	12,7
1006	6	90	± 10%	4,2	15,3
1009	9	200	± 10%	6,3	22,9
1012	12	360	± 10%	8,4	30,6
1018	18	710	± 10%	12,6	45,9
1024	24	1 440	± 10%	16,8	61,2
1036	36	3 140	± 10%	25,2	91,8
1048	48	5 700	± 10%	33,6	122,4
1060	60	7 500	± 10%	42,0	153,0
1110	110	25 200	± 10%	77,0	280,0

The data in bold type relate to the standard versions of the relays.


Coil data - AC 50/60 Hz voltage version

Table 2

Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC 50 Hz	
				min. (at 20 °C)	max. (at 20 °C)
5012	12	100	± 10%	9,6	13,2
5024	24	400	± 10%	19,2	28,8
5048	48	1 550	± 10%	38,4	57,6
5060	60	2 600	± 10%	48,0	72,0
5110	110	8 900	± 10%	88,0	132,0
5115	115	9 600	± 10%	92,0	138,0
5120	120	10 200	± 10%	96,0	144,0
5220	220	35 500	± 10%	176,0	264,0
5230	230	38 500	± 10%	184,0	276,0
5240	240	42 500	± 15%	192,0	288,0

The data in bold type relate to the standard versions of the relays.

Ordering codes

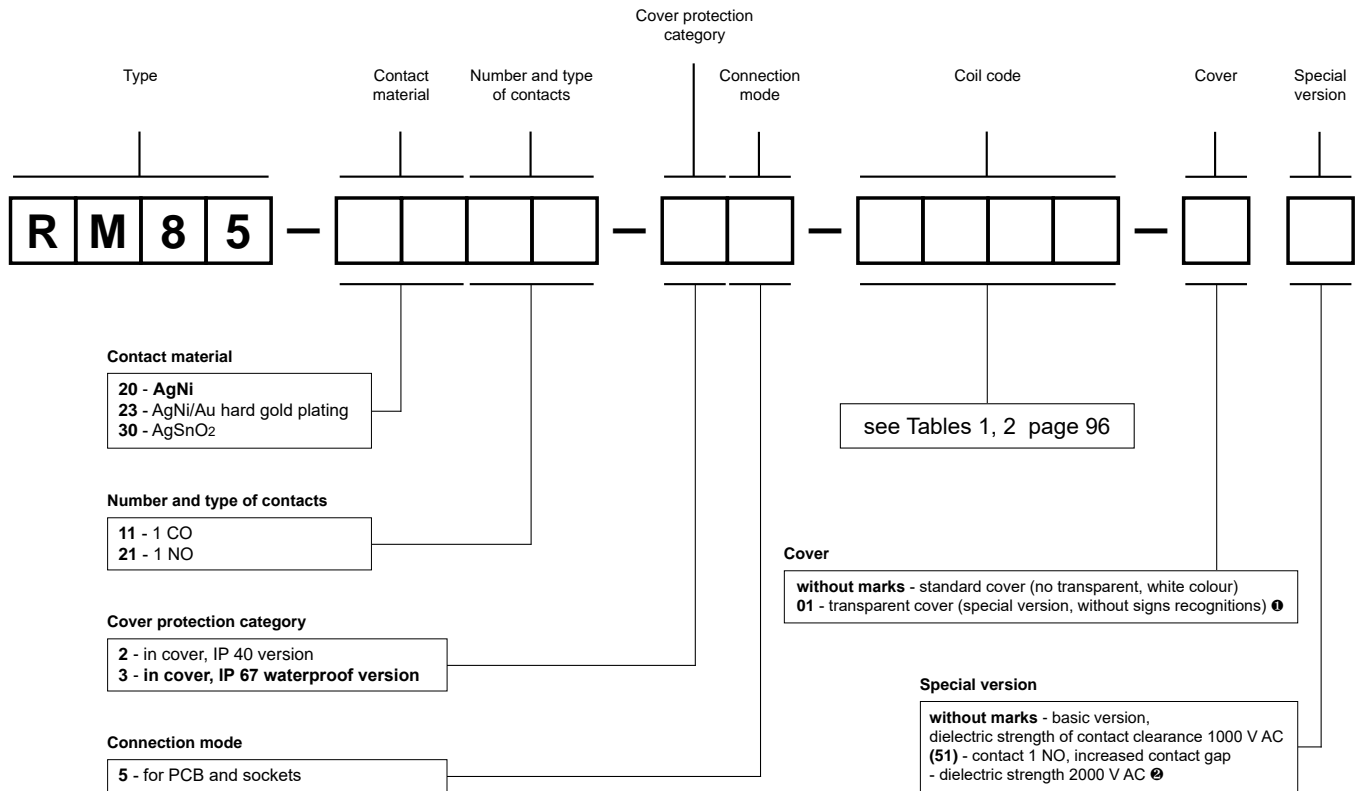

① 01: special version - relay with transparent cover, only available with IP 40 and RTII, operating temperature -20...+70 °C ② (51): special version - relay with one normally open contact 1 NO, with increased contact gap - dielectric strength 2000 V AC, only available with DC coil

Examples of ordering code:

RM85-3011-25-5024

relay **RM85**, for PCB and sockets, one changeover contact, contact material AgSnO₂, coil voltage 24 V AC 50/60 Hz, in standard cover (no transparent, white colour) IP 40

RM85-2011-25-1012-01

relay **RM85**, for PCB and sockets, one changeover contact, contact material AgNi, coil voltage 12 V DC, with transparent cover (special version, without signs recognitions) IP 40

RM85-2321-35-1024 (51)

relay **RM85**, special version with increased contact gap, for PCB and sockets, one normally open contact, contact material AgNi/Au hard gold plating, coil voltage 24 V DC, in standard cover (no transparent, white colour) IP 67

GZF80

Screw terminals
plug-in socket
for RM84, RM85...,
RM87L, RM87P,
RMP84, RMP85
- see page 361



RM85 for switching higher voltages



miniature relays

98

MINIATURE



- **Switching voltage 480 V AC**

- Contact gap: 0,6 mm
- CTI 250
- 5000 V / 10 mm reinforced insulation
- For PCB
- DC coils, insulation class F: 155 °C
- Compliance with standard EN 60335-1
- Recognitions, certifications, directives: RoHS,  

Contact data

Number and type of contacts		1 NO	
Contact material		AgSnO₂	
Rated / max. switching voltage	AC	250 V / 480 V	
Min. switching voltage		10 V	
Rated load (capacity)	AC1	5 A / 480 V AC	
	AC15	3 A / 120 V	1,5 A / 240 V (B300)
	DC1	16 A / 24 V DC	
	DC13	0,22 A / 120 V	0,1 A / 250 V (R300)
Motor load	acc. to UL 508	1/2 HP	240 V AC, 4,9 FLA, single-phase motor ①
	AC3 acc. to IEC 60947-4-1	0,5 kW	240 V AC, single-phase motor
Min. switching current		10 mA	
Max. inrush current		30 A	
Rated current		16 A / 250 V AC	
Max. breaking capacity	AC1	2 400 VA	
Min. breaking capacity		1 W	
Contact resistance		≤ 100 mΩ	100 mA, 24 V
Max. operating frequency			
• at rated load	AC1	360 cycles/hour	
• no load		3 600 cycles/hour	

Coil data

Rated voltage	DC	3, 5, 6, 9, 12 , 18, 24 , 36, 48, 60, 110 V
Must release voltage		≥ 0,1 U _n
Operating range of supply voltage		see Table 1
Rated power consumption	DC	0,4 ... 0,48 W

Insulation according to EN 60664-1


Insulation rated voltage		480 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overtoltage category		III
Insulation pollution degree		2
Dielectric strength		
• between coil and contacts		5 000 V AC type of insulation: reinforced
• contact clearance		2 000 V AC type of clearance: micro-disconnection
Contact - coil distance		
• clearance		≥ 10 mm
• creepage		≥ 10 mm

General data


Operating / release time (typical values)		7 ms / 3 ms
Electrical life (number of cycles)		
• resistive AC1		> 4 x 10 ⁴ 5 A, 480 V AC
• motor load acc. to UL 508		10 ⁵ 5 FLA / 7 LRA, 240 V AC, 65 °C
		10 ⁵ 5 FLA / 12 LRA, 24 V DC, 65 °C
Mechanical life	3 600 cycles/hour	> 3 x 10 ⁷
Electromagnetic load according to UL 508		Heavy Pilot Duty 480 V AC, 15 A make / 1,5 A break
Dimensions (L x W x H)		29 x 12,7 x 15,7 mm
Weight		14 g
Ambient temperature	• storage	-40...+85 °C
(non-condensation and/or icing)	• operating	-40...+85 °C
Cover protection category		IP 40 or IP 67 EN 60529
Environmental protection		RTIII EN 61810-7
Shock resistance		30 g
Vibration resistance		10 g 10...150 Hz
Solder bath temperature		max. 270 °C
Soldering time		max. 5 s

The data in bold type relate to the standard versions of the relays. ① For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.

Dimensions

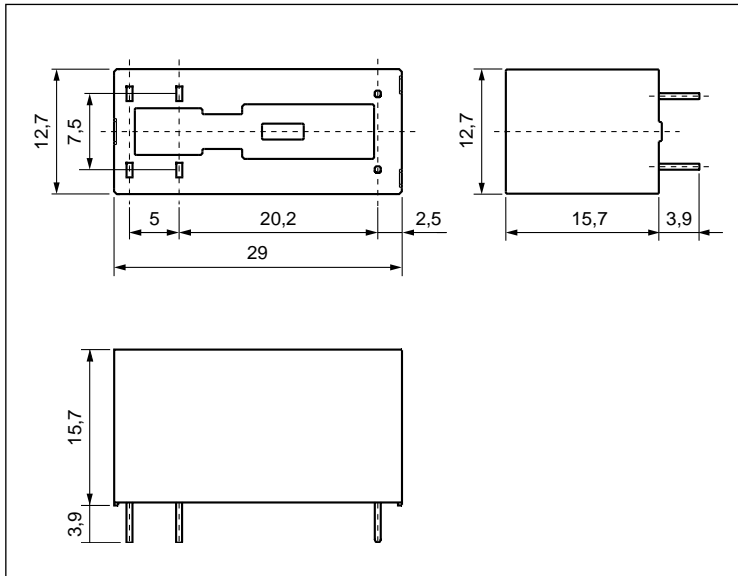


Pinout (solder side view)

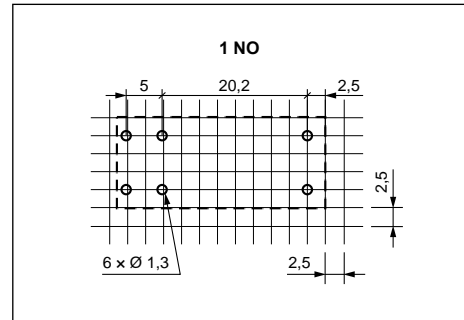

Mounting

Relays **RM85 for switching higher voltages** are designed for direct PCB mounting.

Connection diagram (pin side view)

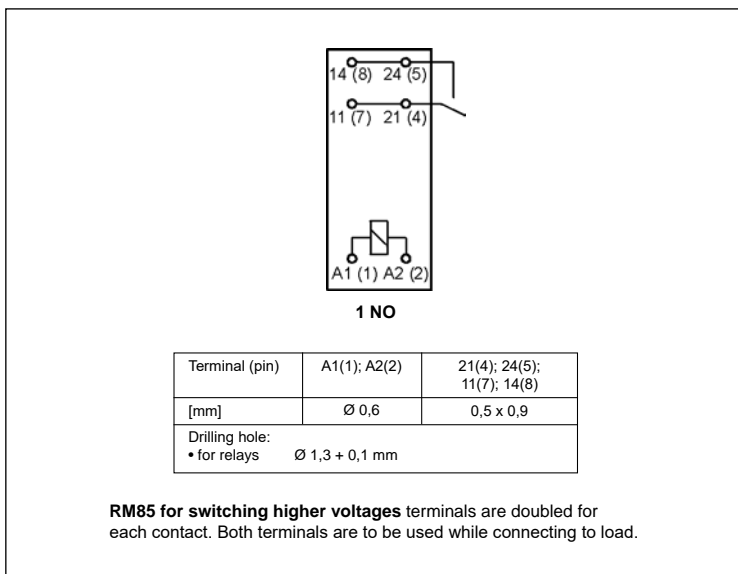

RM85 for switching higher voltages

miniature relays

100

MINIATURE


Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
1003	3	22	± 10%	2,1	7,6
1005	5	60	± 10%	3,5	12,7
1006	6	90	± 10%	4,2	15,3
1009	9	200	± 10%	6,3	22,9
1012	12	360	± 10%	8,4	30,6
1018	18	710	± 10%	12,6	45,9
1024	24	1 440	± 10%	16,8	61,2
1036	36	3 140	± 10%	25,2	91,8
1048	48	5 700	± 10%	33,6	122,4
1060	60	7 500	± 10%	42,0	153,0
1110	110	25 200	± 10%	77,0	280,0

The data in bold type relate to the standard versions of the relays.

Ordering codes

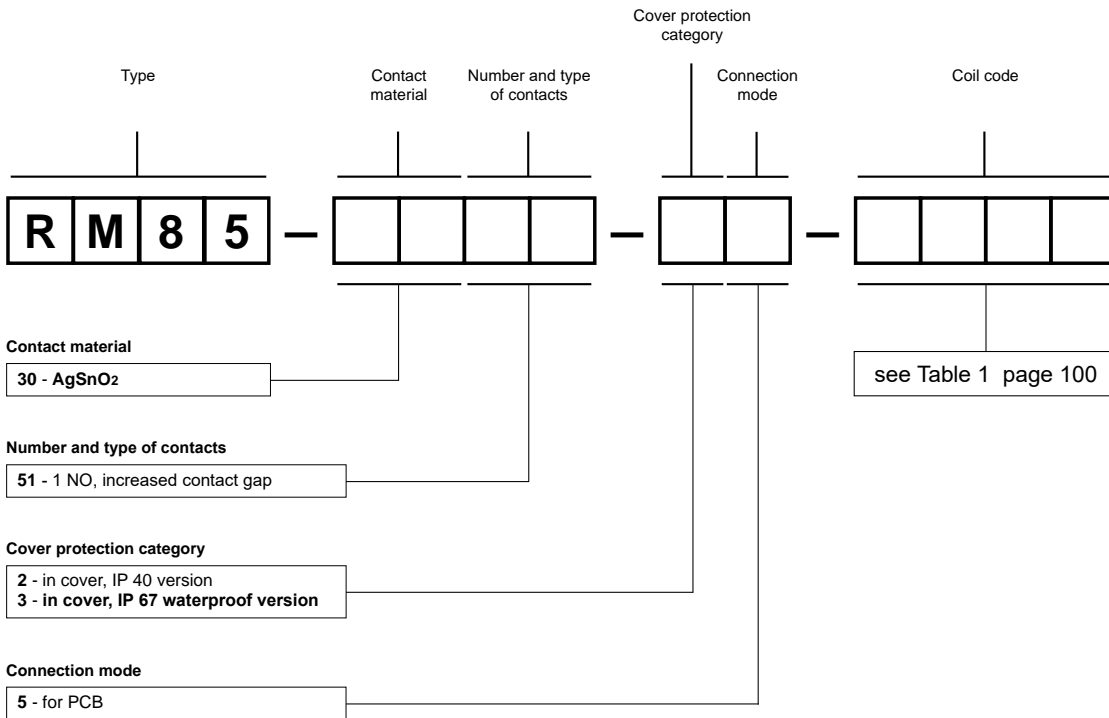




Example of ordering code:

RM85-3051-35-1012

relay **RM85**, with increased contact gap, for PCB, one normally open contact, contact material AgSnO₂, coil voltage 12 V DC, in cover IP 67



- **Resistance to inrush current 80 A (20 ms)**
- CTI 250 • 5000 V / 10 mm reinforced insulation
- For PCB and plug-in sockets
- DC coils, insulation class F: 155 °C
- Applications: for motor operation control, lighting, electromagnetic valves, and many other applications
- Compliance with standard EN 60335-1
- Recognitions, certifications, directives: RoHS,   

Contact data

Number and type of contacts		1 NO
Contact material		AgSnO₂
Rated / max. switching voltage	AC	250 V / 400 V
Min. switching voltage		10 V
Rated load (capacity)	AC1	16 A / 250 V AC
	AC15	3 A / 120 V 1,5 A / 240 V (B300)
	DC1	16 A / 24 V DC (see Fig. 2)
	DC13	0,22 A / 120 V 0,1 A / 250 V (R300)
Motor load	acc. to UL 508	1 HP 240 V AC, 8 FLA, single-phase motor 1
	AC3 acc. to IEC 60947-4-1	0,75 kW 240 V AC, single-phase motor
Min. switching current		10 mA
Max. inrush current		80 A 20 ms
Rated current		16 A
Max. breaking capacity	AC1	4 000 VA
Min. breaking capacity		1 W
Contact resistance		≤ 100 mΩ
Max. operating frequency		
• at rated load	AC1	600 cycles/hour
• no load		72 000 cycles/hour
Coil data		
Rated voltage	DC	3, 5, 6, 9, 12 , 18, 24 , 36, 48, 60, 110 V
Must release voltage		DC: ≥ 0,1 U _n
Operating range of supply voltage		see Table 1 and Fig. 3
Rated power consumption	DC	0,4 ... 0,48 W
Insulation according to EN 60664-1		
Insulation rated voltage		400 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overtoltage category		III
Insulation pollution degree		3
Dielectric strength		
• between coil and contacts		5 000 V AC type of insulation: reinforced
• contact clearance		1 000 V AC type of clearance: micro-disconnection
Contact - coil distance	• clearance	≥ 10 mm
	• creepage	≥ 10 mm
General data		
Operating / release time (typical values)		8 ms / 3 ms
Electrical life (number of cycles)		
• resistive AC1	600 cycles/hour	> 10 ⁵ 16 A, 250 V AC
• cosφ		see Fig. 1
• resistive DC1	600 cycles/hour	> 10 ⁵ 16 A, 24 V DC
• inductive AC3, I = 3,5 A		> 2,5 x 10 ⁵
• at incandescent lamp load, 1000 W		> 0,9 x 10 ⁵
Mechanical life (cycles)		> 3 x 10 ⁷
Dimensions (L x W x H)		29 x 12,7 x 15,7 mm
Weight		14 g
Ambient temperature	• storage	-40...+85 °C
(non-condensation and/or icing)	• operating	-40...+85 °C
Cover protection category		IP 40 EN 60529
Environmental protection		RTII EN 61810-7
Shock resistance		30 g
Vibration resistance		10 g 10...150 Hz
Solder bath temperature		max. 270 °C
Soldering time		max. 5 s

The data in bold type relate to the standard versions of the relays. **1** For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.

Connection diagram (pin side view)

Terminal (pin)	A1(1); A2(2)	21(4); 24(5); 11(7); 14(8)
[mm]	∅ 0,6	0,5 x 0,9
Drilling hole:		
• for relays	∅ 1,3 + 0,1 mm	
• for sockets	∅ 1,5 + 0,1 mm	

RM85 inrush terminals are doubled for each contact. Both terminals are to be used while connecting to load.

Connection of GZ.80 sockets

Note: Loads above 12 A (GZT80, GZM80) or 10 A (GZS80, GZF80, GZMB80) require bridging pairs of terminals: 11 with 21, 14 with 24. Loads up to 12 A or 10 A do not require bridging of common terminals (such bridges may be fixed, however).


Mounting, sockets and accessories for relays

Relays **RM85 inrush** are designed for: • direct PCB mounting • plug-in sockets.


Sockets for RM85 inrush	Accessories			Additional features
	Retainer / retractor clips	Spring wire clips	Description plates	
Screw terminals sockets, 35 mm rail mount (acc. to EN 60715) or on panel mounting (one M3 screw)				
GZT80 ②	GZT80-0040	GZM80-0041	GZT80-0035	modules ④, strips ⑤
GZM80 ②	GZT80-0040	GZM80-0041	GZT80-0035	modules ④, strips ⑤
GZS80 ②	GZS-0040	GZM80-0041	TR	modules ④, strips ⑤
GZF80 ②	–	GZM80-0041	–	–
Spring terminals sockets, 35 mm rail mount (acc. to EN 60715)				
GZMB80 ② ③	GZMB80-0040	GZM80-0041	TR	modules ④
Sockets for PCB				
EC 50	–	MP16-2 ⑥, MH16-2	–	–
PW80	–	MH16-2	–	–
GD50	–	MP16-2 ⑥, MH16-2, GD-0016	–	–

② Sockets GZ.80: load connection - see page 102. ③ Sockets GZMB80: wire connection - see page 361. ④ Signalling / protecting modules type M... - see page 376. ⑤ Interconnection strips ZGGZ80 - see page 377. ⑥ Plastic clips MP16-2.

Dimensions

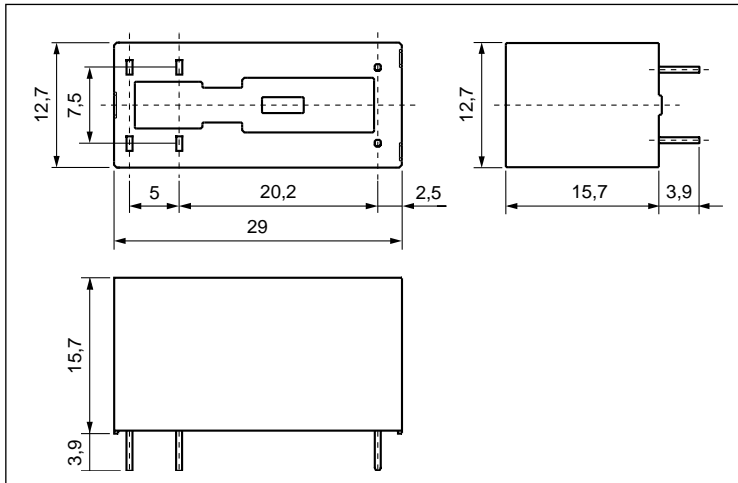


Pinout (solder side view)

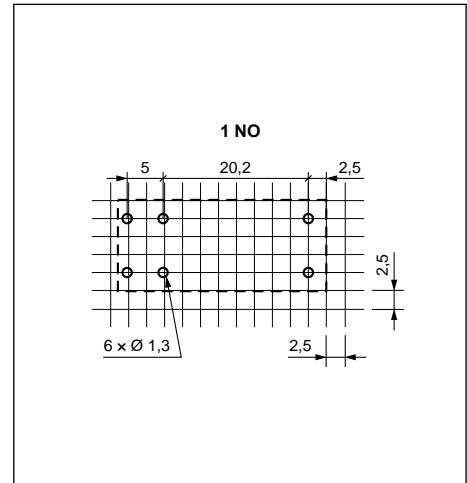


Electrical life reduction factor at AC inductive load

Fig. 1

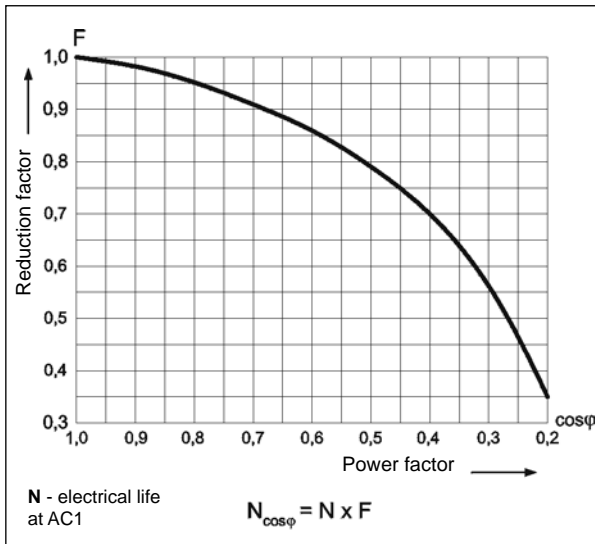


Max. DC resistive load breaking capacity

Fig. 2

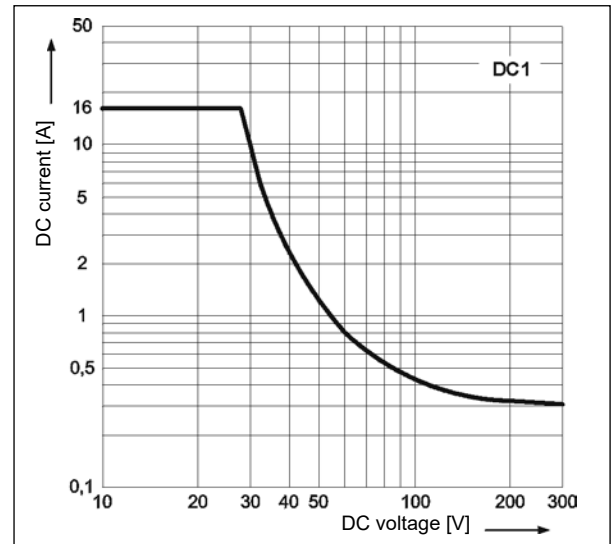

Coil operating range - DC

Fig. 3

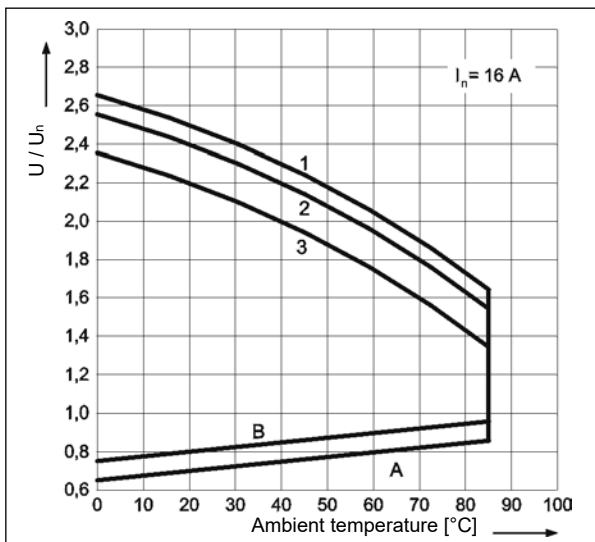

Description of Fig. 3

A - relations between make voltage and ambient temperature at no load on contacts. Coil temperature and ambient temperature are equal before coil energizing. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).

B - relations between make voltage and ambient temperature after initial coil heating up with $1,1 U_n$ at continues load of I_n on contacts. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).

1, 2, 3 - values on Y axis represent allowed overvoltage on coil at certain ambient temperature and contact load:

- 1 - no load
- 2 - 50% of rated load
- 3 - rated load


Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
1003	3	22	± 10%	2,1	7,6
1005	5	60	± 10%	3,5	12,7
1006	6	90	± 10%	4,2	15,3
1009	9	200	± 10%	6,3	22,9
1012	12	360	± 10%	8,4	30,6
1018	18	710	± 10%	12,6	45,9
1024	24	1 440	± 10%	16,8	61,2
1036	36	3 140	± 10%	25,2	91,8
1048	48	5 700	± 10%	33,6	122,4
1060	60	7 500	± 10%	42,0	153,0
1110	110	25 200	± 10%	77,0	280,0

The data in bold type relate to the standard versions of the relays.

Ordering codes

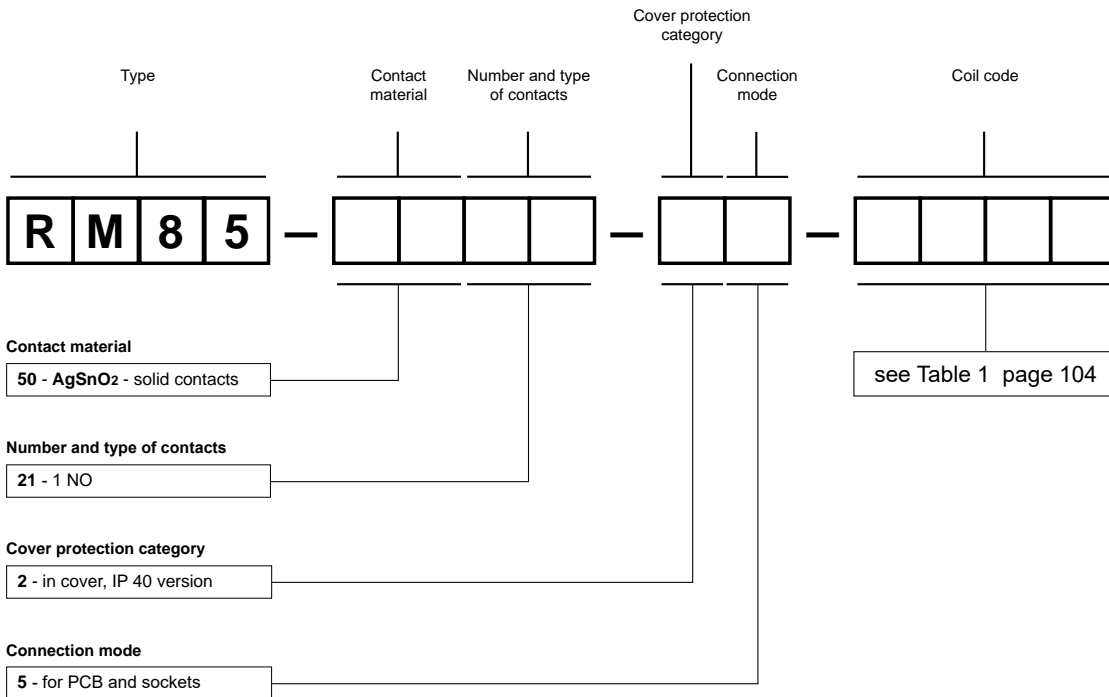

Example of ordering code:





RM85-5021-25-1012

relay **RM85 inrush**, for PCB and sockets, one normally open contact, contact material AgSnO₂ - solid contacts, coil voltage 12 V DC, in cover IP 40

RM85 105 °C sensitive miniature relays

105



- Ambient temperature up to 105 °C
- CTI 250
- For PCB and plug-in sockets
- DC coils - sensitive, insulation class F: 155 °C
- Applications: in household equipment, in temperature controllers
- Compliance with standard EN 60335-1
- Recognitions, certifications, directives: RoHS,    

Contact data

Number and type of contacts		1 NO
Contact material		AgNi, AgNi/Au hard gold plating, AgSnO₂
Rated / max. switching voltage	AC	250 V / 400 V
Min. switching voltage		5 V AgNi, 5 V AgNi/Au hard gold plating, 10 V AgSnO ₂
Rated load (capacity)	AC1	16 A / 250 V AC
	AC15	3 A / 120 V 1,5 A / 240 V (B300)
	DC1	16 A / 24 V DC (see Fig. 2)
	DC13	0,22 A / 120 V 0,1 A / 250 V (R300)
Motor load	acc. to UL 508	1/2 HP 240 V AC, 4,9 FLA, single-phase motor 1
	AC3 acc. to IEC 60947-4-1	0,5 kW 240 V AC, single-phase motor
Min. switching current		5 mA AgNi, 2 mA AgNi/Au hard gold plating, 10 mA AgSnO ₂
Max. inrush current		30 A AgSnO ₂
Rated current		16 A
Max. breaking capacity	AC1	4 000 VA
Min. breaking capacity		0,3 W AgNi, 0,05 W AgNi/Au hard gold plating, 1 W AgSnO ₂
Contact resistance		≤ 100 mΩ
Max. operating frequency	AC1	• at rated load 600 cycles/hour
		• no load 72 000 cycles/hour

Coil data

Rated voltage	DC	5, 6, 9, 10, 12, 18, 24, 48 V
Must release voltage		DC: ≥ 0,1 U _n
Operating range of supply voltage		see Table 1 and Fig. 3
Rated power consumption	DC	0,25 W

Insulation according to EN 60664-1


Insulation rated voltage		400 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overtoltage category		III
Insulation pollution degree		3
Dielectric strength	• between coil and contacts	5 000 V AC type of insulation: reinforced
	• contact clearance	1 000 V AC type of clearance: micro-disconnection
Contact - coil distance	• clearance	≥ 10 mm
	• creepage	≥ 10 mm

General data

Operating / release time (typical values)		8 ms / 3 ms
Electrical life (number of cycles)	• resistive AC1	> 10 ⁵ 16 A, 230 V AC, 70 °C
		> 2 x 10 ⁴ 16 A, 230 V AC, 105 °C
		> 1,7 x 10 ⁵ 10 A, 230 V AC, 105 °C
		> 2,8 x 10 ⁵ 8 A, 230 V AC, 105 °C
		• cosφ
	• DC L/R=40 ms	see Fig. 1 > 10 ⁵ 0,15 A, 220 V DC
Mechanical life (cycles)		> 3 x 10 ⁷
Dimensions (L x W x H)		29 x 12,7 x 15,7 mm
Weight		14 g
Ambient temperature (non-condensation and/or icing)	• storage	-40...+105 °C
	• operating	-40...+105 °C
Cover protection category		IP 40 EN 60529
Environmental protection		RTII EN 61810-7
Shock resistance		30 g
Vibration resistance		10 g 10...150 Hz
Solder bath temperature		max. 270 °C
Soldering time		max. 5 s

The data in bold type relate to the standard versions of the relays. **1** For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.

Connection diagram (pin side view)




1 NO

Terminal (pin)	A1(1); A2(2)	21(4); 24(5); 11(7); 14(8)
[mm]	∅ 0,6	0,5 x 0,9
Drilling hole:		
• for relays ∅ 1,3 + 0,1 mm		
• for sockets ∅ 1,5 + 0,1 mm		

RM85 105 °C sensitive terminals are doubled for each contact. Both terminals are to be used while connecting to load.

Connection of GZ.80 sockets

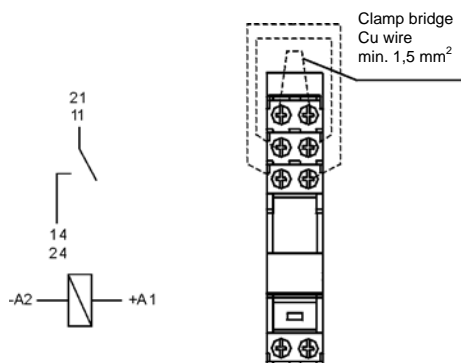

Note: Loads above 12 A (GZT80, GZM80) or 10 A (GZS80, GZF80, GZMB80) require bridging pairs of terminals: 11 with 21, 14 with 24. Loads up to 12 A or 10 A do not require bridging of common terminals (such bridges may be fixed, however).


Mounting, sockets and accessories for relays

Relays RM85 105 °C sensitive are designed for: • direct PCB mounting • plug-in sockets.


Sockets for RM85 105 °C sensitive	Accessories			Additional features
	Retainer / retractor clips	Spring wire clips	Description plates	
Screw terminals sockets, 35 mm rail mount (acc. to EN 60715) or on panel mounting (one M3 screw)				
GZT80 ②	GZT80-0040	GZM80-0041	GZT80-0035	modules ④, strips ⑤
GZM80 ②	GZT80-0040	GZM80-0041	GZT80-0035	modules ④, strips ⑤
GZS80 ②	GZS-0040	GZM80-0041	TR	modules ④, strips ⑤
GZF80 ②	–	GZM80-0041	–	–
Spring terminals sockets, 35 mm rail mount (acc. to EN 60715)				
GZMB80 ② ③	GZMB80-0040	GZM80-0041	TR	modules ④
Sockets for PCB				
EC 50	–	MP16-2 ⑥, MH16-2	–	–
PW80	–	MH16-2	–	–
GD50	–	MP16-2 ⑥, MH16-2, GD-0016	–	–

② Sockets GZ.80: load connection - see page 106. ③ Sockets GZMB80: wire connection - see page 361. ④ Signalling / protecting modules type M... - see page 376. ⑤ Interconnection strips ZGGZ80 - see page 377. ⑥ Plastic clips MP16-2.

Dimensions

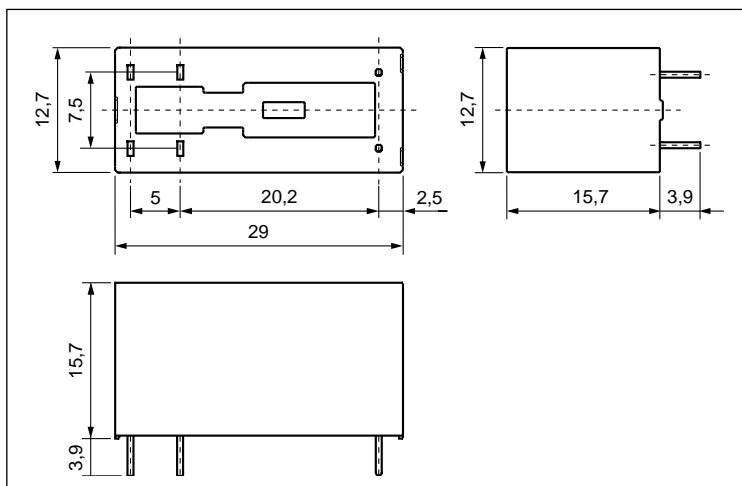


Pinout (solder side view)

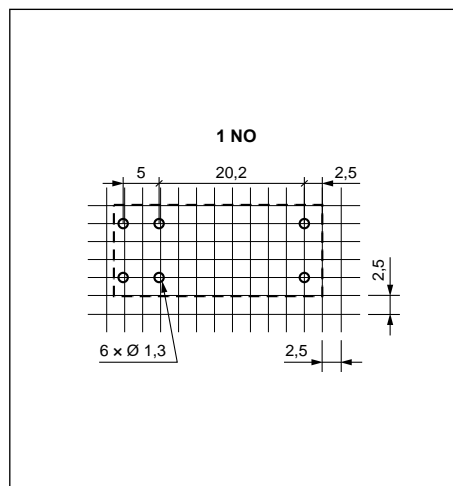


Electrical life reduction factor at AC inductive load

Fig. 1

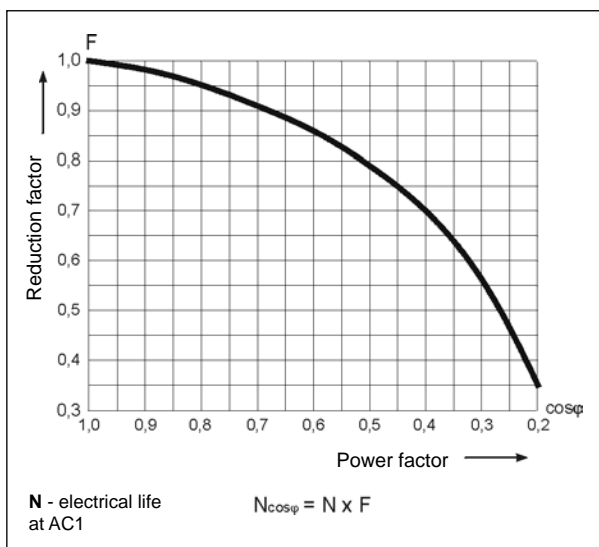


Max. DC resistive load breaking capacity

Fig. 2

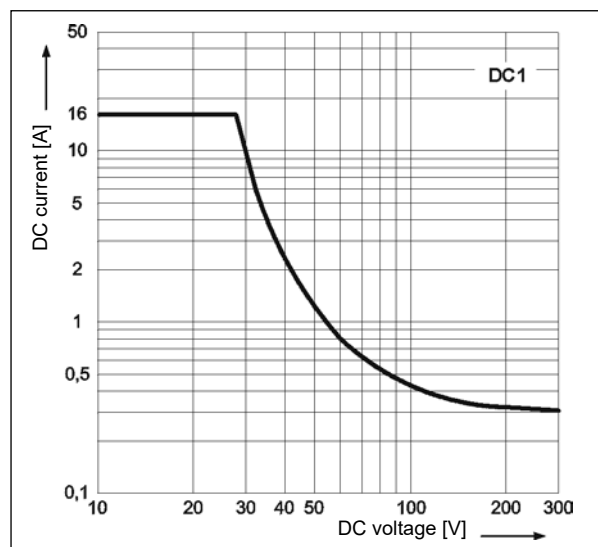

Coil operating range - DC

Fig. 3

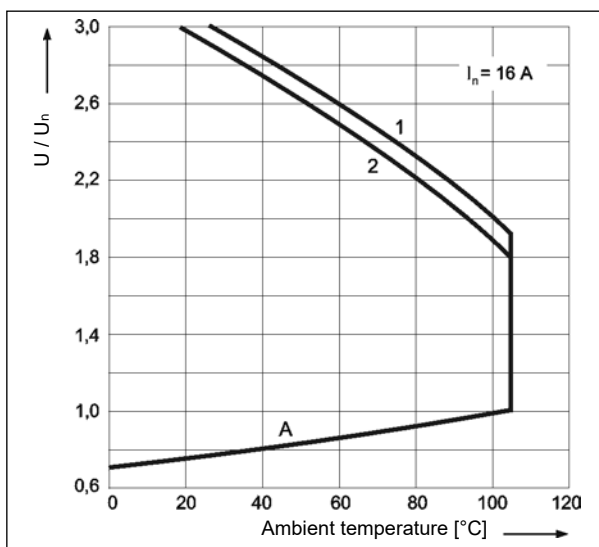

Description of Fig. 3


A - relations between make voltage and ambient temperature at no load on contacts. Coil temperature and ambient temperature are equal before coil energizing. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).
 1, 2 - values on Y axis represent allowed overvoltage on coil at certain ambient temperature and contact load:
 1 - no load
 2 - rated load

Coil data - DC voltage version, sensitive

Table 1


Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
S005	5	102	± 10%	3,75	15,0
S006	6	144	± 10%	4,50	18,0
S009	9	330	± 10%	6,75	27,0
S010	10	380	± 10%	7,50	30,0
S012	12	580	± 10%	9,00	36,0
S018	18	1 300	± 10%	13,50	54,0
S024	24	2 300	± 10%	18,00	72,0
S048	48	9 340	± 10%	36,00	144,0

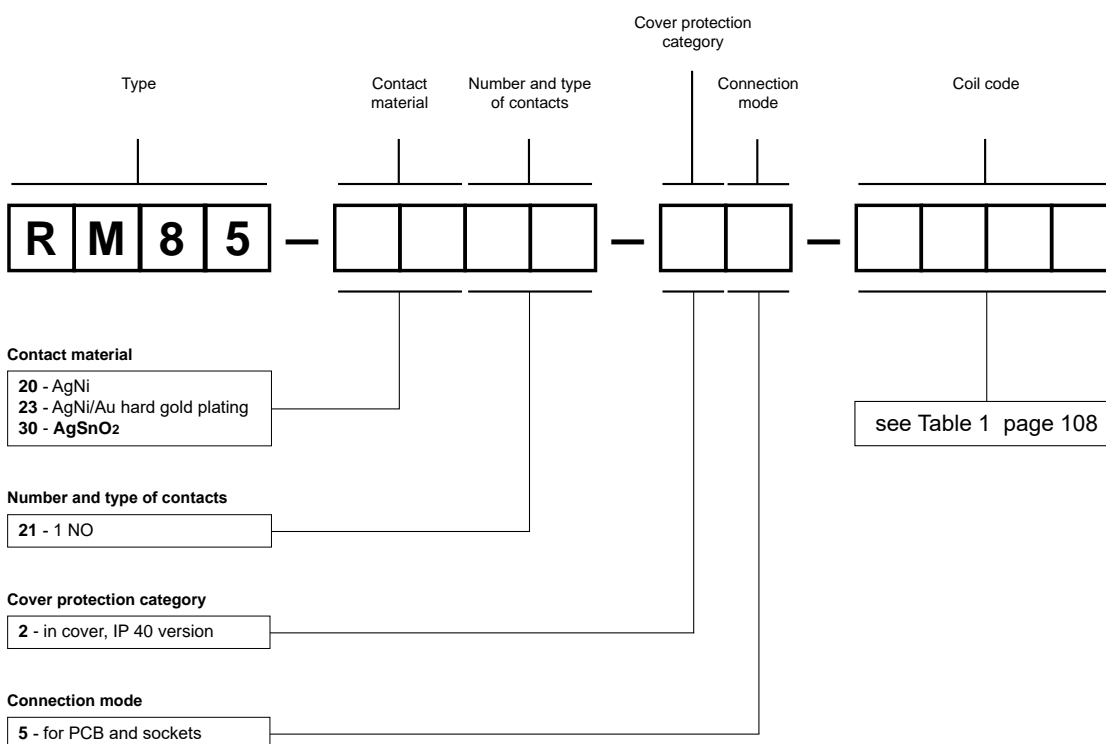


Ordering codes



Examples of ordering code:

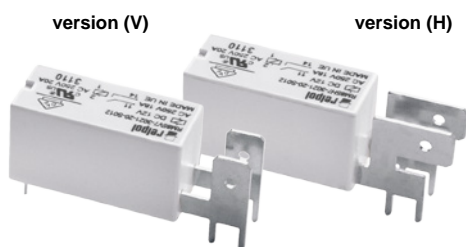- RM85-3021-25-S012** relay **RM85 105 °C sensitive**, for PCB and sockets, one normally open contact, contact material AgSnO₂, sensitive coil voltage 12 V DC, in cover IP 40
- RM85-2321-25-S005** relay **RM85 105 °C sensitive**, for PCB and sockets, one normally open contact, contact material AgNi/Au hard gold plating, sensitive coil voltage 5 V DC, in cover IP 40



- Coil terminals for PCB, contacts terminals for PCB and flat insert connectors - faston 250 (6,3 x 0,8 mm), faston arrangement: vertical version (V) and horizontal version (H)
- Ambient temperature up to 105 °C • CTI 250 • 5000 V / 10 mm reinforced insulation • DC coils - sensitive, insulation class F: 155 °C • Applications: for control of operation of heating elements and motors of household equipment and catering industry devices, for control of electromagnetic valves, in many other applications • Compliance with standard EN 60335-1
- Recognitions, certifications, directives: RoHS,   

Contact data

Number and type of contacts		1 NO
Contact material		AgSnO₂
Rated / max. switching voltage	AC	250 V / 400 V
Min. switching voltage		10 V
Rated load (capacity)	AC1	20 A / 250 V AC
	AC15	3 A / 120 V 1,5 A / 240 V (B300)
	DC1	20 A / 24 V DC
	DC13	0,22 A / 120 V 0,1 A / 250 V (R300)
Motor load	acc. to UL 508	1/2 HP 240 V AC, 4,9 FLA, single-phase motor ①
	AC3 acc. to IEC 60947-4-1	0,5 kW 240 V AC, single-phase motor
Min. switching current		10 mA
Max. inrush current		30 A
Rated current		20 A
Max. breaking capacity	AC1	5 000 VA
Min. breaking capacity		1 W
Contact resistance		≤ 100 mΩ 100 mA, 24 V
Max. operating frequency		
• at rated load	AC1	600 cycles/hour
• no load		72 000 cycles/hour

Coil data

Rated voltage	DC	5, 6, 9, 10, 12 , 18, 24 , 48 V
Must release voltage		DC: ≥ 0,1 U _n
Operating range of supply voltage		see Table 1
Rated power consumption	DC	0,25 W

Insulation according to EN 60664-1


Insulation rated voltage		400 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		3
Dielectric strength		
• between coil and contacts		5 000 V AC type of insulation: reinforced
• contact clearance		1 000 V AC type of clearance: micro-disconnection
Contact - coil distance	• clearance	≥ 10 mm
	• creepage	≥ 10 mm

General data


Operating / release time (typical values)		8 ms / 3 ms
Electrical life (number of cycles)		
• resistive AC1		> 10 ⁴ 20 A, 250 V AC, 85 °C
		> 1,5 x 10 ⁵ 10 A, 250 V AC, 105 °C
• cosφ		see Fig. 1
Mechanical life (cycles)		> 3 x 10 ⁷
Dimensions (L x W x H)		vertical version (V): 40,5 x 12,7 x 15,7 mm
		horizontal version (H): 44,5 x 12,7 x 15,7 mm
Weight		16 g
Ambient temperature	• storage	-40...+105 °C
(non-condensation and/or icing)	• operating	-40...+105 °C
Cover protection category		IP 40 EN 60529
Environmental protection		RTII EN 61810-7
Shock resistance		30 g
Vibration resistance		10 g 10...150 Hz
Solder bath temperature		max. 270 °C
Soldering time		max. 5 s

The data in bold type relate to the standard versions of the relays. ① For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.

Dimensions

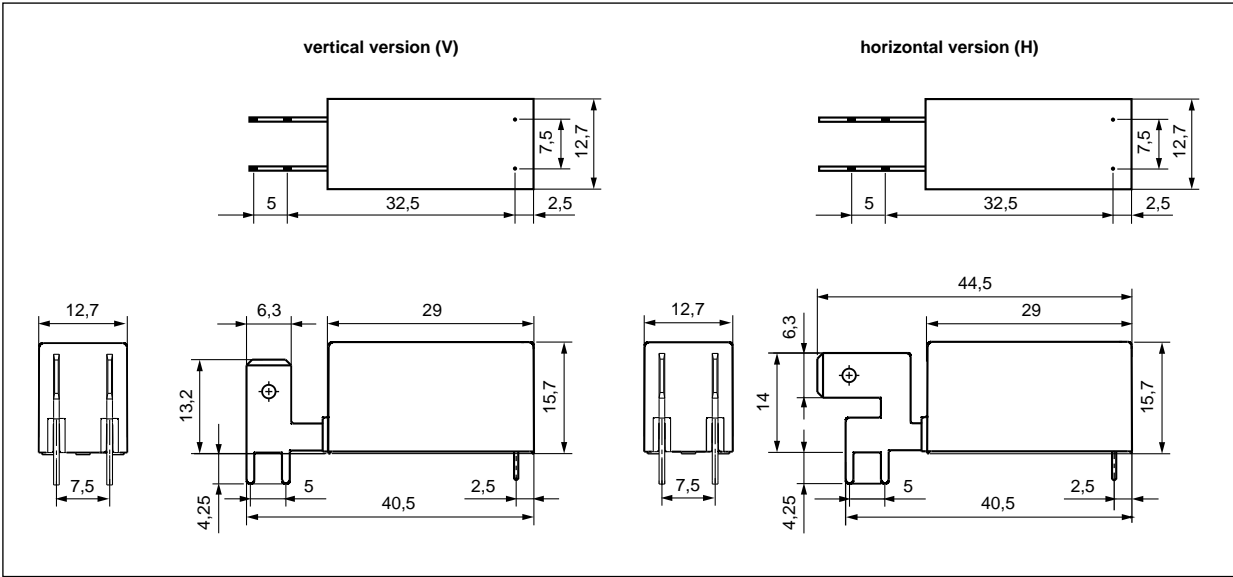


Connection diagram (pin side view)

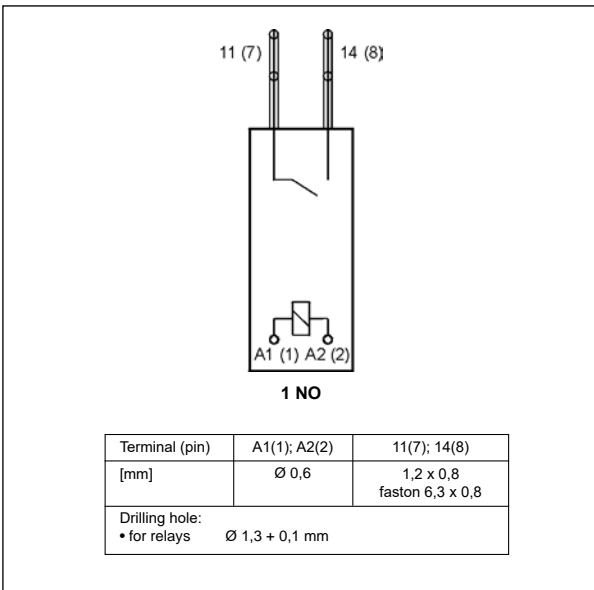


Electrical life reduction factor at AC inductive load

Fig. 1

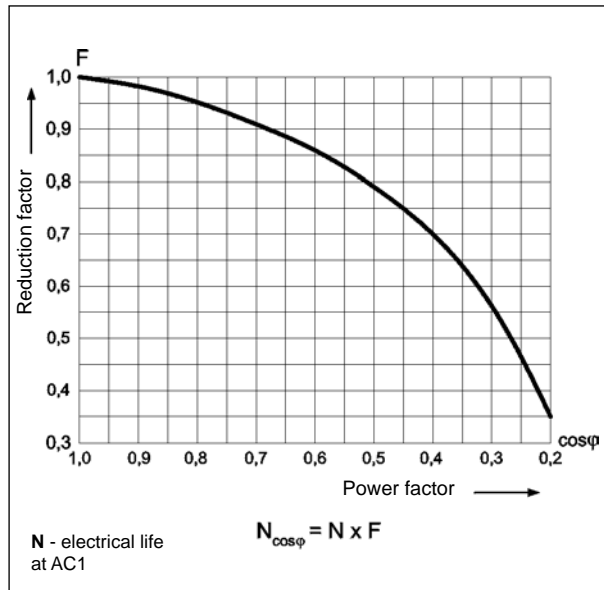

Pinout (solder side view)

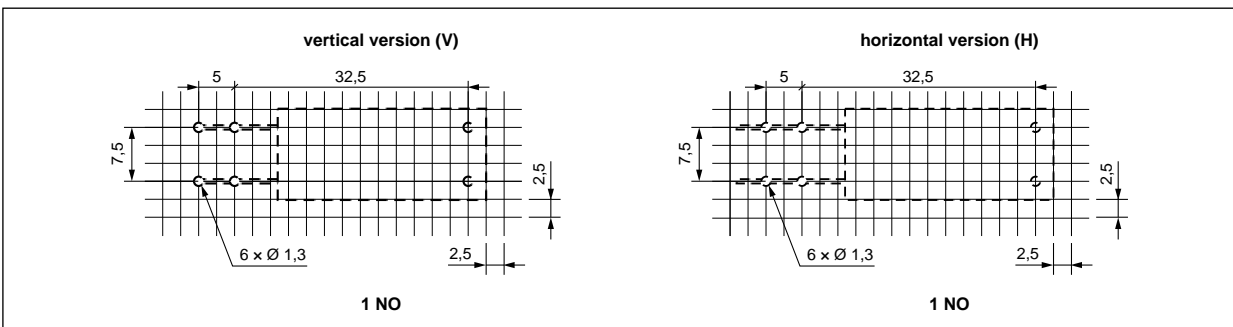

Mounting

Relays **RM85 faston** are designed for: • direct PCB mounting • connection of load with flat insert connectors - faston 250 (6,3 x 0,8 mm).


Coil data - DC voltage version, sensitive

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
S005	5	102	± 10%	3,75	15,0
S006	6	144	± 10%	4,50	18,0
S009	9	330	± 10%	6,75	27,0
S010	10	380	± 10%	7,50	30,0
S012	12	580	± 10%	9,00	36,0
S018	18	1 300	± 10%	13,50	54,0
S024	24	2 300	± 10%	18,00	72,0
S048	48	9 340	± 10%	36,00	144,0

The data in bold type relate to the standard versions of the relays.

Ordering codes

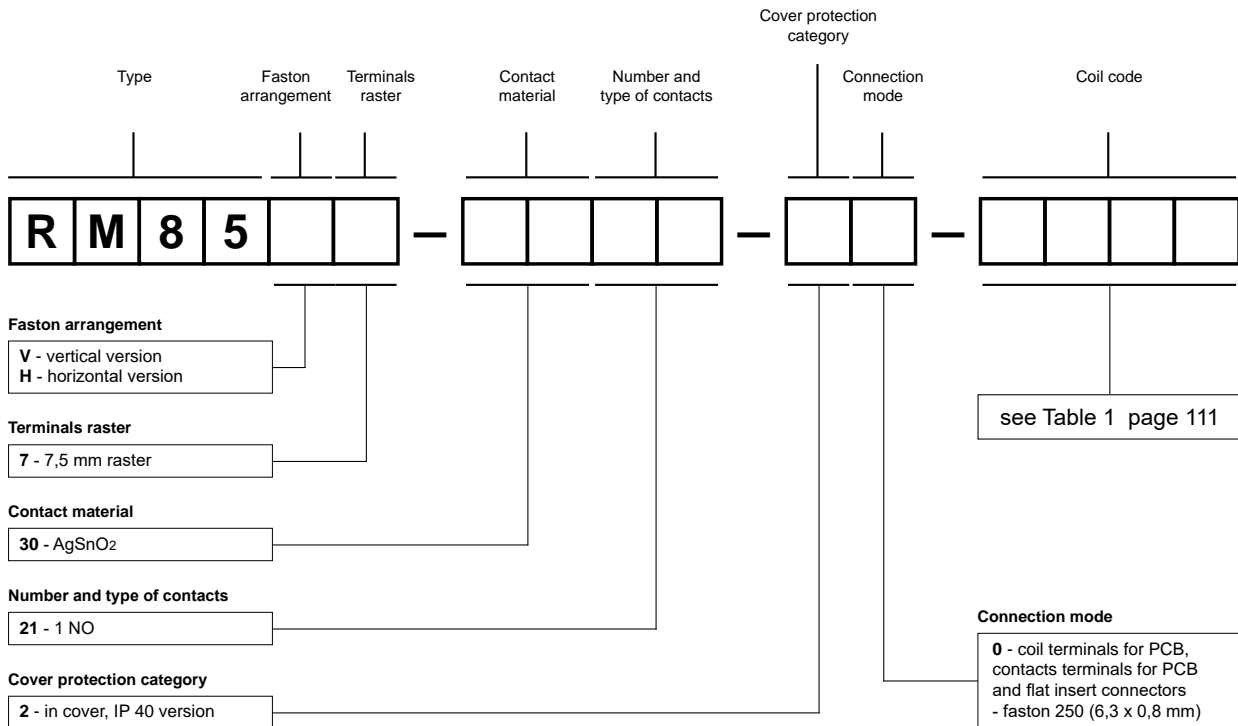

Example of ordering code:

RM85V7-3021-20-S012


relay **RM85 faston**, vertical version, coil terminals for PCB, contacts terminals for PCB and flat insert connectors - faston 250 (6,3 x 0,8 mm), 7,5 mm terminals raster, one normally open contact, contact material AgSnO₂, sensitive coil voltage 12 V DC, in cover IP 40

RM87, RM87 sensitive miniature relays

112

RM87N-...-01 ①

RM87N sensitive

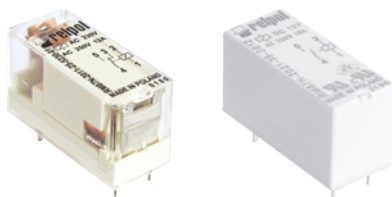

- CTI 250 • 5000 V / 10 mm reinforced insulation
- For PCB and plug-in sockets • **AC and DC coils - standard (RM87), DC coils - sensitive (RM87 sensitive)**, insulation class F: 155 °C
- Available special versions (only for RM87 - standard coil): with transparent cover ①; with the increased dielectric strength of the contact clearance ②
- Compliance with standard EN 60335-1
- Recognitions, certifications, directives: RoHS,

Contact data

		RM87 - standard coil	RM87 sensitive - sensitive coil
Number and type of contacts		1 CO, 1 NO ②	1 NO
Contact material		AgNi , AgNi/Au hard gold plating, AgSnO ₂	
Rated / max. switching voltage AC		250 V / 400 V	
Min. switching voltage		5 V AgNi, 5 V AgNi/Au hard gold plating, 10 V AgSnO ₂	
Rated load (capacity)		12 A / 250 V AC	10 A / 250 V AC
		AC15	3 A / 120 V 1,5 A / 240 V (B300)
		DC1	12 A / 24 V DC (see Fig. 3) 10 A / 24 V DC (see Fig. 4)
		DC13	0,22 A / 120 V 0,1 A / 250 V (R300)
Motor load acc. to UL 508		1/2 HP 240 V AC, 4,9 FLA, single-phase motor ③	
AC3 acc. to IEC 60947-4-1		0,5 kW 240 V AC, single-phase motor	
Min. switching current		5 mA AgNi, 2 mA AgNi/Au hard gold plating, 10 mA AgSnO ₂	
Max. inrush current		25 A AgSnO ₂	20 A AgSnO ₂
Rated current		12 A	10 A
Max. breaking capacity AC1		3 000 VA	2 500 VA
Min. breaking capacity		0,3 W AgNi, 0,05 W AgNi/Au hard gold plating, 1 W AgSnO ₂	
Contact resistance		≤ 100 mΩ	
Max. operating frequency		• at rated load AC1 • no load	600 cycles/hour 72 000 cycles/hour

Coil data

Rated voltage 50/60 Hz AC		12, 24 , 48, 60, 110, 115, 120, 220, 230 , 240 V	—
DC		3, 5, 6, 9, 12, 18, 24 , 36, 48, 60, 110 V	5, 6, 9, 10, 12, 18, 24, 48 V
Must release voltage		AC: ≥ 0,15 U _n DC: ≥ 0,1 U _n	
Operating range of supply voltage		see Tables 1, 3 and Fig. 5, 7	
Rated power consumption AC		0,75 VA	—
DC		0,4 ... 0,48 W	0,25 W

Insulation according to EN 60664-1


Insulation rated voltage		400 V AC	
Rated surge voltage		4 000 V 1,2 / 50 μs	
Overvoltage category		III	
Insulation pollution degree		3	
Dielectric strength		• between coil and contacts • contact clearance	5 000 V AC type of insulation: reinforced 1 000 V AC type of clearance: micro-disconnection 2 000 V AC contact 1 NO, type of clearance: full-disconnection ②
Contact - coil distance		• clearance • creepage	≥ 10 mm ≥ 10 mm

General data


Operating / release time (typical values)		7 ms / 3 ms	
Electrical life (number of cycles)		• resistive AC1 • cosφ • DC L/R=40 ms	> 10 ⁵ 12 A, 250 V AC see Fig. 2 > 10 ⁵ 0,15 A, 220 V DC > 1,7 x 10 ⁵ 10 A, 250 V AC
Mechanical life (cycles)		> 3 x 10 ⁷	
Dimensions (L x W x H) / Weight		29 x 12,7 x 15,7 mm / 14 g	
Ambient temperature (non-condensation and/or icing)		• storage • operating	-40...+85 °C AC: -40...+70 °C DC: -40...+85 °C -20...+70 °C ①
Cover protection category		IP 40 ① or IP 67	EN 60529
Environmental protection		RTII ① or RTIII	EN 61810-7
Shock / vibration resistance		30 g / 10 g 10...150 Hz	
Solder bath temperature / Soldering time		max. 270 °C / max. 5 s	

The data in bold type relate to the standard versions of the relays. ① Relate to the special versions - relays with transparent cover, only available with IP 40 and RTII, operating temperature -20...+70 °C. See "Ordering codes". ② Relate to the special versions - relays with one normally open contact 1 NO, with increased contact gap - dielectric strength 2000 V AC, only available with DC coils. See "Ordering codes". ③ For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.

Dimensions

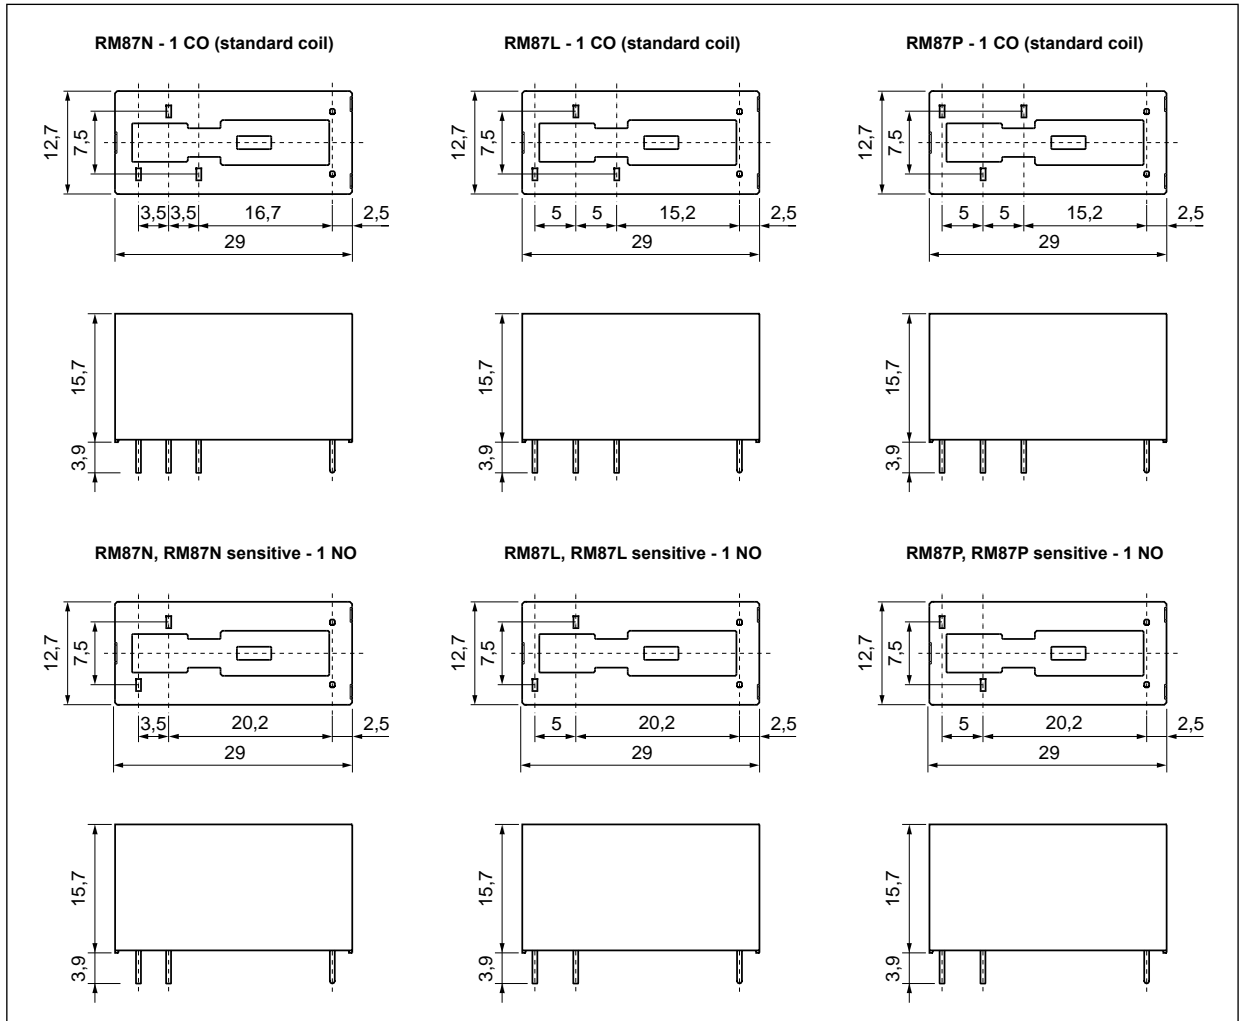


Connection diagrams (pin side view)

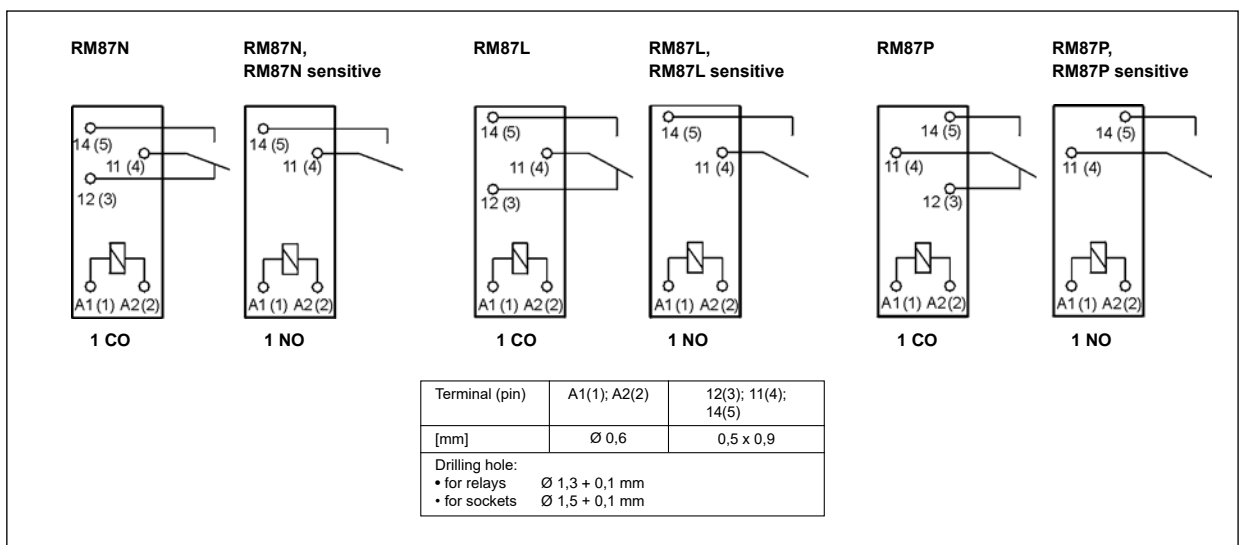


Electrical life at AC resistive load.
Switching frequency: 600 cycles/hour

Fig. 1

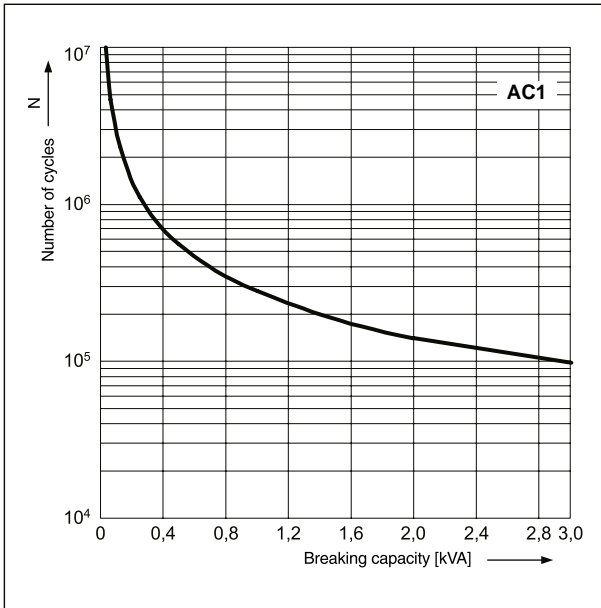


Electrical life reduction factor at AC inductive load

Fig. 2

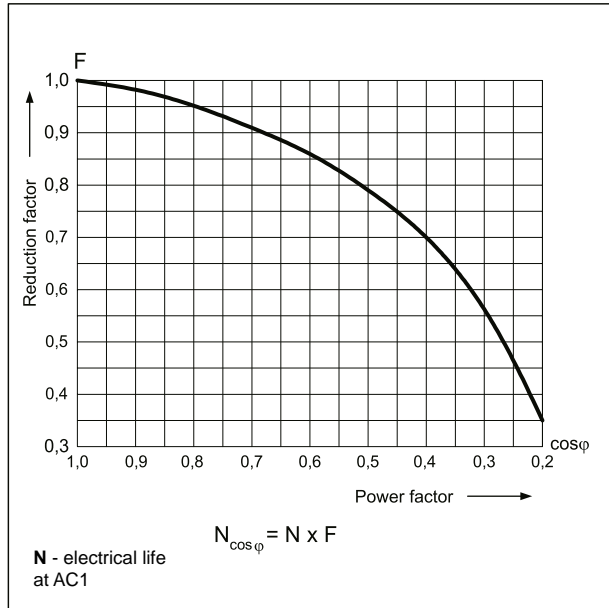


Max. DC resistive load breaking capacity - standard coil

Fig. 3

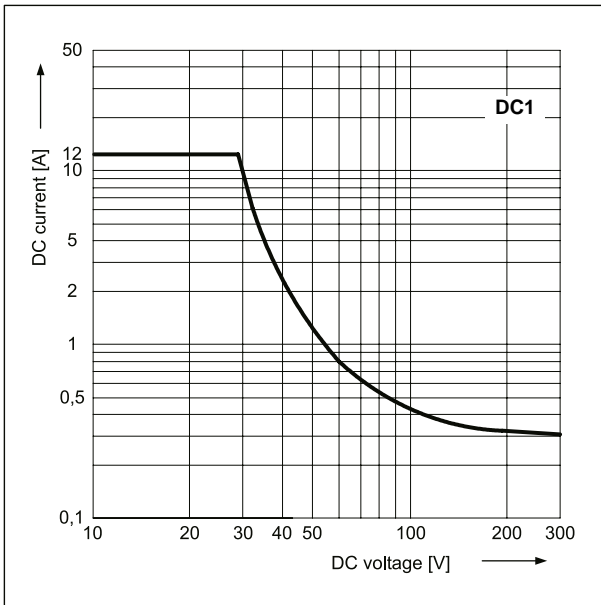

Max. DC resistive load breaking capacity - sensitive coil

Fig. 4

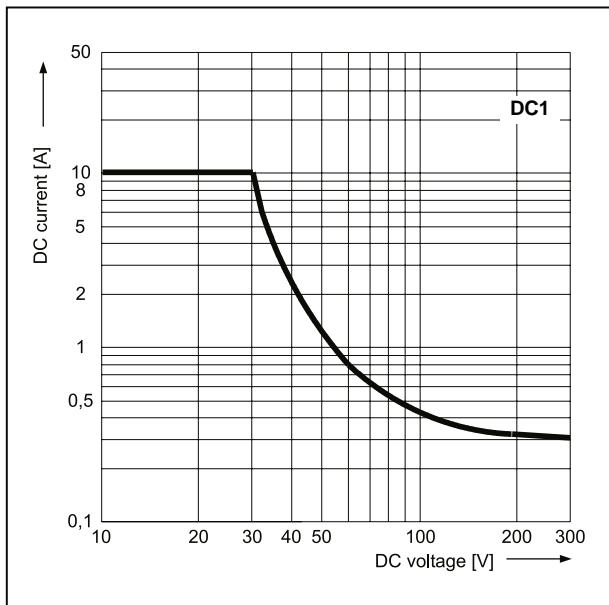


GZMB80

Spring terminals
plug-in socket
for RM84, RM85...,
RM87L, RM87P,
RMP84, RMP85
- see page 361




Coil operating range - DC
- standard coil

Fig. 5

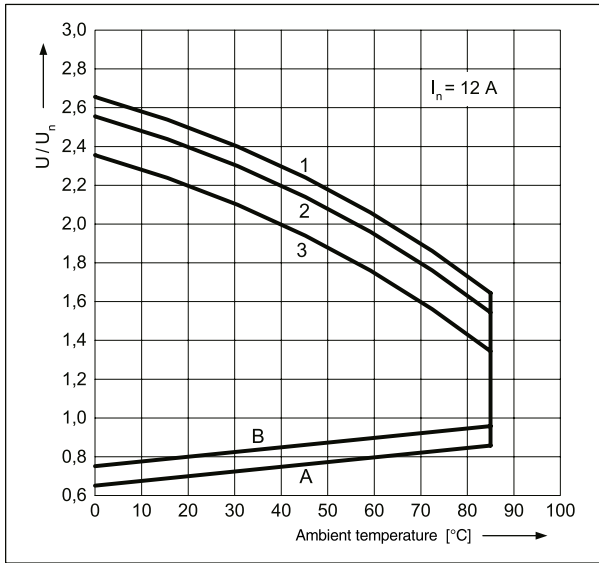


Coil operating range - DC
- sensitive coil

Fig. 6

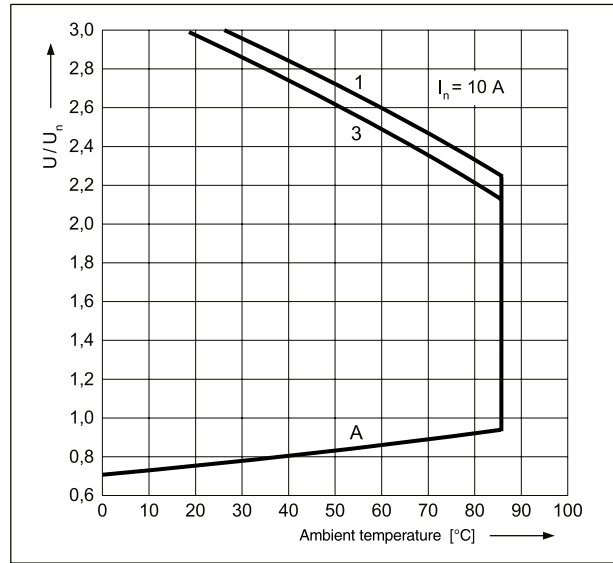

Coil operating range - AC 50 Hz


Fig. 7

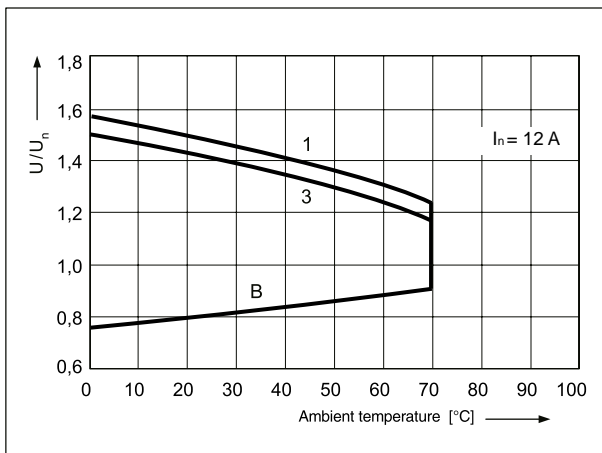

Description of Fig. 5, 6 and 7

A - relations between make voltage and ambient temperature at no load on contacts. Coil temperature and ambient temperature are equal before coil energizing. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).
B - relations between make voltage and ambient temperature after initial coil heating up with $1,1 U_n$, at continues load of I_n on contacts. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).
1, 2, 3 - values on Y axis represent allowed overvoltage on coil at certain ambient temperature and contact load:
1 - no load
2 - 50% of rated load
3 - rated load

Pinout (solder side view)

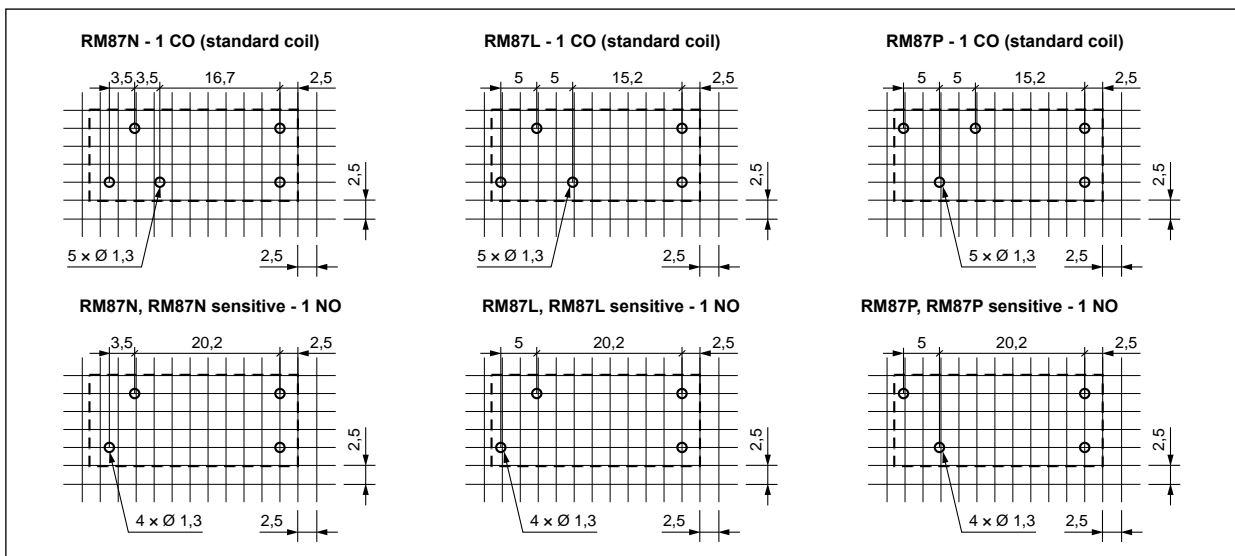

Coil data - DC voltage version, standard (RM87)

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
1003	3	22	± 10%	2,1	7,6
1005	5	60	± 10%	3,5	12,7
1006	6	90	± 10%	4,2	15,3
1009	9	200	± 10%	6,3	22,9
1012	12	360	± 10%	8,4	30,6
1018	18	710	± 10%	12,6	45,9
1024	24	1 440	± 10%	16,8	61,2
1036	36	3 140	± 10%	25,2	91,8
1048	48	5 700	± 10%	33,6	122,4
1060	60	7 500	± 10%	42,0	153,0
1110	110	25 200	± 10%	77,0	280,0

The data in bold type relate to the standard versions of the relays.

Coil data - DC voltage version, sensitive (RM87 sensitive)

Table 2

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
S005	5	102	± 10%	3,75	15,0
S006	6	144	± 10%	4,50	18,0
S009	9	330	± 10%	6,75	27,0
S010	10	400	± 10%	7,50	30,0
S012	12	580	± 10%	9,00	36,0
S018	18	1 300	± 10%	13,50	54,0
S024	24	2 300	± 10%	18,00	72,0
S048	48	9 340	± 10%	36,00	144,0

Coil data - AC 50/60 Hz voltage version (RM87)

Table 3

Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC 50 Hz	
				min. (at 20 °C)	max. (at 20 °C)
5012	12	100	± 10%	9,6	13,2
5024	24	400	± 10%	19,2	28,8
5048	48	1 550	± 10%	38,4	57,6
5060	60	2 600	± 10%	48,0	72,0
5110	110	8 900	± 10%	88,0	132,0
5115	115	9 600	± 10%	92,0	138,0
5120	120	10 200	± 10%	96,0	144,0
5220	220	35 500	± 10%	176,0	264,0
5230	230	38 500	± 10%	184,0	276,0
5240	240	42 500	± 15%	192,0	288,0

The data in bold type relate to the standard versions of the relays.

Mounting, sockets and accessories for relays


Relays **RM87N** ①, **RM87N sensitive** and **RM87L** ②, **RM87L sensitive**, **RM87P** ③, **RM87P sensitive** are designed for: • direct PCB mounting • plug-in sockets.

Sockets for RM87N ...	Sockets for RM87L ..., RM87P ...	Accessories			Additional features
		Retainer / retractor clips	Spring wire clips	Description plates	
Screw terminals sockets , 35 mm rail mount (acc. to EN 60715) or on panel mounting (one M3 screw)					
GZT92	GZT80	GZT80-0040	GZM80-0041	GZT80-0035	modules ④, strips ⑤
GZM92	GZM80	GZT80-0040	GZM80-0041	GZT80-0035	modules ④, strips ⑤
GZS92	GZS80	GZS-0040	GZM80-0041	TR	modules ④, strips ⑤
–	GZF80	–	GZM80-0041	–	–
Spring terminals sockets , 35 mm rail mount (acc. to EN 60715)					
–	GZMB80 ⑥	GZMB80-0040	GZM80-0041	TR	modules ④
Sockets for PCB					
EC 35	EC 50	–	MP16-2 ⑦, MH16-2	–	–
–	PW80	–	MH16-2	–	–
GD35	GD50	–	MP16-2 ⑦, MH16-2, GD-0016	–	–

① For relays with transparent cover: the distance at least 5 mm between the relays mounted side by side. ⑥ Sockets GZMB80: wire connection - see page 361. ⑦ Signalling / protecting modules type M... - see page 376. ⑤ Interconnection strips ZGGZ80 - see page 377. ④ Plastic clips MP16-2.

Ordering codes

RM87 sensitive - sensitive coil: relays only available with one normally open contact.

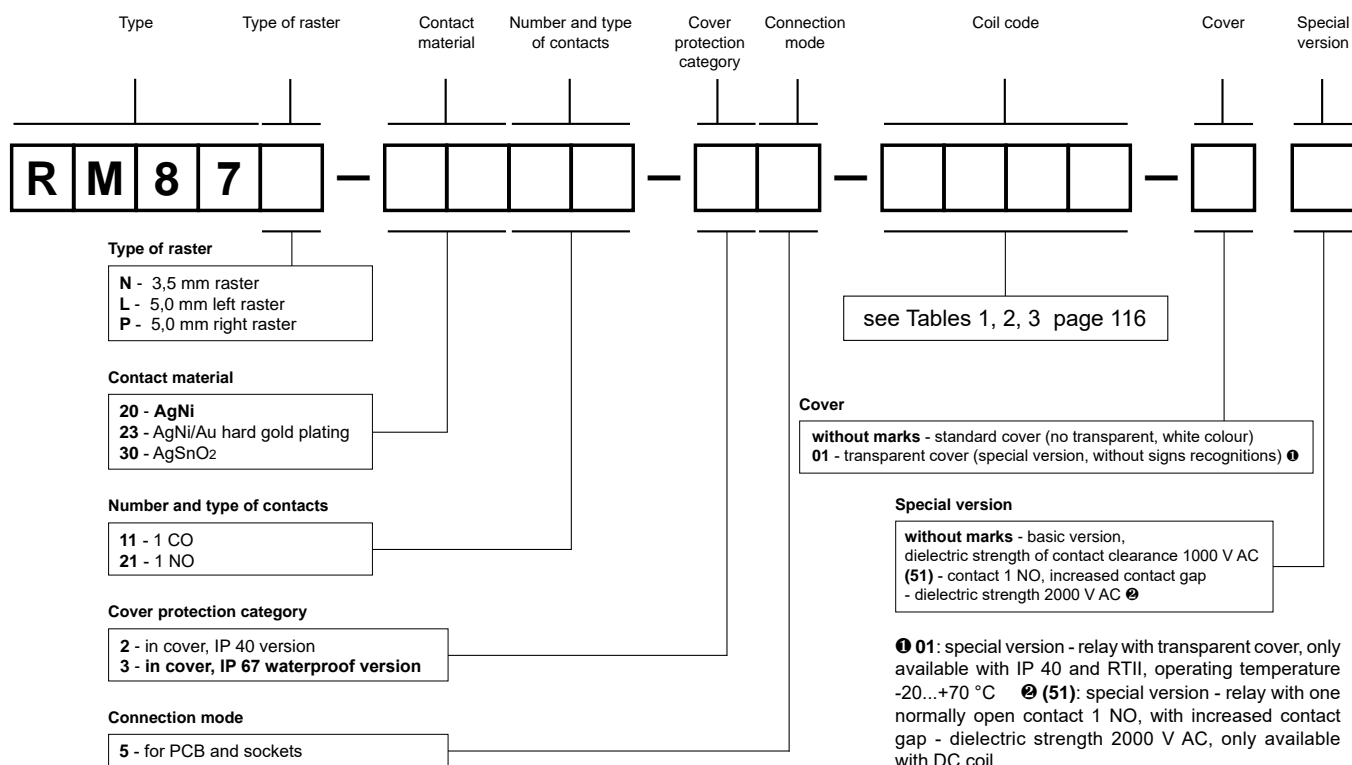

Examples of ordering code:

RM87N-2011-25-1024-01 relay **RM87N**, 3,5 mm raster, for PCB and sockets, one changeover contact, contact material AgNi, coil voltage 24 V DC, with transparent cover (special version, without signs recognitions) IP 40

RM87P-3021-35-S012 relay **RM87P sensitive**, 5 mm right raster, for PCB and sockets, one normally open contact, contact material AgSnO₂, sensitive coil voltage 12 V DC, in standard cover (no transparent, white colour) IP 67

RM96




miniature relays

118

RM96 1 CO

RM96 1 NO / 1 NC



- Height 16,2 mm • IP 40 and IP 67
- For PCB (1 CO, 1 NO, 1 NC) and plug-in sockets (1 CO)
- Accessories: sockets and modules for 1 CO
- DC coils, insulation class F: 155 °C
- Recyclable packing
- Terminals: 3,2 mm for version 1 CO,
5,0 mm for version 1 NO and 1 NC
- Recognitions, certifications, directives: RoHS,   

Contact data

Number and type of contacts		1 CO, 1 NO, 1 NC
Contact material		AgSnO₂ , AgSnO ₂ /Au hard gold plating, AgCdO ①
Rated / max. switching voltage	AC	250 V / 400 V
Min. switching voltage		10 V AgSnO ₂ , 5 V AgSnO ₂ /Au hard gold plating, 10 V AgCdO
Rated load (capacity)	AC1	8 A / 250 V AC
	AC15	3 A / 120 V
	DC1	8 A / 24 V DC (see Fig. 3)
	DC13	0,22 A / 120 V
Motor load	acc. to UL 508	1/2 HP 240 V AC, 4,9 FLA, single-phase motor ②
	AC3 acc. to IEC 60947-4-1	0,37 kW 240 V AC, single-phase motor
Min. switching current		10 mA AgSnO ₂ , 2 mA AgSnO ₂ /Au hard gold plating, 5 mA AgCdO
Max. inrush current		15 A
Rated current		8 A
Max. breaking capacity	AC1	2 000 VA
Min. breaking capacity		1 W AgSnO ₂ , 0,05 W AgSnO ₂ /Au hard gold plating, 0,5 W AgCdO
Contact resistance		≤ 100 mΩ
Max. operating frequency	• at rated load AC1 • no load	600 cycles/hour 72 000 cycles/hour

Coil data

Rated voltage	DC	5, 6, 9, 12 , 18, 24 , 48 V
Must release voltage		DC: ≥ 0,1 U _n
Operating range of supply voltage		see Table 1 and Fig. 4
Rated power consumption	DC	0,22...0,3 W

Insulation according to EN 60664-1


Insulation rated voltage		400 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		3
Dielectric strength		
• between coil and contacts		4 000 V AC type of insulation: reinforced
• contact clearance		1 000 V AC type of clearance: micro-disconnection
Contact - coil distance		
• clearance		≥ 8 mm
• creepage		≥ 8 mm

General data


Operating / release time (typical values)		10 ms / 5 ms
Electrical life (number of cycles)		
• resistive AC1		> 10 ⁵ 8 A, 250 V AC
• cosφ		see Fig. 2
Mechanical life (cycles)		> 2 x 10 ⁷
Dimensions (L x W x H)		1 CO: 30 x 10 x 16,2 mm 1 NO, 1 NC: 28 x 10 x 16,2 mm
Weight		11 g
Ambient temperature	• storage	-40...+85 °C
(non-condensation and/or icing)	• operating	-40...+80 °C
Cover protection category		IP 40 or IP 67 EN 60529
Environmental protection		RTII EN 61810-7
Shock resistance		20 g
Vibration resistance		10 g 10...150 Hz
Solder bath temperature		max. 270 °C
Soldering time		max. 5 s

The data in bold type relate to the standard versions of the relays. ① AgCdO contact material in electrical contacts is only for use in electrical and electronic equipment (EEE) in compliance with directive RoHS2 2011/65/EU in restricted categories of EEE covered by this directive. Relpol S.A. is not responsible for usage relays with AgCdO contact material in categories of EEE where it is prohibited by the directive RoHS2 2011/65/EU. ② For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.


Dimensions

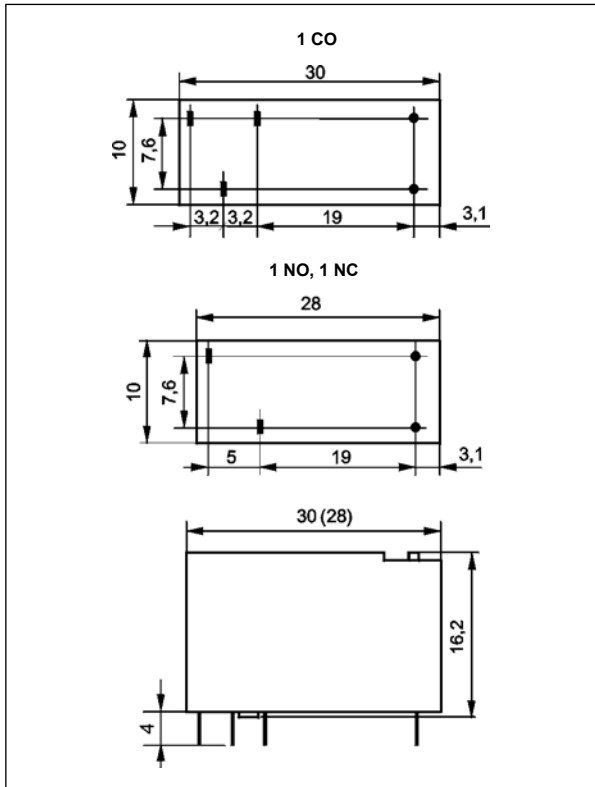

Connection diagrams (pin side view)

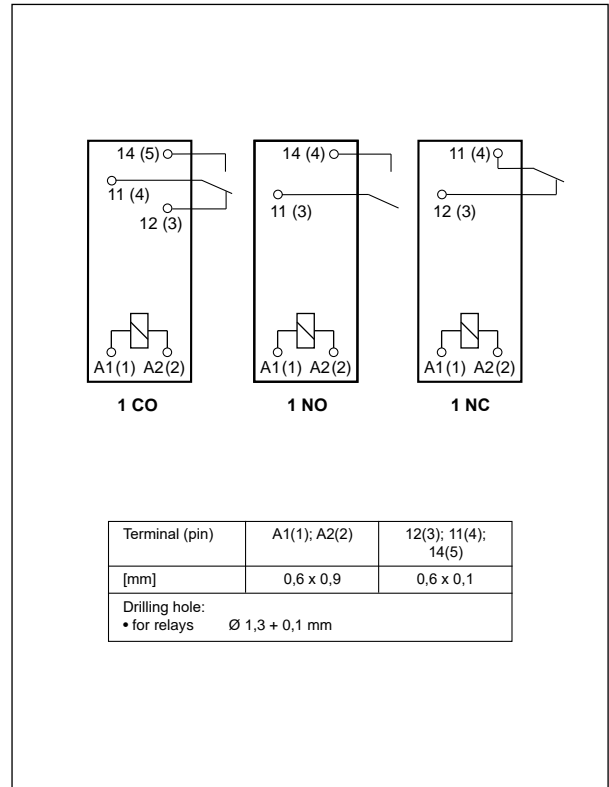

Pinout (solder side view)

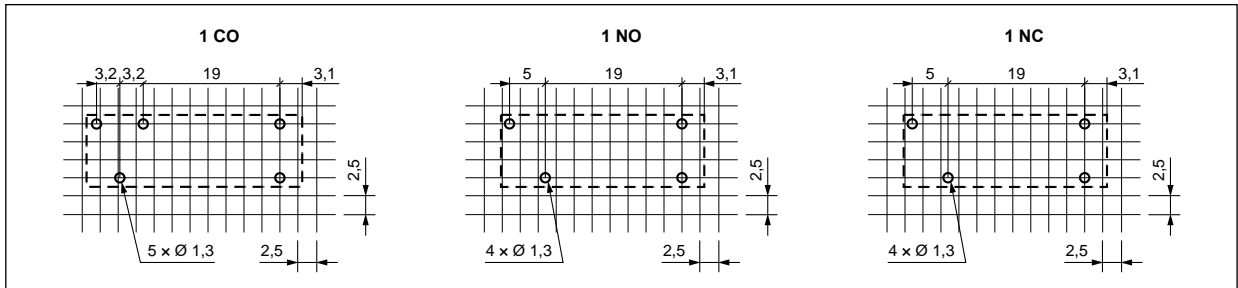

Print on relay cover

Type marking on relays cover **RM96** do not match the ordering codes (examples of marking for **RM96-1011-35-1012** and **RM96-3021-25-1024**).

RM96P-12-W
 \square DC 24V
 AC 250V 8A
 4-5
 3

cRUs
 10A 250VAC

RM96Z-24
 \square DC 24V
 AC 250V 10A
 4-5
 AgSnO₂

cRUs

Number and type of contacts

P - 1 CO
 Z - 1 NO
 R - 1 NC

Coil

5 - 5 V DC
 ...
 48 - 48 V DC

Cover protection category

without marks - IP 40
 W - IP 67


Contact material ③

without marks
 - AgCdO


Contact material ④

AgSnO₂
 - AgSnO₂
 AgSnO₂+Au
 - AgSnO₂/Au hard gold plating


Electrical life at AC resistive current. Fig. 1
 $U_n = 230 \text{ V AC}$ - version 1 NO

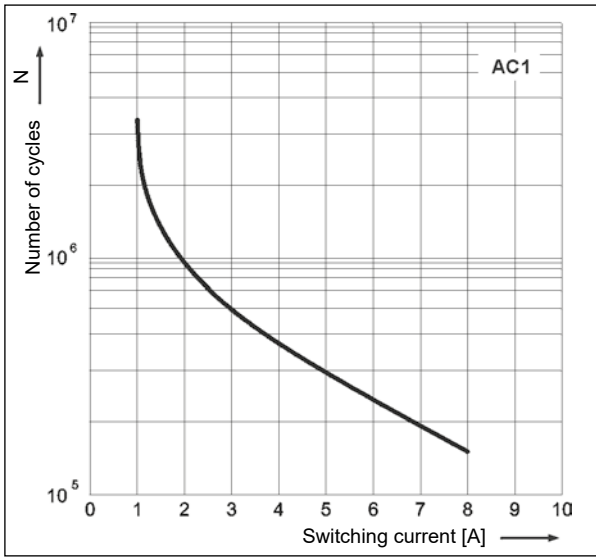


Electrical life reduction factor at AC inductive load Fig. 2

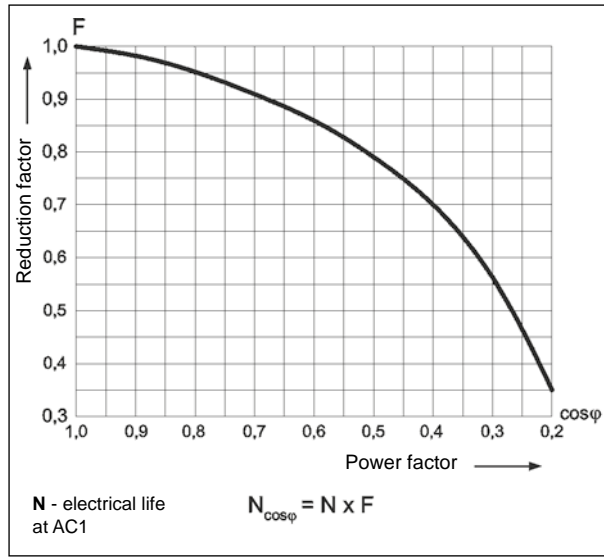

Max. breaking capacity Fig. 3
A - resistive load DC1
B - resistive load AC1

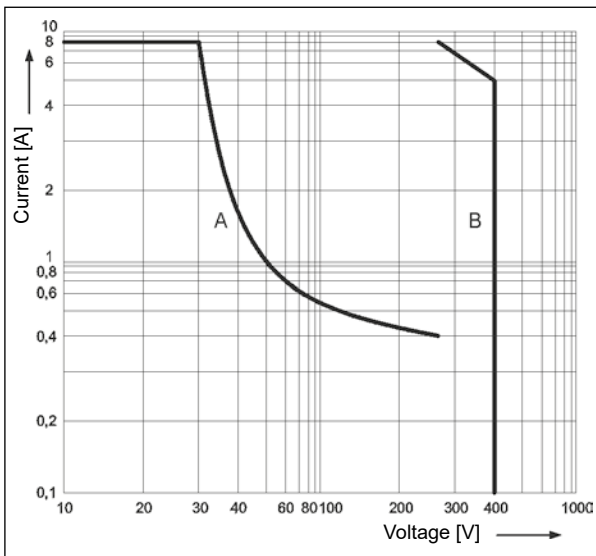

Coil operating range - DC Fig. 4

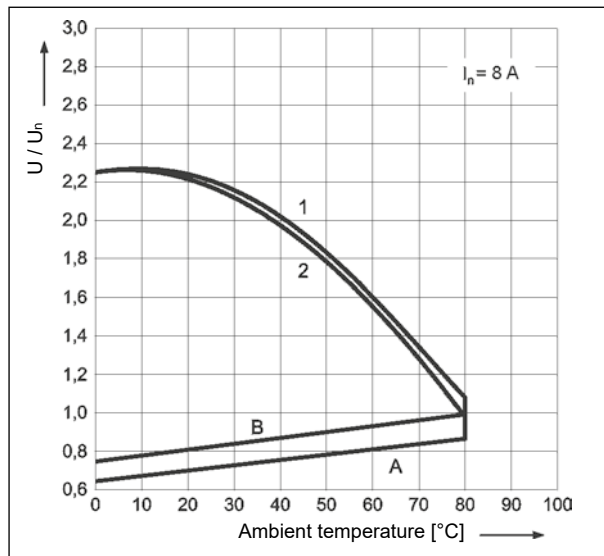


Description of Fig. 4

A - relations between make voltage and ambient temperature at no load on contacts. Coil temperature and ambient temperature are equal before coil energizing. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).
B - relations between make voltage and ambient temperature after initial coil heating up with $1,1 U_n$, at continues load of I_n on contacts. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).
1, 2 - values on Y axis represent allowed overvoltage on coil at certain ambient temperature and contact load:
1 - no load
2 - rated load

ES 32

Screw terminals
 plug-in socket
 for RM96 1 CO
 - see page 364

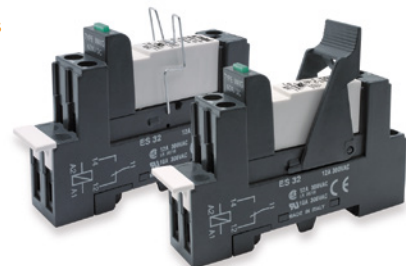

Mounting

Relays **RM96 1 NO** (one normally open contact) and **RM96 1 NC** (one normally closed contact) are designed for direct PCB mounting.

Relays **RM96 1 CO** (one changeover contact) are designed for: • direct PCB mounting • plug-in sockets.

Sockets for RM96 1P	Accessories			Additional features
	Retainer / retractor clips	Spring wire clips	Description plates	
Screw terminals sockets , 35 mm rail mount (acc. to EN 60715) or on panel mounting (one M3 screw)				
ES 32	MS 16, GZMB80-0040	GZM80-0041	TR	modules ⑤, strips ⑥

⑤ Signalling / protecting modules type M... - see page 376. ⑥ Interconnection strips ZGGZ80 - see page 377.


Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
1005	5	110	± 10%	3,5	12,0
1006	6	160	± 10%	4,2	14,5
1009	9	360	± 10%	6,3	22,0
1012	12	660	± 10%	8,4	29,5
1018	18	1 500	± 10%	12,6	44,0
1024	24	2 200	± 10%	16,8	54,0
1048	48	8 000	± 10%	33,6	102,0

The data in bold type relate to the standard versions of the relays.

Ordering codes

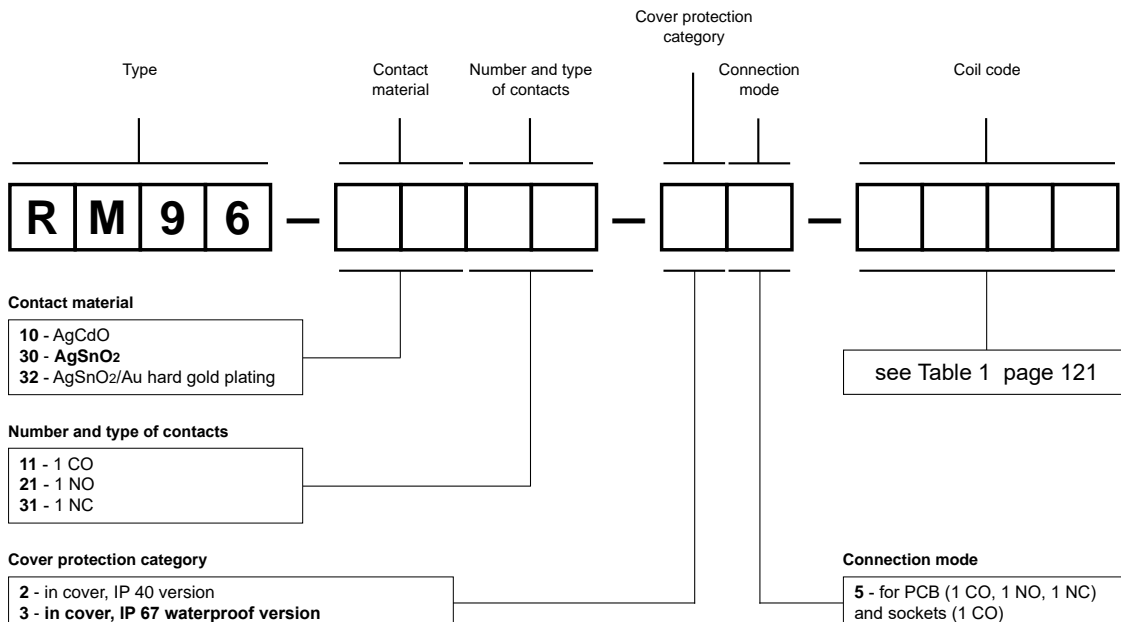

Examples of ordering codes:

RM96-1011-35-1012 relay **RM96**, for PCB and sockets, one changeover contact, contact material AgCdO, coil voltage 12 V DC, in cover IP 67

RM96-3021-25-1024 relay **RM96**, for PCB, one normally open contact, contact material AgSnO₂, coil voltage 24 V DC, in cover IP 40

RM83




miniature relays

122



RM83

RM83-...-01



- Miniature dimensions • General purpose relays
- **Version 1 NO AgSnO₂ - for special loads: resistance to inrush current 120 A (20 ms)**
- Protection category IP 40 or IP 67
- For PCB and plug-in sockets
- DC coils - standard and sensitive, insulation class F: 155 °C
- Available special versions: with transparent cover
- Recognitions, certifications, directives: RoHS,   

Contact data

Number and type of contacts		1 CO, 1 NO, 1 NC
Contact material		AgSnO₂ , (AgCdO, AgCdO/Au flash gold plating) 
Rated / max. switching voltage	AC	250 V / 400 V
Min. switching voltage		10 V AgSnO ₂ , 10 V AgCdO, 10 V AgCdO/Au flash gold plating
Rated load (capacity)	AC1 AC15 DC1 DC13	16 A / 250 V AC 6 A / 120 V 3 A / 240 V (A300) 16 A / 24 V DC (see Fig. 3) 0,22 A / 120 V 0,1 A / 250 V (R300)
Motor load	acc. to UL 508 AC3 acc. to IEC 60947-4-1	1/2 HP 240 V AC, 4,9 FLA, single-phase motor  0,65 kW 240 V AC, single-phase motor
Min. switching current		10 mA AgSnO ₂ , 5 mA AgCdO, 5 mA AgCdO/Au flash gold plating
Max. inrush current		30 A 1 NO, AgSnO ₂
Rated current		16 A
Max. breaking capacity	AC1	4 000 VA
Min. breaking capacity		1 W AgSnO ₂ , 0,5 W AgCdO, 0,5 W AgCdO/Au flash gold plating
Contact resistance		≤ 100 mΩ
Max. operating frequency	• at rated load AC1 • no load	600 cycles/hour 72 000 cycles/hour

Coil data



Rated voltage	DC	5, 6, 9, 12, 18, 24, 36, 48, 60, 110 V standard coil 110 V sensitive coil
Must release voltage		DC: ≥ 0,1 U _n
Operating range of supply voltage		see Table 1
Rated power consumption	DC	0,6 W 5 ... 60 V standard coil 0,6 W 110 V sensitive coil 0,9 W 110 V standard coil

Insulation according to EN 60664-1


Insulation rated voltage		400 V AC
Dielectric strength	• between coil and contacts • contact clearance	4 000 V AC type of insulation: reinforced 1 000 V AC type of clearance: micro-disconnection
Contact - coil distance	• clearance • creepage	≥ 8 mm ≥ 8 mm

General data


Operating / release time (typical values)		7 ms / 3 ms
Electrical life (number of cycles)		
• resistive AC1		> 10 ⁵ 16 A, 250 V AC
• at incandescent lamp load		> 10 ⁵ 1000 W, 230 V AC, 1 NO, AgSnO ₂
		> 3 x 10 ⁴ 3000 W, 230 V AC, 1 NO, AgSnO ₂
• at halogen lamp load		> 10 ⁴ 2500 W, 230 V AC, 1 NO, AgSnO ₂
• cosφ		see Fig. 2
• L/R=40 ms		> 10 ⁵ 0,12 A, 220 V DC
Mechanical life (cycles)		> 3 x 10 ⁷
Dimensions (L x W x H)		IP 40: 29,2 x 13,1 x 25,1 mm IP 67: 29,2 x 13,1 x 25,6 mm
Weight		18 g
Ambient temperature	• storage	-40...+85 °C
(non-condensation and/or icing)	• operating	-40...+70 °C
Cover protection category		IP 40 or IP 67 EN 60529
Environmental protection		RTI or RTII EN 61810-7
Shock / vibration resistance		20 g / 10 g 10...150 Hz
Solder bath temperature / Soldering time		max. 270 °C / max. 5 s

The data in bold type relate to the standard versions of the relays.  AgCdO contact material in electrical contacts is only for use in electrical and electronic equipment (EEE) in compliance with directive RoHS2 2011/65/EU in restricted categories of EEE covered by this directive. Relpol S.A. is not responsible for usage relays with AgCdO contact material in categories of EEE where it is prohibited by the directive RoHS2 2011/65/EU.  For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.


Dimensions

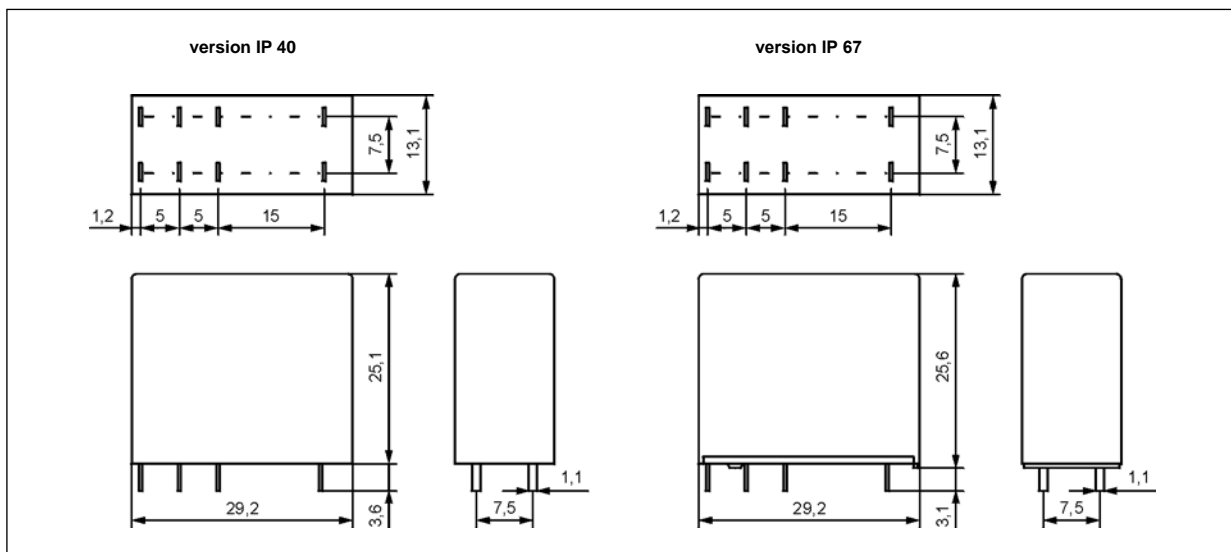

Connection diagrams (pin side view)

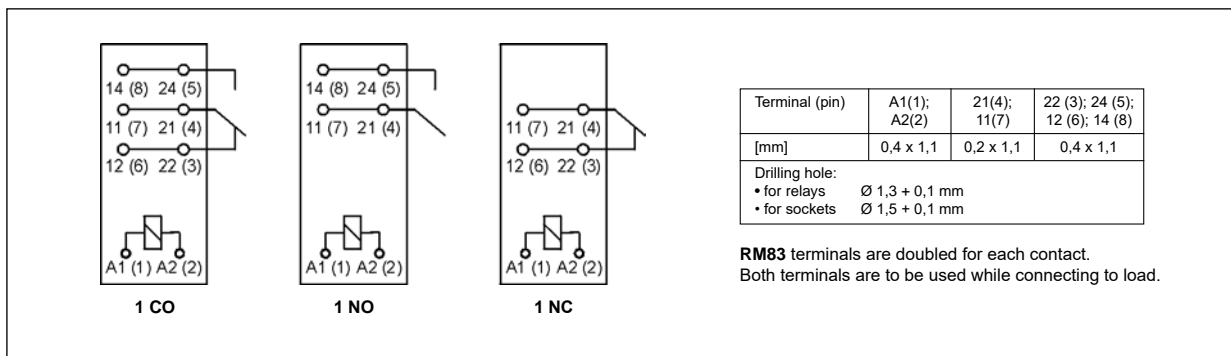


Pinout (solder side view)

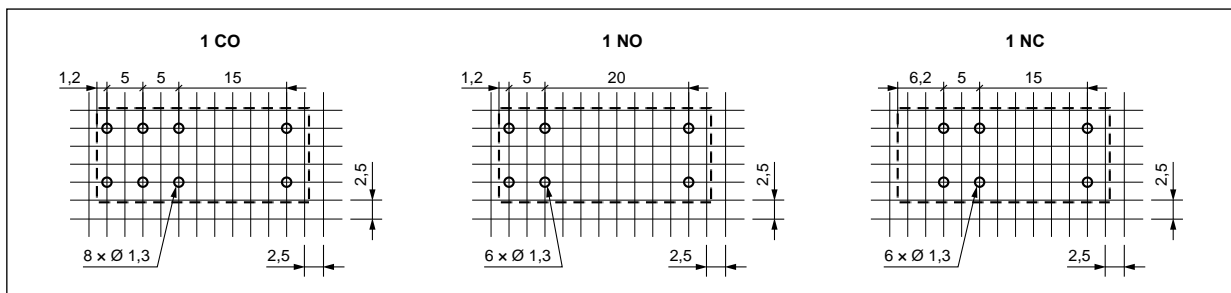


Electrical life at AC resistive load.
Switching frequency: 600 cycles/hour

Fig. 1

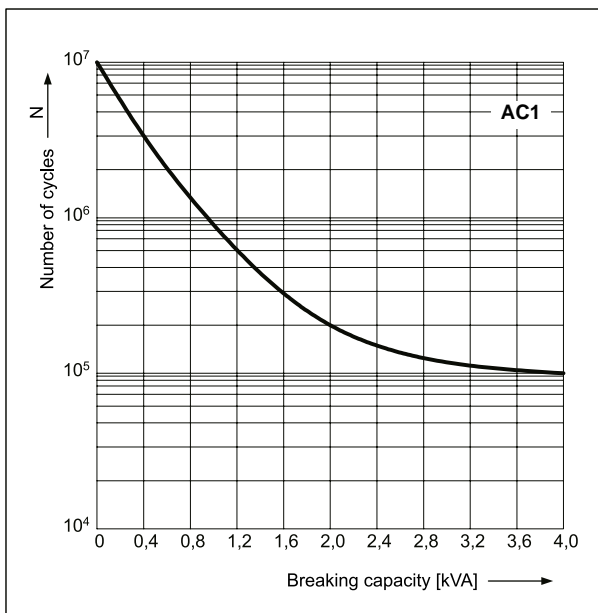


Electrical life reduction factor at AC inductive load

Fig. 2

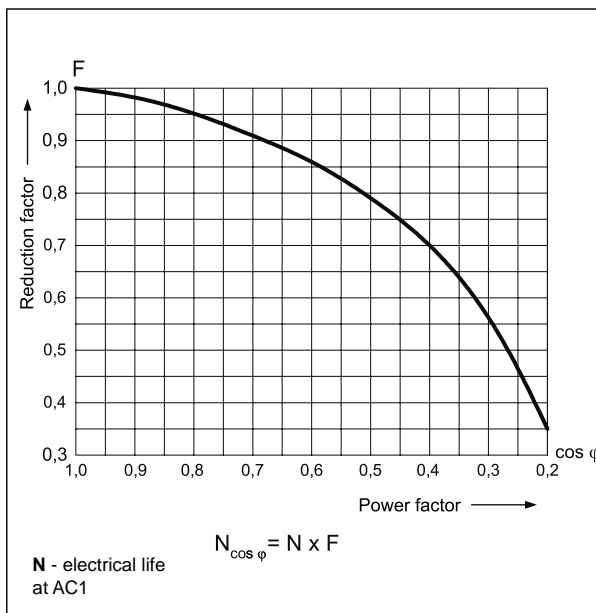

Max. DC resistive load breaking capacity

Fig. 3

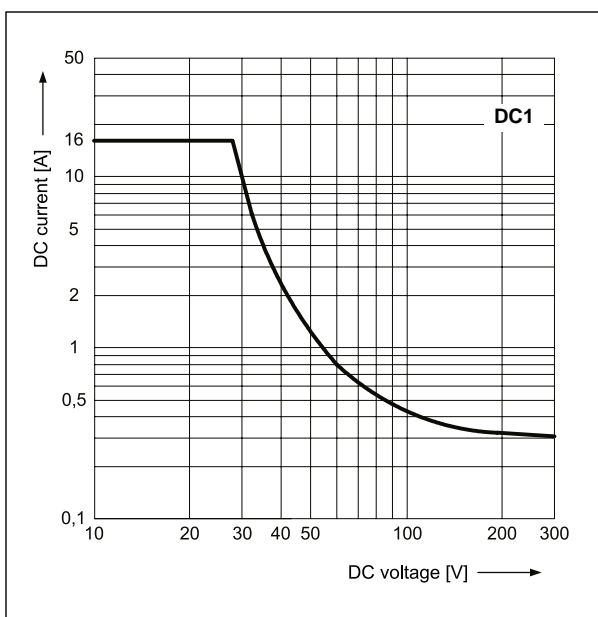

Mounting, sockets and accessories for relays

Relays **RM83** are designed for: • direct PCB mounting
• plug-in sockets.

Sockets for RM83	Accessories
	Spring wire clips
Sockets for PCB	
EC 50	MP25-2 Ⓢ, MH25-2
PW80	MH25-2
GD50	MP25-2 Ⓢ, MH25-2

Ⓢ Plastic clips MP25-2.

Coil data - DC voltage version, standard

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
1005	5	49	± 10%	3,5	8,9
1006	6	68	± 10%	4,2	10,6
1009	9	110	± 10%	6,3	15,9
1012	12	260	± 10%	8,4	21,2
1018	18	550	± 10%	12,6	31,8
1024	24	1 100	± 10%	16,8	42,5
1036	36	2 100	± 10%	25,2	63,7
1048	48	4 400	± 10%	33,6	85,0
1060	60	7 000	± 10%	42,0	106,2
1110	110	13 000	± 10%	77,0	140,0


The data in bold type relate to the standard versions of the relays.

Coil data - DC voltage version, sensitive

Table 2

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
S110	110	20 500	± 10%	77,0	188,0

Ordering codes

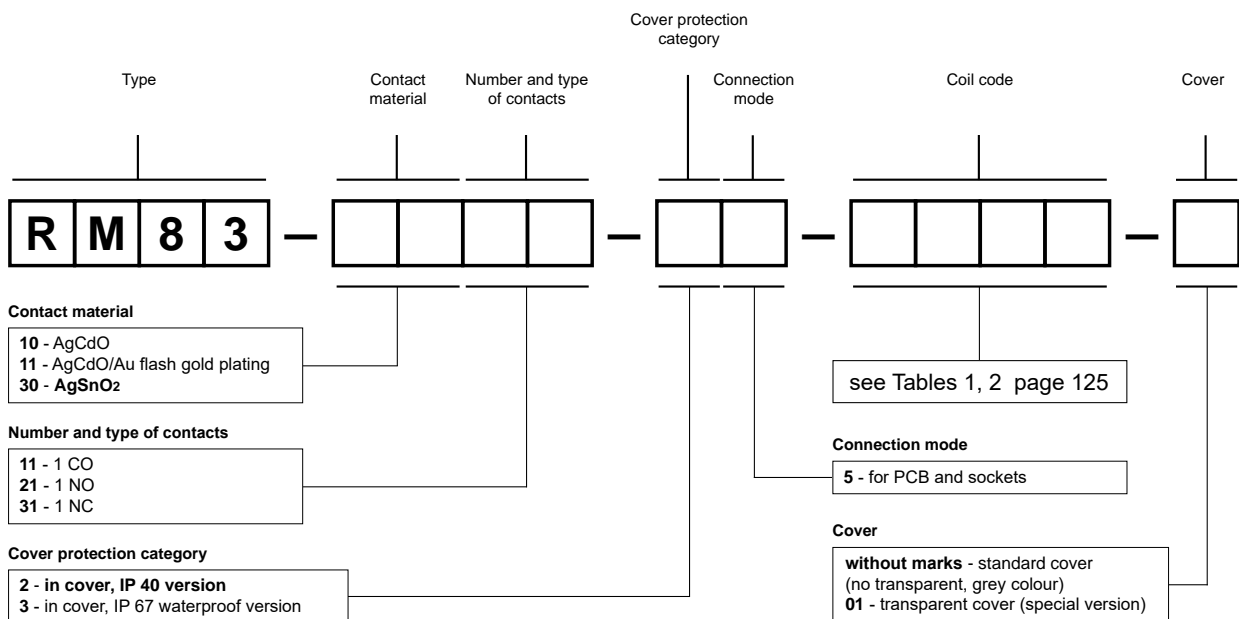

Examples of ordering code:

RM83-3011-25-1024

relay **RM83**, for PCB and sockets, one changeover contact, contact material AgSnO₂, coil voltage 24 V DC, in standard cover (no transparent, grey colour) IP 40

RM83-3011-25-S110

relay **RM83**, for PCB and sockets, one changeover contact, contact material AgSnO₂, sensitive coil voltage 110 V DC, in standard cover (no transparent, grey colour) IP 40

RM83-3021-35-1012-01

relay **RM83**, for PCB and sockets, one normally open contact, contact material AgSnO₂, coil voltage 12 V DC, with transparent cover (special version) IP 67

RMP84

miniature relays

126

MINIATURE

version AC



version DC



- Cadmium - free contacts • Height 25,5 mm
- 5000 V / 8 mm reinforced insulation
- For plug-in sockets
- Accessories: sockets and modules
- AC and DC coils
- WT (mechanical indicator + lockable front test button)
 - standard features of relays
- Recognitions, certifications, directives: RoHS,

Contact data

Number and type of contacts		2 CO
Contact material		AgNi
Rated / max. switching voltage	AC	250 V / 440 V
Min. switching voltage		12 V 10 mA
Rated load	AC1	8 A / 250 V AC
Min. switching current		10 mA 12 V
Max. inrush current		16 A 20 ms
Rated current		8 A
Max. breaking capacity	AC1	2 000 VA
Min. breaking capacity		0,12 W 10 mA / 12 V
Contact resistance		≤ 100 mΩ 1 A / 6 V DC
Max. operating frequency		
• at rated load	AC1	360 cycles/hour
• no load		18 000 cycles/hour

Coil data

Rated voltage	50 Hz AC	24, 115, 230 V
	DC	12, 24, 48, 110 V
Must release voltage		AC: ≥ 0,15 U _n DC: ≥ 0,1 U _n
Operating range of supply voltage		see Tables 1, 2
Rated power consumption	AC	0,75 VA
	DC	0,4 ... 0,48 W

Insulation according to EN 60664-1


Insulation rated voltage		440 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		3
Insulation resistance		1 000 MΩ 500 V DC
Dielectric strength		
• between coil and contacts		5 000 V AC type of insulation: reinforced
• contact clearance		1 000 V AC type of clearance: micro-disconnection
• pole - pole		2 500 V AC type of insulation: basic
Contact - coil distance		
• clearance		≥ 8 mm
• creepage		≥ 8 mm

General data


Operating / release time (typical values)		15 ms / 8 ms
Electrical life	• resistive AC1	> 3 x 10 ⁴ AC coils, 8 A, 250 V AC, ON for 5 s / OFF for 5 s
(number of cycles)		> 10 ⁴ DC coils, 8 A, 250 V AC, ON for 5 s / OFF for 5 s
		> 5 x 10 ⁴ 8 A, 250 V AC, 70 °C, ON for 1 s / OFF for 9 s
Mechanical life (cycles)		> 10 ⁶ AC coils
		> 5 x 10 ⁶ DC coils
Dimensions (L x W x H)		29 x 13 x 25,5 mm
Weight		16 g
Ambient temperature	• storage	-40...+70 °C
(non-condensation and/or icing)	• operating	-40...+70 °C
Cover protection category		IP 40 EN 60529
Environmental protection		RTII EN 61810-7
Relative humidity		5...85%
Shock resistance		10 g
Vibration resistance	(NO/NC)	10 g / 5 g length direction: 10 g / 2 g 10...150 Hz
Solder bath temperature		max. 270 °C
Soldering time		max. 5 s

The data in bold type relate to the standard versions of the relays. The data don't include the power of electronic indicating circuit when the relay picks-up. Operating temperature for relays mounted in sockets on 35 mm rail mount: -40...+55 °C. The distance between the relays mounted side by side: min. 5 mm for versions AC; min. 1,5 mm for versions DC.

Dimensions

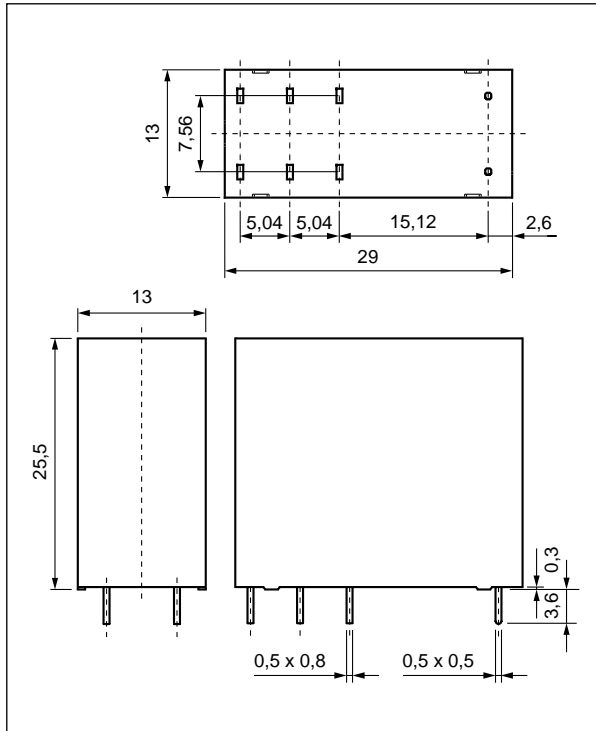

Connection diagram (pin side view)



2 CO

Terminal (pin)	A1(1); A2(2)	22(3); 21(4); 24(5); 12(6); 11(7); 14(8)
[mm]	0,5 x 0,5	0,5 x 0,8
Drilling hole: • for sockets $\varnothing 1,5 + 0,1$ mm		

Test buttons type T




orange
– AC coils

blue
– DC coils

Note: Normally open contacts may be closed with the blocking function of the test button of the T type (it shall be bent by 90° to vertical position). When the button is drawn back, the normally open contacts are opened.


GZF80, GZMB80, EC 50, GD50

Plug-in sockets
for relays
RMP84, RMP85
- see pages 361-362

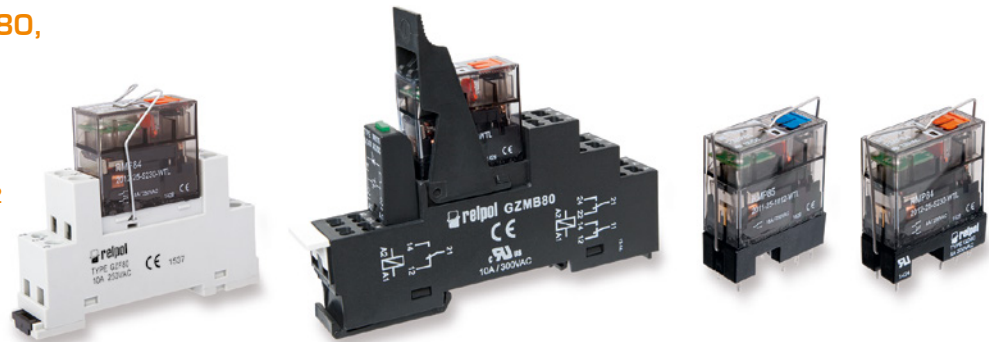


Electrical life at AC resistive load.
Switching frequency: 360 cycles/hour

Fig. 1

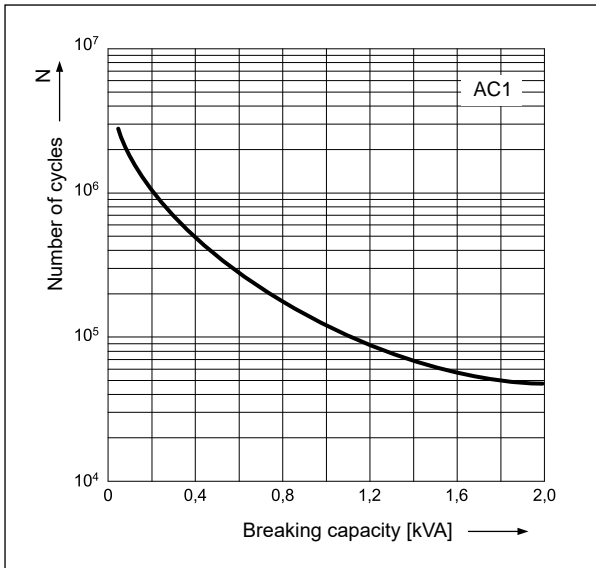

Max. AC 50 Hz resistive load breaking capacity

Fig. 2

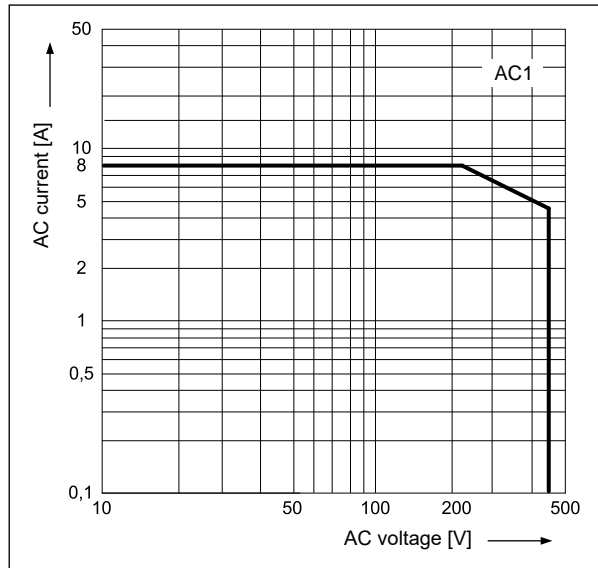

Mounting, sockets and accessories for relays

Relays **RMP84** ④ are designed for mounting in plug-in sockets.

Sockets for RMP84	Accessories			Additional features
	Retainer / retractor clips	Spring wire clips	Description plates	
Screw terminals sockets , 35 mm rail mount (acc. to EN 60715) or on panel mounting (one M3 screw)				
GZF80	–	GZ80-1001	–	–
Spring terminals sockets , 35 mm rail mount (acc. to EN 60715)				
GZMB80 ④	GZMB80-0025	GZM80-0025	TR	modules ⑤
Sockets for PCB				
EC 50	–	MH25-2	–	–
GD50	–	MH25-2	–	–

④ The distance between the relays mounted side by side: min. 5 mm for versions AC; min. 1,5 mm for versions DC. ⑤ Sockets GZMB80: wire connection - see page 361. ⑥ Signalling / protecting modules type M... - see page 376.

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 23 °C Ω	Acceptable resistance	Coil operating range V DC ⑥	
				min. (0...+70 °C)	max. (0...+70 °C)
1012	12	360	± 10%	8,4	18,0
1024	24	1 440	± 10%	16,8	36,0
1048	48	5 760	± 15%	33,6	72,0
1110	110	25 200	± 15%	77,0	165,0

The data in bold type relate to the standard versions of the relays. ⑥ The max. allowable voltage is coil overdrive voltage, it is the instantaneous max. voltage which the relay coil could endure in very short time. Relays with 48 V DC and 110 V DC coils shall be absolutely protected against any possibility of operation at voltages higher than the rated voltage.


Coil data - AC 50 Hz voltage version

Table 2

Coil code	Rated voltage V AC	Coil resistance at 23 °C Ω	Acceptable resistance	Coil operating range V AC 50 Hz	
				min. (0...+70 °C)	max. (0...+70 °C)
5024	24	350	± 10%	18,0	26,4
5115	115	8 100	± 15%	86,3	126,5
5230	230	32 500	± 15%	172,5	253,0

The data in bold type relate to the standard versions of the relays.

Ordering codes

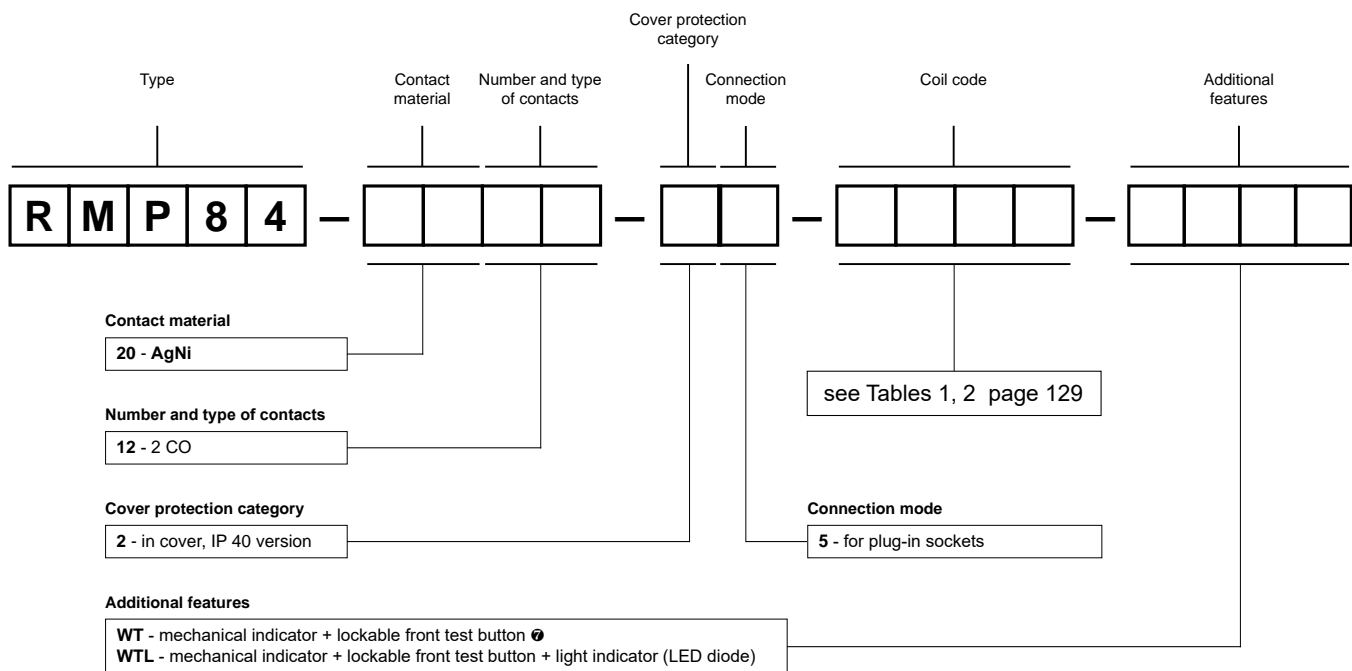

⑦ WT - standard features of relays. Test buttons type T - see page 127.

Examples of ordering code:

RMP84-2012-25-1024-WT

relay **RMP84**, for plug-in sockets, two changeover contacts, contact material AgNi, coil voltage 24 V DC, with mechanical indicator and lockable front test button, in cover IP 40

RMP84-2012-25-5230-WTL

relay **RMP84**, for plug-in sockets, two changeover contacts, contact material AgNi, coil voltage 230 V AC 50 Hz, with mechanical indicator and lockable front test button and light indicator (LED diode), in cover IP 40

RMP85

miniature relays

130

MINIATURE

version AC



version DC



- Cadmium - free contacts • Height 25,5 mm
- 5000 V / 8 mm reinforced insulation
- For plug-in sockets
- Accessories: sockets and modules
- AC and DC coils
- WT (mechanical indicator + lockable front test button)
 - standard features of relays
- Recognitions, certifications, directives: RoHS,

Contact data

Number and type of contacts		1 CO
Contact material		AgNi
Rated / max. switching voltage	AC	250 V / 440 V
Min. switching voltage		12 V 10 mA
Rated load	AC1	16 A / 250 V AC
Min. switching current		10 mA 12 V
Max. inrush current		32 A 20 ms
Rated current		16 A
Max. breaking capacity	AC1	4 000 VA
Min. breaking capacity		0,12 W 10 mA / 12 V
Contact resistance		≤ 100 mΩ 1 A / 6 V DC
Max. operating frequency		
• at rated load	AC1	360 cycles/hour
• no load		18 000 cycles/hour

Coil data

Rated voltage	50 Hz AC	24, 115, 230 V
	DC	12, 24, 48, 110 V
Must release voltage		AC: ≥ 0,15 U _n DC: ≥ 0,1 U _n
Operating range of supply voltage		see Tables 1, 2
Rated power consumption	AC	0,75 VA
	DC	0,4 ... 0,48 W

Insulation according to EN 60664-1


Insulation rated voltage		440 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		3
Insulation resistance		1 000 MΩ 500 V DC
Dielectric strength		
• between coil and contacts		5 000 V AC type of insulation: reinforced
• contact clearance		1 000 V AC type of clearance: micro-disconnection
Contact - coil distance		
• clearance		≥ 8 mm
• creepage		≥ 8 mm

General data


Operating / release time (typical values)		15 ms / 8 ms
Electrical life	• resistive AC1	> 3 x 10 ⁴ AC coils, 16 A, 250 V AC, ON for 5 s / OFF for 5 s
(number of cycles)		> 10 ⁴ DC coils, 16 A, 250 V AC, ON for 5 s / OFF for 5 s
		> 3 x 10 ⁴ 16 A, 250 V AC, 70 °C, ON for 1 s / OFF for 9 s
Mechanical life (cycles)		> 10 ⁶ AC coils
		> 5 x 10 ⁶ DC coils
Dimensions (L x W x H)		29 x 13 x 25,5 mm
Weight		16 g
Ambient temperature	• storage	-40...+70 °C
(non-condensation and/or icing)	• operating	-40...+70 °C
Cover protection category		IP 40 EN 60529
Environmental protection		RTII EN 61810-7
Relative humidity		5...85%
Shock resistance		10 g
Vibration resistance	(NO/NC)	10 g / 5 g length direction: 10 g / 2 g 10...150 Hz
Solder bath temperature		max. 270 °C
Soldering time		max. 5 s

The data in bold type relate to the standard versions of the relays. The data don't include the power of electronic indicating circuit when the relay picks-up. Operating temperature for relays mounted in sockets on 35 mm rail mount: -40...+55 °C. The distance between the relays mounted side by side: min. 5 mm for versions AC; min. 1,5 mm for versions DC.


Dimensions

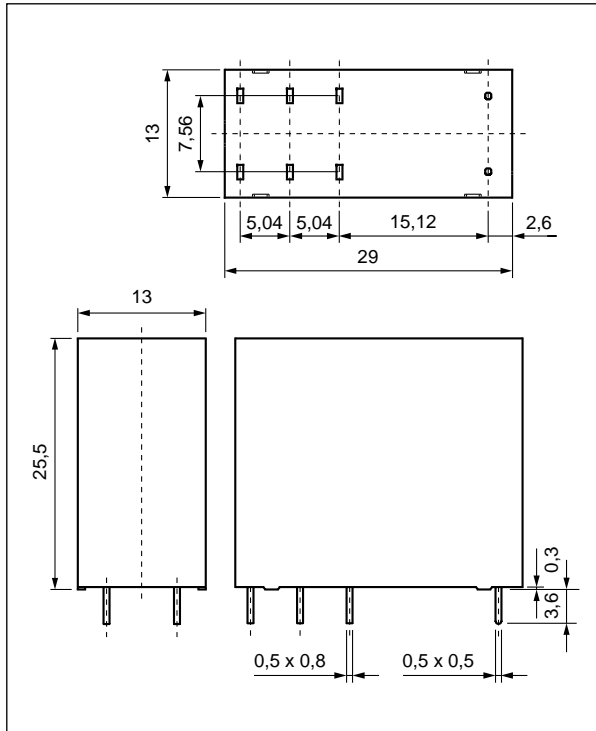


Test buttons type T

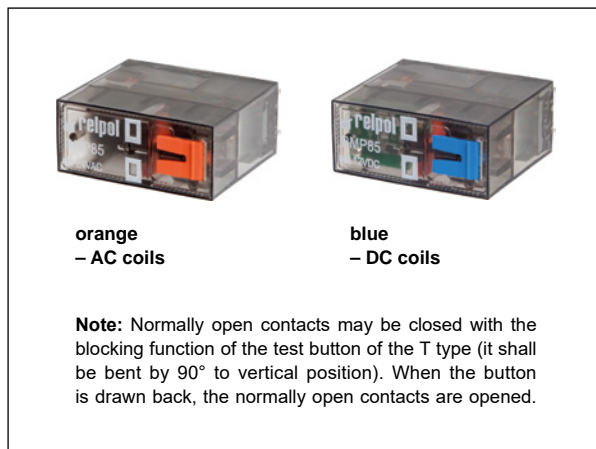

Connection diagram (pin side view)

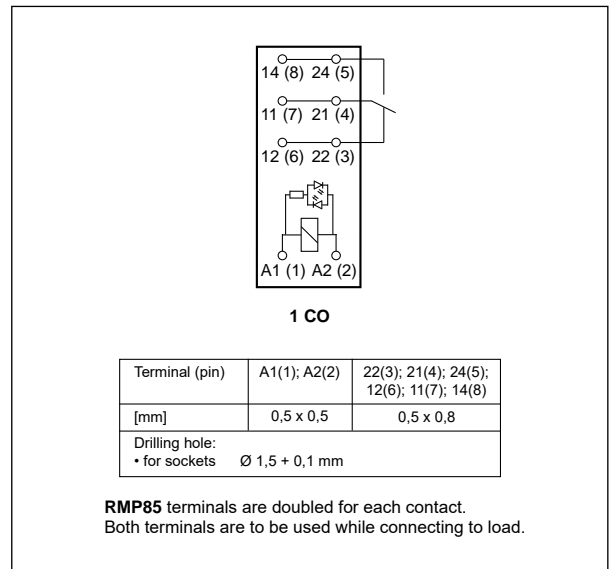


Connection of GZ.80 sockets

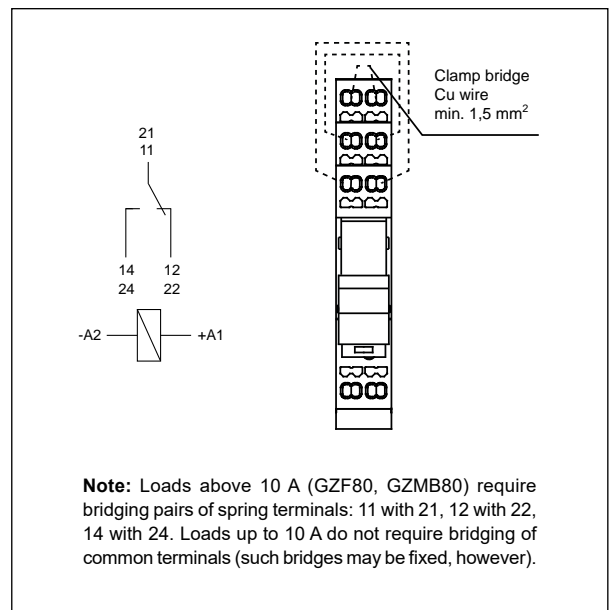


Electrical life at AC resistive load.
Switching frequency: 360 cycles/hour

Fig. 1

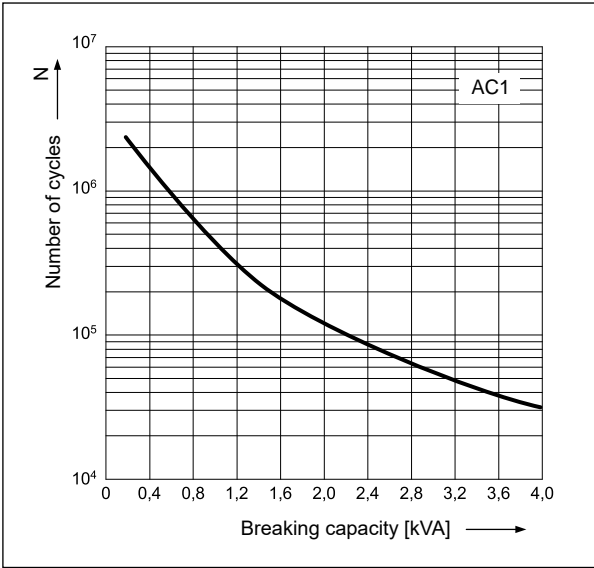

Max. AC 50 Hz resistive load breaking capacity

Fig. 2

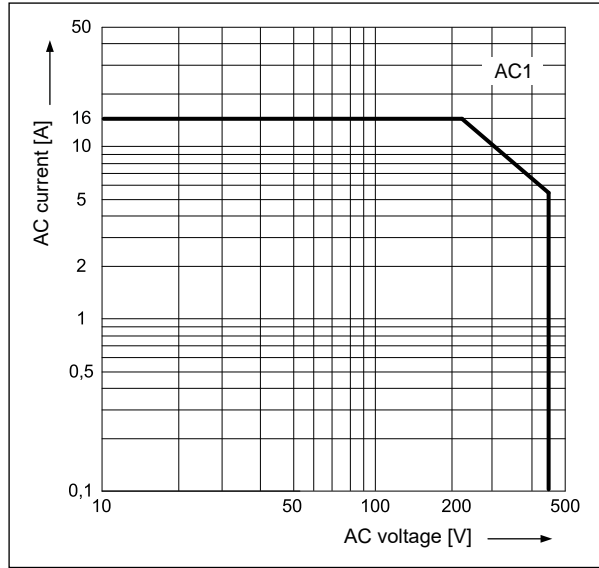

Mounting, sockets and accessories for relays


Relays **RMP85** ④ are designed for mounting in plug-in sockets.

Sockets for RMP85	Accessories			Additional features
	Retainer / retractor clips	Spring wire clips	Description plates	
Screw terminals sockets, 35 mm rail mount (acc. to EN 60715) or on panel mounting (one M3 screw)				
GZF80 ④	–	GZ80-1001	–	–
Spring terminals sockets, 35 mm rail mount (acc. to EN 60715)				
GZMB80 ④ ⑤	GZMB80-0025	GZM80-0025	TR	modules ⑥
Sockets for PCB				
EC 50	–	MH25-2	–	–
GD50	–	MH25-2	–	–

④ The distance between the relays mounted side by side: min. 5 mm for versions AC; min. 1,5 mm for versions DC. ④ Sockets GZ.80: load connection - see page 131. ⑤ Sockets GZMB80: wire connection - see page 361. ⑥ Signalling / protecting modules type M... - see page 376.

GZF80, GZMB80, EC 50, GD50

Plug-in sockets for relays RMP84, RMP85 - see pages 361-362

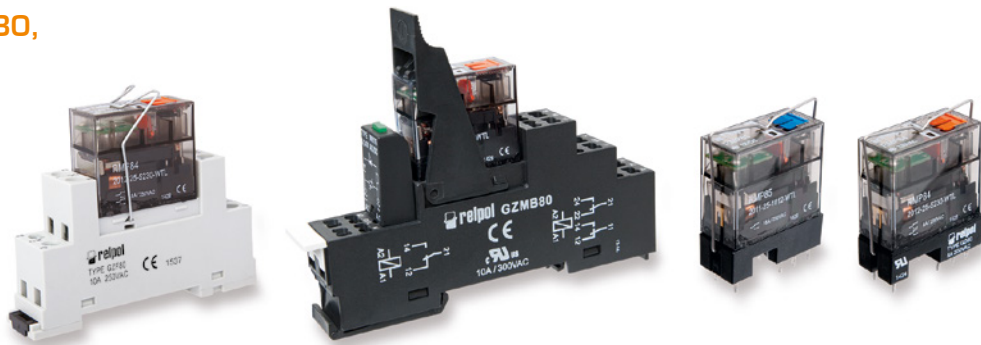

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 23 °C Ω	Acceptable resistance	Coil operating range V DC ⑦	
				min. (0...+70 °C)	max. (0...+70 °C)
1012	12	360	± 10%	8,4	18,0
1024	24	1 440	± 10%	16,8	36,0
1048	48	5 760	± 15%	33,6	72,0
1110	110	25 200	± 15%	77,0	165,0

The data in bold type relate to the standard versions of the relays. ⑦ The max. allowable voltage is coil overdrive voltage, it is the instantaneous max. voltage which the relay coil could endure in very short time. Relays with 48 V DC and 110 V DC coils shall be absolutely protected against any possibility of operation at voltages higher than the rated voltage.


Coil data - AC 50 Hz voltage version

Table 2

Coil code	Rated voltage V AC	Coil resistance at 23 °C Ω	Acceptable resistance	Coil operating range V AC 50 Hz	
				min. (0...+70 °C)	max. (0...+70 °C)
5024	24	350	± 10%	18,0	26,4
5115	115	8 100	± 15%	86,3	126,5
5230	230	32 500	± 15%	172,5	253,0

The data in bold type relate to the standard versions of the relays.

Ordering codes

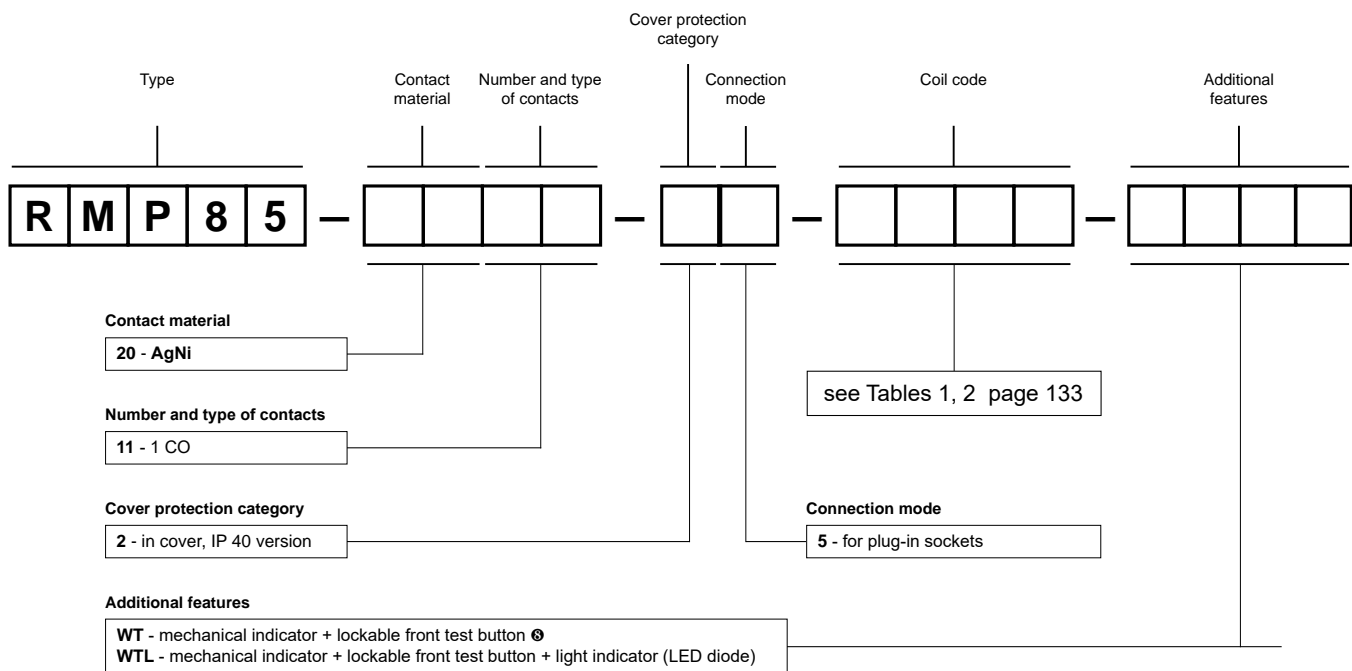

③ WT - standard features of relays. Test buttons type T - see page 131.

Examples of ordering code:

RMP85-2011-25-1024-WT

relay **RMP85**, for plug-in sockets, one changeover contact, contact material AgNi, coil voltage 24 V DC, with mechanical indicator and lockable front test button, in cover IP 40

RMP85-2011-25-5230-WTL

relay **RMP85**, for plug-in sockets, one changeover contact, contact material AgNi, coil voltage 230 V AC 50 Hz, with mechanical indicator and lockable front test button and light indicator (LED diode), in cover IP 40



- Cadmium - free contacts • Miniature dimensions
- Automotive applications
- High resistance to inrush current
- For PCB
- Following relays versions are available:
 - RA2** - standard design
 - RAW2** - narrow pin layout design
- Recognitions, certifications, directives: RoHS

Contact data

Number and type of contacts		1 CO, 1 NO, 2 NO
Contact material		AgSnO₂
Rated / max. switching voltage	DC	60 V / 60 V
Min. switching voltage		1 V
Min. switching current		10 mA
Max. inrush current		1 CO: 110 A / 50 A (NO/NC) 1 NO: 110 A 2 NO: 2 x 110 A
Rated current		1 CO: 20 A / 12 A (NO/NC) 1 NO: 20 A 2 NO: 2 x 12,5 A
Max. breaking capacity		1 CO: 270 W / 162 W (NO/NC) 1 NO: 270 W 2 NO: 2 x 168 W
Min. breaking capacity		1 W
Contact resistance		≤ 3 mΩ
Max. operating frequency		
• at rated load	AC1	900 cycles/hour 2 s ON / 2 s OFF
• at motor load		450 cycles/hour 2 s ON / 6 s OFF
• at incandescent lamp load		120 cycles/hour 2 s ON / 30 s OFF
• no load		36 000 cycles/hour

Coil data

Rated voltage	DC	5, 6, 9, 12 , 15, 18, 24, 48 V
Must release voltage		DC: ≥ 0,15 U _n
Operating range of supply voltage		see Table 1
Must operate voltage		≤ 0,6 U _n
Rated power consumption	DC	1,44 W

Insulation

Insulation rated voltage		60 V AC
Dielectric strength		
• between coil and contacts		500 V AC
• contact clearance		500 V AC
Contact - coil distance		
• clearance		≥ 1 mm
• creepage		≥ 1 mm

General data

Operating / release time (typical values)		10 ms / 3 ms
Electrical life		
• resistive DC1		1 CO: > 10 ⁵ 20 A / 12 A (NO/NC), 13,5 V DC 1 NO: > 10 ⁵ 20 A, 13,5 V DC 2 NO: > 10 ⁵ 2 x 12,5 A, 13,5 V DC
Mechanical life (cycles)		> 10 ⁷
Dimensions (L x W x H)		IP 00: 18,6 x 13,0 x 18,5 mm IP 40: 20,5 x 15,3 x 19,7 mm
Weight		12 g
Ambient temperature	• storage	-40...+100 °C
(non-condensation and/or icing)	• operating	-40...+85 °C
Cover protection category		IP 40 or IP 00 (without cover) EN 60529
Solder bath temperature		max. 270 °C
Soldering time		max. 5 s

The data in bold type relate to the standard versions of the relays.


Connection diagrams (pin side view)

Relay terminals:


c, d, e, f - 0,6 x 1,4 mm

a - 0,6 x 1,0 mm


b - 1,0 x 1,5 mm

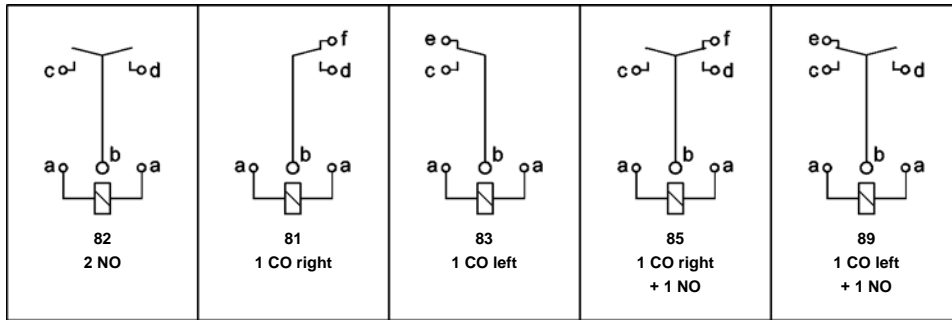

Dimensions

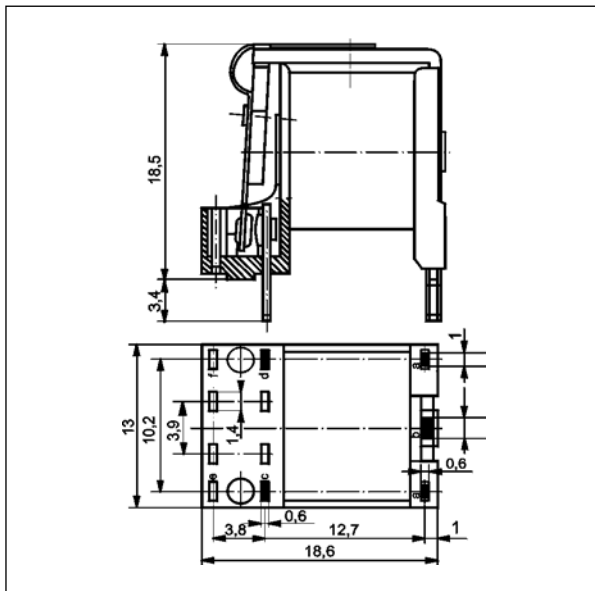

Max. DC resistive load breaking capacity Fig. 1

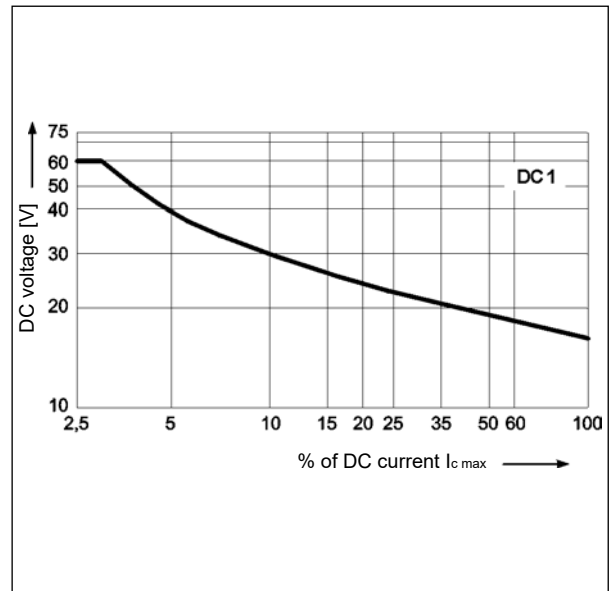

Mounting

Relays RA2 are designed for direct PCB mounting.


Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
1005	5	18	± 10%	4,0	6,6
1006	6	24	± 10%	4,8	8,0
1009	9	55	± 10%	7,2	12,0
1012	12	100	± 10%	9,6	16,0
1015	15	152	± 10%	12,0	20,0
1018	18	230	± 10%	14,4	23,9
1024	24	390	± 10%	19,2	31,9
1048	48	1 590	± 10%	38,4	63,8

The data in bold type relate to the standard versions of the relays.

Ordering codes

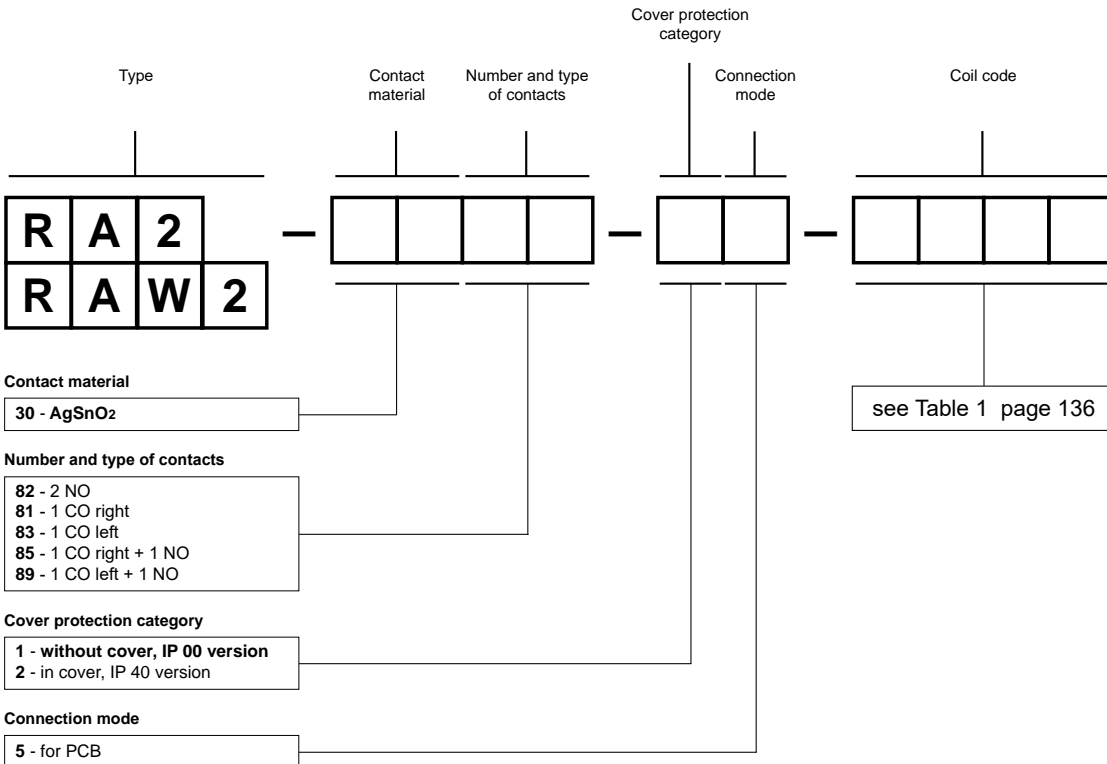

Examples of ordering codes:

- RA2-3081-15-1012** relay **RA2**, for PCB, one right changeover contact, contact material AgSnO₂, coil voltage 12 V DC, without cover IP 00
- RAW2-3082-25-1024** relay **RAW2** with narrow pin layout design, for PCB, two normally open contacts, contact material AgSnO₂, coil voltage 24 V DC, in cover IP 40

Relays industrial



INDUSTRIAL

Industrial relays are applied mainly in industrial and power automation systems, in signaling and protection systems, in other control and electric drives systems. The main products of Relpol S.A. have been successfully applied in industrial automation for many years. Their reliability and quality have been acknowledged by numerous prizes and awards, and by the Customers' satisfaction.



The basic features of industrial relays are: contact number: from 1 to 4, rated contact switching currents up to 48 A (depending on the relay type), versions with coil overvoltage suppression, versions with flag indicators and manual relay test pushbuttons with the possibility of latching the normally open contacts closed, mounting on THT, plug-in sockets, 35 mm rails; screw and spring terminals of plug-in sockets, and via flat connecting inserts. R2N, R3N and R4N relays are the basis for the interface relays of PIR2, PIR3 and PIR4 types which are described in the section of "Interface relays".



They meet the requirements of REACH and RoHS Directive. The relays are recognized and certified by: AUCOTEAM GmbH Berlin,



miniature industrial






R2N	138
R3N	143
R4N	148
RY2	154
R2M	158

industrial of small dimensions


R15 - 2 CO, 3 CO	162
R15 - 4 CO	167
RUC	171
RUC-M	177
RG25	182
R20	185
R30N	188
R40N	191
RS35, RS50	194




12 A / 250 V AC

- Relays of general application • For plug-in sockets: on 35 mm rail mount acc. to EN 60715; on panel mounting; with terminals for soldering
- AC and DC coils, insulation class F: 155 °C
- WT (mechanical indicator + lockable front test button) - standard features of relays. Relays may be provided with the test buttons (no latching) and plugs - page 380
- Recognitions, certifications, directives: RoHS,     

Contact data


Number and type of contacts		2 CO
Contact material		AgNi , AgNi/Au flash gold plating
Rated / max. switching voltage	AC	250 V / 440 V
Min. switching voltage		10 V
Rated load (capacity)	AC1	12 A / 250 V AC
	AC15	3 A / 120 V 1,5 A / 240 V (B300)
	DC1	12 A / 24 V DC (see Fig. 3)
	DC13	0,22 A / 120 V 0,1 A / 250 V (R300)
Motor load	acc. to UL 508	1/2 HP 240 V AC, 4,9 FLA, single-phase motor 
	AC3 acc. to IEC 60947-4-1	0,37 kW 240 V AC, single-phase motor
Min. switching current		5 mA
Max. inrush current		24 A
Rated current		12 A
Max. breaking capacity	AC1	3 000 VA
Min. breaking capacity		0,3 W
Contact resistance		≤ 100 mΩ
Max. operating frequency		
• at rated load	AC1	1 200 cycles/hour
• no load		12 000 cycles/hour
Coil data		
Rated voltage	50/60 Hz AC	6, 12, 24 , 42, 48, 60, 80, 110, 115, 120, 127, 220, 230 , 240 V
	DC	5, 6, 12 , 24 , 48, 60, 80, 110, 125, 220 V
Must release voltage		AC: ≥ 0,2 U _n DC: ≥ 0,1 U _n
Operating range of supply voltage		see Tables 1, 2
Rated power consumption	AC	1,6 VA
	DC	0,9 W
Insulation according to EN 60664-1		
Insulation rated voltage		250 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		3
Dielectric strength		
• between coil and contacts		2 500 V AC type of insulation: basic
• contact clearance		1 500 V AC type of clearance: micro-disconnection
• pole - pole		2 500 V AC type of insulation: basic
Contact - coil distance		
• clearance		≥ 2,5 mm
• creepage		≥ 4 mm
General data		
Operating / release time (typical values)		AC: 10 ms / 8 ms DC: 13 ms / 3 ms
Electrical life		
• resistive AC1		> 10 ⁵ 12 A, 250 V AC
• cosφ		see Fig. 2
Mechanical life (cycles)		> 2 x 10 ⁷
Dimensions (L x W x H)		27,4 x 21 x 35,5 mm
Weight		35 g
Ambient temperature	• storage	-40...+85 °C
(non-condensation and/or icing)	• operating	AC: -40...+55 °C DC: -40...+70 °C
Cover protection category		IP 40 EN 60529
Environmental protection		RTI EN 61810-7
Shock resistance	(NO/NC)	10 g / 5 g
Vibration resistance		5 g 10...150 Hz

The data in bold type relate to the standard versions of the relays.  For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.

Design



Improvement of the functionality of the mechanical indicator (W): it is mounted on an insulation base of the unit of the movable contacts; the changes provide the appropriate position in the window in the upper side of the housing irrespectively of the number of operations performed by the relay.




Application of electronics made in the SMD technology: additional features L (LED diode) and D (diode) are located on the printed circuit board; the change of the position of the LED diode and optimization of the quality and intensity of its light provide certainty that the relay is in operation status when the LED is on.




Improvement of the efficiency of the electromagnet: an innovational technology of connecting elements has been introduced, which guarantees more reliable operation of the relay.

Strengthening of the insulation in the area of the contact plate: polyamide PA66 has been applied; it has very good mechanical and electrical parameters and best thermal properties.


Dimensions - plug-in version (WT), with lockable front test button type T

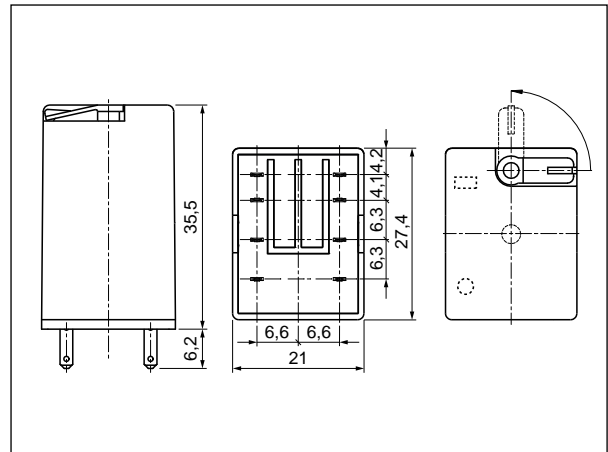


Dimensions - plug-in version, with test button (no latching) or with plug (no manual operation)

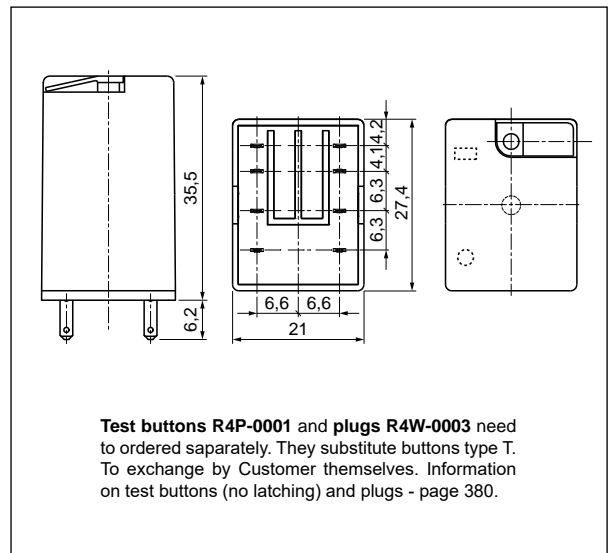


Connection diagram (pin side view)

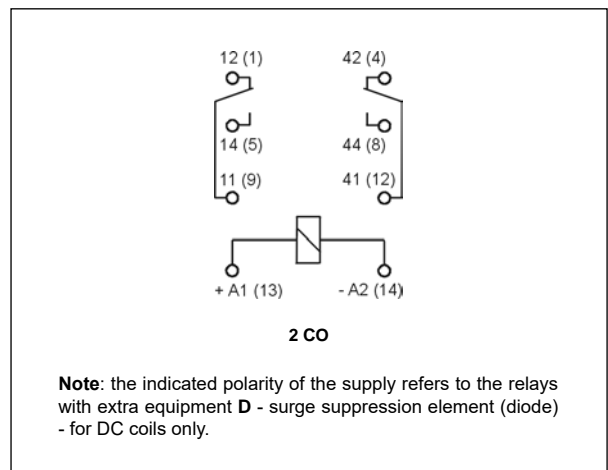

Electrical life at AC resistive load. Fig. 1
Switching frequency: 1 200 cycles/hour

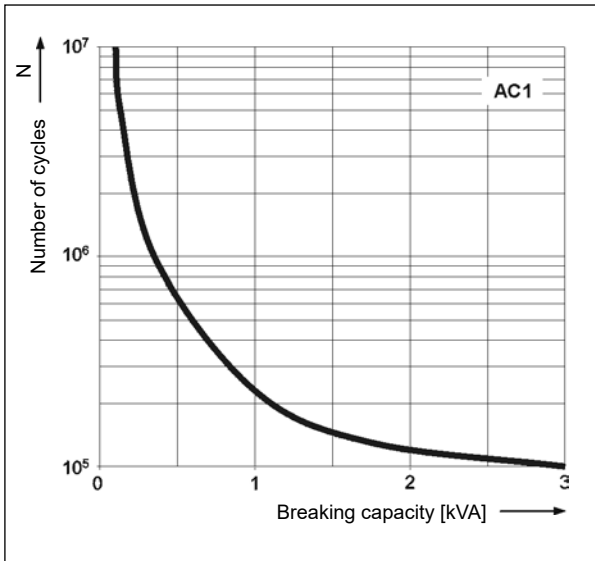


Electrical life reduction factor at AC inductive load Fig. 2

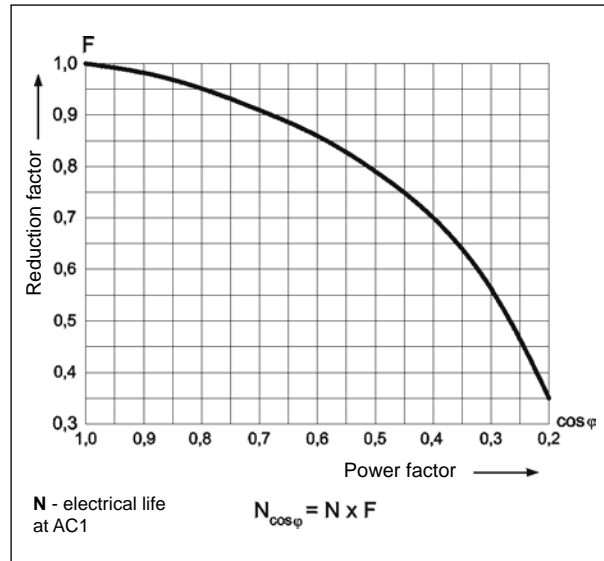

Contact material selection for different load types

- **AgNi** - for resistive or inductive loads,
- **AgNi/Au flash gold plating** - Au protects the contact surface during storage.

Max. DC resistive load breaking capacity Fig. 3

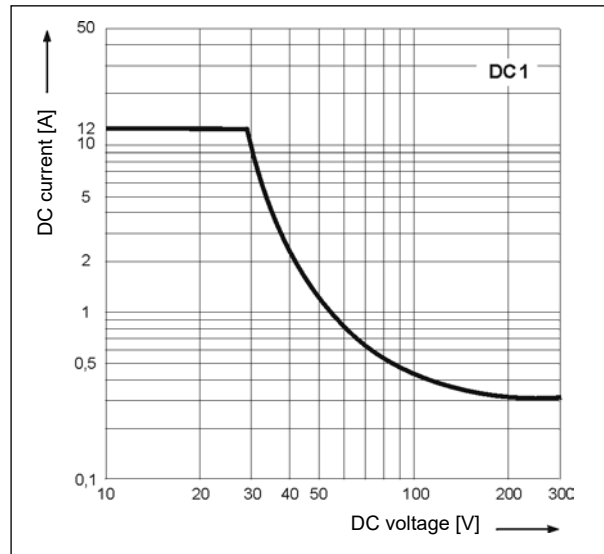

Mounting, sockets and accessories for relays

Relays **R2N** are designed for mounting in plug-in sockets. **With WT features as standard (W - mechanical indicator + T - lockable front test button)**. In these relays is **possibility self-exchange of button type T for test button R4P-0001 (no latching) or on plug R4W-0003 (no manual operation)**. The buttons **R4P-0001** and the plugs **R4W-0003** need to ordered separately.

Sockets for R2N	Accessories			Additional features
	Retainer / retractor clips	Spring wire clips	Description plates	
Screw terminals sockets, 35 mm rail mount (EN 60715) or on panel mounting (two M3 screws)				
GZT2	GZT4-0040	G4 1052	GZT4-0035	modules ③, strips ④
GZM2	GZT4-0040	G4 1052	GZT4-0035	modules ③, strips ④
Spring terminals sockets, 35 mm rail mount (EN 60715)				
GZMB2 ⑥	GZMB4-0040	G4 1052	TR	modules ③
Sockets for PCB				
SU4/2D	–	G4 1053	–	–
Solder terminals sockets				
SU4/2L	–	G4 1053	–	spring clamps ⑤
G4/2	–	G4 1053	–	–

③ Sockets GZMB2: wire connection - see page 365. ④ Signalling / protecting modules type M... - see page 376. ⑤ Interconnection strips ZGGZ4 - see page 378. ⑥ Spring clamps G4 1040 for spring wire clips.

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 70 °C)
1005	5	28	± 10%	4,0	5,5
1006	6	40	± 10%	4,8	6,6
1012	12	160	± 10%	9,6	13,2
1024	24	640	± 10%	19,2	26,4
1048	48	2 600	± 10%	38,4	52,8
1060	60	4 000	± 10%	48,0	66,0
1080	80	7 100	± 10%	64,0	88,0
1110	110	13 600	± 10%	88,0	121,0
1125	125	16 000	± 10%	100,0	137,5
1220	220	54 000	± 10%	176,0	242,0

The data in bold type relate to the standard versions of the relays.

Coil data - AC 50/60 Hz voltage version

Table 2

Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC	
				min. (at 20 °C)	max. (at 55 °C)
5006	6	9,8	± 10%	4,8	6,6
5012	12	39,5	± 10%	9,6	13,2
5024	24	158	± 10%	19,2	26,4
5042	42	470	± 10%	33,6	46,2
5048	48	640	± 10%	38,4	52,8
5060	60	930	± 10%	48,0	66,0
5080	80	1 720	± 10%	64,0	88,0
5110	110	3 450	± 10%	88,0	121,0
5115	115	3 610	± 10%	92,0	127,0
5120	120	3 770	± 10%	96,0	132,0
5127	127	4 000	± 10%	101,6	139,0
5220	220	15 400	± 10%	176,0	242,0
5230	230	16 100	± 10%	184,0	253,0
5240	240	16 800	± 10%	192,0	264,0


The data in bold type relate to the standard versions of the relays.

R2T, PIR2T

Relays for
railroad industry
- see
www.repol.com.pl



Ordering codes

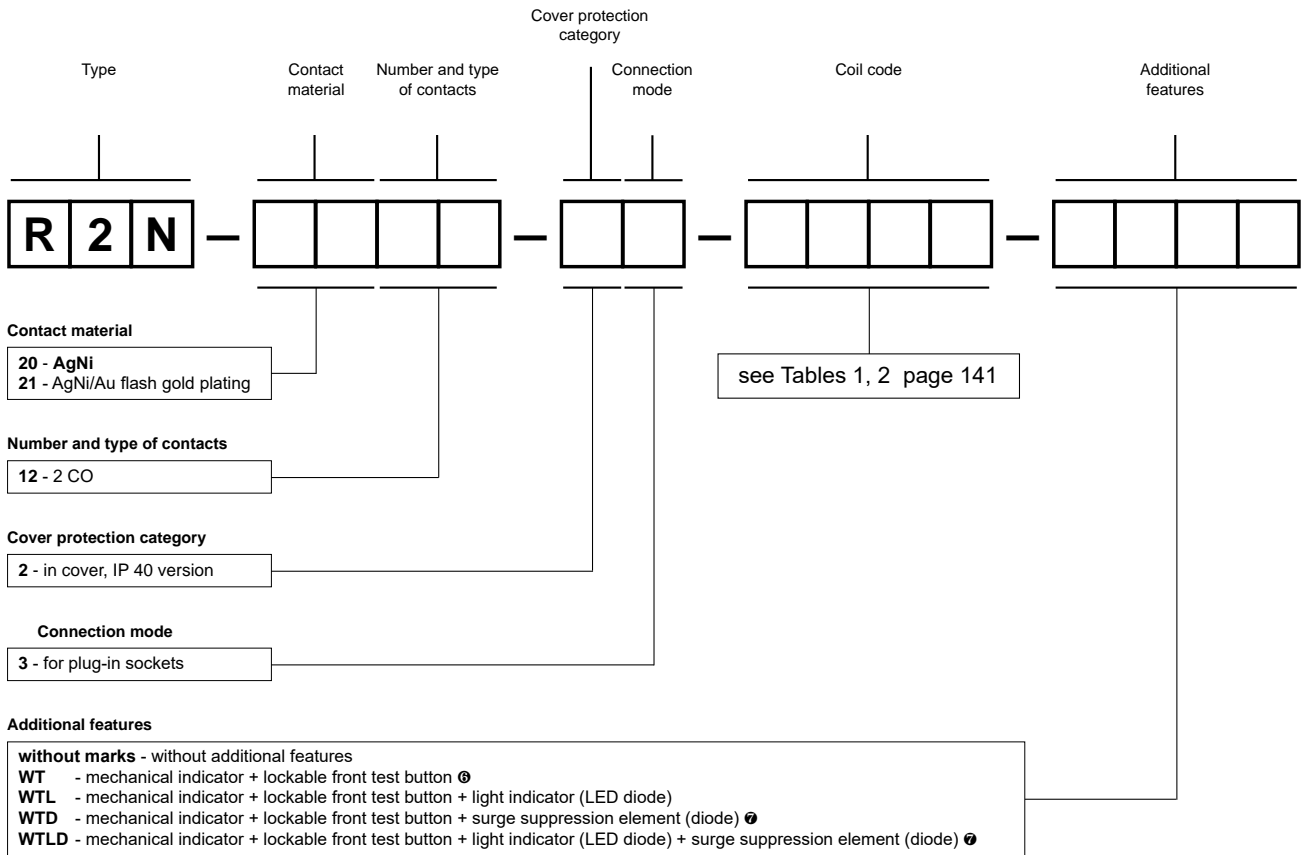

⑥ WT - standard features of relays

⑦ WTD, WTLD - available only in relays with DC coils

Test buttons (no latching) and plugs need to be ordered separately. They substitute buttons type T. To be exchanged by the customer themselves.

Information on test buttons (no latching) and plugs - page 380.

- Button R4P-0001-A - orange colour (AC coils)
- Button R4P-0001-D - green colour (DC coils)
- Plug R4W-0003-A - orange colour (AC coils)
- Plug R4W-0003-D - green colour (DC coils)

Note:

While the relay operates, the test button of the T type becomes heated. In order to push the test button manually, you should first turn the supply voltage off, and wait some time until the button becomes colder (or push the button immediately using a protective glove or an insulated tool). The button shall be pushed smoothly and quickly. The normally open contacts are closed with the button for the time during which the button is pushed. Releasing the button opens the normally open contacts. Normally open contacts may be closed with the blocking function of the button (it shall be turned by 90°). When the button is turned back, the normally open contacts are opened.






For relays with additional features **D** - surge suppression element (diode) (versions WTD and WTLD) - fixed supply polarity compulsory for the DC load of coils: +A1(13) / -A2(14). The polarity is indicated on the relay cover. For other versions of the relays with DC coils any polarity is possible.

Example of ordering codes:

R2N-2012-23-1024-WT relay **R2N**, for plug-in sockets, two changeover contacts, contact material AgNi, coil voltage 24 V DC, with mechanical indicator and lockable front test button, in cover IP 40



10 A / 250 V AC

- Relays of general application • For plug-in sockets: on 35 mm rail mount acc. to EN 60715; on panel mounting
- AC and DC coils, insulation class F: 155 °C
- WT (mechanical indicator + lockable front test button) - standard features of relays. Relays may be provided with the test buttons (no latching) and plugs - page 380
- Recognitions, certifications, directives: RoHS,     

Contact data


Number and type of contacts		3 CO
Contact material		AgNi , AgNi/Au flash gold plating
Rated / max. switching voltage	AC	250 V / 440 V
Min. switching voltage		10 V
Rated load (capacity)	AC1	10 A / 250 V AC
	AC15	3 A / 120 V 1,5 A / 240 V (B300)
	DC1	10 A / 24 V DC (see Fig. 3)
	DC13	0,22 A / 120 V 0,1 A / 250 V (R300)
Motor load	acc. to UL 508	1/2 HP 240 V AC, 4,9 FLA, single-phase motor ¹
	AC3 acc. to IEC 60947-4-1	0,37 kW 240 V AC, single-phase motor
Min. switching current		5 mA
Max. inrush current		20 A
Rated current		10 A
Max. breaking capacity	AC1	2 500 VA
Min. breaking capacity		0,3 W
Contact resistance		≤ 100 mΩ
Max. operating frequency	• at rated load	AC1 1 200 cycles/hour
	• no load	18 000 cycles/hour
Coil data		
Rated voltage	50/60 Hz AC	6, 12, 24 , 42, 48, 60, 80, 110, 115, 120, 127, 220, 230 , 240 V
	DC	5, 6, 12 , 24 , 48, 60, 80, 110, 125, 220 V
Must release voltage		AC: ≥ 0,2 U _n DC: ≥ 0,1 U _n
Operating range of supply voltage		see Tables 1, 2
Rated power consumption	AC	1,6 VA
	DC	0,9 W
Insulation according to EN 60664-1		
Insulation rated voltage		250 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overtoltage category		III
Insulation pollution degree		2
Dielectric strength	• between coil and contacts	2 500 V AC type of insulation: basic
	• contact clearance	1 500 V AC type of clearance: micro-disconnection
	• pole - pole	2 500 V AC type of insulation: basic
Contact - coil distance	• clearance	≥ 2,5 mm
	• creepage	≥ 4 mm
General data		
Operating / release time (typical values)		AC: 10 ms / 8 ms DC: 13 ms / 3 ms
Electrical life	• resistive AC1	> 10 ⁵ 10 A, 250 V AC
	• cosφ	see Fig. 2
Mechanical life (cycles)		> 2 x 10 ⁷
Dimensions (L x W x H)		27,4 x 21 x 35,5 mm
Weight		35 g
Ambient temperature	• storage	-40...+85 °C
	(non-condensation and/or icing) • operating	AC: -40...+55 °C DC: -40...+70 °C
Cover protection category		IP 40 EN 60529
Environmental protection		RTI EN 61810-7
Shock resistance	(NO/NC)	10 g / 5 g
Vibration resistance		5 g 10...150 Hz

The data in bold type relate to the standard versions of the relays. ¹ For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.

Design



Improvement of the functionality of the mechanical indicator (W): it is mounted on an insulation base of the unit of the movable contacts; the changes provide the appropriate position in the window in the upper side of the housing irrespectively of the number of operations performed by the relay.




Application of electronics made in the SMD technology: additional features L (LED diode) and D (diode) are located on the printed circuit board; the change of the position of the LED diode and optimization of the quality and intensity of its light provide certainty that the relay is in operation status when the LED is on.




Improvement of the efficiency of the electromagnet: an innovational technology of connecting elements has been introduced, which guarantees more reliable operation of the relay.

Strengthening of the insulation in the area of the contact plate: polyamide PA66 has been applied; it has very good mechanical and electrical parameters and best thermal properties.


Dimensions - plug-in version (WT), with lockable front test button type T

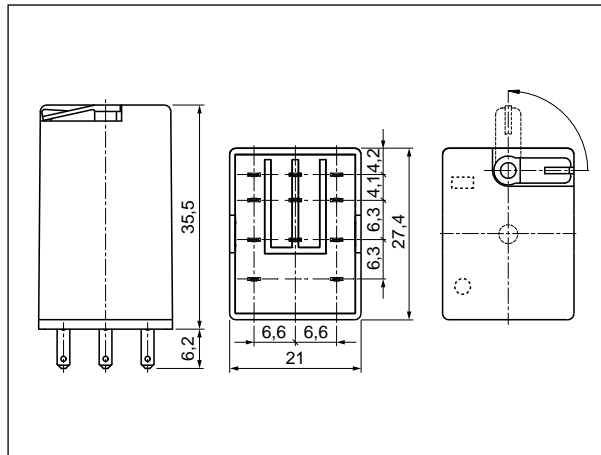


Dimensions - plug-in version, with test button (no latching) or with plug (no manual operation)

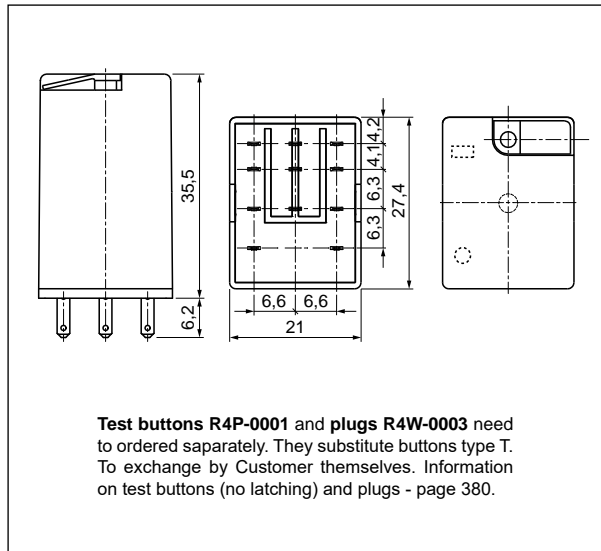


Connection diagram (pin side view)

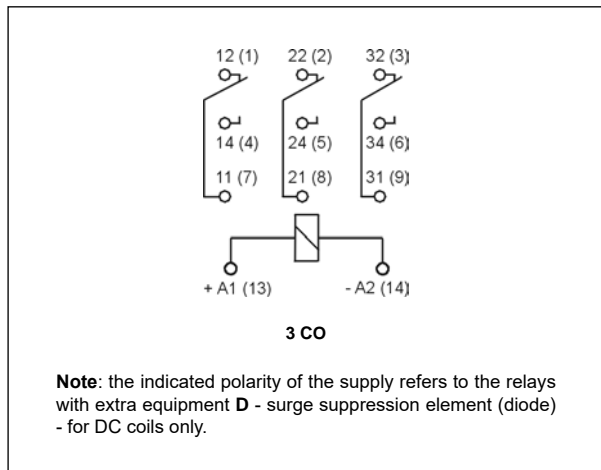

Electrical life at AC resistive load. Fig. 1
Switching frequency: 1 200 cycles/hour

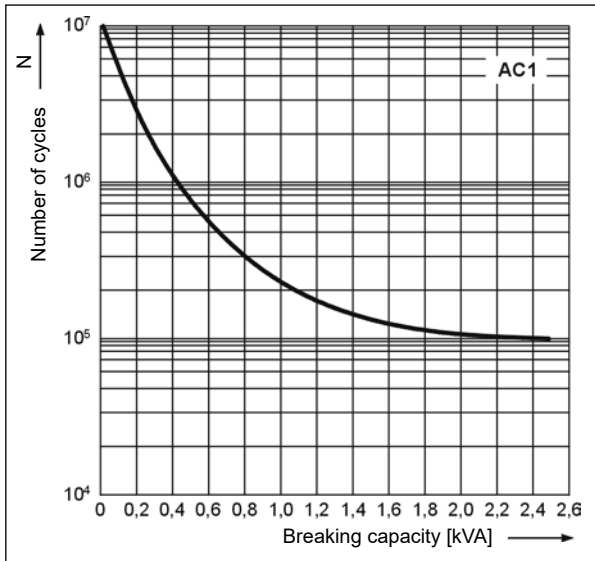


Electrical life reduction factor at AC inductive load Fig. 2

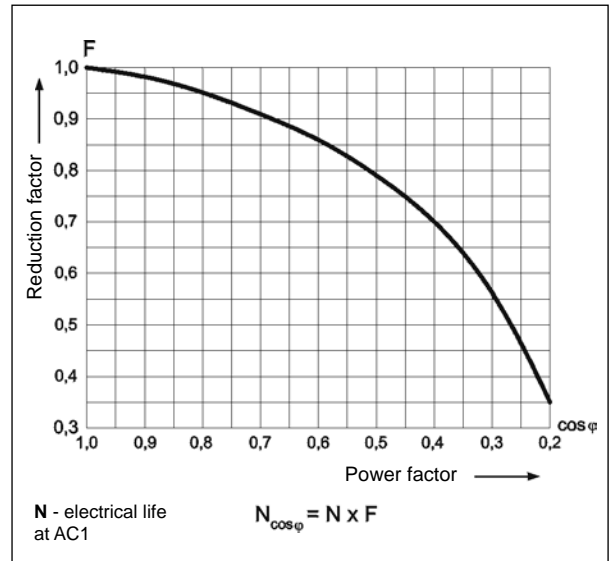

Contact material selection for different load types

- **AgNi** - for resistive or inductive loads,
- **AgNi/Au flash gold plating** - Au protects the contact surface during storage.

Max. DC breaking capacity Fig. 3
A - resistive load DC1
B - inductive load L/R = 40 ms

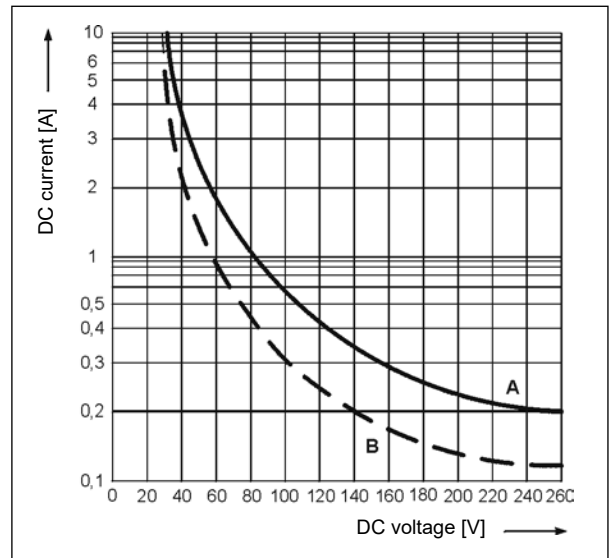

Mounting, sockets and accessories for relays

Relays **R3N** are designed for mounting in plug-in sockets. **With WT features as standard** (**W** - mechanical indicator + **T** - lockable front test button). In these relays is **possibility self-exchange of button type T for test button R4P-0001** (no latching) **or on plug R4W-0003** (no manual operation). The buttons **R4P-0001** and the plugs **R4W-0003** need to ordered separately.

Sockets for R3N	Accessories			Additional features
	Retainer / retractor clips	Spring wire clips	Description plates	
Screw terminals sockets, 35 mm rail mount (EN 60715) or on panel mounting (two M3 screws)				
GZT3	GZT4-0040	G4 1052	GZT4-0035	modules Ⓜ, strips Ⓢ
GZM3	GZT4-0040	G4 1052	GZT4-0035	modules Ⓜ, strips Ⓢ

Ⓜ Signalling / protecting modules type M... - see page 376. Ⓢ Interconnection strips ZGGZ4 - see page 378.

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 70 °C)
1005	5	28	± 10%	4,0	5,5
1006	6	40	± 10%	4,8	6,6
1012	12	160	± 10%	9,6	13,2
1024	24	640	± 10%	19,2	26,4
1048	48	2 600	± 10%	38,4	52,8
1060	60	4 000	± 10%	48,0	66,0
1080	80	7 100	± 10%	64,0	88,0
1110	110	13 600	± 10%	88,0	121,0
1125	125	16 000	± 10%	100,0	137,5
1220	220	54 000	± 10%	176,0	242,0

The data in bold type relate to the standard versions of the relays.

Coil data - AC 50/60 Hz voltage version

Table 2

Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC	
				min. (at 20 °C)	max. (at 55 °C)
5006	6	9,8	± 10%	4,8	6,6
5012	12	39,5	± 10%	9,6	13,2
5024	24	158	± 10%	19,2	26,4
5042	42	470	± 10%	33,6	46,2
5048	48	640	± 10%	38,4	52,8
5060	60	930	± 10%	48,0	66,0
5080	80	1 720	± 10%	64,0	88,0
5110	110	3 450	± 10%	88,0	121,0
5115	115	3 610	± 10%	92,0	127,0
5120	120	3 770	± 10%	96,0	132,0
5127	127	4 000	± 10%	101,6	139,0
5220	220	15 400	± 10%	176,0	242,0
5230	230	16 100	± 10%	184,0	253,0
5240	240	16 800	± 10%	192,0	264,0

The data in bold type relate to the standard versions of the relays.


R3T, PIR3T

Relays for
railroad industry
- see
www.relpol.com.pl

NEW



Ordering codes

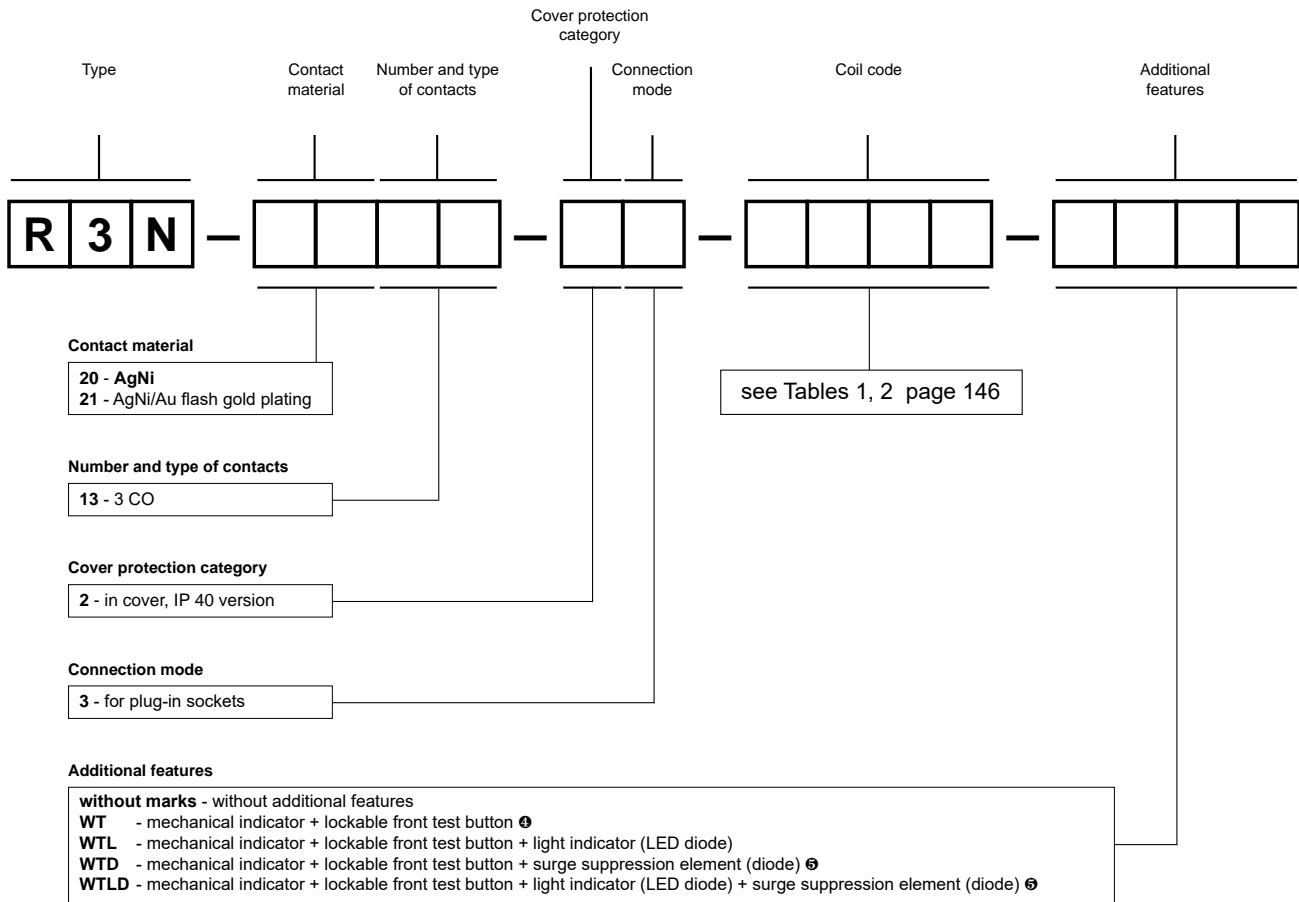

④ WT - standard features of relays

⑤ WTD, WTLD - available only in relays with DC coils

Test buttons (no latching) and plugs need to be ordered separately. They substitute buttons type T. To be exchanged by the Customer themselves. Information on test buttons (no latching) and plugs - page 380.

- Button R4P-0001-A - orange colour (AC coils)
- Button R4P-0001-D - green colour (DC coils)
- Plug R4W-0003-A - orange colour (AC coils)
- Plug R4W-0003-D - green colour (DC coils)

Note:

While the relay operates, the test button of the **T** type becomes heated. In order to push the test button manually, you should first turn the supply voltage off, and wait some time until the button becomes colder (or push the button immediately using a protective glove or an insulated tool). The button shall be pushed smoothly and quickly. The normally open contacts are closed with the button for the time during which the button is pushed. Releasing the button opens the normally open contacts. Normally open contacts may be closed with the blocking function of the button (it shall be turned by 90°). When the button is turned back, the normally open contacts are opened.







For relays with additional features **D** - surge suppression element (diode) (versions WTD and WTLD) - fixed supply polarity compulsory for the DC load of coils: +A1(13) / -A2(14). The polarity is indicated on the relay cover. For other versions of the relays with DC coils any polarity is possible.

Example of ordering code:


R3N-2013-23-1024-WT relay **R3N**, for plug-in sockets, three changeover contacts, contact material AgNi, coil voltage 24 V DC, with mechanical indicator and lockable front test button, in cover IP 40



7 A / 230 V AC

- Relays of general application • For plug-in sockets: on 35 mm rail mount acc. to EN 60715; on panel mounting; with terminals for soldering
- PCB version available • AC and DC coils, insulation class F: 155 °C
- WT (mechanical indicator + lockable front test button) - standard features of relays. Relays may be provided with the test buttons (no latching) and plugs - page 380
- **Have obtained LR Type Approval Certificate (Lloyd's Register)**
- Recognitions, certifications, directives: RoHS,      

Contact data

Number and type of contacts		4 CO
Contact material		AgNi , AgNi/Au flash gold plating, AgNi/Au hard gold plating
Rated / max. switching voltage	AC	250 V / 250 V
Min. switching voltage		10 V AgNi, 10 V AgNi/Au flash gold plating 5 V AgNi/Au hard gold plating
Rated load (capacity)	AC1 AC15 DC1 DC13	7 A / 230 V AC (VDE) 6 A / 250 V AC 1,5 A / 120 V 0,75 A / 240 V (C300) 6 A / 24 V DC (see Fig. 3) 0,22 A / 120 V 0,1 A / 250 V (R300)
Motor load	acc. to UL 508 AC3 acc. to IEC 60947-4-1	1/3 HP 240 V AC, 3,6 FLA, single-phase motor  0,125 kW 240 V AC, single-phase motor
Min. switching current		5 mA
Max. inrush current		12 A
Rated current		7 A
Max. breaking capacity	AC1	1 500 VA
Min. breaking capacity		0,3 W AgNi, 0,3 W AgNi/Au flash gold plating 0,1 W AgNi/Au hard gold plating
Contact resistance		≤ 100 mΩ
Max. operating frequency		
• at rated load	AC1	1 200 cycles/hour
• no load		18 000 cycles/hour

Coil data


Rated voltage	50/60 Hz AC DC	6, 12, 24 , 42, 48, 60, 80, 110, 115, 120, 127, 220, 230 , 240 V 5, 6, 12 , 24 , 48, 60, 80, 110, 125, 220 V
Must release voltage		AC: ≥ 0,2 U _n DC: ≥ 0,1 U _n
Operating range of supply voltage		see Tables 1, 2
Rated power consumption	AC DC	1,6 VA 0,9 W

Insulation according to EN 60664-1

Insulation rated voltage		250 V AC
Rated surge voltage		2 500 V 1,2 / 50 μs
Overvoltage category		II
Insulation pollution degree		2
Dielectric strength		
• between coil and contacts		2 500 V AC type of insulation: basic
• contact clearance		1 500 V AC type of clearance: micro-disconnection
• pole - pole		2 000 V AC type of insulation: basic
Contact - coil distance	• clearance • creepage	≥ 1,6 mm ≥ 3,2 mm

General data


Operating / release time (typical values)		AC: 10 ms / 8 ms DC: 13 ms / 3 ms
Electrical life	• resistive AC1 • cosφ	> 5 x 10 ⁴ 7 A, 230 V AC (VDE) > 10 ⁵ 6 A, 250 V AC see Fig. 2
Mechanical life (cycles)		> 2 x 10 ⁷
Dimensions (L x W x H)		27,4 x 21 x 35,5 mm
Weight		35 g
Ambient temperature	• storage (non-condensation and/or icing) • operating	-40...+85 °C AC: -40...+55 °C DC: -40...+70 °C
Cover protection category		IP 40 EN 60529
Environmental protection		RTI EN 61810-7
Shock resistance	(NO/NC)	10 g / 5 g
Vibration resistance		5 g 10...150 Hz

The data in bold type relate to the standard versions of the relays.  For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.

Design



Improvement of the functionality of the mechanical indicator (W): it is mounted on an insulation base of the unit of the movable contacts; the changes provide the appropriate position in the window in the upper side of the housing irrespectively of the number of operations performed by the relay.




Application of electronics made in the SMD technology: additional features L (LED diode) and D (diode) are located on the printed circuit board; the change of the position of the LED diode and optimization of the quality and intensity of its light provide certainty that the relay is in operation status when the LED is on.




Improvement of the efficiency of the electromagnet: an innovational technology of connecting elements has been introduced, which guarantees more reliable operation of the relay.

Strengthening of the insulation in the area of the contact plate: polyamide PA66 has been applied; it has very good mechanical and electrical parameters and best thermal properties.


Dimensions - plug-in version (WT), with lockable front test button type T

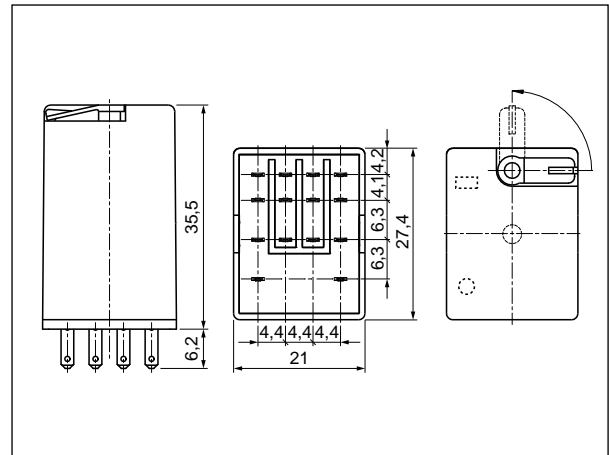


Dimensions - plug-in version, with test button (no latching) or with plug (no manual operation)

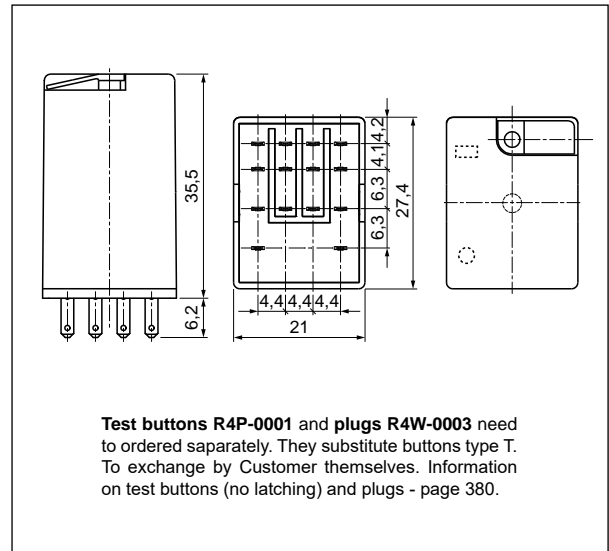


Dimensions - PCB version (WT), with lockable front test button type T

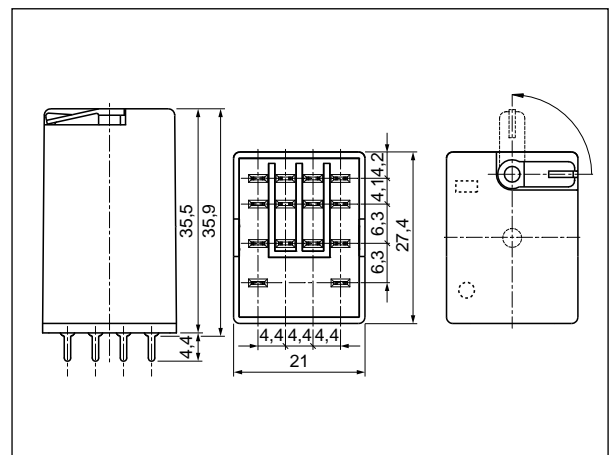


Electrical life at AC resistive load. Fig. 1
Switching frequency: 1 200 cycles/hour

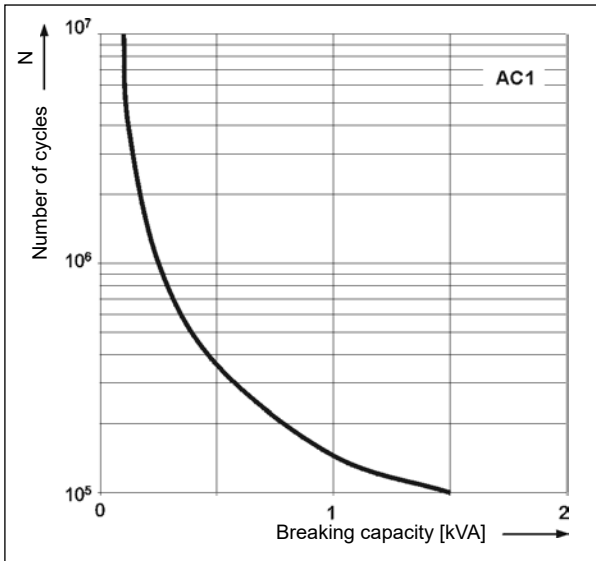


Electrical life reduction factor at AC inductive load Fig. 2

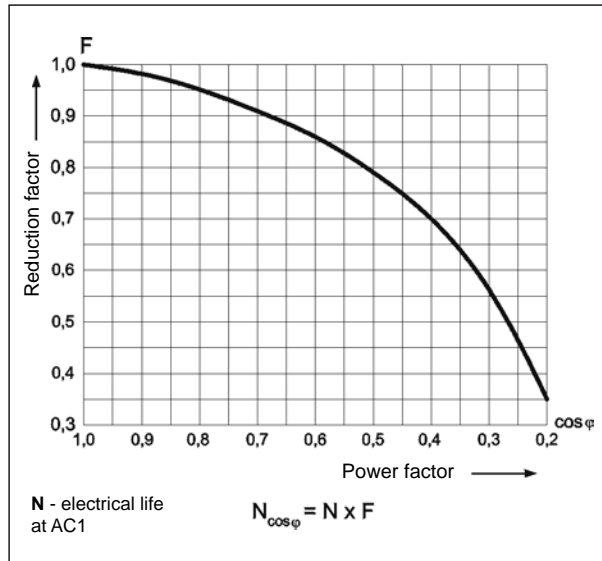

Max. DC breaking capacity Fig. 3
A - resistive load DC1
B - inductive load L/R = 40 ms

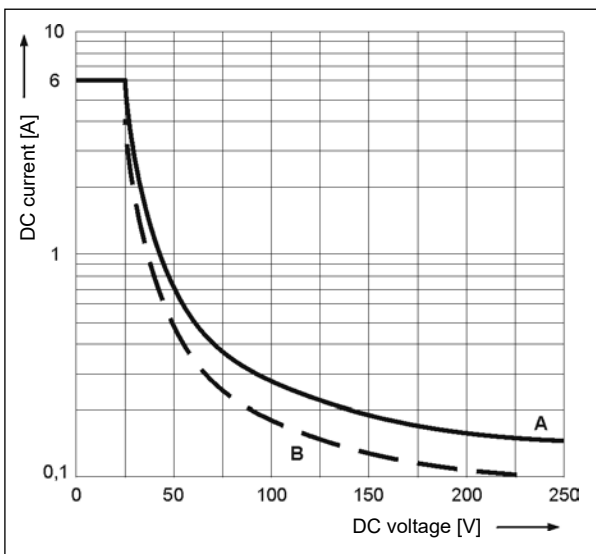

Connection diagram (pin side view)

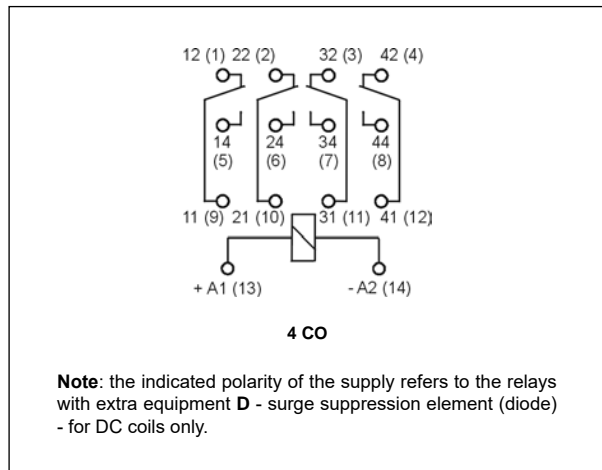

Contact material selection for different load types

- **AgNi** - for resistive or inductive loads,
- **AgNi/Au flash gold plating** - Au protects the contact surface during storage,
- **AgNi/Au hard gold plating** - for small resistive loads in control circuits.

Mounting, sockets and accessories for relays

Relays **R4N** are offered in versions: • for plug-in sockets • for PCB. **With WT features as standard (W - mechanical indicator + T - lockable front test button).** In these relays is **possibility self-exchange of button type T for test button R4P-0001 (no latching) or on plug R4W-0003 (no manual operation).** The buttons **R4P-0001** and the plugs **R4W-0003** need to ordered separately.

Sockets for R4N	Accessories			Additional features
	Retainer / retractor clips	Spring wire clips	Description plates	
Screw terminals sockets, 35 mm rail mount (EN 60715) or on panel mounting (two M3 screws)				
GZT4	GZT4-0040	G4 1052	GZT4-0035	modules ②, strips ④
GZM4	GZT4-0040	G4 1052	GZT4-0035	modules ②, strips ④
GZ4	–	G4 1052	–	–
GS4	–	GS4-0036	GS4-0035	–
Spring terminals sockets, 35 mm rail mount (EN 60715)				
GZMB4 ②	GZMB4-0040	G4 1052	TR	modules ②
Sockets for PCB				
SU4D	–	G4 1053	–	–
Solder terminals sockets				
SU4L	–	G4 1053	–	spring clamps ⑤
G4	–	G4 1053	–	–

② Sockets GZMB4: wire connection - see page 367. ③ Signalling / protecting modules type M... - see page 376. ④ Interconnection strips ZGGZ4 - see page 378. ⑤ Spring clamps G4 1040 for spring wire clips.

NEW TECHNOLOGY

The new R2N, R3N, R4N relays are modernized versions of the R2, R3, R4 relays. The modernization covered the design of the relays and the manufacturing process.



Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 70 °C)
1005	5	28	± 10%	4,0	5,5
1006	6	40	± 10%	4,8	6,6
1012	12	160	± 10%	9,6	13,2
1024	24	640	± 10%	19,2	26,4
1048	48	2 600	± 10%	38,4	52,8
1060	60	4 000	± 10%	48,0	66,0
1080	80	7 100	± 10%	64,0	88,0
1110	110	13 600	± 10%	88,0	121,0
1125	125	16 000	± 10%	100,0	137,5
1220	220	54 000	± 10%	176,0	242,0

The data in bold type relate to the standard versions of the relays.

Coil data - AC 50/60 Hz voltage version

Table 2

Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC	
				min. (at 20 °C)	max. (at 55 °C)
5006	6	9,8	± 10%	4,8	6,6
5012	12	39,5	± 10%	9,6	13,2
5024	24	158	± 10%	19,2	26,4
5042	42	470	± 10%	33,6	46,2
5048	48	640	± 10%	38,4	52,8
5060	60	930	± 10%	48,0	66,0
5080	80	1 720	± 10%	64,0	88,0
5110	110	3 450	± 10%	88,0	121,0
5115	115	3 610	± 10%	92,0	127,0
5120	120	3 770	± 10%	96,0	132,0
5127	127	4 000	± 10%	101,6	139,0
5220	220	15 400	± 10%	176,0	242,0
5230	230	16 100	± 10%	184,0	253,0
5240	240	16 800	± 10%	192,0	264,0

The data in bold type relate to the standard versions of the relays.


R4T, PIR4T

Relays for
railroad industry
- see
www.relpol.com.pl

NEW



Ordering codes

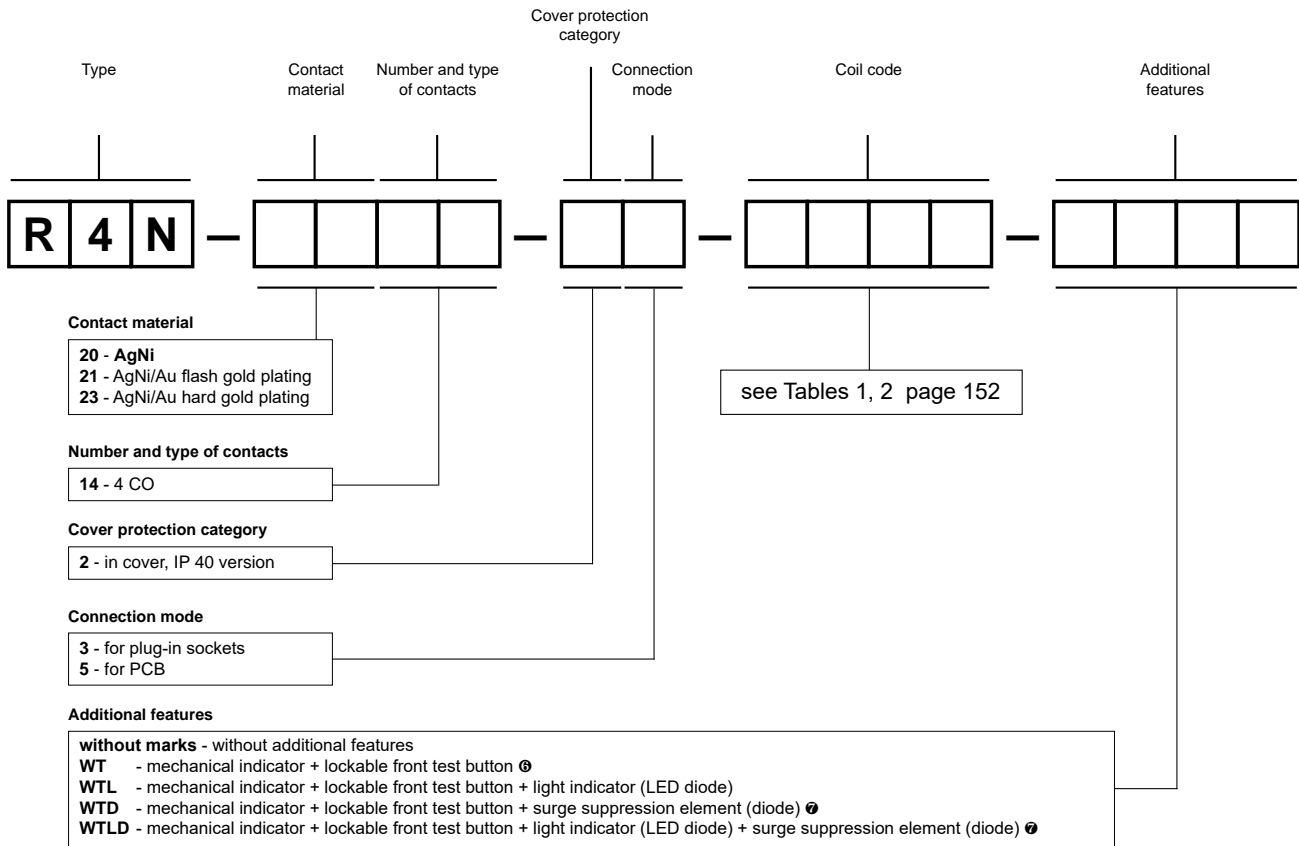

⑥ WT - standard features of relays

⑦ WTD, WTLD - available only in relays with DC coils

Test buttons (no latching) and plugs need to ordered separately. They substitute buttons type T. To exchange by Customer themselves. Information on test buttons (no latching) and plugs - page 380.

- Button R4P-0001-A - orange colour (AC coils)
- Button R4P-0001-D - green colour (DC coils)
- Plug R4W-0003-A - orange colour (AC coils)
- Plug R4W-0003-D - green colour (DC coils)

Note:

While the relay operates, the test button of the **T** type becomes heated. In order to push the test button manually, you should first turn the supply voltage off, and wait some time until the button becomes colder (or push the button immediately using a protective glove or an insulated tool). The button shall be pushed smoothly and quickly. The normally open contacts are closed with the button for the time during which the button is pushed. Releasing the button opens the normally open contacts. Normally open contacts may be closed with the blocking function of the button (it shall be turned by 90°). When the button is turned back, the normally open contacts are opened.




For relays with additional features **D** - surge suppression element (diode) (versions WTD and WTLD) - fixed supply polarity compulsory for the DC load of coils: +A1(13) / -A2(14). The polarity is indicated on the relay cover. For other versions of the relays with DC coils any polarity is possible.

Examples of ordering codes:

R4N-2014-23-5230-WTL relay **R4N**, for plug-in sockets, four changeover contacts, contact material AgNi, coil voltage 230 V AC 50/60 Hz, with mechanical indicator and lockable front test button and light indicator (LED diode), in cover IP 40

R4N-2014-25-1024-WT relay **R4N**, for PCB, four changeover contacts, contact material AgNi, coil voltage 24 V DC, with mechanical indicator and lockable front test button, in cover IP 40




- Relays of general application
- For plug-in sockets: on 35 mm rail mount acc. to EN 60715; on panel mounting
- For direct mounting on panel - cover with mounting flange
- Flat insert connectors - faston 187 (4,8 x 0,5 mm)
- AC and DC coils, insulation class F: 155 °C
- Recognitions, certifications, directives: RoHS,   

Contact data


Number and type of contacts		2 CO
Contact material		AgNi, AgCdO ①
Rated / max. switching voltage	AC	250 V / 440 V
Min. switching voltage		5 V AgNi, 10 V AgCdO
Rated load	AC1	12 A / 250 V AC
	DC1	12 A / 30 V DC
Min. switching current		5 mA AgNi, 10 mA AgCdO
Max. inrush current		20 A
Rated current		12 A
Max. breaking capacity	AC1	3 000 VA
Min. breaking capacity		0,3 W AgNi, 1 W AgCdO
Contact resistance		≤ 100 mΩ
Max. operating frequency		
• at rated load	AC1	1 200 cycles/hour
• no load		18 000 cycles/hour
Coil data		
Rated voltage	50/60 Hz AC	6, 12, 24, 42, 48, 60, 80, 110, 120, 127, 220, 230, 240 V
	DC	5, 6, 12, 24, 48, 60, 80, 110, 125, 220 V
Must release voltage		AC: ≥ 0,2 U _n DC: ≥ 0,1 U _n
Operating range of supply voltage		see Tables 1, 2
Rated power consumption	AC	1,6 VA
	DC	0,9 W
Insulation according to EN 60664-1		
Insulation rated voltage		250 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		3
Dielectric strength		
• between coil and contacts		2 500 V AC type of insulation: basic
• contact clearance		1 000 V AC type of clearance: micro-disconnection
• pole - pole		2 500 V AC type of insulation: basic
Contact - coil distance		
• clearance		≥ 2,6 mm
• creepage		≥ 4 mm
General data		
Operating / release time (typical values)		15 ms / 10 ms
Electrical life		
• resistive AC1		> 10 ⁵ 12 A, 250 V AC
• cosφ		see Fig. 2
Mechanical life (cycles)		> 10 ⁷
Dimensions (L x W x H)		27,5 x 21,1 x 34,5 mm ②
Weight		35 g
Ambient temperature	• storage	-40...+70 °C
(non-condensation and/or icing)	• operating	-40...+55 °C
Cover protection category		IP 40 EN 60529
Shock resistance		10 g
Vibration resistance		5 g 15...150 Hz

The data in bold type relate to the standard versions of the relays. ① AgCdO contact material in electrical contacts is only for use in electrical and electronic equipment (EEE) in compliance with directive RoHS2 2011/65/EU in restricted categories of EEE covered by this directive. Relpol S.A. is not responsible for usage relays with AgCdO contact material in categories of EEE where it is prohibited by the directive RoHS2 2011/65/EU. ② For plug-in sockets version: standard

Dimensions - plug-in version (standard)

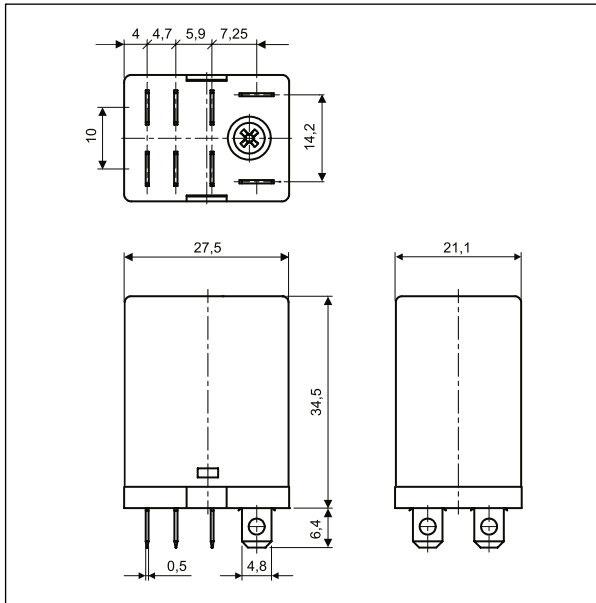


Dimensions - version with mounting flange in the upper wall of the cover

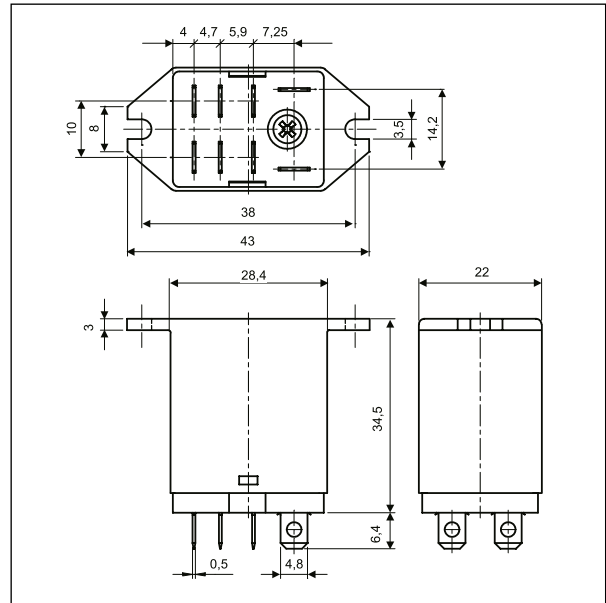


**Electrical life at AC resistive load.
Switching frequency: 1 200 cycles/hour**

Fig. 1

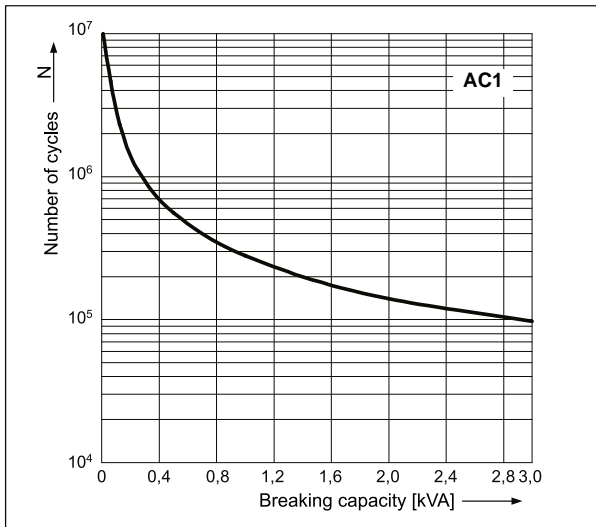


**Electrical life reduction factor
at AC inductive load**

Fig. 2

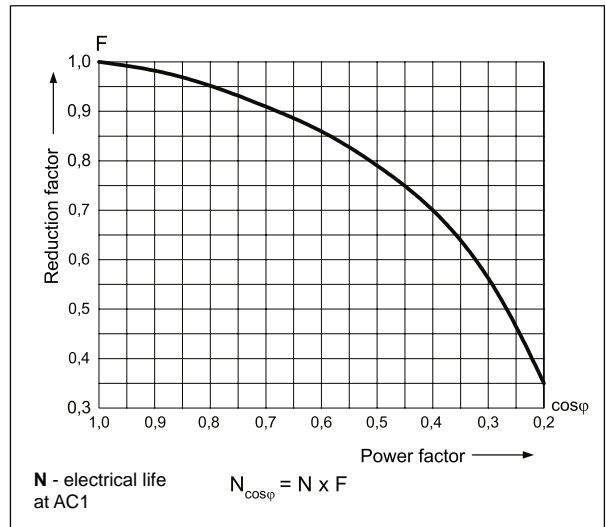


$N_{\cos\varphi} = N \times F$


Connection diagram (pin side view)

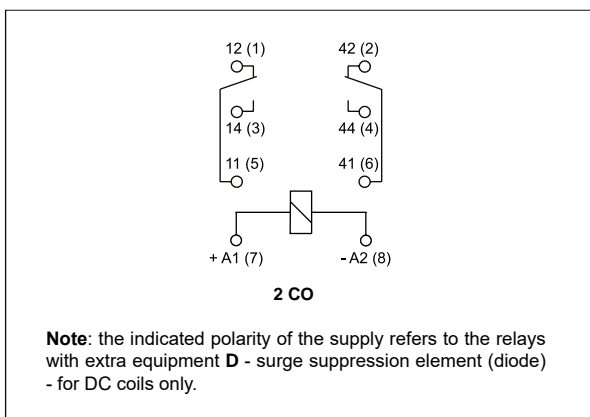

Mounting, sockets and accessories for relays

Sockets for RY2	Accessories
	Spring wire clips
Screw terminals sockets , 35 mm rail mount (EN 60715) or on panel mounting (two M3 screws)	
GZY2G	GZY2G-0041 

Relays **RY2** are offered in versions: • standard, for plug-in sockets • with mounting flange in the upper wall of the cover, on panel mounting with two M3 screws, flat insert connectors - faston 187 (4,8 x 0,5 mm).

 For each GZY2G socket a set of two GZY2G-0041 clips shall be ordered.

Coil data - DC voltage version

Table 1


Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 55 °C)
1005	5	28	± 10%	4,0	5,5
1006	6	40	± 10%	4,8	6,6
1012	12	160	± 10%	9,6	13,2
1024	24	640	± 10%	19,2	26,4
1048	48	2 600	± 10%	38,4	52,8
1060	60	4 000	± 10%	48,0	66,0
1080	80	7 100	± 10%	64,0	88,0
1110	110	13 600	± 10%	88,0	121,0
1125	125	16 000	± 10%	100,0	137,5
1220	220	54 000	± 10%	176,0	242,0

Coil data - AC 50/60 Hz voltage version

Table 2

Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC	
				min. (at 20 °C)	max. (at 55 °C)
5006	6	9,8	± 10%	4,8	6,6
5012	12	39,5	± 10%	9,6	13,2
5024	24	158	± 10%	19,2	26,4
5042	42	470	± 10%	33,6	46,2
5048	48	640	± 10%	38,4	52,8
5060	60	930	± 10%	48,0	66,0
5080	80	1 720	± 10%	64,0	88,0
5110	110	3 450	± 10%	88,0	121,0
5120	120	3 770	± 10%	96,0	132,0
5127	127	4 000	± 10%	101,6	139,7
5220	220	15 400	± 10%	176,0	242,0
5230	230	16 100	± 10%	184,0	253,0
5240	240	16 800	± 10%	192,0	264,0

Ordering codes

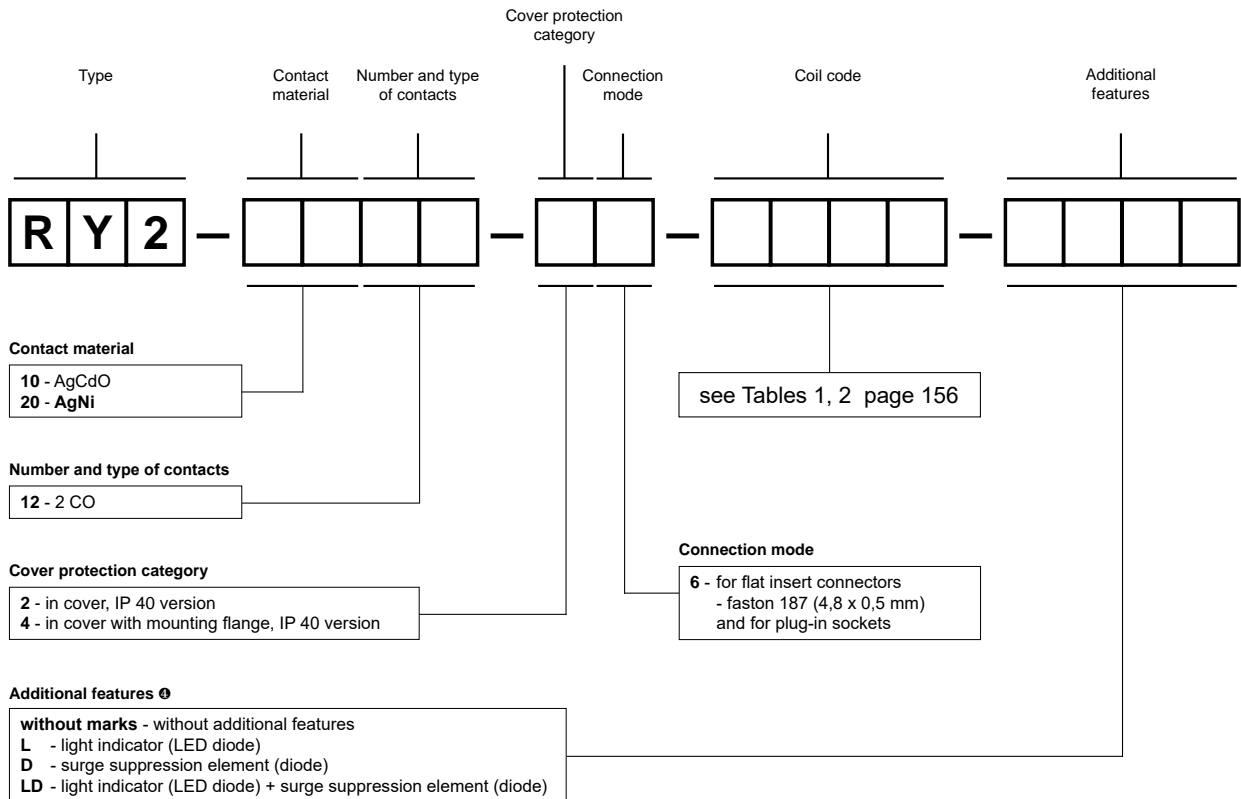

⚡ D, LD - only for DC coils

Note:

For relays with additional features **D** - surge suppression element (diode) (versions D and LD) - fixed supply polarity compulsory for the DC load of coils: +A1(7) / -A2(8). The polarity is indicated on the relay cover. For other versions of the relays with DC coils any polarity is possible.

Examples of ordering codes:

RY2-2012-26-1024 relay **RY2**, for plug-in sockets, two changeover contacts, contact material AgNi, coil voltage 24 V DC, in cover IP 40




RY2-2012-26-5230-L relay **RY2**, for plug-in sockets, two changeover contacts, contact material AgNi, coil voltage 230 V AC 50/60 Hz, with light indicator (LED diode), in cover IP 40

GZY2G

Screw terminals
plug-in sockets
for RY2
- see page 369





- Relays of general application
- For plug-in sockets: on 35 mm rail mount acc. to EN 60715; on panel mounting
- For PCB and for soldering connections
- AC and DC coils, insulation class F: 155 °C
- Recognitions, certifications, directives: RoHS,   

Contact data

Number and type of contacts		2 CO
Contact material		AgNi ① , AgNi/Au flash gold plating, AgSnO ₂
Rated / max. switching voltage	AC	250 V / 250 V
Min. switching voltage		5 V AgNi, 5 V AgNi/Au flash gold plating, 10 V AgSnO ₂
Rated load	AC1	5 A / 250 V AC
	DC1	5 A / 24 V DC
Min. switching current		5 mA AgNi, 5 mA AgNi/Au flash gold plating, 10 mA AgSnO ₂
Rated current		5 A
Max. breaking capacity	AC1	1 250 VA
Min. breaking capacity		0,3 W AgNi, 0,3 W AgNi/Au flash gold plating, 1 W AgSnO ₂
Contact resistance		≤ 100 mΩ
Max. operating frequency		
• at rated load	AC1	1 200 cycles/hour
• no load		36 000 cycles/hour

Coil data

Rated voltage	50/60 Hz AC	6, 12, 24 , 50, 100, 110, 115, 120, 220, 230 , 240 V
	DC	6, 12 , 24 , 48, 60, 80, 110 V
Must release voltage		≥ 0,05 U _n
Operating range of supply voltage		see Tables 1, 2
Rated power consumption	AC	1,2 VA
	DC	0,9 W

Insulation according to EN 60664-1

Insulation rated voltage		250 V AC
Rated surge voltage		2 500 V 1,2 / 50 μs
Overvoltage category		II
Insulation pollution degree		3
Dielectric strength		
• between coil and contacts		2 000 V AC type of insulation: basic
• contact clearance		1 000 V AC type of clearance: micro-disconnection
• pole - pole		2 000 V AC type of insulation: basic
Contact - coil distance		
• clearance		≥ 3 mm
• creepage		≥ 4 mm


General data

Operating / release time (typical values)		AC: 8 ms / 7 ms	DC: 10 ms / 3 ms
Electrical life			
• resistive AC1		> 2 x 10 ⁵	5 A, 250 V AC
• cosφ		see Fig. 2	
Mechanical life (cycles)		> 10 ⁷	
Dimensions (L x W x H)		27,5 x 14 x 32,9 mm	
Weight		22 g	
Ambient temperature	• storage	-40...+70 °C	
(non-condensation and/or icing)	• operating	-40...+55 °C	
Cover protection category		IP 40	EN 60529
Shock resistance		10 g	
Vibration resistance		5 g 10...150 Hz	
Solder bath temperature		max. 270 °C	
Soldering time		max. 5 s	


The data in bold type relate to the standard versions of the relays.

① Relays with AgNi contacts can be used up to 5 A at resistive and inductive load.

Dimensions - plug-in version

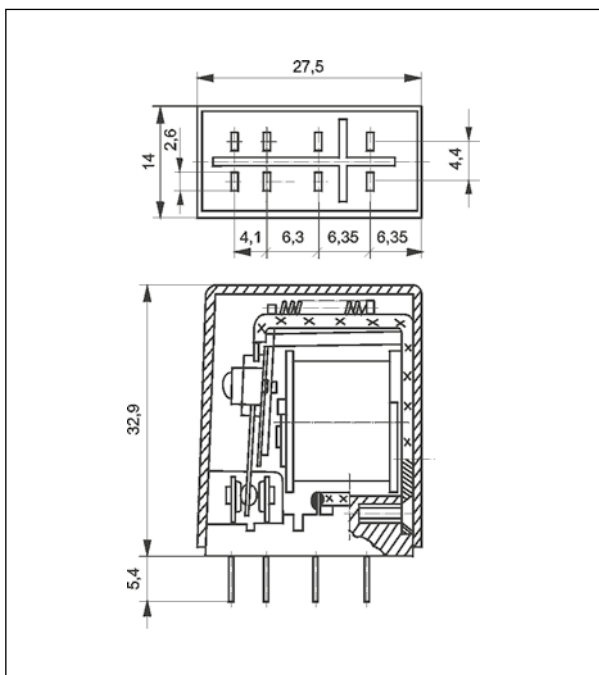

Dimensions - PCB version

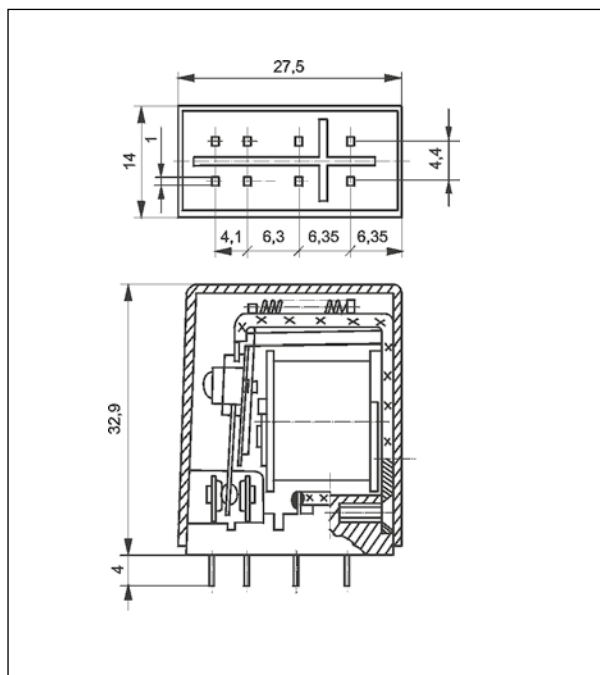

Mounting, sockets and accessories for relays

Relays **R2M** are designed for: • plug-in sockets • direct PCB mounting.

Sockets for R2M	Accessories	Additional features
	Spring wire clips	
Screw terminals sockets, 35 mm rail mount (EN 60715) or on panel mounting (two M3 screws)		
GZ2	GZ2 1060 ②	—
Sockets for PCB		
S2M	G4 1050	—
Solder terminals sockets		
G2M	G4 1050	spring clamps ③


② Set GZ2 1060: spring wire clip and two spring clamps. ③ Spring clamps G2M 1020 for spring wire clips.

GZ2


Screw terminals
plug-in sockets
for R2M
- see page 369




Connection diagram (pin side view)

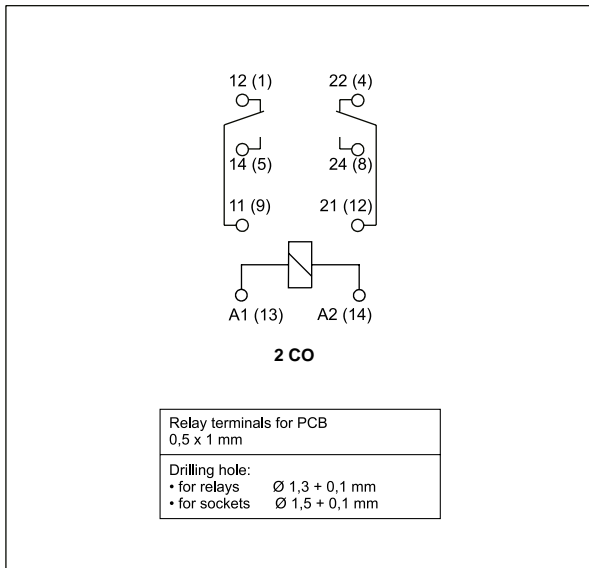


Electrical life at AC resistive load. Switching frequency: 1 200 cycles/hour Fig. 1

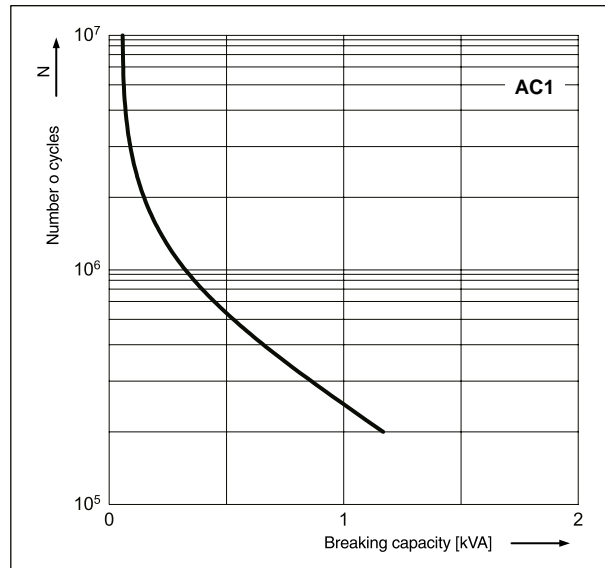

Electrical life reduction factor at AC inductive load Fig. 2

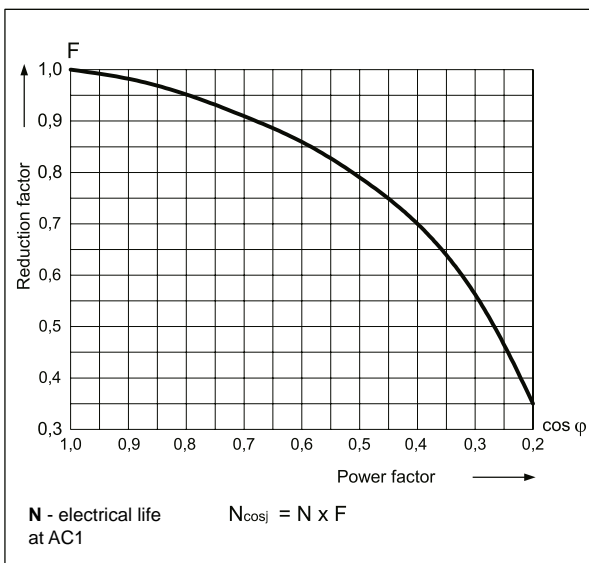

Max. DC resistive load breaking capacity Fig. 3

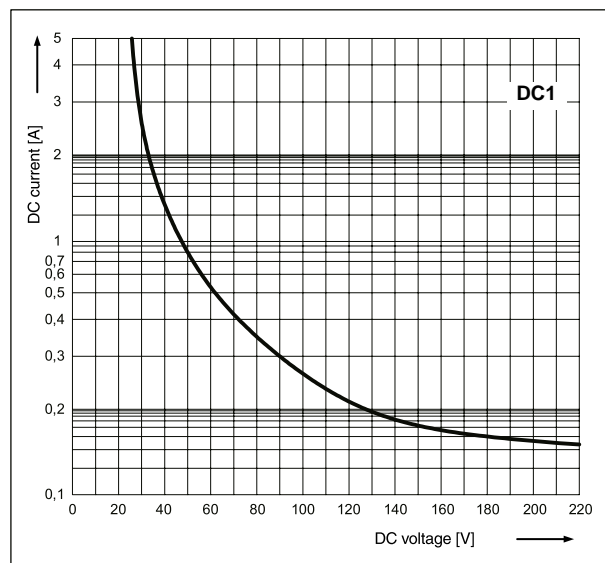

Contact material selection for different load types

- **AgNi** - for resistive or inductive loads,
- **AgNi/Au flash gold plating** - Au protects the contact surface during storage,
- **AgSnO₂** - for capacitive loads or incandescent lamp loads.

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 55 °C)
1006	6	47	± 10%	4,8	6,6
1012	12	188	± 10%	9,6	13,2
1024	24	750	± 10%	19,2	26,4
1048	48	2 660	± 10%	38,4	52,8
1060	60	4 000	± 10%	48,0	66,0
1080	80	7 100	± 10%	64,0	88,0
1110	110	13 480	± 10%	88,0	121,0

The data in bold type relate to the standard versions of the relays.


Coil data - AC 50/60 Hz voltage version

Table 2

Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC	
				min. (at 20 °C)	max. (at 55 °C)
5006	6	16	± 10%	4,8	6,6
5012	12	68	± 10%	9,6	13,2
5024	24	270	± 10%	19,2	26,4
5050	50	1 150	± 10%	40,0	55,0
5100	100	5 590	± 10%	80,0	110,0
5110	110	5 670	± 10%	88,0	121,0
5115	115	5 990	± 10%	92,0	126,0
5120	120	6 390	± 10%	96,0	132,0
5220	220	21 470	± 10%	176,0	242,0
5230	230	21 470	± 10%	184,0	253,0
5240	240	25 390	± 10%	192,0	264,0

The data in bold type relate to the standard versions of the relays.

Ordering codes

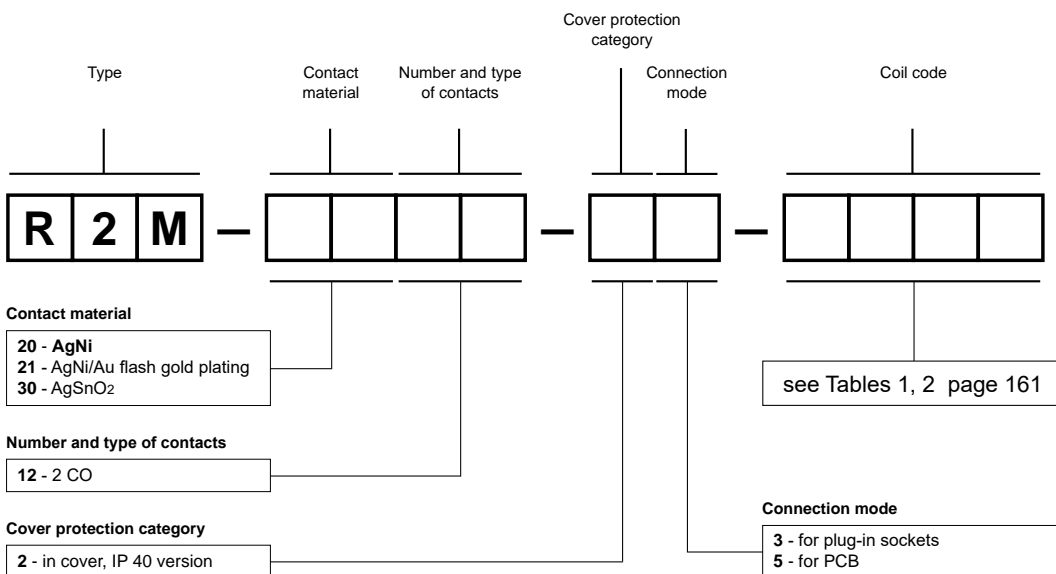

Examples of ordering codes:

- R2M-2012-23-5230** relay R2M, for plug-in sockets, two changeover contacts, contact material AgNi, coil voltage 230 V AC 50/60 Hz, in cover IP 40
- R2M-2012-25-1024** relay R2M, for PCB, two changeover contacts, contact material AgNi, coil voltage 24 V DC, in cover IP 40

R15 - 2 CO, 3 CO

industrial relays of small dimensions








162



R15 - 2 CO



R15 - 3 CO


- Relays of general application • For plug-in sockets: on 35 mm rail mount acc. to EN 60715; on panel mounting; with terminals for soldering
- Coils AC and DC, insulation class F: 155 °C • WT (mechanical indicator + lockable front test button) - standard features of relays in cover, for plug-in sockets. Relays may be provided with the test buttons (no latching) and plugs - page 380 • **Have obtained LR Type Approval Certificate (Lloyd's Register)** • Recognitions, certifications, directives: RoHS, AUCOTEAM GmbH Berlin - railroad standard,       

Contact data


Number and type of contacts	2 CO, 3 CO	
Contact material	AgNi , AgNi/Au flash gold plating, AgNi/Au hard gold plating	
Rated / max. switching voltage	AC	250 V / 440 V
Min. switching voltage	10 V AgNi, 10 V AgNi/Au flash gold plating 5 V AgNi/Au hard gold plating	
Rated load (capacity)	AC1	10 A / 250 V AC
	AC15	10 A / 277 V AC UL 508
	DC1	3 A / 120 V
	DC13	1,5 A / 240 V (B300)
Motor load	acc. to UL 508	10 A / 24 V DC (see Fig. 3)
	AC3 acc. to IEC 60947-4-1	0,22 A / 120 V 0,1 A / 250 V (R300)
Min. switching current	1/2 HP 240 V AC, 4,9 FLA, single-phase motor ①	
Max. inrush current	0,37 kW 240 V AC, single-phase motor	
Rated current	5 mA	
Max. breaking capacity	AC1	20 A
Min. breaking capacity	10 A	
Contact resistance	2 500 VA	
Max. operating frequency	• at rated load AC1 • no load	0,3 W AgNi, 0,3 W AgNi/Au flash gold plating 0,05 W AgNi/Au hard gold plating
Coil data	≤ 100 mΩ	
Rated voltage	50/60 Hz AC	1 200 cycles/hour
Must release voltage	DC	12 000 cycles/hour
Operating range of supply voltage	AC: ≥ 0,15 U _n DC: ≥ 0,1 U _n	
Rated power consumption	AC	see Tables 1, 2
	DC	2,8 VA 50 Hz 2,5 VA 60 Hz
		1,5 W
Insulation according to EN 60664-1		
Insulation rated voltage	250 V AC	
Rated surge voltage	2 500 V 1,2 / 50 μs	
Overvoltage category	III	
Insulation pollution degree	3	
Dielectric strength	• between coil and contacts	2 500 V AC type of insulation: basic
	• contact clearance	1 500 V AC type of clearance: micro-disconnection
	• pole - pole	2 000 V AC type of insulation: basic
Contact - coil distance	• clearance	≥ 3 mm
	• creepage	≥ 4,2 mm
General data		
Operating / release time (typical values)	AC: 12 ms / 10 ms	DC: 18 ms / 7 ms
Electrical life	• resistive AC1	≥ 2 x 10 ⁵ 10 A, 250 V AC
	• cosφ	see Fig. 2
Mechanical life (cycles)	≥ 2 x 10 ⁷	
Dimensions (L x W x H)	35 x 35 x 54,4 mm	
Weight	83 g	
Ambient temperature	• storage	-40...+85 °C
	• operating	AC: -40...+55 °C DC: -40...+70 °C
Cover protection category	IP 20 (with socket PZ8, PZ11)	EN 60529
Environmental protection	RTI	EN 61810-7
Shock resistance	10 g	
Vibration resistance	5 g 10...150 Hz	
Solder bath temperature	max. 270 °C	
Soldering time	max. 5 s	

The data in bold type relate to the standard versions of the relays. ① For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.

Dimensions - plug-in version (WT), with lockable front test button type T

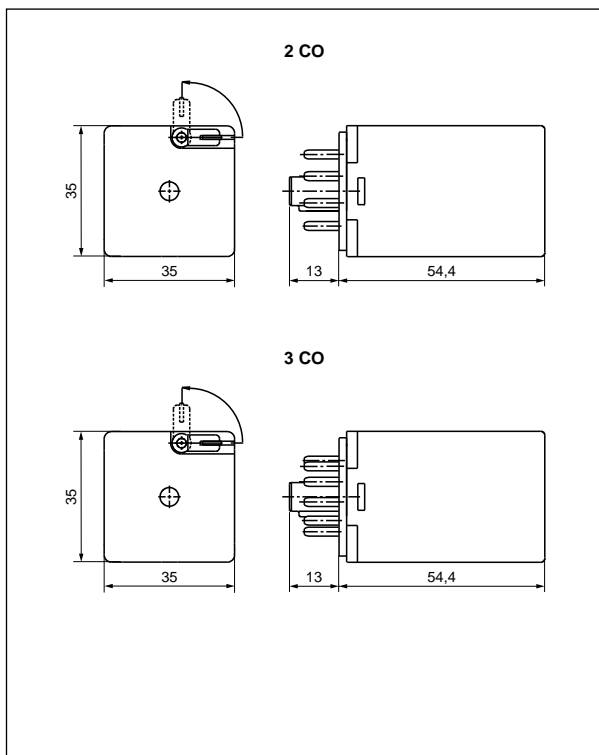

Dimensions - plug-in version, with test button (no latching) or with plug (no manual operation)

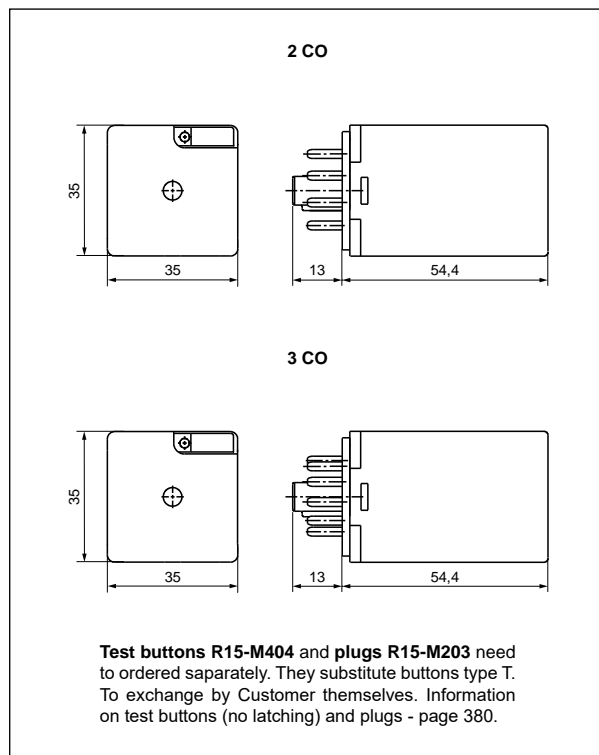


Mounting, sockets and accessories for relays

Relays **R15 - 2 CO, 3 CO** are designed for mounting in plug-in sockets. **With WT features as standard (W - mechanical indicator + T - lockable front test button)**. In these relays is **possibility self-exchange of button type T for test button R15-M404 (no latching) or on plug R15-M203 (no manual operation)**. The buttons **R15-M404** and the plugs **R15-M203** need to be ordered separately.


Sockets for R15 - 2 CO	Sockets for R15 - 3 CO	Accessories		Additional features
		Spring wire clips	Description plates	
Screw terminals sockets, 35 mm rail mount (EN 60715) or on panel mounting (two M3 screws)				
PZ8	PZ11	PZ11 0031	-	-
GZP8	GZP11	GZP-0054	GZP-0035	time modules ②
Screw terminals sockets, 35 mm rail mount (EN 60715)				
GZU8	GZU11	GZU 1052	-	-
Screw terminals sockets, on panel mounting (two M3 screws)				
GZ8	GZ11	GZ 1050	-	-
Solder terminals sockets				
GOP8	GOP11	R159 1051 ③	-	-

② Time modules COM3 - see page 324 ③ Set R159 1051: spring wire clip and two spring clamps.


Electrical life at AC resistive load.
Switching frequency: 1 200 cycles/hour Fig. 1

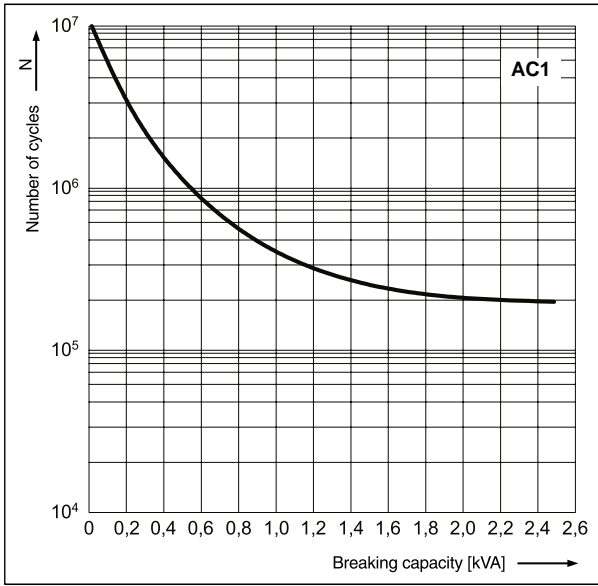


Electrical life reduction factor at AC inductive load Fig. 2

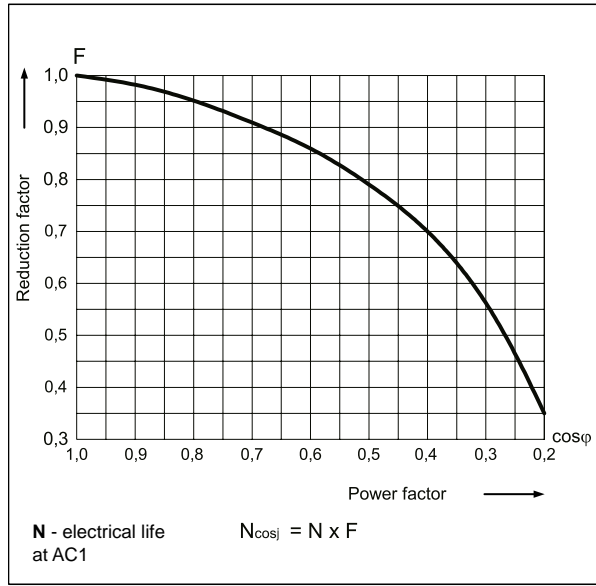

Max. DC breaking capacity
A - resistive load DC1
B - inductive load L/R = 40 ms Fig. 3

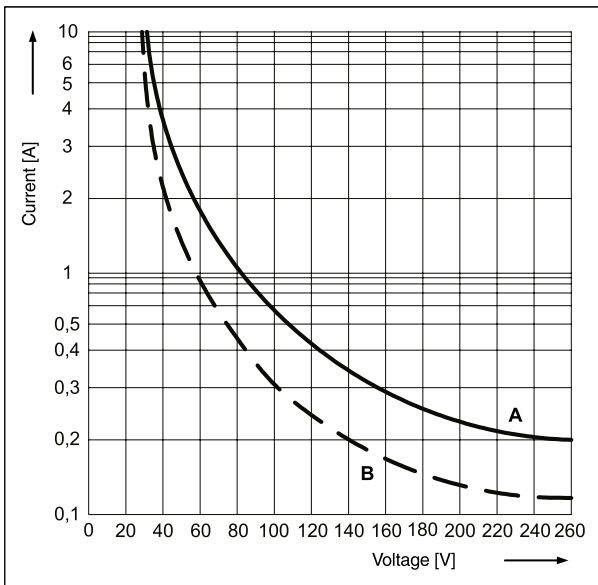

Connection diagrams (pin side view)

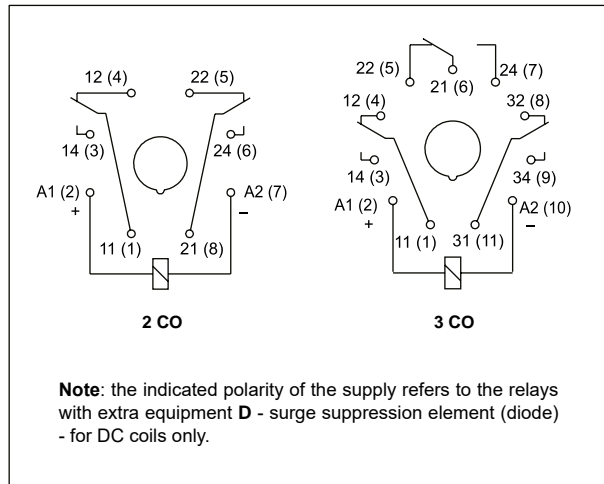

R15T, PIR15.T

Relays for
railroad industry
- see
www.repol.com.pl



R15 - 2 CO, 3 CO

industrial relays of small dimensions

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 70 °C)
1006	6	28	$\pm 10\%$	4,8	6,6
1012	12	110	$\pm 10\%$	9,6	13,2
1024	24	430	$\pm 10\%$	19,2	26,4
1048	48	1 750	$\pm 10\%$	38,4	52,8
1060	60	2 700	$\pm 10\%$	48,0	66,0
1110	110	9 200	$\pm 10\%$	88,0	121,0
1120	120	11 000	$\pm 10\%$	96,0	132,0
1220	220	37 000	$\pm 10\%$	176,0	242,0

The data in bold type relate to the standard versions of the relays.

Coil data - AC 50/60 Hz voltage version


Table 2

Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC	
				min. (at 20 °C)	max. (at 55 °C)
5006	6	4,3	$\pm 15\%$	4,8	6,6
5012	12	18,5	$\pm 15\%$	9,6	13,2
5024	24	75	$\pm 15\%$	19,2	26,4
5048	48	305	$\pm 15\%$	38,4	52,8
5060	60	475	$\pm 15\%$	48,0	66,0
5115	115	1 840	$\pm 15\%$	92,0	126,5
5120	120	1 910	$\pm 15\%$	96,0	132,0
5220	220	6 980	$\pm 15\%$	176,0	242,0
5230	230	7 080	$\pm 15\%$	184,0	253,0
5240	240	7 760	$\pm 15\%$	192,0	264,0

The data in bold type relate to the standard versions of the relays.



Ordering codes

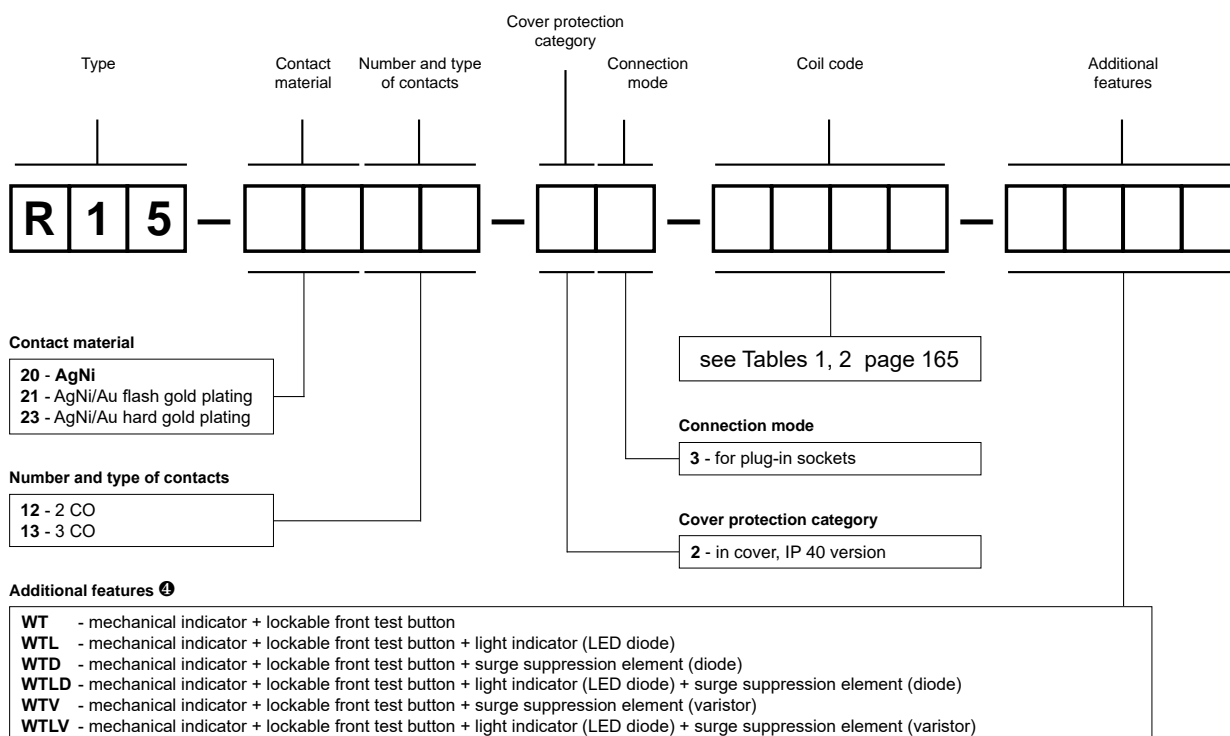

ⓘ WT - standard features of relays for plug-in sockets. WTD, WTLD - only for DC coils, WTV, WTLV - only for AC coils

Test buttons (no latching) and plugs need to be ordered separately. They substitute buttons type T. To be exchanged by the customer themselves.

Information on test buttons (no latching) and plugs - page 380.

- Button R15-M404-A - orange colour (AC coils)
- Button R15-M404-D - green colour (DC coils)
- Plug R15-M203-A - orange colour (AC coils)
- Plug R15-M203-D - green colour (DC coils)

Note:

While the relay operates, the test button of the **T** type becomes heated. In order to push the test button manually, you should first turn the supply voltage off, and wait some time until the button becomes colder (or push the button immediately using a protective glove or an insulated tool). The button shall be pushed smoothly and quickly. The normally open contacts are closed with the button for the time during which the button is pushed. Releasing the button opens the normally open contacts. Normally open contacts may be closed with the blocking function of the button (it shall be turned by 90°). When the button is turned back, the normally open contacts are opened.


For relays with additional features **D** - surge suppression element (diode) (versions WTD and WTLD) - fixed supply polarity compulsory for the DC load of coils: +A1(2) / -A2(7) for R15 - 2 CO and +A1(2) / -A2(10) for R15 - 3 CO. The polarity is indicated on the relay cover. For other versions of the relays with DC coils any polarity is possible.






Examples of ordering codes:

- R15-2012-23-1024-WT** relay **R15**, for plug-in sockets, two changeover contacts, contact material AgNi, coil voltage 24 V DC, with mechanical indicator and lockable front test button, in cover IP 40
- R15-2013-23-5230-WTL** relay **R15**, for plug-in sockets, three changeover contacts, contact material AgNi, coil voltage 230 V AC 50/60 Hz, with mechanical indicator and lockable front test button and light indicator (LED diode), in cover IP 40

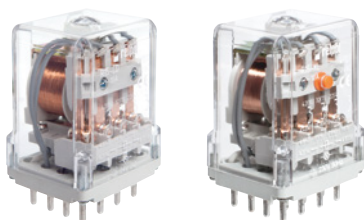R15 - 4 CO

industrial relays of small dimensions



- Relays of general application
- For plug-in sockets: on 35 mm rail mount acc. to EN 60715; on panel mounting; with terminals for soldering
- Coils AC and DC, insulation class F: 155 °C
- Recognitions, certifications, directives: RoHS,     

Contact data

Number and type of contacts	4 CO	
Contact material	AgNi , AgNi/Au flash gold plating, AgNi/Au hard gold plating, AgCdO ^①	
Rated / max. switching voltage	AC	250 V / 440 V
Min. switching voltage	10 V AgNi, 10 V AgNi/Au flash gold plating 5 V AgNi/Au hard gold plating, 10 V AgCdO	
Rated load (capacity)	AC1	10 A / 250 V AC
	AC15	10 A / 277 V AC UL 508
	DC1	3 A / 120 V
	DC13	1,5 A / 240 V (B300)
Motor load	acc. to UL 508	10 A / 24 V DC (see Fig. 3)
	AC3 acc. to IEC 60947-4-1	0,22 A / 120 V
Min. switching current		0,1 A / 250 V (R300)
		1/2 HP 240 V AC, 4,9 FLA, single-phase motor ^② 0,37 kW 240 V AC, single-phase motor
Max. inrush current	5 mA AgNi, 5 mA AgNi/Au flash gold plating 5 mA AgNi/Au hard gold plating, 10 mA AgCdO	
Rated current	20 A	
Max. breaking capacity	AC1	10 A
Min. breaking capacity	2 500 VA	
Contact resistance	0,3 W AgNi, 0,3 W AgNi/Au flash gold plating 0,05 W AgNi/Au hard gold plating, 0,5 W AgCdO	
Max. operating frequency	• at rated load AC1 • no load	≤ 100 mΩ 1 200 cycles/hour 12 000 cycles/hour

Coil data

Rated voltage	50 Hz AC	6, 12, 24, 48, 60, 115, 120, 220, 230, 240, 400 V	basic version
	60 Hz AC	6, 12, 24, 48, 60, 110, 120, 220, 230, 240 V	special version
	DC	6, 12 , 24 , 48, 60, 110, 120, 220 V	
Must release voltage		AC: ≥ 0,15 U _n DC: ≥ 0,1 U _n	
Operating range of supply voltage	see Tables 1, 2, 3		
Rated power consumption	AC	2,8 VA	
	DC	1,5 W	

Insulation according to EN 60664-1


Insulation rated voltage	250 V AC		
Rated surge voltage	2 500 V 1,2 / 50 μs		
Overvoltage category	III		
Insulation pollution degree	3		
Dielectric strength	• between coil and contacts	2 500 V AC	type of insulation: basic
	• contact clearance	1 500 V AC	type of clearance: micro-disconnection
	• pole - pole	2 000 V AC	type of insulation: basic
Contact - coil distance	• clearance	≥ 3 mm	
	• creepage	≥ 3,2 mm	

General data


Operating / release time (typical values)	AC: 12 ms / 10 ms	DC: 18 ms / 7 ms
Electrical life	• resistive AC1	≥ 10 ⁵ 10 A, 250 V AC
	• cosφ	see Fig. 2
Mechanical life (cycles)	≥ 2 x 10 ⁷	
Dimensions (L x W x H) / Weight	35 x 42,5 x 54,5 mm / 95 g	
Ambient temperature	• storage	-40...+85 °C
	• operating	AC: -40...+55 °C DC: -40...+70 °C
Cover protection category	IP 20 (with socket GZ14U, GZ14)	EN 60529
Environmental protection	RTI	EN 61810-7
Shock / vibration resistance	10 g / 5 g 10...150 Hz	
Solder bath temperature / Soldering time	max. 270 °C / max. 5 s	

The data in bold type relate to the standard versions of the relays. ^① AgCdO contact material in electrical contacts is only for use in electrical and electronic equipment (EEE) in compliance with directive RoHS2 2011/65/EU in restricted categories of EEE covered by this directive. Relpol S.A. is not responsible for usage relays with AgCdO contact material in categories of EEE where it is prohibited by the directive RoHS2 2011/65/EU. ^② For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.


Electrical life at AC resistive load.
Switching frequency: 1 200 cycles/hour Fig. 1

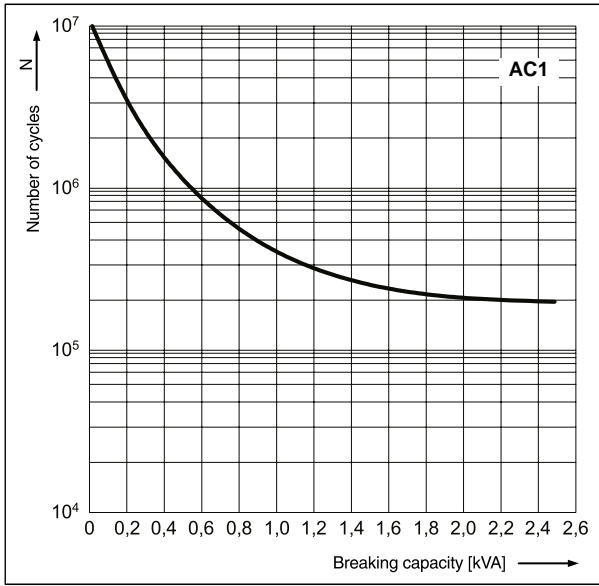


Electrical life reduction factor at AC inductive load Fig. 2

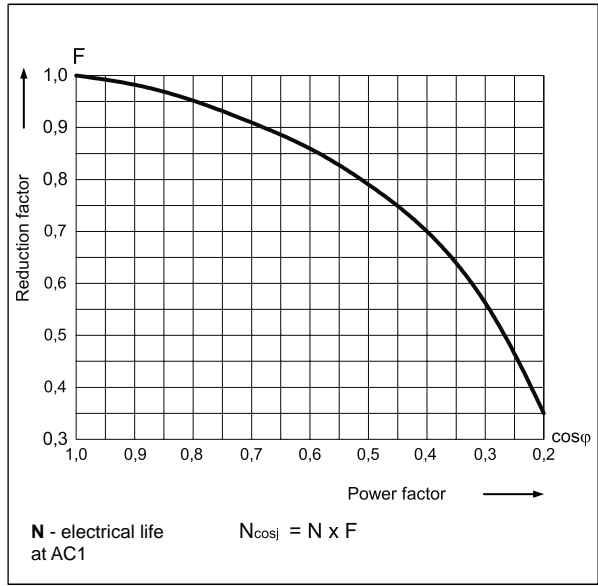


Max. DC breaking capacity
A - resistive load DC1 Fig. 3
B - inductive load L/R = 40 ms

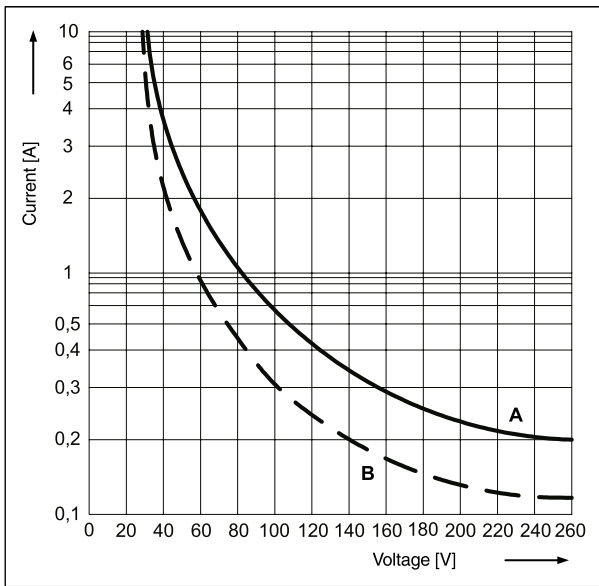

Connection diagram (pin side view)

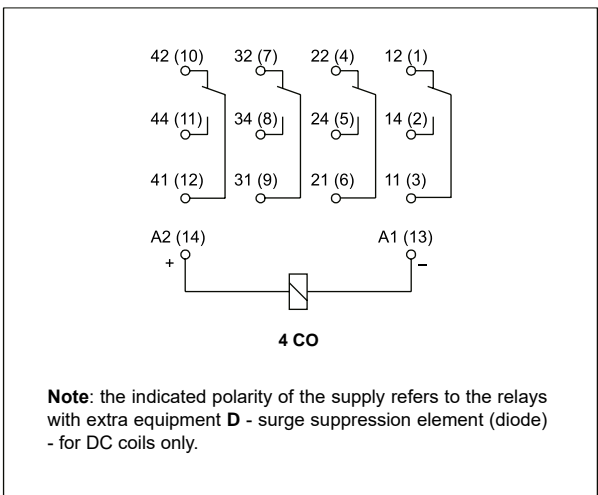

Dimensions

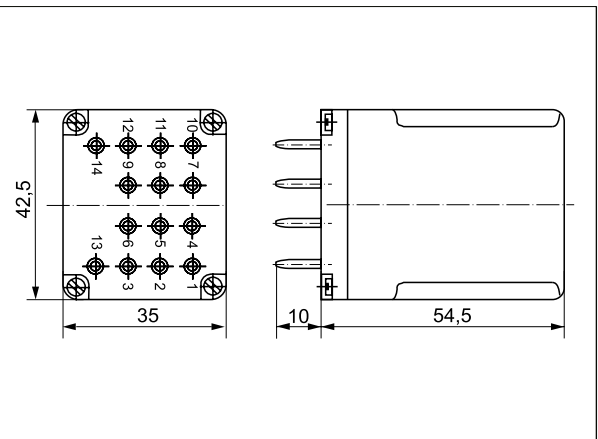

GZ14Z

Screw terminals
plug-in sockets
for R15 - 4 CO
**to be mounted behind
the assembly panel**
- see page 373



Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 70 °C)
1006	6	28	± 10%	5,1	6,6
1012	12	110	± 10%	10,2	13,2
1024	24	430	± 10%	20,4	26,4
1048	48	1 750	± 10%	40,8	52,8
1060	60	2 700	± 10%	51,0	66,0
1110	110	9 200	± 10%	93,5	121,0
1120	120	11 000	± 10%	102,0	132,0
1220	220	37 000	± 10%	187,0	242,0

The data in bold type relate to the standard versions of the relays.

Coil data - AC 50 Hz voltage version, basic

Table 2

Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC	
				min. (at 20 °C)	max. (at 55 °C)
3006	6	4,8	± 15%	5,1	6,6
3012	12	20	± 15%	10,2	13,2
3024	24	72	± 15%	20,4	26,4
3048	48	360	± 15%	40,8	52,8
3060	60	520	± 15%	51,0	66,0
3115	115	2 100	± 15%	97,7	126,5
3120	120	2 300	± 15%	102,0	132,0
3220	220	7 000	± 15%	187,0	242,0
3230	230	7 900	± 15%	195,5	253,0
3240	240	8 300	± 15%	204,0	264,0
3400	400	21 500	± 15%	340,0	440,0

Coil data - AC 60 Hz voltage version, special

Table 3

Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC	
				min. (at 20 °C)	max. (at 55 °C)
6006	6	4,8	± 15%	5,1	6,6
6012	12	17	± 15%	10,2	13,2
6024	24	65	± 15%	20,4	26,4
6048	48	310	± 15%	40,8	52,8
6060	60	490	± 15%	51,0	66,0
6110	110	1 760	± 15%	93,5	121,0
6120	120	2 000	± 15%	102,0	132,0
6220	220	6 900	± 15%	187,0	242,0
6230	230	7 000	± 15%	195,5	253,0
6240	240	7 100	± 15%	204,0	264,0


Mounting, sockets and accessories for relays

Relays **R15 4 - CO** are designed for mounting in plug-in sockets.

Sockets for R15 - 4 CO	Accessories	Additional features
	Spring wire clips	
Screw terminals sockets, 35 mm rail mount (EN 60715)		
GZ14U	GZ14 0737	–
Screw terminals sockets, on panel mounting (two M3 screws)		
GZ14	GZ14 0737	–
GZ14Z ⑥	GZ14 0737	–
Solder terminals sockets		
GOP14	R15 0736	spring clamps ⑦

⑥ Sockets GZ14Z: to be mounted behind the assembly panel - see page 373. ⑦ Spring clamps R15 5922 for spring wire clips.

Ordering codes

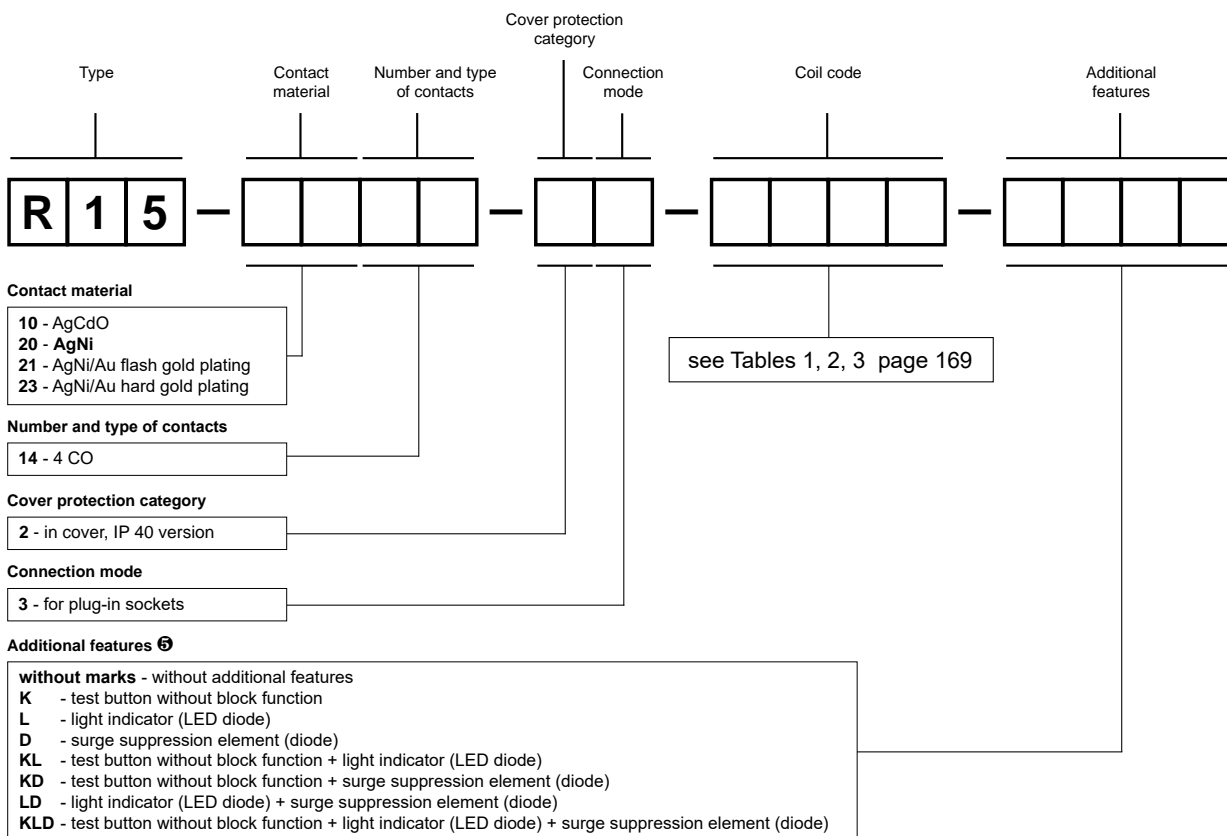

⑥ D, KD, LD, KLD - only for DC coils

Note:

For relays with additional features **D** - surge suppression element (diode) (versions D, KD, LD, KLD) - fixed supply polarity compulsory for the DC load of coils: -A1(13) / +A2(14). The polarity is indicated on the relay cover. For other versions of the relays with DC coils any polarity is possible.


Examples of ordering codes:

R15-2014-23-1024-KD

relay **R15**, for plug-in sockets, four changeover contacts, contact material AgNi, coil voltage 24 V DC, with test button without block function and surge suppression element (diode), in cover IP 40



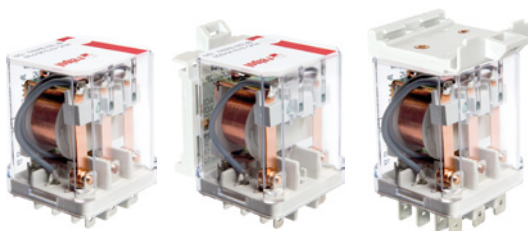

R15-2114-23-3230-KL

relay **R15**, for plug-in sockets, four changeover contacts, contact material AgNi/Au flash gold plating, coil voltage 230 V AC 50 Hz, with test button without block function and light indicator (LED diode), in cover IP 40






with adaptor (V)


with adaptor (H)

- Power relays of general application • AC and DC coils, insulation class F: 155 °C • For plug-in sockets: on 35 mm rail mount acc. to EN 60715; on panel mounting
- Versions: PCB; faston 187 (4,8 x 0,5 mm); faston 250 (6,3 x 0,8 mm)
- Contact gap: 3 mm (option - only in versions with normally open contacts) • Additional features: K - test button; L - light indicator (LED)
- Applications: control of electromagnets; systems of heating, cooling, ventilation, air conditioning; control with single-phase and three-phase motors; catering industry machines and equipment; automation systems; photoelectric systems; etc.
- Recognitions, certifications, directives: RoHS,    

Contact data

Number and type of contacts	2 CO, 3 CO, 2 NO, 3 NO 2 NO, 3 NO with contact gap \geq 3 mm	
Contact material	AgCdO  , AgNi, AgSnO₂	
Rated / max. switching voltage	AC	250 V / 440 V 230 V / 250 V 
Min. switching voltage	10 V AgCdO, 5 V AgNi, 10 V AgSnO ₂	
Rated load	AC1 DC1	16 A / 250 V AC or 10 A / 400 V AC 16 A / 250 V AC  16 A / 24 V DC (see Fig. 3)
Motor load	acc. to UL 508	1/3 HP 120 V AC, 7,2 FLA, single-phase motor 3/4 HP 240 V AC, 6,9 FLA, single-phase motor 1 HP 400 V AC, 2,3 FLA, three-phase motor, (only 3 NO)
Min. switching current	10 mA AgCdO, 5 mA AgNi, 10 mA AgSnO ₂	
Max. inrush current	40 A	
Rated current	16 A	
Max. breaking capacity	AC1	4 000 VA
Min. breaking capacity	1 W AgCdO, 0,3 W AgNi, 1 W AgSnO ₂	
Contact resistance	\leq 100 m Ω	
Max. operating frequency	AC1	1 200 cycles/hour 12 000 cycles/hour
• at rated load • no load		

Coil data

Rated voltage	50/60 Hz AC 50 Hz AC DC DC	6, 12, 24, 115, 120, 220, 230, 240 V 400 V  6, 12 , 24, 42, 48, 60, 110, 120, 220 V standard coil 12, 24, 48, 110, 220 V reinforced coil
Must release voltage		AC: \geq 0,15 U _n DC: \geq 0,1 U _n
Operating range of supply voltage	see Tables 1, 2, 3, 4	
Rated power consumption	AC DC	2,8 VA 50 Hz 2,5 VA 60 Hz 1,5 W 1,7 W with contact gap \geq 3 mm

Insulation according to EN 60664-1


Insulation rated voltage	400 V AC	
Rated surge voltage	4 000 V 1,2 / 50 μ s	
Overvoltage category	III	
Insulation pollution degree	2	
Dielectric strength		
• between coil and contacts	2 500 V AC	type of insulation: basic
• contact clearance	1 500 V AC	type of clearance: micro-disconnection, with contact gap \geq 0,4 mm
	2 500 V AC	type of clearance: full-disconnection, with contact gap \geq 3 mm
• pole - pole	2 500 V AC	type of insulation: basic
Contact - coil distance		
• clearance	\geq 5 mm 2 CO, 2 NO	\geq 4 mm 3 CO, 3 NO
• creepage	\geq 8 mm 2 CO, 2 NO	\geq 5 mm 3 CO, 3 NO
Pole - pole distance		
• clearance	\geq 15,6 mm 2 CO, 2 NO	\geq 6,3 mm 3 CO, 3 NO
• creepage	\geq 22 mm 2 CO, 2 NO	\geq 8 mm 3 CO, 3 NO

The data in bold type relate to the standard versions of the relays.  AgCdO contact material in electrical contacts is only for use in electrical and electronic equipment (EEE) in compliance with directive RoHS2 2011/65/EU in restricted categories of EEE covered by this directive. Relpol S.A. is not responsible for usage relays with AgCdO contact material in categories of EEE where it is prohibited by the directive RoHS2 2011/65/EU.  For RUC faston 4,8 x 0,5 with GUC11 or GUC11S socket, max. switching voltages and coil voltages of relays are limited to 250 V AC / DC.


General data

Operating / release time (typical values)	20 ms / 15 ms	
Electrical life		
• resistive AC1	> 10 ⁵ 16 A, 250 V AC > 10 ⁵ 10 A, 400 V AC	
• cosφ	see Fig. 2	
Mechanical life (cycles)	> 10 ⁷	
Dimensions (L x W x H) / Weight		
• RUC faston 4,8 x 0,5	36,1 x 38,6 x 45,5 mm / 80 g	for plug-in sockets
	36,1 x 38,6 x 52,5 mm / 80 g	for PCB
	58,75 x 38,6 x 45,9 mm / 85 g	with adaptor (V)
	46,8 x 38,6 x 62,45 mm / 85 g	with adaptor (H)
	66,3 x 38,6 x 36,1 mm / 85 g	with mounting flange
Dimensions (L x W x H) / Weight		
• RUC faston 6,3 x 0,8	62,4 x 38,6 x 45,9 mm / 85 g	with adaptor (V)
	46,8 x 38,6 x 66,1 mm / 85 g	with adaptor (H)
	66,3 x 38,6 x 36,1 mm / 85 g	with mounting flange
Ambient temperature (non-condensation and/or icing)	• storage	-40...+85 °C
	• operating	AC: -40...+55 °C 3 CO, 3 NO / 16 A AC: -40...+70 °C 2 CO, 2 NO / 16 A DC: -40...+55 °C 3 CO, 3 NO / 16 A DC: -40...+70 °C 3 CO, 3 NO / 10 A; 2 CO, 2 NO / 16 A
Cover protection category	IP 00	EN 60529
Environmental protection	RTI	EN 61810-7
Shock resistance	10 g	
Vibration resistance	5 g 10...150 Hz	
Solder bath temperature	max. 270 °C	
Soldering time	max. 5 s	


Dimensions - RUC faston 4,8 x 0,5
- plug-in version (standard)

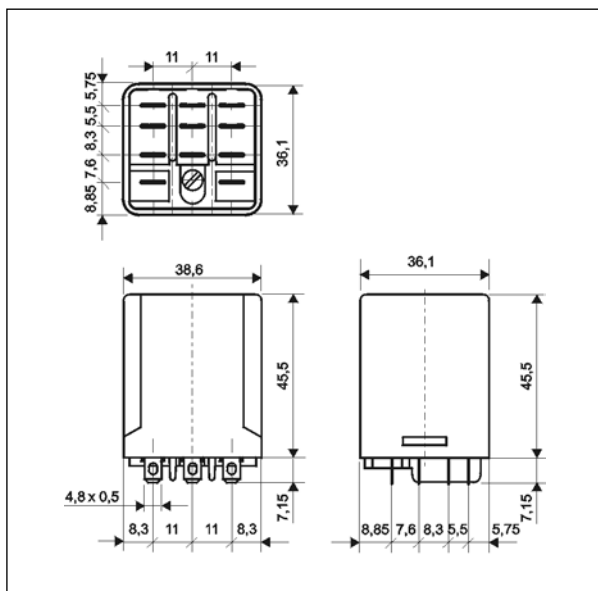


Dimensions - RUC faston 4,8 x 0,5
- PCB version

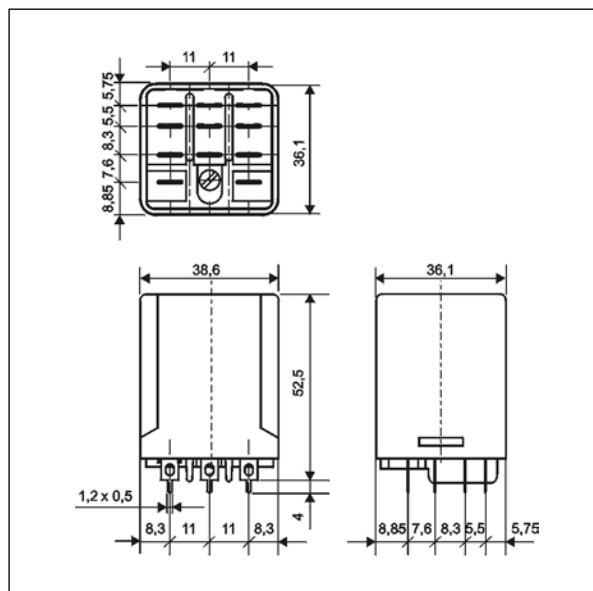


Dimensions - RUC faston 4,8 x 0,5
- version with vertical adaptor (V)

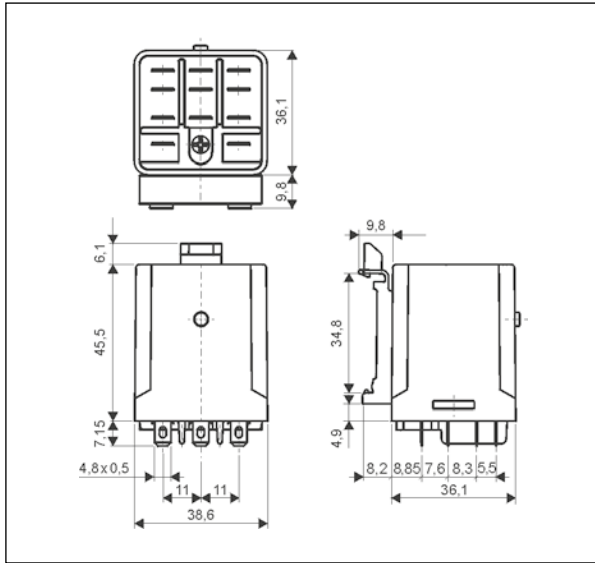


Dimensions - RUC faston 4,8 x 0,5
- version with horizontal adaptor (H)

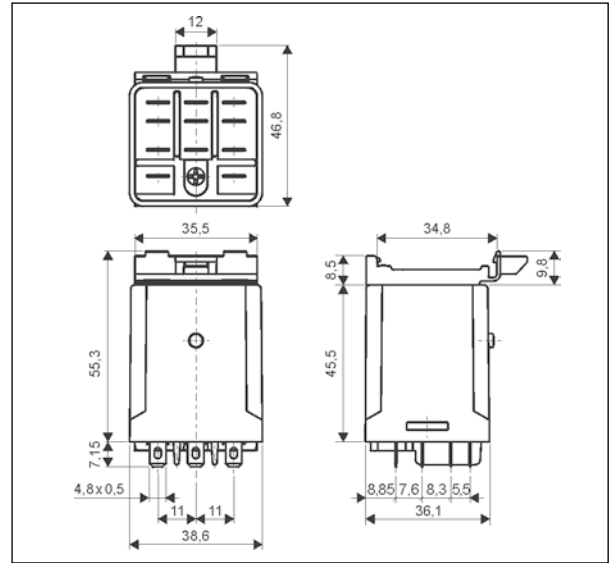


Dimensions - RUC faston 6,3 x 0,8
- version with vertical adaptor (V)

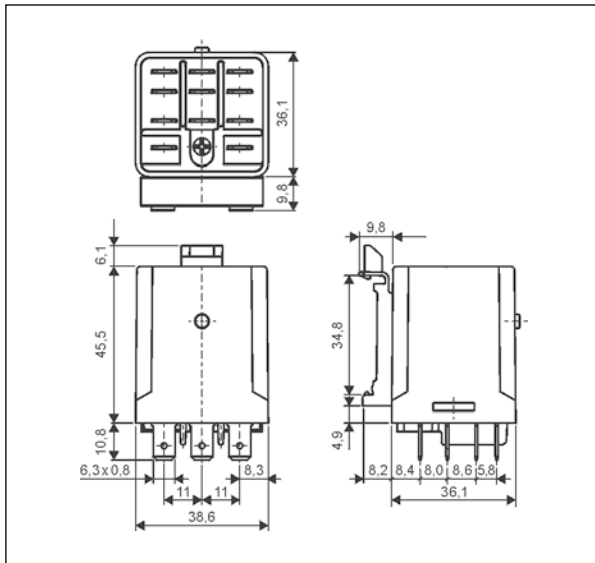

Dimensions - RUC faston 6,3 x 0,8
- version with horizontal adaptor (H)

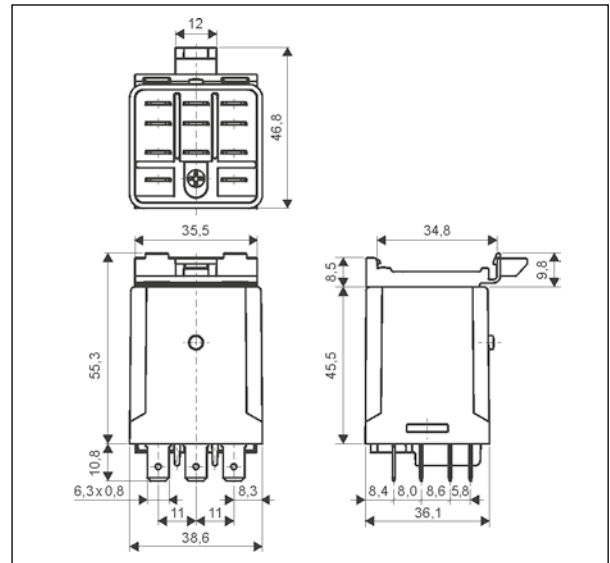


Dimensions - RUC faston 4,8 x 0,5 (faston 6,3 x 0,8)
- version with mounting flange in the wall of the cover

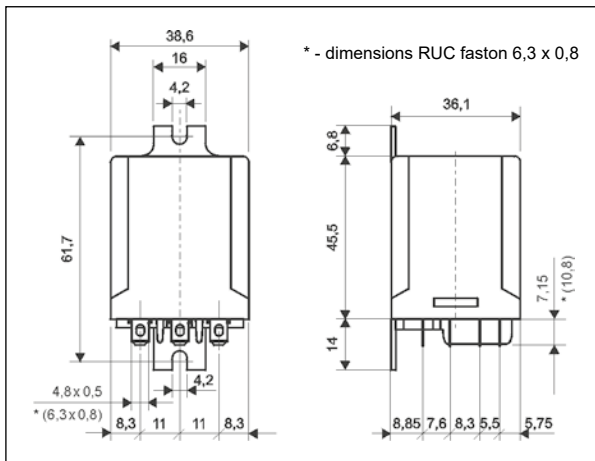


GUC11S


Screw terminals
plug-in sockets for
RUC faston 4,8 x 0,5,
RUC-M
- see page 374

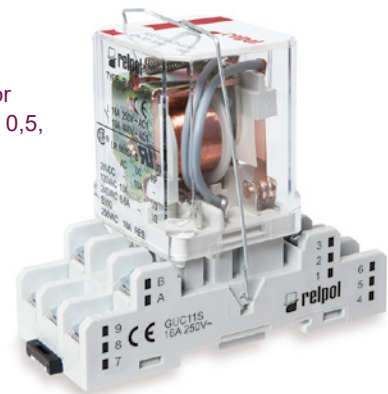


Electrical life at AC resistive load. Fig. 1
Switching frequency: 1 200 cycles/hour

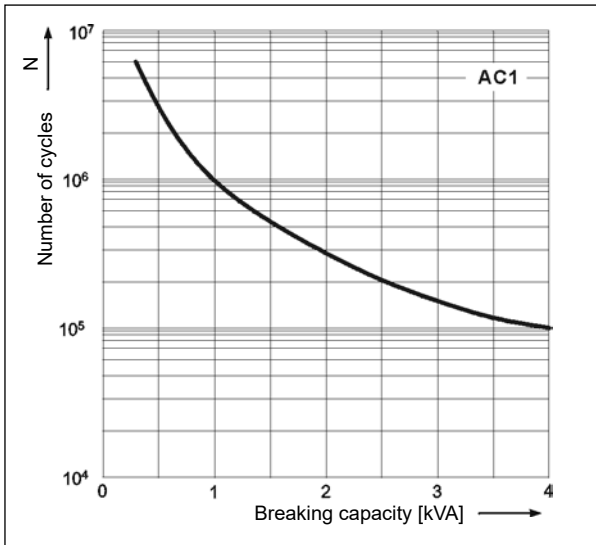


Electrical life reduction factor at AC inductive load Fig. 2

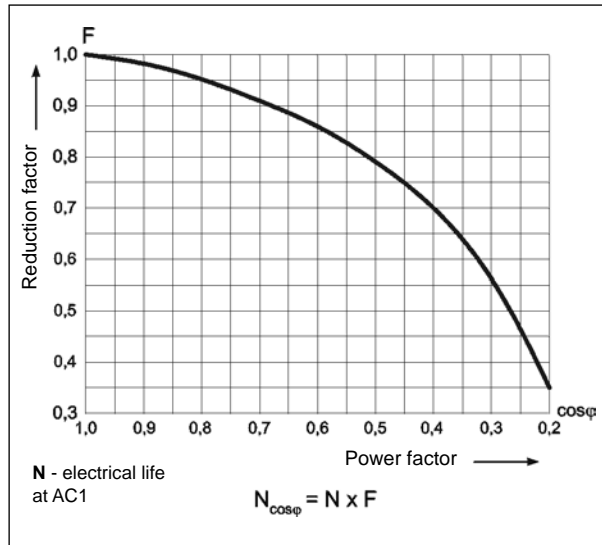

Max. DC breaking capacity Fig. 3
A - resistive load DC1
B - inductive load L/R = 40 ms

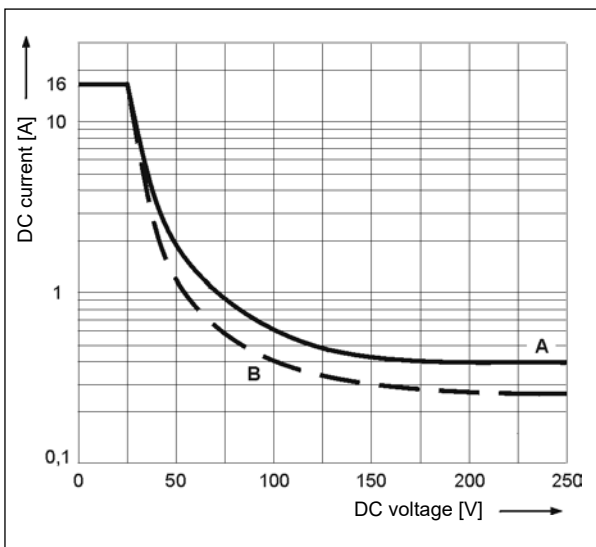

Connection diagrams (pin side view)

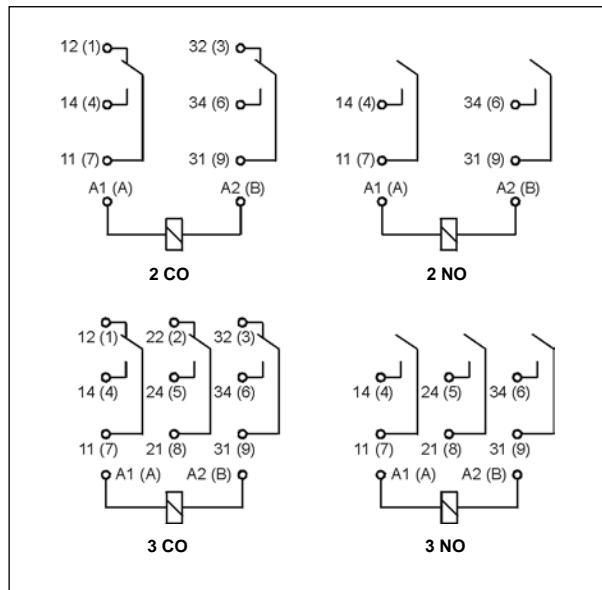

Mounting, sockets and accessories for relays

Relays **RUC** are offered in versions: • standard, for plug-in sockets • with mounting flange in the wall of the cover, on panel mounting with two M4 screws, flat insert connectors - faston 187 (4,8 x 0,5 mm) or faston 250 (6,3 x 0,8 mm) • with vertical (V) or horizontal (H) adaptors for direct mounting on 35 mm rail mount acc. to EN 60715, flat insert connectors - faston 187 (4,8 x 0,5 mm) or faston 250 (6,3 x 0,8 mm) • for direct PCB mounting ④.

Sockets for RUC faston 4,8 x 0,5	Accessories
Screw terminals sockets, 35 mm rail mount (EN 60715) or on panel mounting (two M3 screws)	Spring wire clips
GUC11 ④	MBA
Screw terminals sockets, 35 mm rail mount (EN 60715)	
GUC11S ④	MBA

④ For RUC faston 4,8 x 0,5 with GUC11 or GUC11S socket, max. switching voltages and coil voltages of relays are limited to 250 V AC / DC. ④ Relays unavailable with (V) or (H) adaptor, and cover with mounting flange.

Coil data - DC voltage version, standard

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 55 °C) ④
1006	6	28	± 10%	4,8	6,6
1012	12	110	± 10%	9,6	13,2
1024	24	430	± 10%	19,2	26,4
1042	42	1 340	± 10%	33,6	46,2
1048	48	1 750	± 10%	38,4	52,8
1060	60	2 700	± 10%	48,0	66,0
1110	110	9 200	± 10%	88,0	121,0
1120	120	11 000	± 10%	96,0	132,0
1220	220	37 000	± 10%	176,0	242,0

The data in bold type relate to the standard versions of the relays.

Coil data - DC voltage version, reinforced

Table 2

Coil code ⑤	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 55 °C) ④
W012	12	85	± 10%	9,6	13,2
W024	24	345	± 10%	19,2	26,4
W048	48	1 370	± 10%	38,4	52,8
W110	110	7 300	± 10%	88,0	121,0
W220	220	30 000	± 10%	176,0	242,0

④ Max. (at 70 °C) for versions: 3 CO, 3 NO / 10 A; 2 CO, 2 NO / 16 A

⑤ For version with contact gap ≥ 3 mm.

Coil data - AC 50/60 Hz voltage version

Table 3


Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC	
				min. (at 20 °C)	max. (at 55 °C)
5006	6	4,3	± 15%	4,8	6,6
5012	12	18,5	± 15%	9,6	13,2
5024	24	75	± 15%	19,2	26,4
5115	115	1 840	± 15%	92,0	126,5
5120	120	1 910	± 15%	96,0	132,0
5220	220	6 980	± 15%	176,0	242,0
5230	230	7 080	± 15%	184,0	253,0
5240	240	7 760	± 15%	192,0	264,0

Coil data - AC 50 Hz voltage version

Table 4

Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC	
				min. (at 20 °C)	max. (at 55 °C)
3400	400	21 500	± 15%	320,0	440,0

Ordering codes

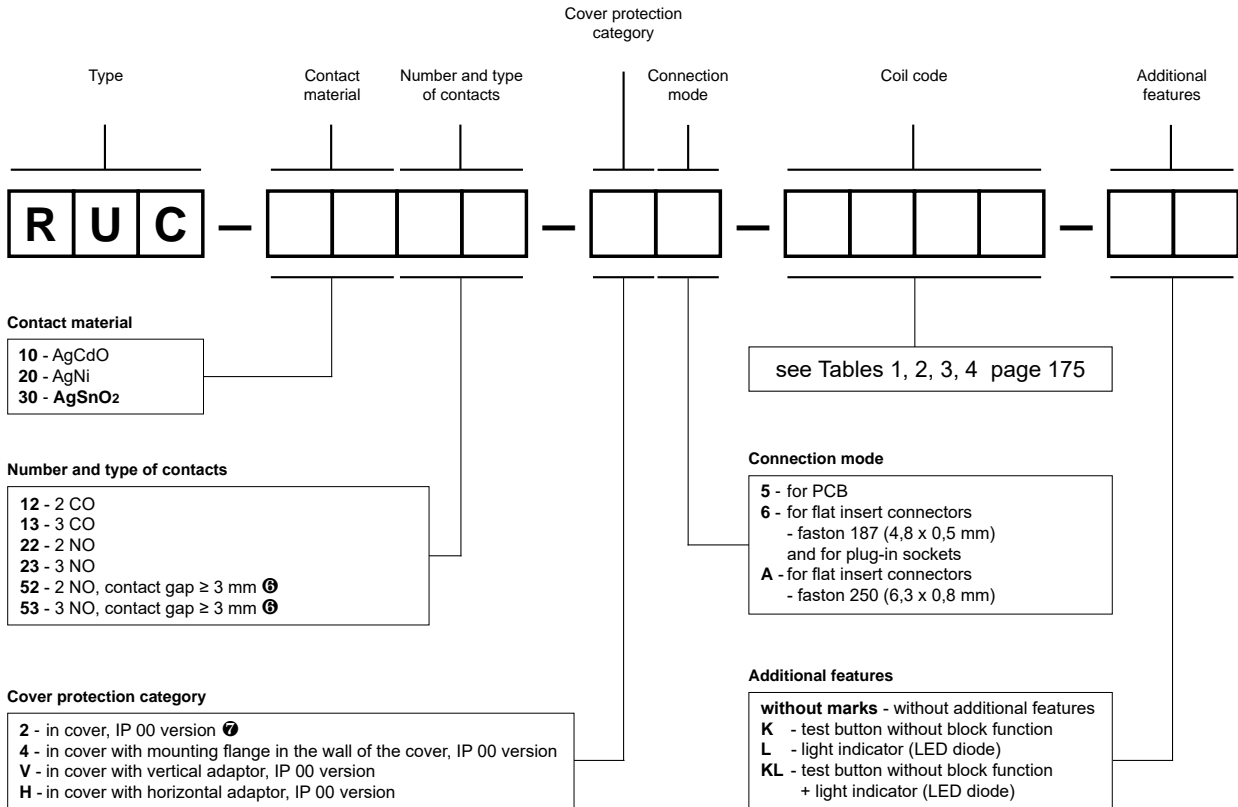

⑥ For versions with reinforced DC coils: W012, W024, W048, W110, W220 and with AC coils.
⑦ For relays RUC: for plug-in sockets; for PCB.

Examples of ordering codes:


- RUC-3053-26-W024** relay **RUC**, faston 187 (4,8 x 0,5 mm), with contact gap ≥ 3 mm, for plug-in sockets, three normally open contacts, contact material AgSnO₂, reinforced coil voltage 24 V DC, in cover IP 00
- RUC-2013-V6-3400-KL** relay **RUC**, faston 187 (4,8 x 0,5 mm), for flat insert connectors, with vertical adaptor (V), three changeover contacts, contact material AgNi, coil voltage 400 V AC 50 Hz, with test button without block function and light indicator (LED diode), in cover IP 00
- RUC-2052-HA-W220-L** relay **RUC**, faston 250 (6,3 x 0,8 mm), for flat insert connectors, with contact gap ≥ 3 mm, with horizontal adaptor (H), two normally open contacts, contact material AgNi, reinforced coil voltage 220 V DC, with light indicator (LED diode), in cover IP 00
- RUC-1022-25-5024** relay **RUC**, for PCB, two normally open contacts, contact material AgCdO, coil voltage 24 V AC 50/60 Hz, in cover IP 00

RUCT, PRUCT

Relays for
railroad industry
- see
www.repol.com.pl




NEW

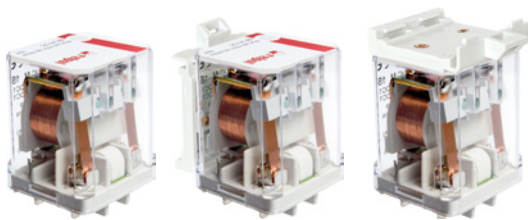



with adaptor (V)

with adaptor (H)

- **Relays with permanent magnet whose magnetic field blows the electric arc between the contacts; for high DC loads**
- AC and DC coils, insulation class F: 155 °C • For plug-in sockets: on 35 mm rail mount acc. to EN 60715; on panel mounting • Versions: PCB; faston 187 (4,8 x 0,5 mm) • Contact gap: 3 mm (version 2 NO); 6 mm (version 1 NO) • Additional features: L - light indicator (LED)
- Applications: control of electromagnets; systems of heating, cooling, ventilation, air conditioning; control with single-phase motors; catering industry machines and equipment; automation systems; photoelectric systems; etc.
- Recognitions, certifications, directives: RoHS,   

Contact data


Number and type of contacts		1 NO (double-break)	2 NO
Contact material		AgCdO Ⓛ , AgNi, AgSnO₂	
Rated / max. switching voltage		250 V DC; 250 V AC / 350 V DC; 440 V AC Ⓜ	
Min. switching voltage		10 V AgCdO, 5 V AgNi, 10 V AgSnO ₂	
Rated load	DC1	16 A / 24 V DC; 14 A / 110 V DC 12 A / 220 V DC	16 A / 24 V DC; 10,5 A / 110 V DC 4,5 A / 220 V DC
	DC L/R=40 ms	16 A / 24 V DC; 5,4 A / 110 V DC 3 A / 220 V DC	16 A / 24 V DC; 1,35 A / 110 V DC 0,45 A / 220 V DC
	AC1	16 A / 250 V AC	16 A / 250 V AC
Min. switching current		10 mA AgCdO, 5 mA AgNi, 10 mA AgSnO ₂	
Max. inrush current		40 A 20 ms	
Rated current		16 A	
Max. breaking capacity	AC1	4 000 VA	
Min. breaking capacity		1 W AgCdO, 0,3 W AgNi, 1 W AgSnO ₂	
Contact resistance		≤ 100 mΩ	
Max. operating frequency	AC1	• at rated load 1 200 cycles/hour	
		• no load 12 000 cycles/hour	
Coil data			
Rated voltage	50/60 Hz AC	12, 24, 48, 115, 120, 230, 240 V	
	DC	12, 24, 48, 110, 220 V reinforced coil	
Must release voltage		AC: ≥ 0,15 U _n	DC: ≥ 0,1 U _n
Operating range of supply voltage		AC: 0,85...1,1 U _n	DC: 0,8...1,1 U _n see Tables 1, 2
Rated power consumption	AC	2,8 VA	
	DC	1,7 W	
Insulation according to EN 60664-1			
Insulation rated voltage		400 V AC	
Rated surge voltage		4 000 V 1,2 / 50 μs	
Overvoltage category		III	
Insulation pollution degree		3	
Dielectric strength	• between coil and contacts	2 500 V AC	type of insulation: basic
	• contact clearance	4 000 V AC	contact 1 NO, type of clearance: full-disconnection
• pole - pole		2 000 V AC	contacts 2 NO, type of clearance: full-disconnection
		2 500 V AC	contacts 2 NO, type of insulation: basic
Contact - coil distance	• clearance	≥ 6,3 mm	
	• creepage	≥ 8 mm	

The data in bold type relate to the standard versions of the relays. **Ⓛ** AgCdO contact material in electrical contacts is only for use in electrical and electronic equipment (EEE) in compliance with directive RoHS2 2011/65/EU in restricted categories of EEE covered by this directive. Relpol S.A. is not responsible for usage relays with AgCdO contact material in categories of EEE where it is prohibited by the directive RoHS2 2011/65/EU. **Ⓜ** For RUC-M with GUC11 or GUC11S socket, max. switching voltages and coil voltages of relays are limited to 250 V AC / DC.


General data

Operating / release time (typical values)	20 ms / 15 ms	
Electrical life		
• resistive DC1	> 2 x 10 ⁵	contact 1 NO, 12 A, 220 V DC
	> 2 x 10 ⁵	contacts 2 NO, 4,5 A, 220 V DC
• DC L/R=40 ms	> 2 x 10 ⁵	contact 1 NO, 3 A, 220 V DC
	> 2 x 10 ⁵	contacts 2 NO, 0,45 A, 220 V DC
Mechanical life (cycles)	> 2 x 10 ⁷	
Dimensions (L x W x H) / Weight	36,1 x 38,6 x 45,5 mm / 80 g for plug-in sockets 36,1 x 38,6 x 52,5 mm / 80 g for PCB 58,75 x 38,6 x 45,9 mm / 85 g with adaptor (V) 46,8 x 38,6 x 62,45 mm / 85 g with adaptor (H) 66,3 x 38,6 x 36,1 mm / 85 g with mounting flange	
Ambient temperature (non-condensation and/or icing)	• storage	-40...+85 °C
	• operating	-40...+70 °C
Cover protection category	IP 00 EN 60529	
Shock resistance	10 g	
Vibration resistance	5 g 10...150 Hz	
Solder bath temperature	max. 270 °C	
Soldering time	max. 5 s	

Dimensions - plug-in version (standard)

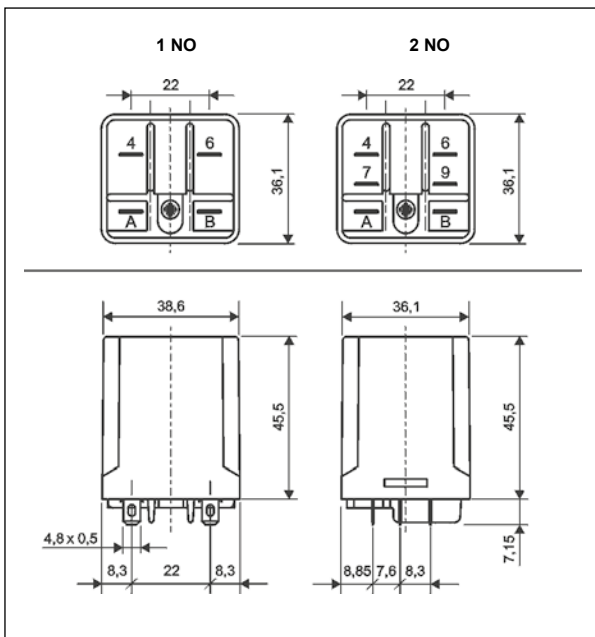

Dimensions - PCB version

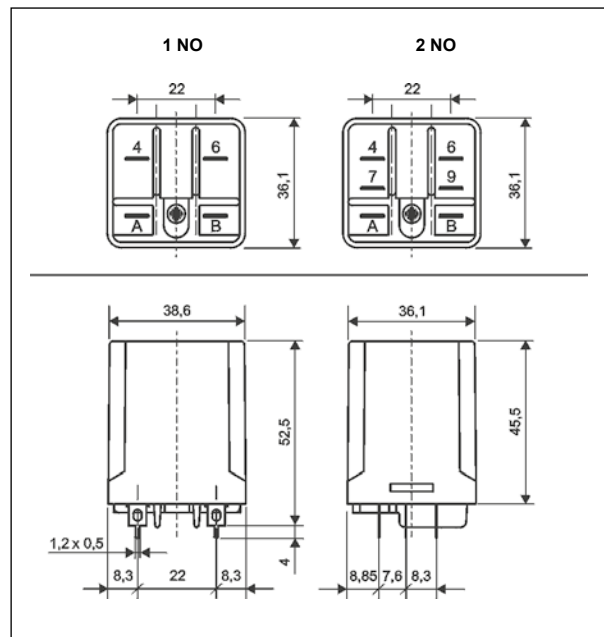


RUCT-M, PRUCT-M

Relays for
railroad industry
- see
www.repol.com.pl


NEW




Dimensions - version with vertical adaptor (V)

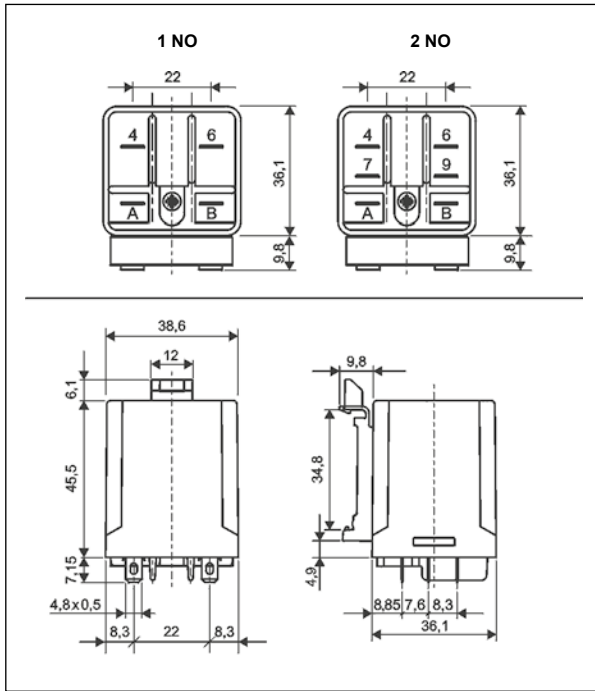


Dimensions - version with horizontal adaptor (H)

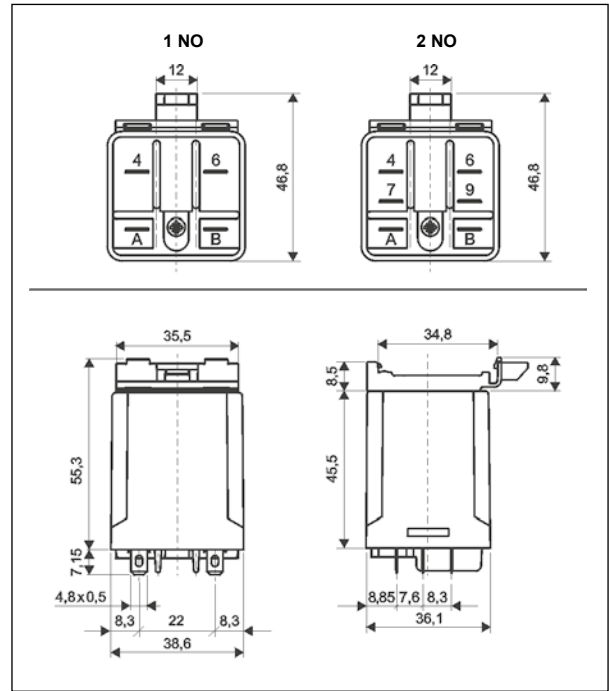


Dimensions - version with mounting flange in the wall of the cover

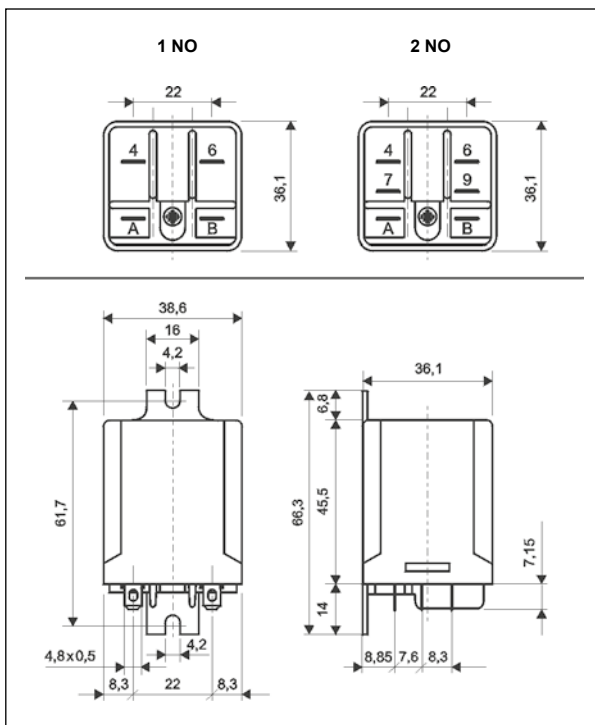


Connection diagrams (pin side view)

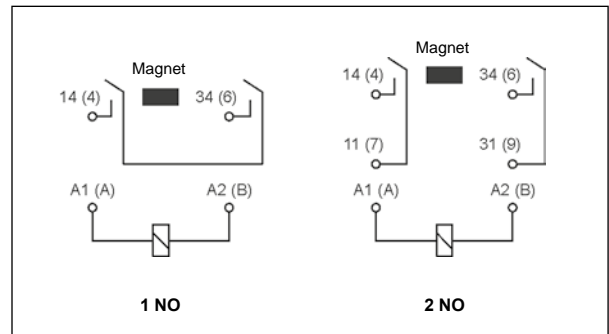


Design

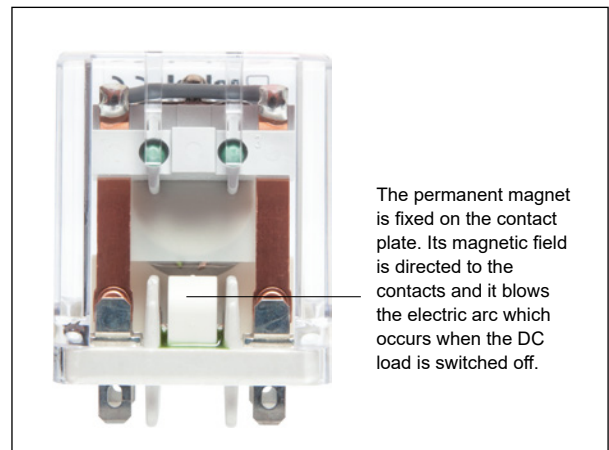


Electrical life at AC resistive load. Fig. 1
Switching frequency: 1 200 cycles/hour

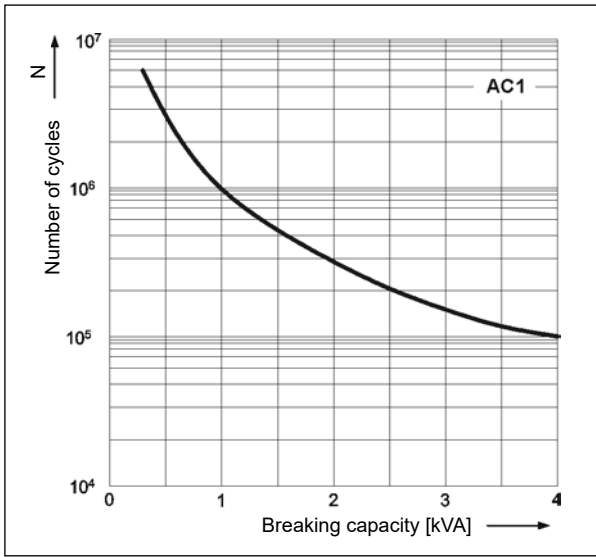


Electrical life reduction factor at AC inductive load Fig. 2

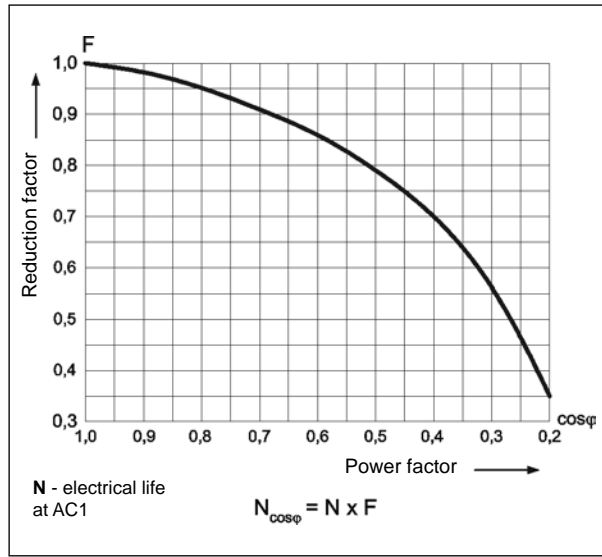

Max. DC breaking capacity Fig. 3
A - resistive load DC1
B - inductive load L/R = 40 ms
 $U_n = 24 \text{ V DC}$ - version 1 NO (6 mm)

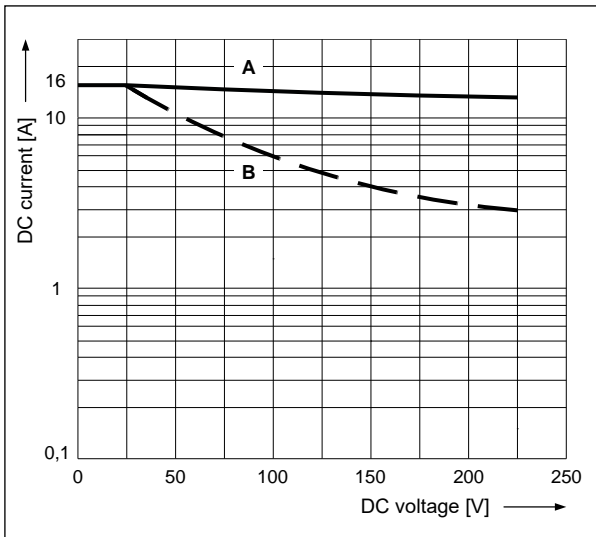

Max. DC breaking capacity Fig. 4
A - resistive load DC1
B - inductive load L/R = 40 ms
 $U_n = 24 \text{ V DC}$ - version 2 NO (3 mm)

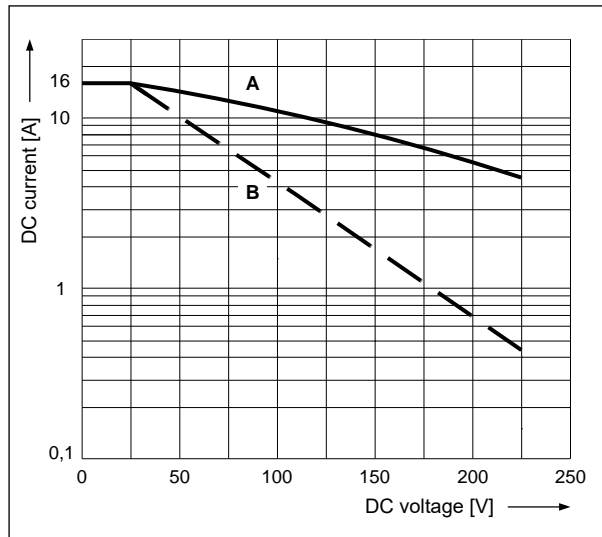

Mounting, sockets and accessories for relays

Relays **RUC-M** are offered in versions: • standard, for plug-in sockets • with mounting flange in the wall of the cover, on panel mounting with two M4 screws, flat insert connectors - faston 187 (4,8 x 0,5 mm) • with vertical (V) or horizontal (H) adaptors for direct mounting on 35 mm rail mount acc. to EN 60715, flat insert connectors - faston 187 (4,8 x 0,5 mm) • for direct PCB mounting ☉.

Sockets for RUC-M	Accessories
	Spring wire clips
Screw terminals sockets , 35 mm rail mount (EN 60715) or on panel mounting (two M3 screws)	
GUC11 ☉	MBA
Screw terminals sockets , 35 mm rail mount (EN 60715)	
GUC11S ☉	MBA

☉ For RUC-M with GUC11 or GUC11S socket, max. switching voltages and coil voltages of relays are limited to 250 V AC / DC. ☉ Relays unavailable with (V) or (H) adaptor, and cover with mounting flange.

Coil data - DC voltage version, reinforced

Table 1


Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 70 °C)
W012	12	85	± 10%	9,6	13,2
W024	24	345	± 10%	19,2	26,4
W048	48	1 370	± 10%	38,4	52,8
W110	110	7 300	± 10%	88,0	121,0
W220	220	30 000	± 10%	176,0	242,0

Coil data - AC 50/60 Hz voltage version

Table 2

Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC	
				min. (at 20 °C)	max. (at 55 °C)
5012	12	18,5	± 15%	9,6	13,2
5024	24	75	± 15%	19,2	26,4
5048	48	305	± 15%	38,4	52,8
5115	115	1 840	± 15%	92,0	126,5
5120	120	1 910	± 15%	96,0	132,0
5230	230	7 080	± 15%	184,0	253,0
5240	240	7 760	± 15%	192,0	264,0

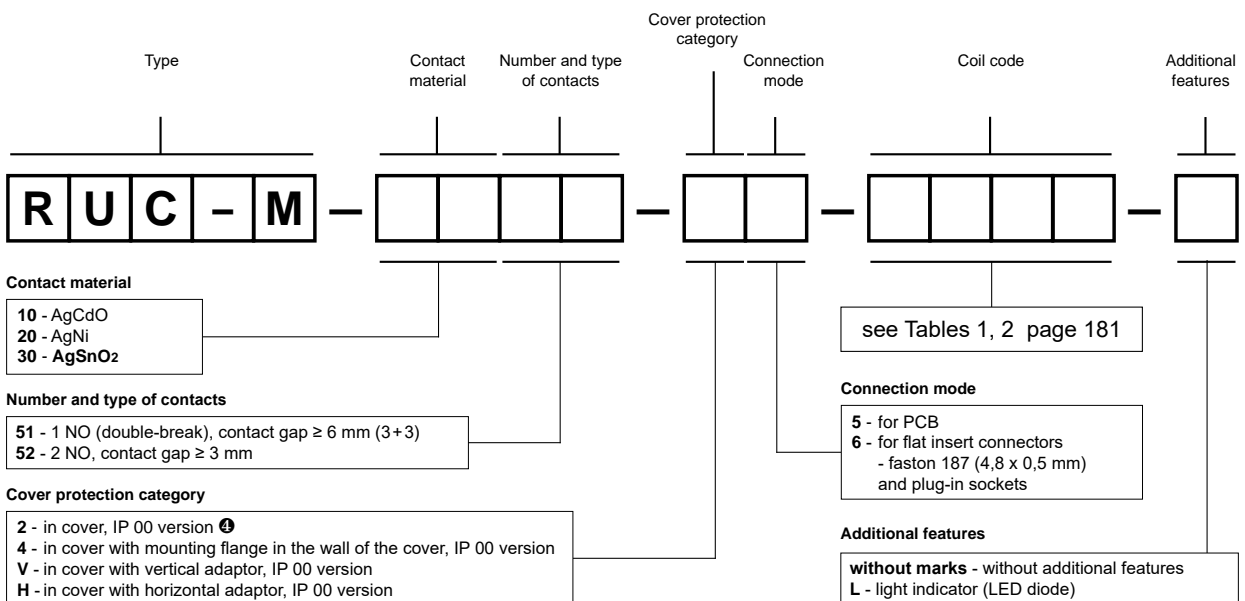

Ordering codes





Examples of ordering codes:



- RUC-M-3051-26-W024** relay RUC-M, faston 187 (4,8 x 0,5 mm), with contact gap ≥ 6 mm (3+3), for plug-in sockets, one normally open contact (double-break), contact material AgSnO₂, reinforced coil voltage 24 V DC, in cover IP 00
- RUC-M-1052-V6-5230-L** relay RUC-M, faston 187 (4,8 x 0,5 mm), for flat insert connectors, with contact gap ≥ 3 mm, with vertical adaptor (V), two normally open contacts, contact material AgCdO, coil voltage 230 V AC 50/60 Hz, with light indicator (LED diode), in cover IP 00
- RUC-M-2051-25-5024** relay RUC-M, with contact gap ≥ 6 mm (3+3), for PCB, one normally open contact (double-break), contact material AgNi, coil voltage 24 V AC 50/60 Hz, in cover IP 00




- Power relays of general application • AC and DC coils, insulation class F: 155 °C • High breaking capacity: AC1 - 10 kVA
- 35 mm rail mount acc. to EN 60715 • High insulation dielectric strength
- Applications: control of electromagnets; systems of heating, cooling, ventilation, air conditioning; control with single-phase motors; catering industry machines and equipment; automation systems; photoelectric systems; etc.
- Recognitions, certifications, directives: RoHS,  

Contact data


Number and type of contacts		2 NO
Contact material		AgSnO₂ , AgCdO 
Rated / max. switching voltage	AC	400 V / 440 V
Min. switching voltage		10 V
Rated load (capacity)	AC1	25 A / 400 V AC
	DC1	25 A / 24 V DC (see Fig. 3)
	DC13	0,3 A / 120 V 0,15 A / 250 V (R300)
Motor load	acc. to UL 508	3/4 HP 240 V AC, 6,9 FLA, single-phase motor 
Min. switching current		10 mA
Max. inrush current		40 A
Rated current		25 A
Max. breaking capacity	AC1	10 000 VA
Min. breaking capacity		1 W
Contact resistance		≤ 100 mΩ
Max. operating frequency		
• at rated load	AC1	600 cycles/hour
	AC3	600 cycles/hour
• no load		3 600 cycles/hour
Coil data		
Rated voltage	50 Hz AC	12, 24 , 110, 230 , 400 V
	DC	12, 24 , 48, 110, 220 V
Must release voltage		≥ 0,1 U _n
Operating range of supply voltage		see Tables 1, 2
Rated power consumption	AC	3,0 VA
	DC	1,7 W
Insulation according to EN 60664-1		
Insulation rated voltage		400 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		3
Dielectric strength		
• between coil and contacts		5 000 V AC type of insulation: reinforced
• contact clearance		1 500 V AC type of clearance: micro-disconnection
• pole - pole		5 000 V AC type of insulation: reinforced
Contact - coil distance	• clearance	≥ 6 mm
	• creepage	≥ 8 mm
General data		
Operating / release time (typical values)		20 ms / 20 ms
Electrical life		
• resistive AC1		> 10 ⁵ 25 A, 400 V AC
• cosφ		see Fig. 2
Mechanical life (cycles)		> 10 ⁶
Dimensions (L x W x H)		26 x 53,7 x 75,5 mm
Weight		130 g
Ambient temperature	• storage	-25...+85 °C
(non-condensation and/or icing)	• operating	-25...+85 °C
Cover protection category		IP 20 EN 60529
Environmental protection		RTI EN 61810-7
Shock resistance		10 g
Vibration resistance		5 g 10...150 Hz

The data in bold type relate to the standard versions of the relays.  AgCdO contact material in electrical contacts is only for use in electrical and electronic equipment (EEE) in compliance with directive RoHS2 2011/65/EU in restricted categories of EEE covered by this directive. Relpol S.A. is not responsible for usage relays with AgCdO contact material in categories of EEE where it is prohibited by the directive RoHS2 2011/65/EU.  For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.


Electrical life at AC resistive load.
Switching frequency: 600 cycles/hour Fig. 1

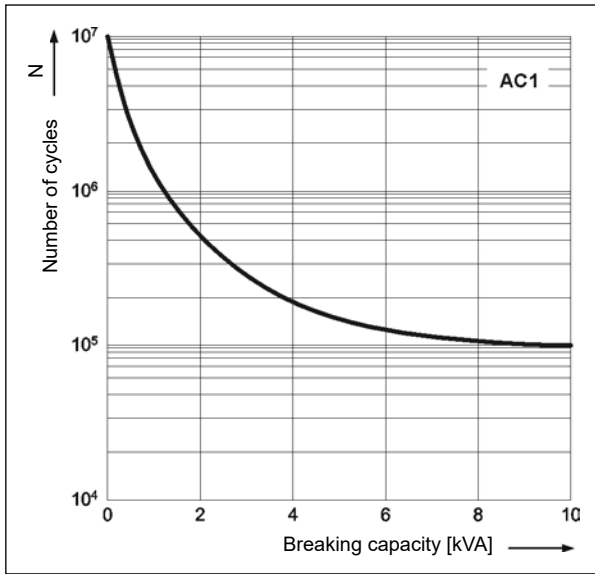


Electrical life reduction factor at AC inductive load Fig. 2

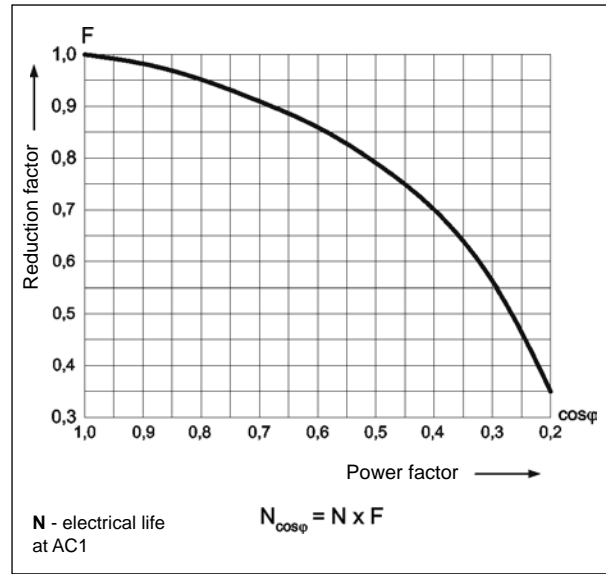


Max. DC breaking capacity
A - resistive load DC1
B - inductive load L/R = 40 ms Fig. 3

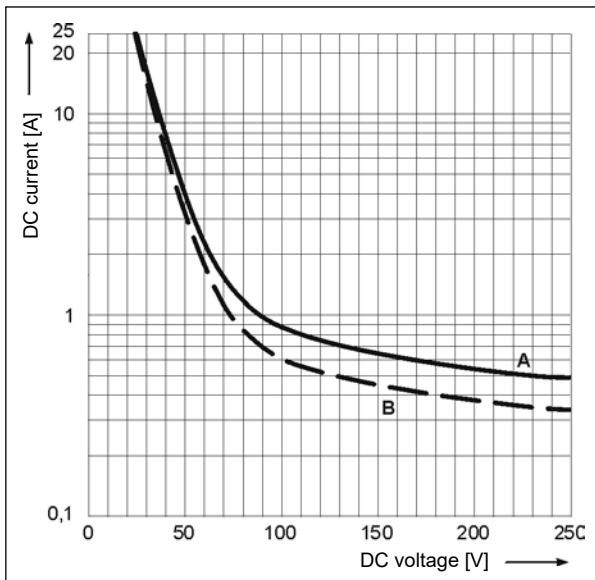

Dimensions

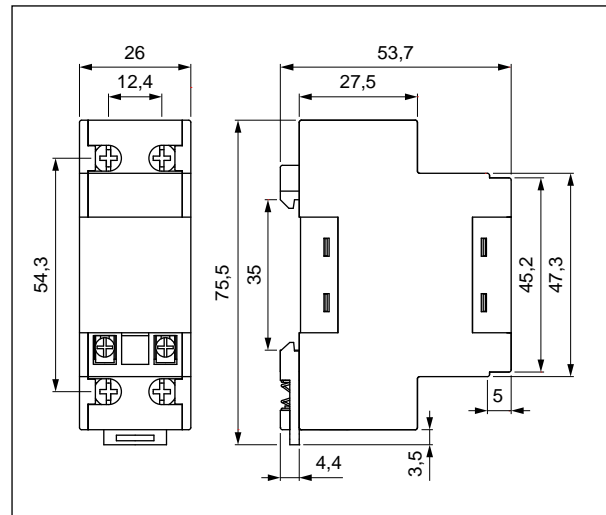

Connection diagram
(screw terminals side view)

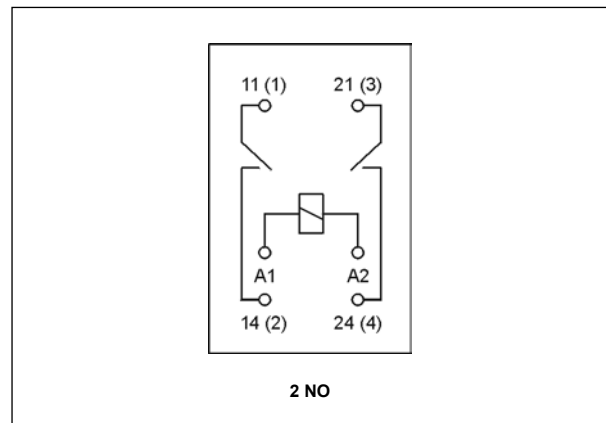

INDUSTRIAL

Mounting

Relays **RG25** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - screw terminals of coil downwards. **Connections:** max. cross section of the cables: 2 x 2,5 mm² (2 x 14 AWG), stripping length: 9 mm, max. tightening moment for the terminal: 0,7 Nm.

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 55 °C)
1012	12	85	± 10%	9,6	13,2
1024	24	340	± 10%	19,2	26,4
1048	48	1 350	± 10%	38,4	52,8
1110	110	7 600	± 10%	88,0	121,0
1220	220	30 000	± 10%	176,0	242,0

The data in bold type relate to the standard versions of the relays.


Coil data - AC 50 Hz voltage version

Table 2

Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC	
				min. (at 20 °C)	max. (at 55 °C)
3012	12	17	± 10%	8,4	13,2
3024	24	76	± 10%	16,8	26,4
3110	110	1 600	± 10%	77,0	121,0
3230	230	6 800	± 10%	161,0	253,0
3400	400	18 600	± 10%	280,0	440,0

The data in bold type relate to the standard versions of the relays.

Ordering codes

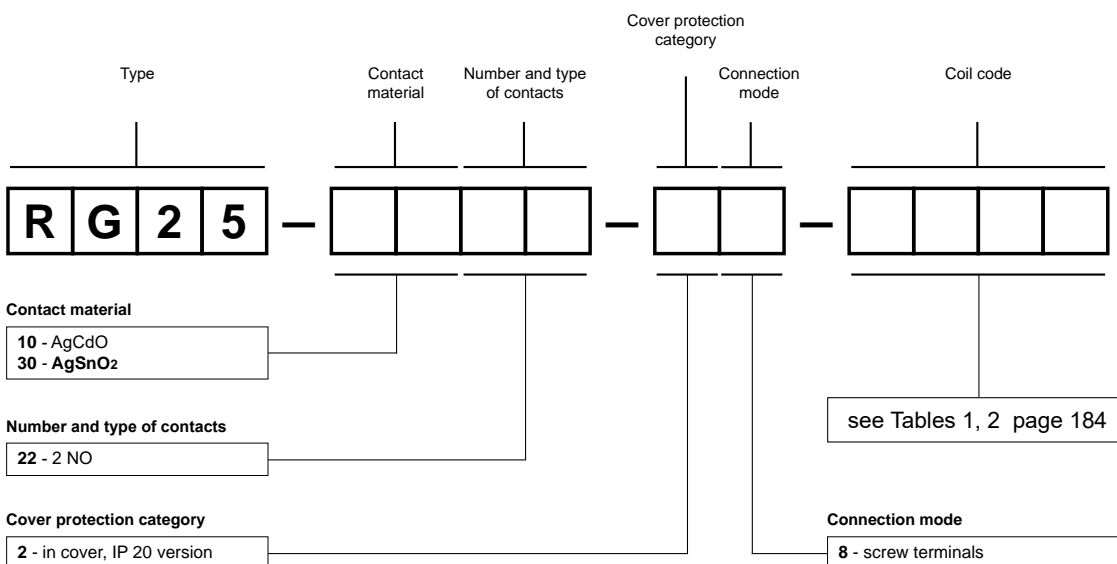

Example of ordering code:

RG25-3022-28-3230

relay **RG25**, screw terminals, two normally open contacts, contact material AgSnO₂, coil voltage 230 V AC 50 Hz, in cover IP 20



- High switching capacity up to 30 A
- "Bridge" type contacts which open the circuit with double break
- Flat insert connectors - faston faston 250 (6,3 x 0,8 mm)
- High resistance to interference • High strength of insulation
- Applications: household equipment; air-conditioning and ventilation systems; audio equipment; control devices; automation systems; photoelectric systems; etc.
- Recognitions, certifications, directives: RoHS, **CE**

Contact data

Number and type of contacts	1 NO, 2 NO		
Contact material	AgSnO₂		
Rated / max. switching voltage	AC	250 V / 440 V	
Min. switching voltage	10 V		
Rated load	AC1	1 NO: 30 A / 250 V AC	2 NO: 25 A / 250 V AC
Min. switching current	10 mA		
Rated current	1 NO: 30 A		2 NO: 25 A
Max. breaking capacity	AC1	1 NO: 7 000 VA	2 NO: 6 250 VA
Min. breaking capacity	0,1 W		
Contact resistance	≤ 100 mΩ		

Coil data

Rated voltage	50/60 Hz AC	24, 48, 115, 230 V	
	DC	12, 24, 110 V	
Must release voltage	DC: ≥ 0,1 U _n		
Operating range of supply voltage	see Tables 1, 2		
Rated power consumption	AC	1,7 VA 24, 48 V	2,5 VA 115, 230 V
	DC	1,9 W	

Insulation according to EN 60664-1


Insulation rated voltage	250 V AC		
Dielectric strength	type of insulation: reinforced		
• between coil and contacts	4 000 V AC		
• contact clearance	2 000 V AC	type of clearance: full-disconnection	
Contact - coil distance			
• clearance	≥ 9 mm		
• creepage	≥ 11 mm		

General data


Operating / release time (typical values)	30 ms / 30 ms		
Electrical life			
• resistive AC1	1 200 cycles/hour	10 ⁵ 1Z: 30 A, 250 V AC	2Z: 25 A, 250 V AC
Mechanical life (cycles)	> 10 ⁷		
Dimensions (L x W x H)	67 x 33 x 35 mm		
Weight	90 g		
Ambient temperature			
(non-condensation and/or icing)	• operating	-25...+75 °C	
Cover protection category	IP 50 EN 60529		
Shock resistance	10 g		
Vibration resistance	1,5 mm DA (constant amplitude) 10...55 Hz		

The data in bold type relate to the standard versions of the relays.


Dimensions

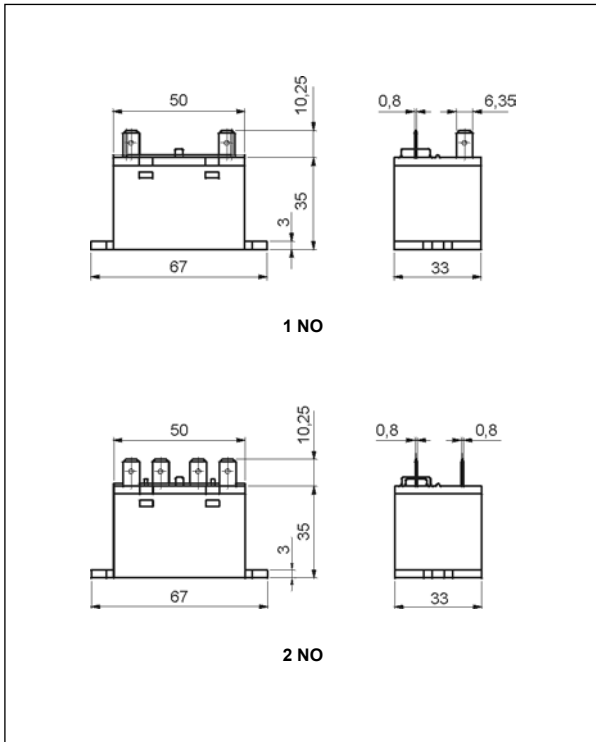

Connection diagrams (pin side view)

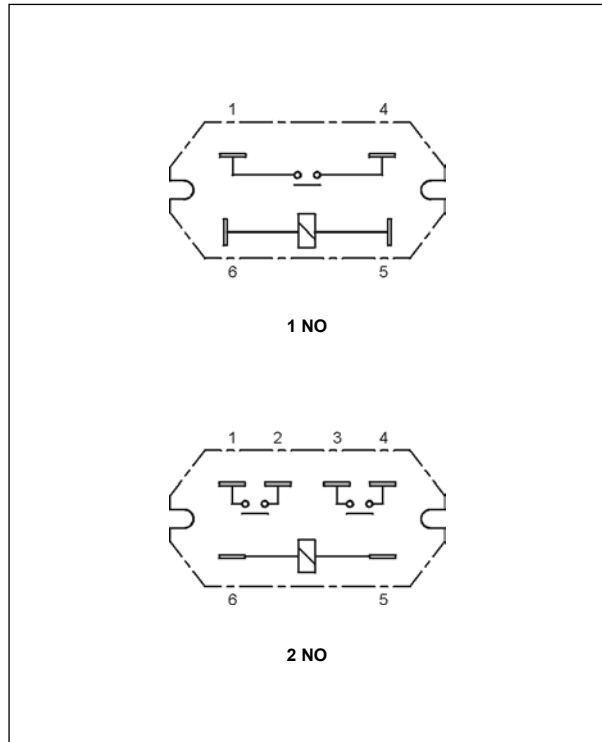

Pinout

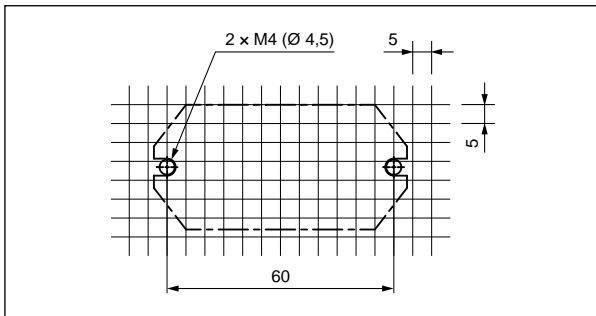

Mounting

Relays **R20** are designed for flat insert connectors - faston 250 (6,3 x 0,8 mm), relays are direct on panel mounting with two M4 screws.


Coil data - DC voltage version Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
1012	12	75,8	± 10%	9,0	13,2
1024	24	303	± 10%	18,0	26,4
1110	110	6 400	± 10%	82,5	121,0

Coil data - AC 50/60 Hz voltage version Table 2



Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC	
				min. (at 20 °C)	max. (at 20 °C)
5024	24	338	± 10%	18,0	26,4
5048	48		± 10%	36,0	52,8
5115	115	5 260	± 10%	86,3	126,5
5230	230	21 000	± 10%	172,5	253,0

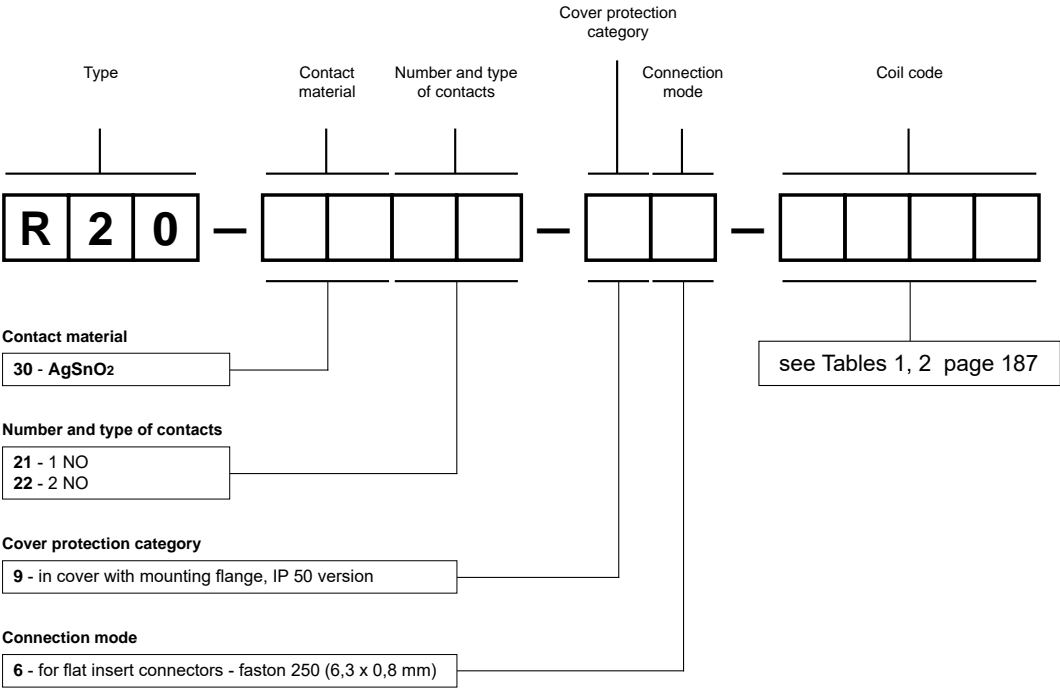Ordering codes




Example of ordering code:
R20-3021-96-1012 relay **R20**, for flat insert connectors - faston 250 (6,3 x 0,8 mm), one normally open contact, contact material AgSnO₂, coil voltage 12 V DC, in cover with mounting flange IP 50



- High load 30 A • DC coils - of up to 110 V DC, low coil power 0,9 W, insulation class F: 155 °C
- For PCB • Small dimensions, light weight
- High shock and vibration resistance
- High quality, long life
- Applications: for automobile, machine, electronic equipment, air conditioner, household appliance
- Recognitions, certifications, directives: RoHS,  

Contact data

Number and type of contacts		1 CO, 1 NO	
Contact material		AgSnO₂, AgCdO 	
Rated / max. switching voltage	AC	240 V / 300 V	
	DC	110 V / 110 V	
Min. switching voltage		10 V	
Rated load	AC1	1 CO: 30 A / 20 A (NO/NC) / 240 V AC	1 NO: 30 A / 240 V AC
	DC1	1 CO: 30 A / 20 A (NO/NC) / 14 V DC	1 NO: 30 A / 14 V DC
Rated current		30 A	
Max. breaking capacity	AC1	1 CO: 7 200 VA / 4 800 VA (NO/NC)	1 NO: 7 200 VA
Contact resistance		≤ 30 mΩ	

Coil data


Rated voltage	DC	5, 12, 24, 48, 110 V	
Must release voltage		DC: ≥ 0,1 U _n	
Operating range of supply voltage		see Table 1	
Must operate voltage		≤ 0,75 U _n	
Rated power consumption	DC	0,9 W	

Insulation according to EN 60664-1


Insulation rated voltage		500 V AC	
Overvoltage category		II	
Flammability class		V-0 UL 94	
Insulation resistance		> 1 000 MΩ	500 V DC, 60 s
Dielectric strength			
• between coil and contacts		2 500 V AC	type of insulation: basic
• contact clearance		1 500 V AC	type of clearance: micro-disconnection

General data


Operating / release time (typical values)		15 ms / 10 ms	
Electrical life			
• resistive AC1	1 200 cycles/hour	10 ⁵ 1 CO: 30 A / 20 A (NO/NC), 240 V AC	1 NO: 30 A, 240 V AC
• resistive DC1	1 200 cycles/hour	10 ⁵ 1 CO: 30 A / 20 A (NO/NC), 14 V DC	1 NO: 30 A, 14 V DC
Mechanical life (cykle)		10 ⁷	
Dimensions (L x W x H)		32,5 x 27,6 x 20,5 mm	
Weight		30 g	
Ambient temperature (non-condensation and/or icing)		• operating -55...+100 °C	
Cover protection category		IP 64 or IP 67	EN 60529
Environmental protection		RTII or RTIII	EN 61810-7
Shock resistance		20 g	
Vibration resistance		1,5 mm DA (constant amplitude) 10...55 Hz	
Solder bath temperature		max. 260 °C	
Soldering time		max. 5 s	

The data in bold type relate to the standard versions of the relays.  AgCdO contact material in electrical contacts is only for use in electrical and electronic equipment (EEE) in compliance with directive RoHS2 2011/65/EU in restricted categories of EEE covered by this directive. Relpol S.A. is not responsible for usage relays with AgCdO contact material in categories of EEE where it is prohibited by the directive RoHS2 2011/65/EU.


Dimensions

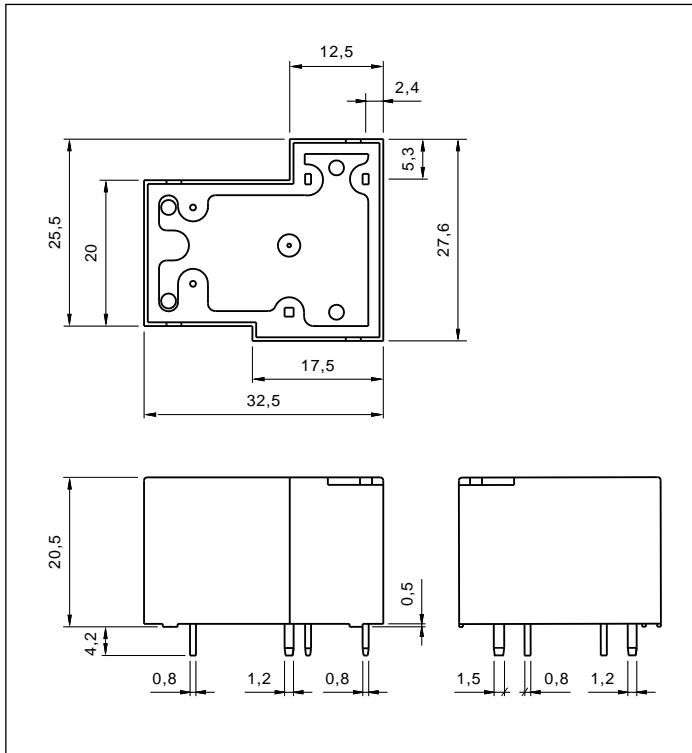

Connection diagrams (pin side view)

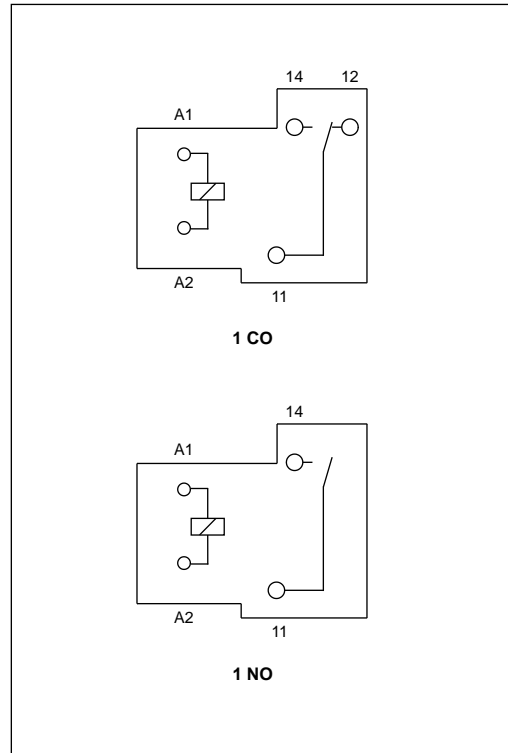

Pinout (solder side view)

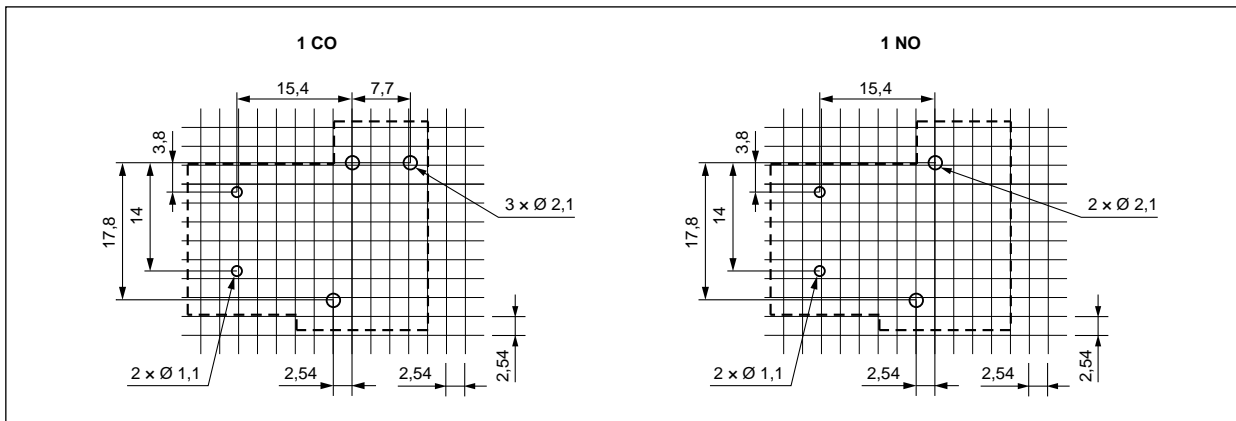

Mounting

Relays **R30N** are designed for direct PCB mounting.

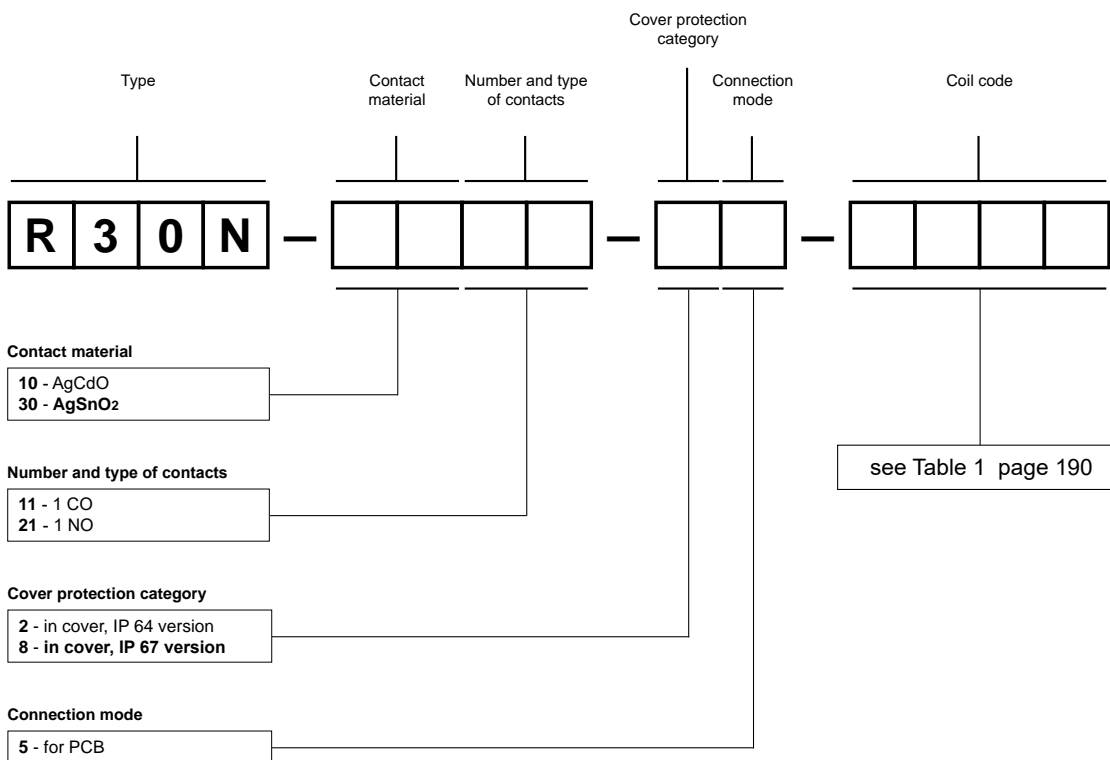
Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
1005	5	28	± 10%	3,8	6,5
1012	12	160	± 10%	9,0	15,6
1024	24	640	± 10%	18,0	31,2
1048	48	2 560	± 10%	36,0	62,4
1110	110	13 445	± 10%	82,5	143,0

The data in bold type relate to the standard versions of the relays.



Ordering codes




Examples of ordering codes:


- R30N-3011-85-1012** relay **R30N**, for PCB, one changeover contact, contact material AgSnO₂, coil voltage 12 V DC, in cover IP 67
- R30N-1021-25-1024** relay **R30N**, for PCB, one normally open contact, contact material AgCdO, coil voltage 24 V DC, in cover IP 64




- High load 40 A • AC coils - of up to 220 V AC, DC coils - of up to 110 V DC, insulation class F: 155 °C
- For PCB • Small dimensions, light weight
- High shock and vibration resistance
- High quality, long life
- Applications: for automobile, machine, electronic equipment, air conditioner, household appliance
- Recognitions, certifications, directives: RoHS,  

Contact data


Number and type of contacts		1 CO, 1 NO	
Contact material		AgSnO₂ , AgCdO 	
Rated / max. switching voltage	AC	240 V / 300 V	
	DC	110 V / 110 V	
Min. switching voltage		10 V	
Rated load	AC1	1 CO: 40 A / 30 A (NO/NC) / 240 V AC	1 NO: 40 A / 240 V AC
	DC1	1 CO: 40 A / 30 A (NO/NC) / 30 V DC	1 NO: 40 A / 30 V DC
Motor load	acc. to UL 508	1 CO: 2 HP / 1,5 HP	250 V AC, (NO/NC), single-phase motor
	AC3 acc. to IEC 60947-4-1	1 NO: 2 HP	250 V AC, single-phase motor
		1 CO: 1,5 kW / 1,1 kW	250 V AC, (NO/NC), single-phase motor
		1 NO: 1,5 kW	250 V AC, single-phase motor
Rated current		40 A	
Max. breaking capacity	AC1	1 CO: 9 600 VA / 7 200 VA (NO/NC)	1 NO: 9 600 VA
	DC1	1 CO: 1 200 W / 900 W (NO/NC)	1 NO: 1 200 W
Contact resistance		≤ 30 mΩ	
Coil data			
Rated voltage	50/60 Hz AC	12, 24 , 110, 120, 220 V	
	DC	5 , 12 , 24 , 48, 110 V	
Must release voltage		DC: ≥ 0,1 U _n	
Operating range of supply voltage		see Tables 1, 2	
Must operate voltage		≤ 0,75 U _n	
Rated power consumption	AC	2,0 VA	
	DC	0,9 W	
Insulation according to EN 60664-1			
Insulation rated voltage		500 V AC	
Overvoltage category		II	
Flammability class		V-0 UL 94	
Insulation resistance		> 1 000 MΩ 500 V DC, 60 s	
Dielectric strength			
• between coil and contacts		4 000 V AC	type of insulation: reinforced
• contact clearance		1 500 V AC	type of clearance: micro-disconnection
General data			
Operating / release time (typical values)		15 ms / 10 ms	
Electrical life			
• resistive AC1	1 200 cycles/hour	10 ⁵ 1 CO: 40 A / 30 A (NO/NC), 240 V AC	1 NO: 40 A, 240 V AC
• resistive DC1	1 200 cycles/hour	10 ⁵ 1 CO: 40 A / 30 A (NO/NC), 30 V DC	1 NO: 40 A, 30 V DC
Mechanical life (cycle)		10 ⁷	
Dimensions (L x W x H)		32,5 x 27,6 x 20,5 mm	
Weight		30 g	
Ambient temperature (non-condensation and/or icing)		• operating	-55...+100 °C
Cover protection category		IP 64 or IP 67	EN 60529
Environmental protection		RTII or RTIII	EN 61810-7
Shock resistance		20 g	
Vibration resistance		1,5 mm DA (constant amplitude) 10...55 Hz	
Solder bath temperature		max. 260 °C	
Soldering time		max. 5 s	

The data in bold type relate to the standard versions of the relays.  AgCdO contact material in electrical contacts is only for use in electrical and electronic equipment (EEE) in compliance with directive RoHS2 2011/65/EU in restricted categories of EEE covered by this directive. Relpol S.A. is not responsible for usage relays with AgCdO contact material in categories of EEE where it is prohibited by the directive RoHS2 2011/65/EU.


Dimensions

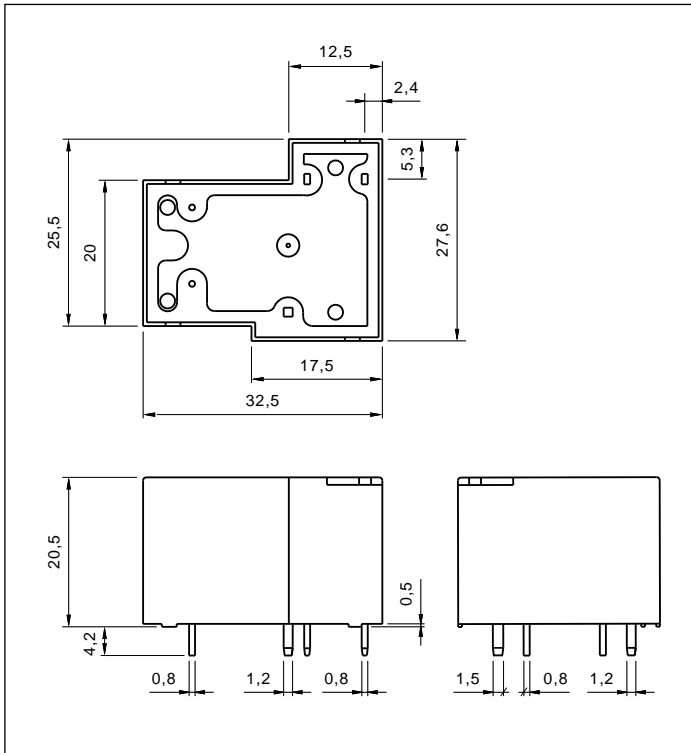

Connection diagrams (pin side view)

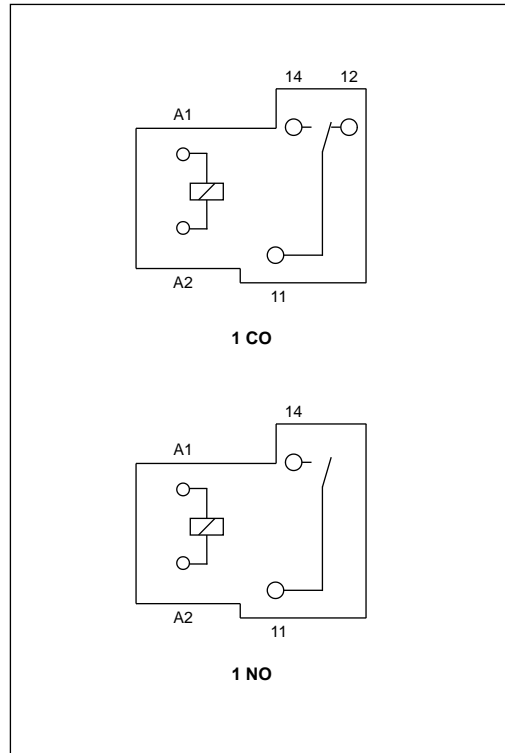

Pinout (solder side view)

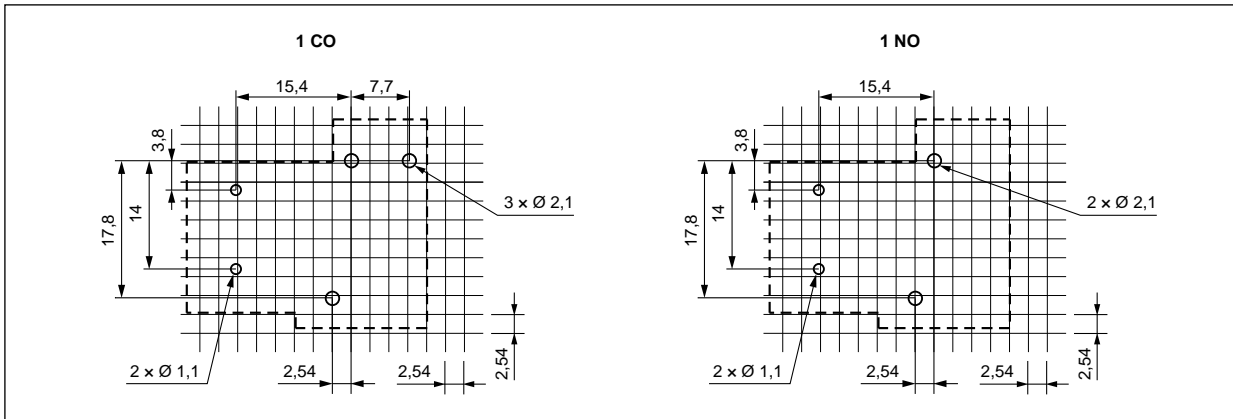

Mounting

Relays **R40N** are designed for direct PCB mounting.

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
1005	5	28	± 10%	3,8	6,5
1012	12	160	± 10%	9,0	15,6
1024	24	640	± 10%	18,0	31,2
1048	48	2 560	± 10%	36,0	62,4
1110	110	13 445	± 10%	82,5	143,0

The data in bold type relate to the standard versions of the relays.


Coil data - AC 50/60 Hz voltage version

Table 2

Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC 50 Hz	
				min. (at 20 °C)	max. (at 20 °C)
5012	12	27	± 10%	9,0	15,6
5024	24	120	± 10%	18,0	31,2
5110	110	2 360	± 10%	82,5	143,0
5120	120	3 040	± 10%	90,0	156,0
5220	220	13 490	± 10%	165,0	286,0

The data in bold type relate to the standard versions of the relays.

Ordering codes

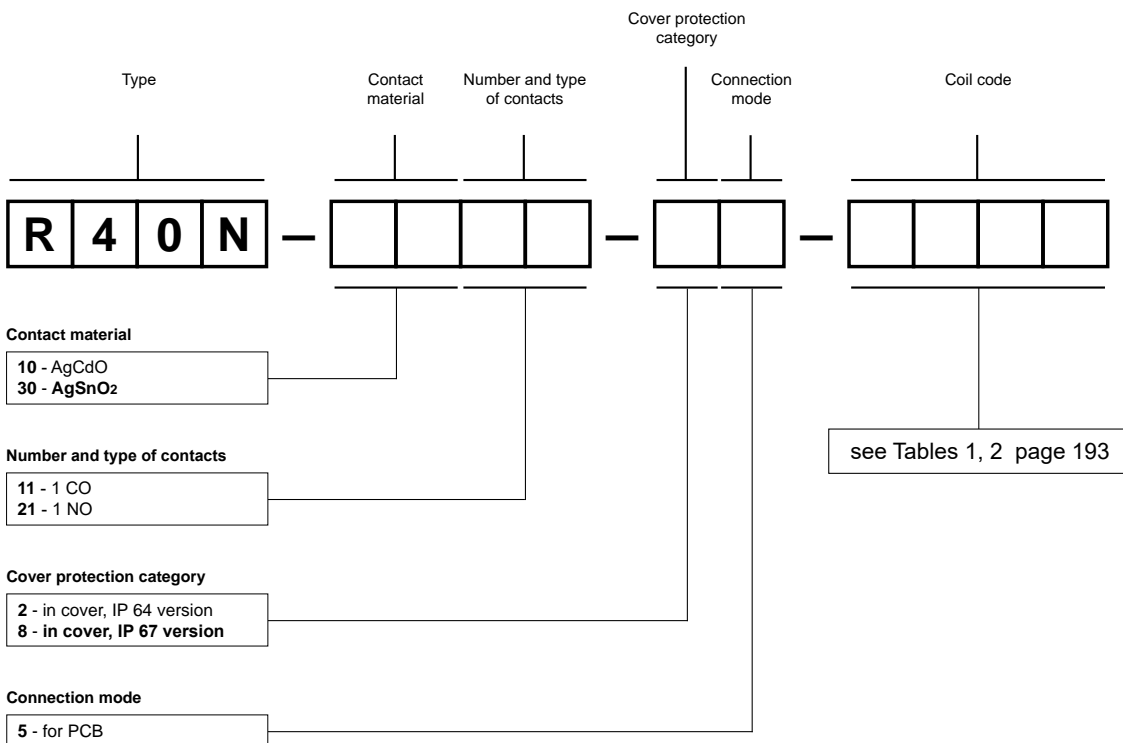

Examples of ordering codes:

R40N-3011-85-1012

relay **R40N**, for PCB, one changeover contact, contact material AgSnO₂, coil voltage 12 V DC, in cover IP 67

R40N-1021-25-5024

relay **R40N**, for PCB, one normally open contact, contact material AgCdO, coil voltage 24 V AC 50/60 Hz, in cover IP 64

RS35, RS50

industrial relays for solar systems




194



RS35



RS50


- Relays to control power in photovoltaic systems which generate electric energy
- Max. switching current: 35 A (version RS35); 50 A (version RS50)
- 5000 V / 10 mm reinforced insulation • Contact gap: RS35 \geq 2,2 mm; RS50 \geq 1,85 mm • Holding power 0,1 W
- For PCB • DC coils, insulation class F: 155 °C • Reinforced insulation, acc. EN 60730-1 (VDE 0631, part 1); EN 60335-1 (VDE 0700, part 1)
- Recognitions, certifications, directives: RoHS,   

Contact data

Number and type of contacts		2 NO	
Contact material		AgSnO₂	
Rated / max. switching voltage	AC	250 V / 440 V	
Min. switching voltage		10 V	
Rated load	AC1 DC1	RS35: 35 A / 250 V AC RS35: 35 A / 24 V DC	RS50: 48 A / 250 V AC RS50: 48 A / 24 V DC
Min. switching current		10 mA	
Rated current		RS35: 35 A	RS50: 50 A
Max. breaking capacity	AC1 DC1	RS35: 8 750 VA RS35: 90 W 0,3 A / 300 V	RS50: 12 500 VA RS50: 90 W 0,3 A / 300 V
Min. breaking capacity		1 W	
Contact resistance		\leq 50 m Ω	
Max. operating frequency	AC1	360 cycles/hour 3 600 cycles/hour	
• at rated load			
• no load			
Coil data			
Rated voltage	DC	5, 9, 12, 18, 24, 110 V	
Must release voltage		DC: \geq 0,05 U _n	
Operating range of supply voltage		0,75...2,0 U _n see Table 1	
Rated power consumption	DC	0,48 W	
Power consumption at pickup voltage		0,3 W	
Max. continuous dissipation		1,9 W 20 °C	
Insulation according to EN 60664-1			
Insulation rated voltage		250 V AC	
Rated surge voltage		6 000 V 1,2 / 50 μ s	
Overvoltage category		III	
Insulation pollution degree		3	
Insulation resistance		1000 M Ω	
Dielectric strength			
• between coil and contacts		5 000 V AC	type of insulation: reinforced
• contact clearance		2 500 V AC	type of clearance: full-disconnection
• pole - pole		2 500 V AC	type of insulation: basic
Contact - coil distance			
• clearance		\geq 10 mm	
• creepage		\geq 10 mm	
General data			
Operating / release time (typical values)		40 ms / 3 ms	
Electrical life			
• resistive AC1		5 x 10 ⁴	RS35, 35 A, 250 V AC, 20 °C
		3 x 10 ⁴	RS50, 50 A, 250 V AC, 20 °C
• AC7a		3 x 10 ⁴	RS35, 35 A, 263 V AC, 85 °C (VDE)
		1,5 x 10 ⁴	RS50, 50 A, 263 V AC, 85 °C (VDE)
Mechanical life (cycles)		10 ⁶	
Dimensions (L x W x H)		40 x 25 x 49,2 mm	
Weight		105 g	
Ambient temperature	• storage	-40...+105 °C	
(non-condensation and/or icing)	• operating	-40...+85 °C	
Cover protection category		IP 40	EN 60529
Environmental protection		RTI	EN 61810-7
Shock resistance		10 g	
Vibration resistance		1,5 mm DA (constant amplitude) 10...55 Hz	
Solder bath temperature		max. 270 °C	
Soldering time		max. 5 s	

The data in bold type relate to the standard versions of the relays.


Dimensions

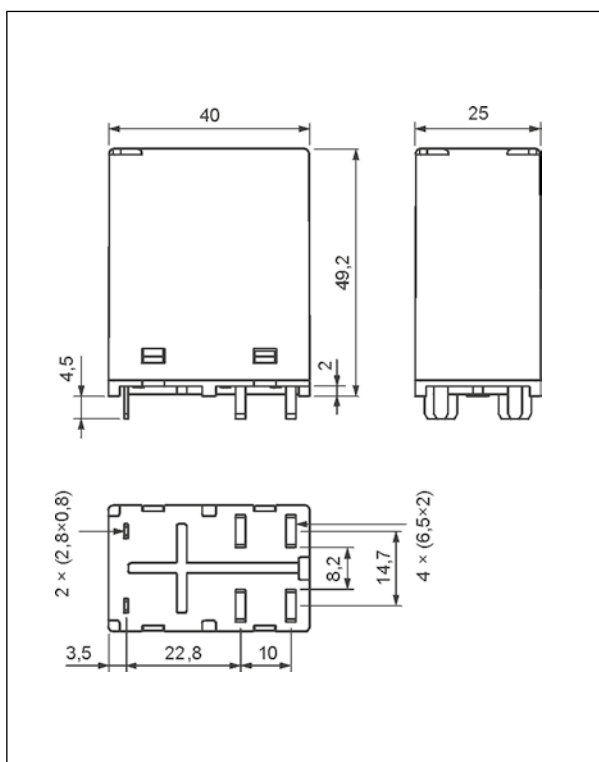


Mounting

Relays **RS35**, **RS50** are designed for direct PCB mounting.

Connection diagrams (pin side view)

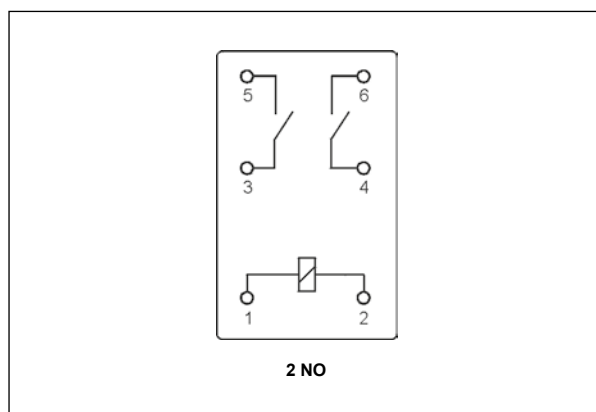

Pinout (solder side view)

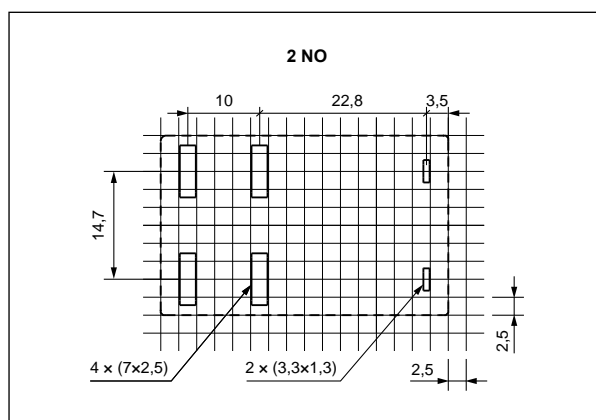


INDUSTRIAL

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 55 °C)
1005	5	50	± 10%	3,75	10
1009	9	170	± 10%	6,75	18
1012	12	300	± 10%	9,00	24
1018	18	675	± 10%	13,50	36
1024	24	1 200	± 10%	18,00	48
1110	110	25 000	± 10%	82,50	220


Ordering codes

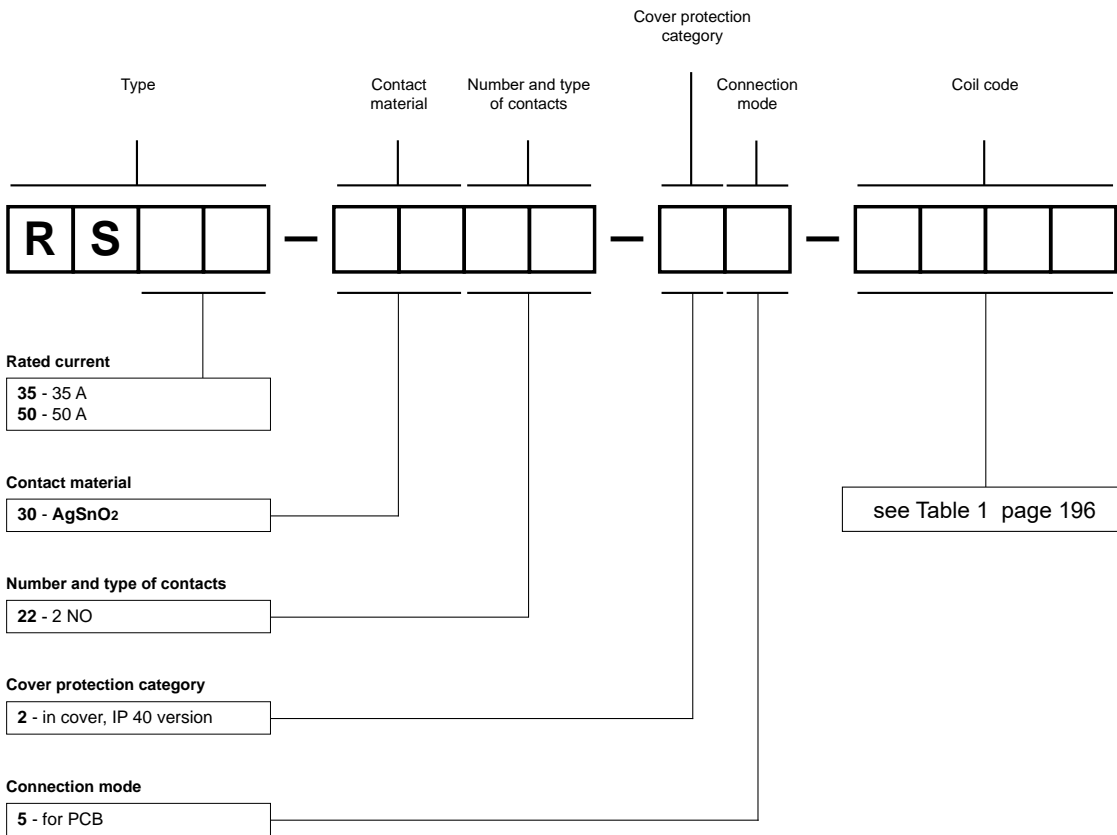

Examples of ordering code:

- RS35-3022-25-1005** relay **RS35**, rated current 35 A, for PCB, two normally open contacts, contact material AgSnO₂, coil voltage 5 V DC, in cover IP 40
- RS50-3022-25-1110** relay **RS50**, rated current 50 A, for PCB, two normally open contacts, contact material AgSnO₂, coil voltage 110 V DC, in cover IP 40

Relays interface

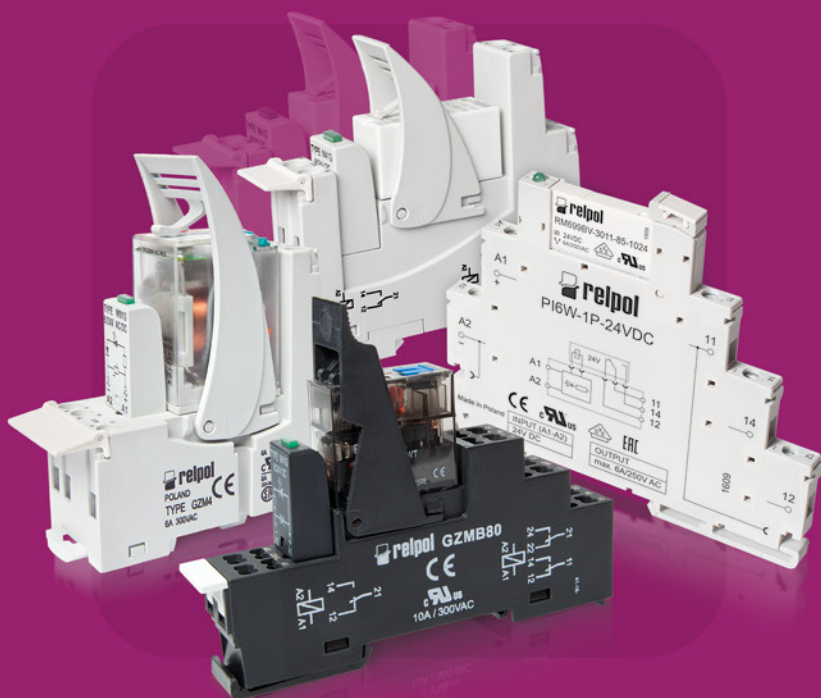

The interface relays perform the function of input/output separation in the applications with PLC controllers, and they are applied in numerous other electric devices as interface and output elements.

- The basic features of the relays are: quick mounting, separation of control circuits from output circuits, coil overvoltage suppression devices, light indicators of operation, number of contacts: from 1 to 4.

The high quality and reliability of the interface relays have been proved by their numerous successful applications. Miniature and industrial relays of the types: RM699BV, RM84, RM85, RMP84, RMP85, R2N, R3N, R4N are the basis for these relays.

They meet the requirements of REACH and RoHS Directive. The relays are recognized and certified by:



with plug-in sockets

PI84 with socket GZT80	198
PI84 with socket GZM80	202
PI84 with socket GZMB80	206
PI85 with socket GZT80	210
PI85 with socket GZM80	214
PI85 with socket GZMB80	218
PI85 inrush with socket GZT80	222
PI84P with socket GZMB80	226
PI85P with socket GZMB80	229
PIR2 with socket GZM2	232
PIR3 with socket GZM3	236
PIR4 with socket GZM4	240

in narrow-profile covers

PI6-1P	244
PI6-1T	247
PIR6W-1P-...	249
PIR6W-1PS-...	253
PIR6WB-1PS-...	257

RM84 + GZT80



- Interface relay **PI84 with socket GZT80** consists of: electromagnet relay **RM84**, grey plug-in socket **GZT80**, signalling / protecting module **type M...**, retainer / retractor clip **GZT80-0040** (plastic), white description plate **GZT80-0035**
- 35 mm rail mount acc. to EN 60715 or on panel mounting with one M3 screw • May be linked with interconnection strip type **ZGGZ80**
- Recognitions, certifications, directives: recognitions RM84, RoHS,





Contact data

Number and type of contacts		2 CO
Contact material		AgNi , AgNi/Au hard gold plating, AgSnO ₂
Rated / max. switching voltage	AC	250 V / 300 V
Min. switching voltage		5 V AgNi, 5 V AgNi/Au hard gold plating, 10 V AgSnO ₂
Rated load (capacity)	AC1	8 A / 250 V AC
	AC15	3 A / 120 V 1,5 A / 240 V (B300)
	DC1	8 A / 24 V DC (see Fig. 3)
	DC13	0,22 A / 120 V 0,1 A / 250 V (R300)
Motor load	acc. to UL 508	1/3 HP 240 V AC, 3,6 FLA, single-phase motor ①
	AC3 acc. to IEC 60947-4-1	0,37 kW 240 V AC, single-phase motor
Min. switching current		5 mA AgNi, 2 mA AgNi/Au hard gold plating, 10 mA AgSnO ₂
Max. inrush current		15 A
Rated current		8 A
Max. breaking capacity	AC1	2 000 VA
Min. breaking capacity		0,3 W AgNi, 0,05 W AgNi/Au hard gold plating, 1 W AgSnO ₂
Contact resistance		≤ 100 mΩ
Max. operating frequency	• at rated load	600 cycles/hour
	• no load	72 000 cycles/hour
Coil data		
Rated voltage	50/60 Hz AC	12, 24 , 48, 120, 230 , 240 V
	DC	12, 24 , 48, 110 V
Must release voltage		AC: ≥ 0,15 U _n DC: ≥ 0,1 U _n
Operating range of supply voltage		see Tables 1, 2 and Fig. 4, 5
Rated power consumption	AC	0,75 VA
	DC	0,4 ... 0,48 W
Insulation according to EN 60664-1		
Insulation rated voltage		250 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		3
Dielectric strength	• between coil and contacts	5 000 V AC type of insulation: reinforced
	• contact clearance	1 000 V AC type of clearance: micro-disconnection
	• pole - pole	2 500 V AC type of insulation: basic
Contact - coil distance	• clearance	≥ 10 mm
	• creepage	≥ 10 mm
General data		
Operating / release time (typical values)		7 ms / 3 ms
Electrical life	• resistive AC1	> 10 ⁵ 8 A, 250 V AC
	• cosφ	see Fig. 2
	• DC L/R=40 ms	> 10 ⁵ 0,12 A, 220 V DC
Mechanical life (cycles)		> 3 x 10 ⁷
Dimensions (L x W x H)		80 x 15,6 x 67 mm
Weight		61 g
Ambient temperature	• storage	-40...+85 °C
	(non-condensation and/or icing) • operating	AC: -40...+70 °C DC: -40...+85 °C
Cover protection category		IP 20 EN 60529
Environmental protection		RM84: RTII GZT80: RT0 EN 61810-7
Shock resistance		20 g
Vibration resistance	(NO/NC)	10 g / 5 g 10...150 Hz


The data in bold type relate to the standard versions of the relays. ① For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.

Dimensions

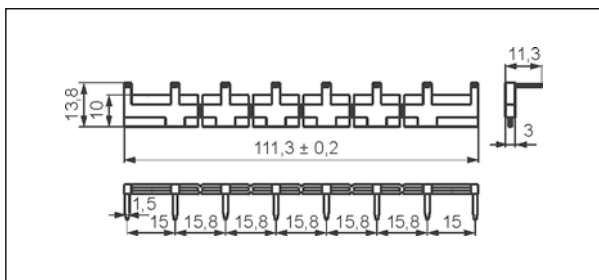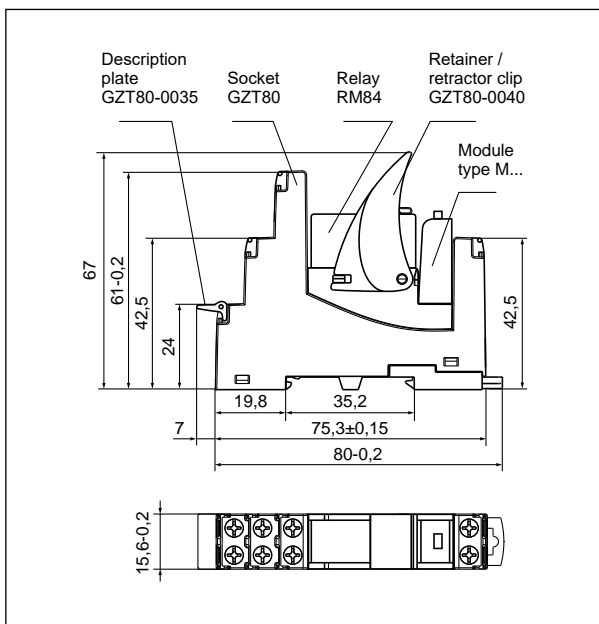


Interconnection strip type **ZGGZ80**

Connection diagrams (screw terminals side view)

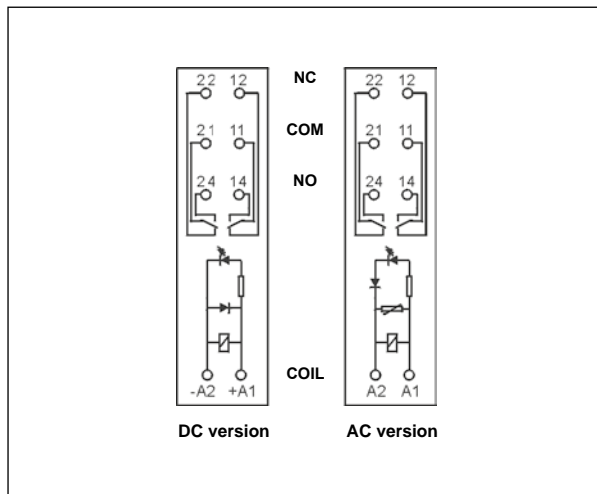


Connection of GZT80 socket

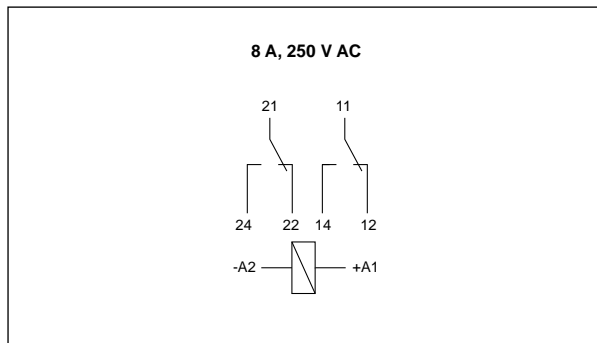

Mounting

Relays **PI84 with socket GZT80** are designed for direct mounting on 35 mm rail mount acc. to EN 60715 or on panel mounting with one M3 screw. **Connections:** max. cross section of the cables (stranded): 2 x 2,5 mm² (2 x 14 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,7 Nm.


Plug-in sockets **GZT80** may be linked with interconnection strip type **ZGGZ80**. Strip **ZGGZ80** bridges common input signals, maximum permissible current is 10 A / 250 V AC. Possibility of connection of 8 sockets. Colours of strips: **ZGGZ80-1** grey, **ZGGZ80-2** black (see page 377).

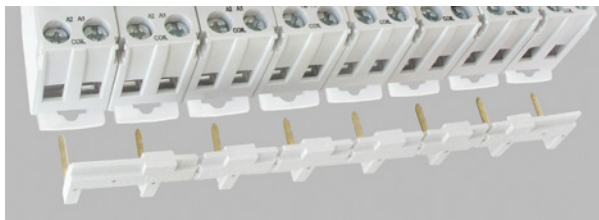

Interconnection strip ZGGZ80: bridging of common input signals.


Electrical life at AC resistive load.
Switching frequency: 600 cycles/hour

Fig. 1

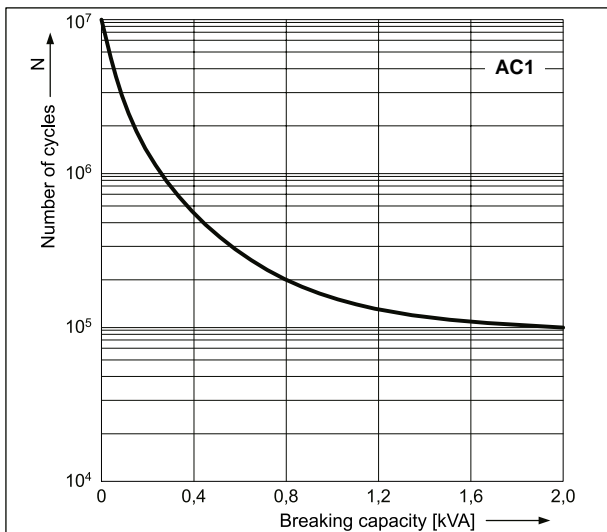


Electrical life reduction factor
at AC inductive load

Fig. 2

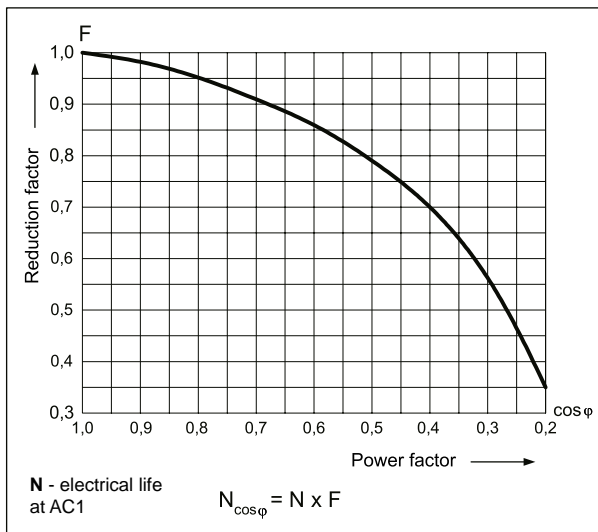


Max. DC resistive load breaking capacity

Fig. 3

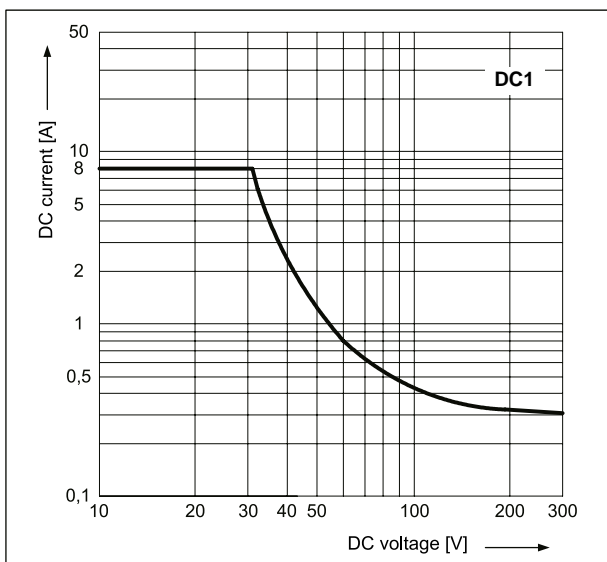


Coil operating range - DC

Fig. 4

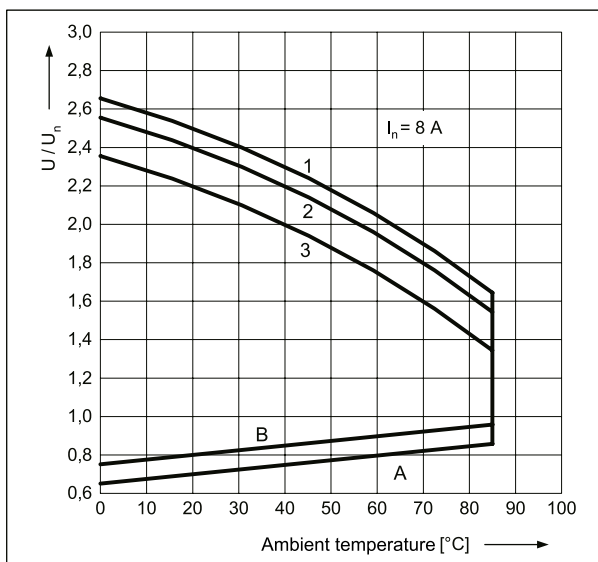

Coil operating range - AC 50 Hz

Fig. 5

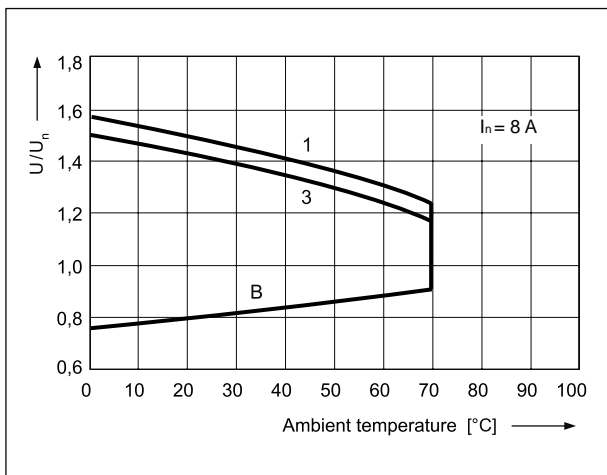

Description of Fig. 4 and 5

A - relations between make voltage and ambient temperature at no load on contacts. Coil temperature and ambient temperature are equal before coil energizing. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).

B - relations between make voltage and ambient temperature after initial coil heating up with 1,1 U_n , at continues load of I_n on contacts. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).

1, 2, 3 - values on Y axis represent allowed overvoltage on coil at certain ambient temperature and contact load:

- 1 - no load
- 2 - 50% of rated load
- 3 - rated load

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
012DC	12	360	± 10%	8,4	30,6
024DC	24	1 440	± 10%	16,8	61,2
048DC	48	5 700	± 10%	33,6	122,4
110DC	110	25 200	± 10%	77,0	280,0

The data in bold type relate to the standard versions of the relays.


Coil data - AC 50/60 Hz voltage version

Table 2

Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC 50 Hz	
				min. (at 20 °C)	max. (at 20 °C)
012AC	12	100	± 10%	9,6	13,2
024AC	24	400	± 10%	19,2	28,8
048AC	48	1 550	± 10%	38,4	57,6
120AC	120	10 200	± 10%	96,0	144,0
230AC	230	38 500	± 10%	184,0	276,0
240AC	240	42 500	± 15%	192,0	288,0

The data in bold type relate to the standard versions of the relays.

Ordering codes

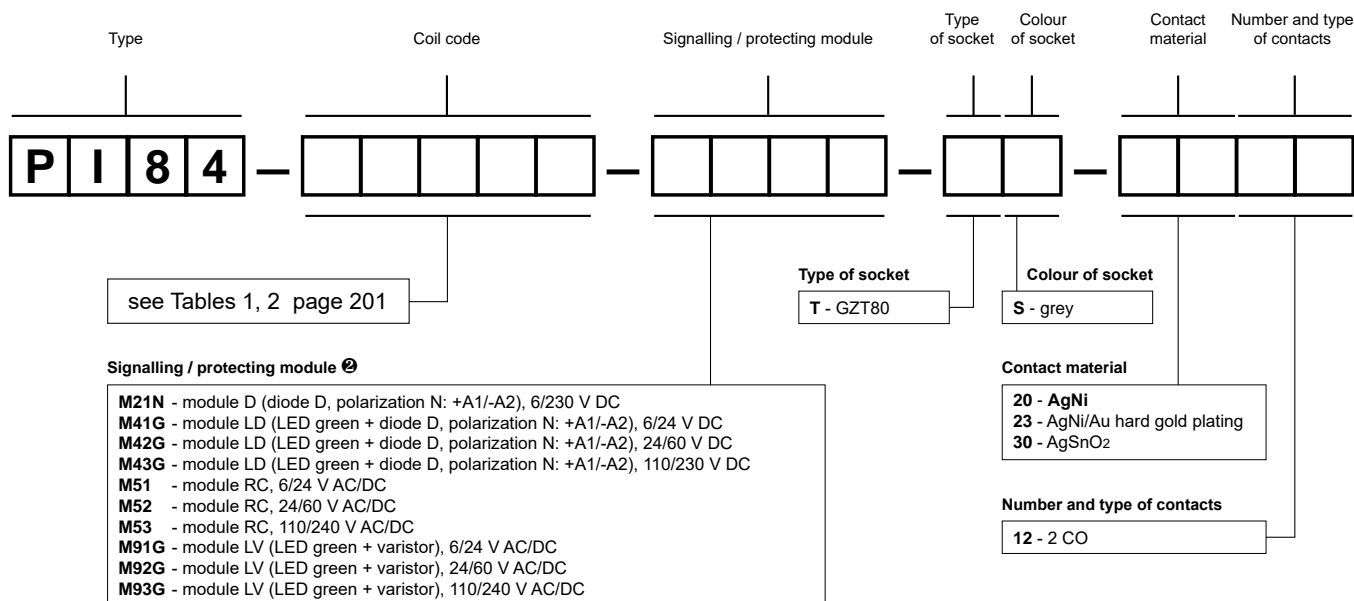

☉ Modules D, RC - only for versions with contacts AgNi

Examples of ordering codes:

PI84-012DC-M41G-TS-2012

interface relay **PI84** consists of: relay **RM84** (two changeover contacts, contact material AgNi, coil voltage 12 V DC), socket **GZT80** (grey, screw terminals), signalling / protecting module **M41G** (version LD), retainer / retractor clip **GZT80-0040** (plastic), description plate **GZT80-0035** (white)

PI84-230AC-M93G-TS-3012

interface relay **PI84** consists of: relay **RM84** (two changeover contacts, contact material AgSnO₂, coil voltage 230 V AC 50/60 Hz), socket **GZT80** (grey, screw terminals), signalling / protecting module **M93G** (version LV), retainer / retractor clip **GZT80-0040** (plastic), description plate **GZT80-0035** (white)

PI84 with socket GZM80 interface relays

202

RM84 + GZM80



- Interface relay **PI84 with socket GZM80** consists of: electromagnetic relay **RM84**, grey plug-in socket **GZM80**, signalling / protecting module **type M...**, retainer / retractor clip **GZT80-0040** (plastic), white description plate **GZT80-0035**
- 35 mm rail mount acc. to EN 60715 or on panel mounting with one M3 screw • May be linked with interconnection strip type **ZGGZ80**
- Recognitions, certifications, directives: recognitions RM84, RoHS,



Contact data

Number and type of contacts		2 CO
Contact material		AgNi , AgNi/Au hard gold plating, AgSnO ₂
Rated / max. switching voltage	AC	250 V / 300 V
Min. switching voltage		5 V AgNi, 5 V AgNi/Au hard gold plating, 10 V AgSnO ₂
Rated load (capacity)	AC1	8 A / 250 V AC
	AC15	3 A / 120 V
	DC1	1,5 A / 240 V (B300)
	DC13	8 A / 24 V DC (see Fig. 3)
Motor load	acc. to UL 508	1/3 HP 240 V AC, 3,6 FLA, single-phase motor ①
	AC3 acc. to IEC 60947-4-1	0,37 kW 240 V AC, single-phase motor
Min. switching current		5 mA AgNi, 2 mA AgNi/Au hard gold plating, 10 mA AgSnO ₂
Max. inrush current		15 A
Rated current		8 A
Max. breaking capacity	AC1	2 000 VA
Min. breaking capacity		0,3 W AgNi, 0,05 W AgNi/Au hard gold plating, 1 W AgSnO ₂
Contact resistance		≤ 100 mΩ
Max. operating frequency	• at rated load	600 cycles/hour
	• no load	72 000 cycles/hour

Coil data

Rated voltage	50/60 Hz AC	12, 24 , 120, 230 , 240 V
	DC	12, 24 , 48, 60, 110 V
Must release voltage		AC: ≥ 0,15 U _n DC: ≥ 0,1 U _n
Operating range of supply voltage		see Tables 1, 2 and Fig. 4, 5
Rated power consumption	AC	0,75 VA
	DC	0,4 ... 0,48 W

Insulation according to EN 60664-1


Insulation rated voltage		300 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		3
Dielectric strength	• between coil and contacts	5 000 V AC type of insulation: reinforced
	• contact clearance	1 000 V AC type of clearance: micro-disconnection
	• pole - pole	2 500 V AC type of insulation: basic
Contact - coil distance	• clearance	≥ 10 mm
	• creepage	≥ 10 mm

General data


Operating / release time (typical values)		7 ms / 3 ms
Electrical life	• resistive AC1	> 10 ⁵ 8 A, 250 V AC
	• cosφ	see Fig. 2
	• cosφ = 0,4	> 10 ⁵ 3 A, 250 V AC
	• DC L/R=40 ms	> 10 ⁵ 0,12 A, 220 V DC
Mechanical life (cycles)		> 3 x 10 ⁷
Dimensions (L x W x H)		81,6 x 15,9 x 67 mm
Weight		60 g
Ambient temperature	• storage	-40...+85 °C
	(non-condensation and/or icing) • operating	AC: -40...+70 °C DC: -40...+85 °C
Cover protection category		IP 20 EN 60529
Environmental protection		RM84: RTII GZM80: RTO EN 61810-7
Shock resistance		20 g
Vibration resistance	(NO/NC)	10 g / 5 g 10...150 Hz

The data in bold type relate to the standard versions of the relays. ① For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.



Dimensions

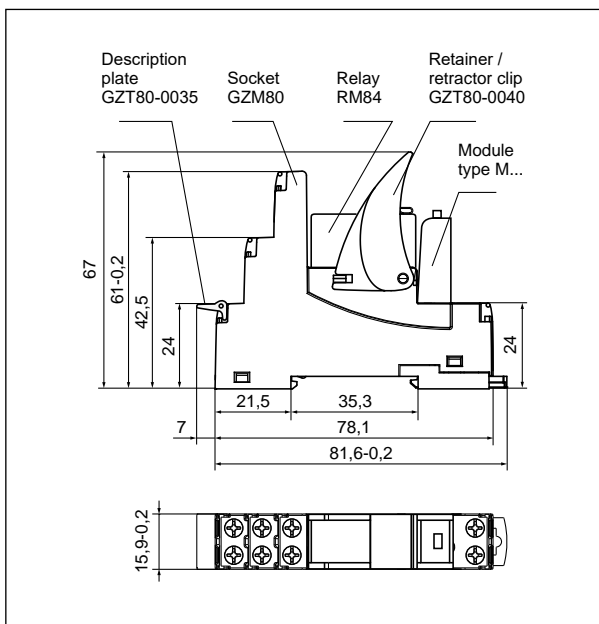

Connection diagrams (screw terminals side view)

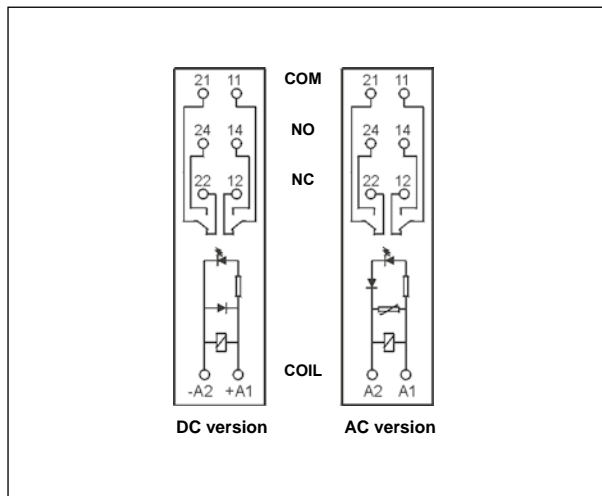

Connection of GZM80 socket

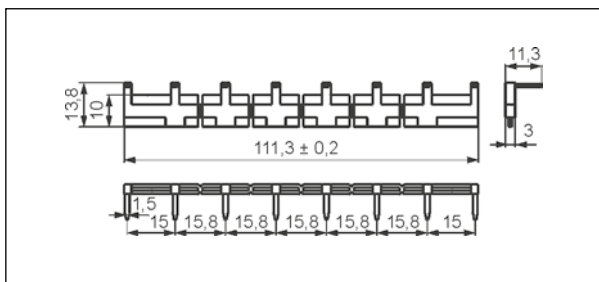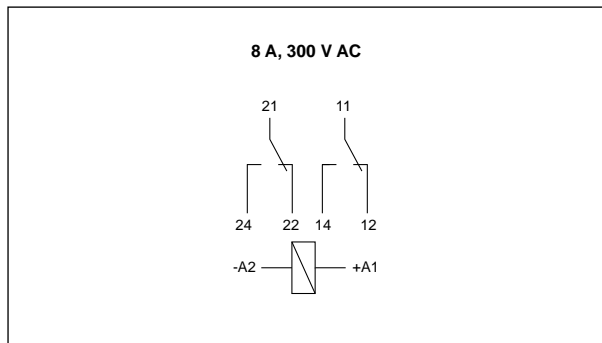


Interconnection strip type **ZGGZ80**

Mounting

Relays **PI84 with socket GZM80** are designed for direct mounting on 35 mm rail mount acc. to EN 60715 or on panel mounting with one M3 screw. **Connections:** max. cross section of the cables (stranded): 2 x 2,5 mm² (2 x 14 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,7 Nm.


Plug-in sockets **GZM80** may be linked with interconnection strip type **ZGGZ80**. Strip **ZGGZ80** bridges common input signals, maximum permissible current is 10 A / 250 V AC. Possibility of connection of 8 sockets. Colours of strips: **ZGGZ80-1** grey, **ZGGZ80-2** black (see page 377).

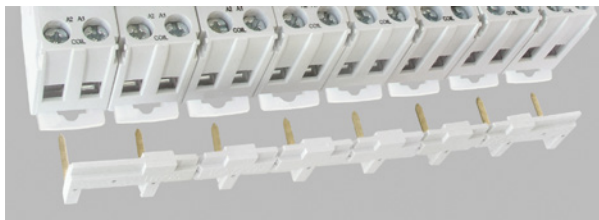

Interconnection strip ZGGZ80: bridging of common input signals.


Electrical life at AC resistive load.
Switching frequency: 600 cycles/hour

Fig. 1

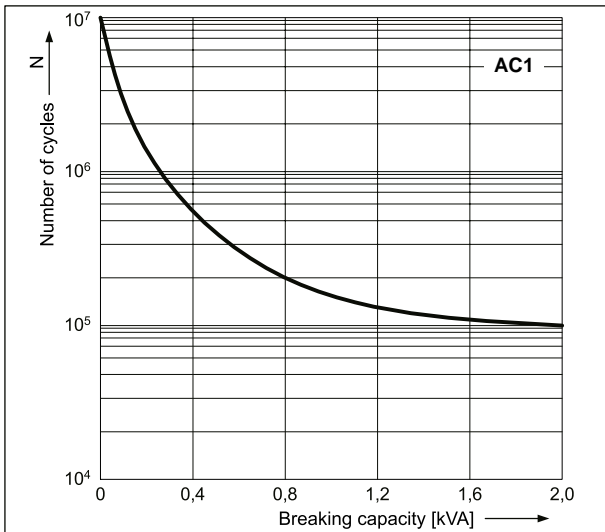


Electrical life reduction factor
at AC inductive load

Fig. 2

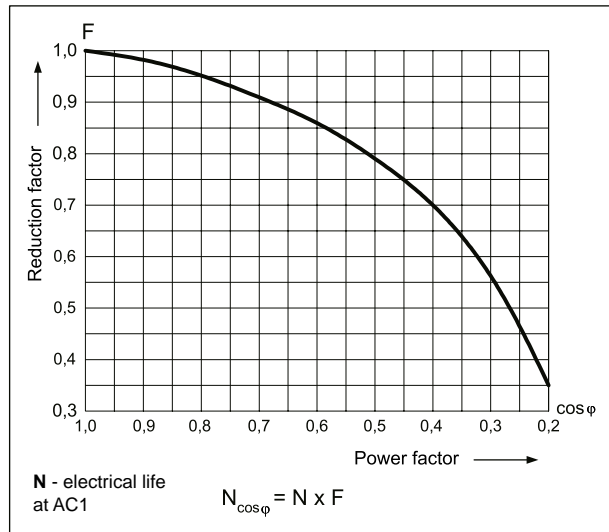


Max. DC resistive load breaking capacity

Fig. 3

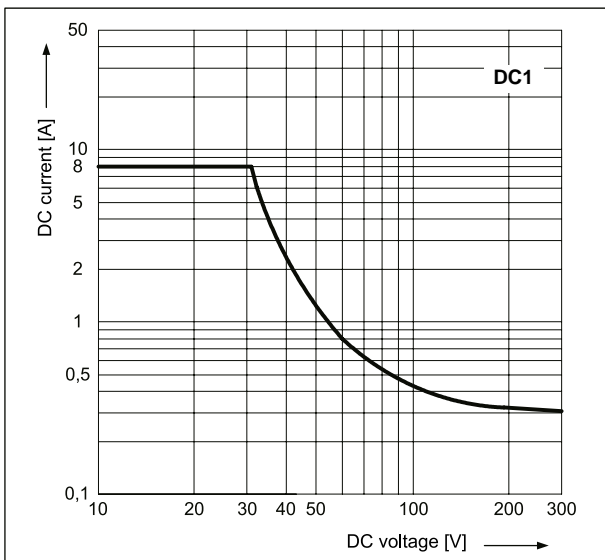


Coil operating range - DC

Fig. 4

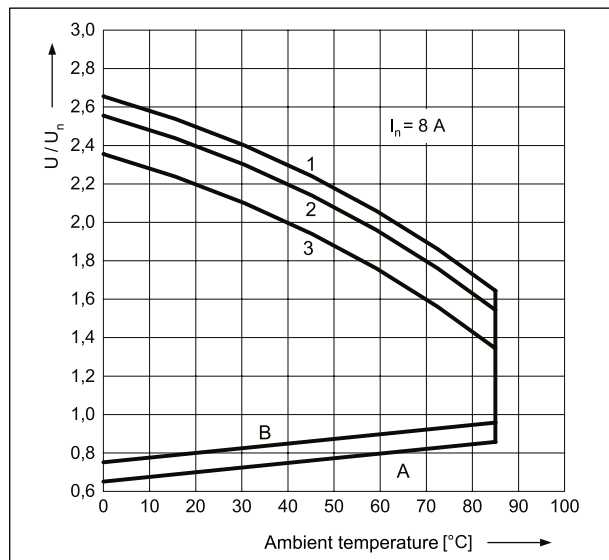

Coil operating range - AC 50 Hz

Fig. 5

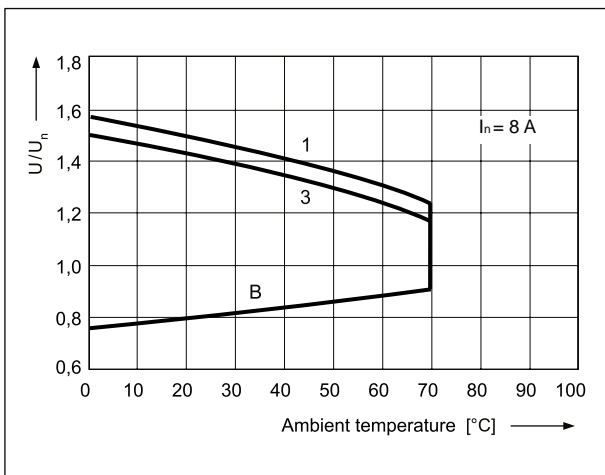

Description of Fig. 4 and 5

A - relations between make voltage and ambient temperature at no load on contacts. Coil temperature and ambient temperature are equal before coil energizing. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).

B - relations between make voltage and ambient temperature after initial coil heating up with $1,1 U_n$, at continues load of I_n on contacts. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).

1, 2, 3 - values on Y axis represent allowed overvoltage on coil at certain ambient temperature and contact load:

- 1 - no load
- 2 - 50% of rated load
- 3 - rated load

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
012DC	12	360	± 10%	8,4	30,6
024DC	24	1 440	± 10%	16,8	61,2
048DC	48	5 700	± 10%	33,6	122,4
060DC	60	7 500	± 10%	42,0	153,0
110DC	110	25 200	± 10%	77,0	280,0

The data in bold type relate to the standard versions of the relays.


Coil data - AC 50/60 Hz voltage version

Table 2

Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC 50 Hz	
				min. (at 20 °C)	max. (at 20 °C)
012AC	12	100	± 10%	9,6	13,2
024AC	24	400	± 10%	19,2	28,8
120AC	120	10 200	± 10%	96,0	144,0
230AC	230	38 500	± 10%	184,0	276,0
240AC	240	42 500	± 15%	192,0	288,0

The data in bold type relate to the standard versions of the relays.

Ordering codes

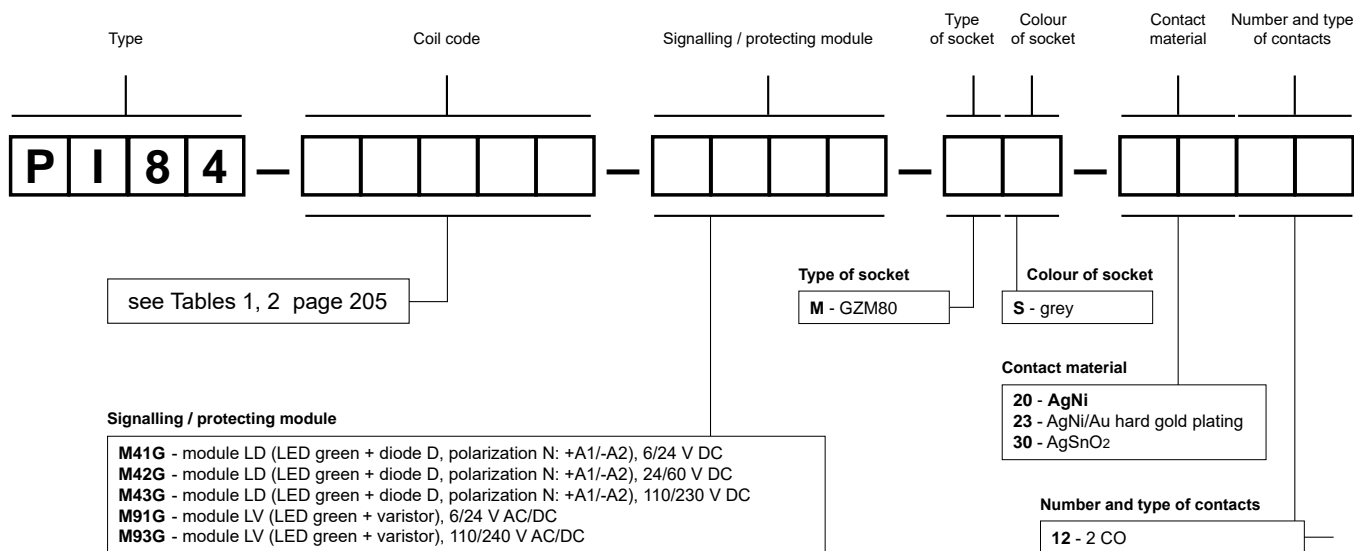

Examples of ordering codes:

PI84-012DC-M41G-MS-2012

interface relay **PI84** consists of: relay **RM84** (two changeover contacts, contact material AgNi, coil voltage 12 V DC), socket **GZM80** (grey, screw terminals), signalling / protecting module **M41G** (version LD), retainer / retractor clip **GZT80-0040** (plastic), description plate **GZT80-0035** (white)

PI84-230AC-M93G-MS-3012

interface relay **PI84** consists of: relay **RM84** (two changeover contacts, contact material AgSnO₂, coil voltage 230 V AC 50/60 Hz), socket **GZM80** (grey, screw terminals), signalling / protecting module **M93G** (version LV), retainer / retractor clip **GZT80-0040** (plastic), description plate **GZT80-0035** (white)

PI84 with socket GZMB80

interface relays with spring terminals

206

RM84 + GZMB80



- Interface relay **PI84 with socket GZMB80** consists of: electromagnetic relay **RM84**, black plug-in socket **GZMB80**, signalling / protecting module **type M...**, retainer / retractor clip **GZMB80-0040** (plastic), white description plate **TR**
- 35 mm rail mount acc. to EN 60715
- Recognitions, certifications, directives: recognitions RM84, RoHS,




Contact data

Number and type of contacts		2 CO
Contact material		AgNi , AgNi/Au hard gold plating, AgSnO ₂
Rated / max. switching voltage	AC	250 V / 300 V
Min. switching voltage		5 V AgNi, 5 V AgNi/Au hard gold plating, 10 V AgSnO ₂
Rated load (capacity)	AC1	8 A / 250 V AC
	AC15	3 A / 120 V 1,5 A / 240 V (B300)
	DC1	8 A / 24 V DC (see Fig. 3)
	DC13	0,22 A / 120 V 0,1 A / 250 V (R300)
Motor load	acc. to UL 508	1/3 HP 240 V AC, 3,6 FLA, single-phase motor ①
	AC3 acc. to IEC 60947-4-1	0,37 kW 240 V AC, single-phase motor
Min. switching current		5 mA AgNi, 2 mA AgNi/Au hard gold plating, 10 mA AgSnO ₂
Max. inrush current		15 A AgSnO ₂
Rated current		8 A
Max. breaking capacity	AC1	2 000 VA
Min. breaking capacity		0,3 W AgNi, 0,05 W AgNi/Au hard gold plating, 1 W AgSnO ₂
Contact resistance		≤ 100 mΩ
Max. operating frequency	• at rated load	600 cycles/hour
	• no load	72 000 cycles/hour
Coil data		
Rated voltage	50/60 Hz AC	12, 24 , 110, 120, 230 V
	DC	12, 24 , 110 V
Must release voltage		AC: ≥ 0,15 U _n DC: ≥ 0,1 U _n
Operating range of supply voltage		see Tables 1, 2 and Fig. 4, 5
Rated power consumption	AC	0,75 VA
	DC	0,4 ... 0,48 W
Insulation according to EN 60664-1		
Insulation rated voltage		300 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		3
Dielectric strength	• between coil and contacts	4 000 V AC
	• contact clearance	1 000 V AC type of clearance: micro-disconnection
	• pole - pole	2 500 V AC
Contact - coil distance	• clearance	≥ 10 mm
	• creepage	≥ 10 mm
General data		
Operating / release time (typical values)		7 ms / 3 ms
Electrical life	• resistive AC1	> 10 ⁵ 8 A, 250 V AC
	• cosφ	see Fig. 2
	• DC L/R=40 ms	> 10 ⁵ 0,12 A, 220 V DC
	Mechanical life (cycles)	> 3 x 10 ⁷
Dimensions (L x W x H)		97 x 16 x 69 mm
Weight		60 g
Ambient temperature	• storage	-40...+85 °C
	(non-condensation and/or icing) • operating	AC: -40...+70 °C DC: -40...+85 °C
Cover protection category		IP 20 EN 60529
Environmental protection		RM84: RTII GZMB80: RT0 EN 61810-7
Shock resistance		20 g
Vibration resistance	(NO/NC)	10 g / 5 g 10...150 Hz

The data in bold type relate to the standard versions of the relays. ① For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.


Dimensions

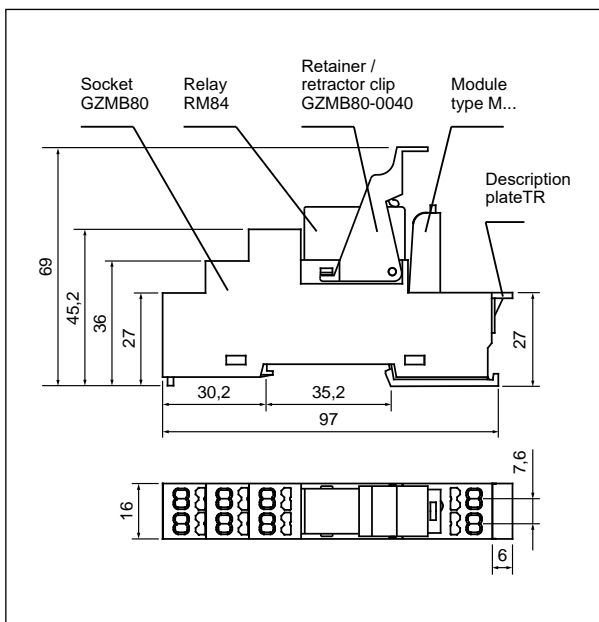


Mounting

Relays **PI84 with socket GZMB80** are designed for direct mounting on 35 mm rail mount acc. to EN 60715.
Connections: max. cross section of the cables: 1 x 0,2... 1,5 mm² (1 x 24...16 AWG), stripping length: 9...11 mm.

Connection diagrams (spring terminals side view)

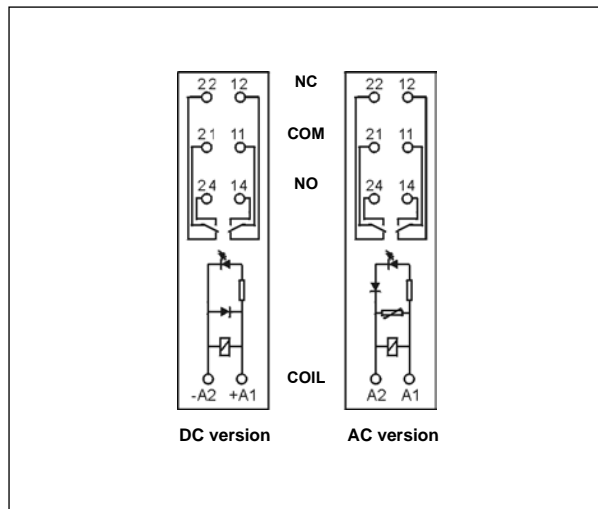


Connection of GZMB80 socket

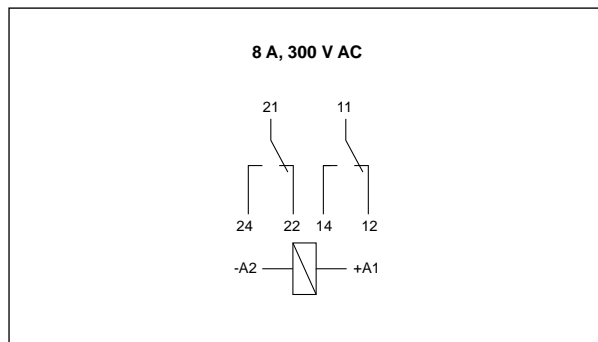


Wire connection

The drawings present the sequence of operations in course of inserting wires to the spring terminal, and the recommended screwdriver to be used for opening of case springs, comply with the DIN 5264 FORM "A".

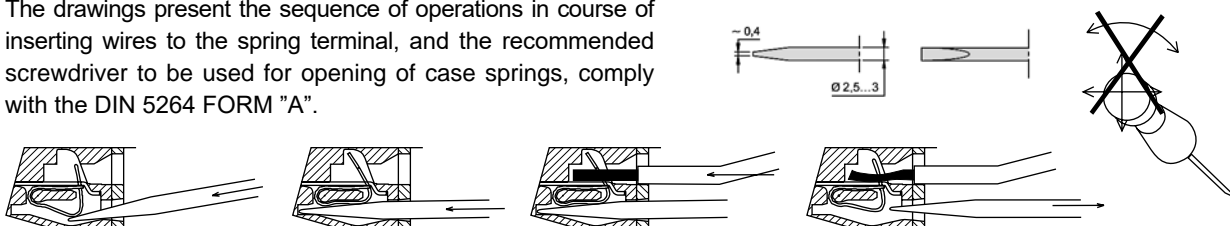


Electrical life at AC resistive load.
Switching frequency: 600 cycles/hour

Fig. 1

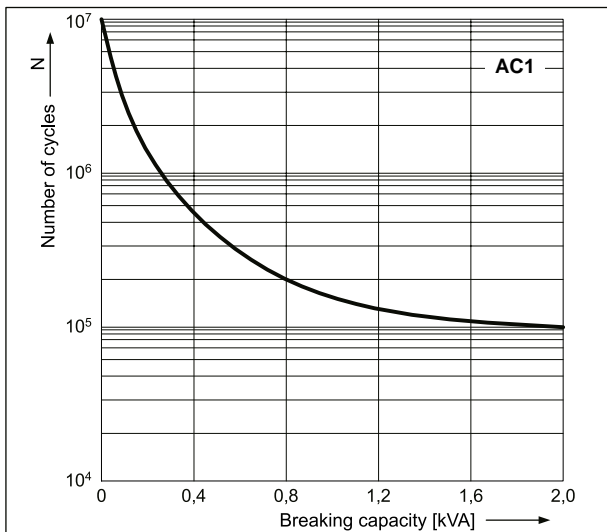


Electrical life reduction factor
at AC inductive load

Fig. 2

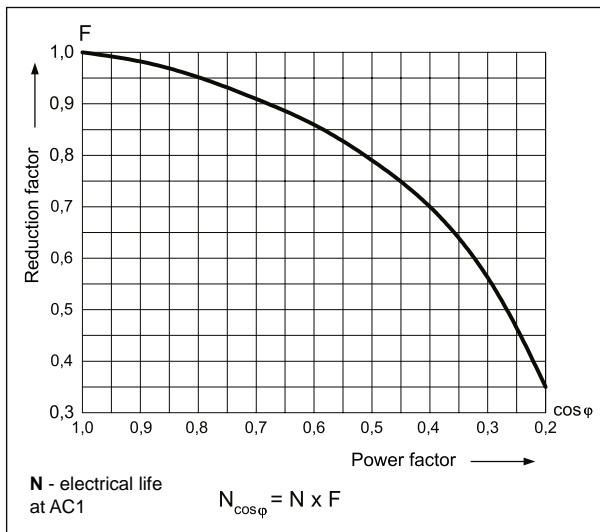


Max. DC resistive load breaking capacity

Fig. 3

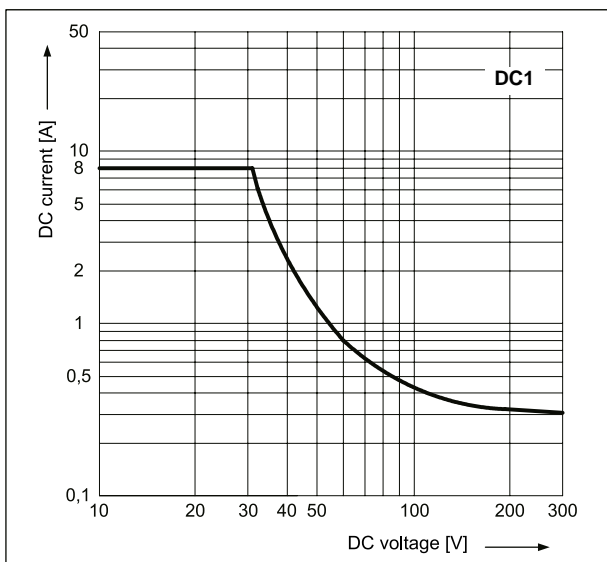


Coil operating range - DC

Fig. 4

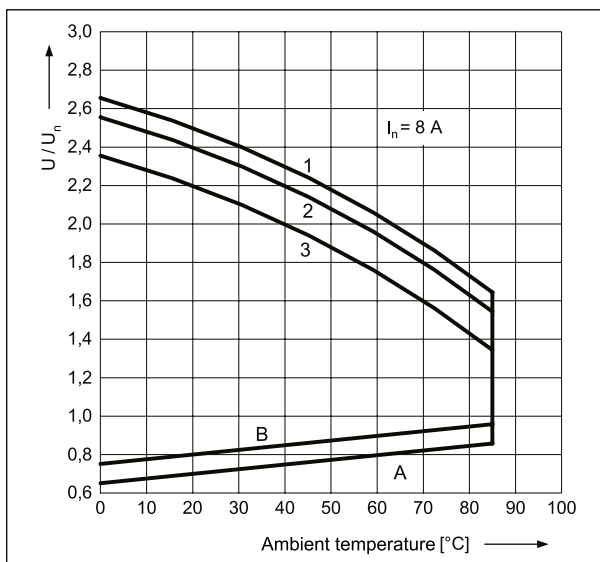

Coil operating range - AC 50 Hz

Fig. 5

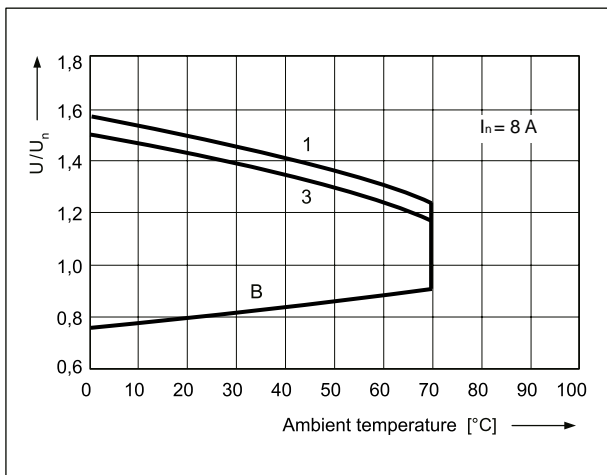

Description of Fig. 4 and 5

A - relations between make voltage and ambient temperature at no load on contacts. Coil temperature and ambient temperature are equal before coil energizing. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).
B - relations between make voltage and ambient temperature after initial coil heating up with 1,1 U_n, at continues load of I_n on contacts. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).
1, 2, 3 - values on Y axis represent allowed overvoltage on coil at certain ambient temperature and contact load:
1 - no load
2 - 50% of rated load
3 - rated load

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
012DC	12	360	± 10%	8,4	30,6
024DC	24	1 440	± 10%	16,8	61,2
110DC	110	25 200	± 10%	77,0	280,0

The data in bold type relate to the standard versions of the relays.


Coil data - AC 50/60 Hz voltage version

Table 2

Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC 50 Hz	
				min. (at 20 °C)	max. (at 20 °C)
012AC	12	100	± 10%	9,6	13,2
024AC	24	400	± 10%	19,2	28,8
110AC	110	8 900	± 10%	88,0	132,0
120AC	120	10 200	± 10%	96,0	144,0
230AC	230	38 500	± 10%	184,0	276,0

The data in bold type relate to the standard versions of the relays.

Ordering codes

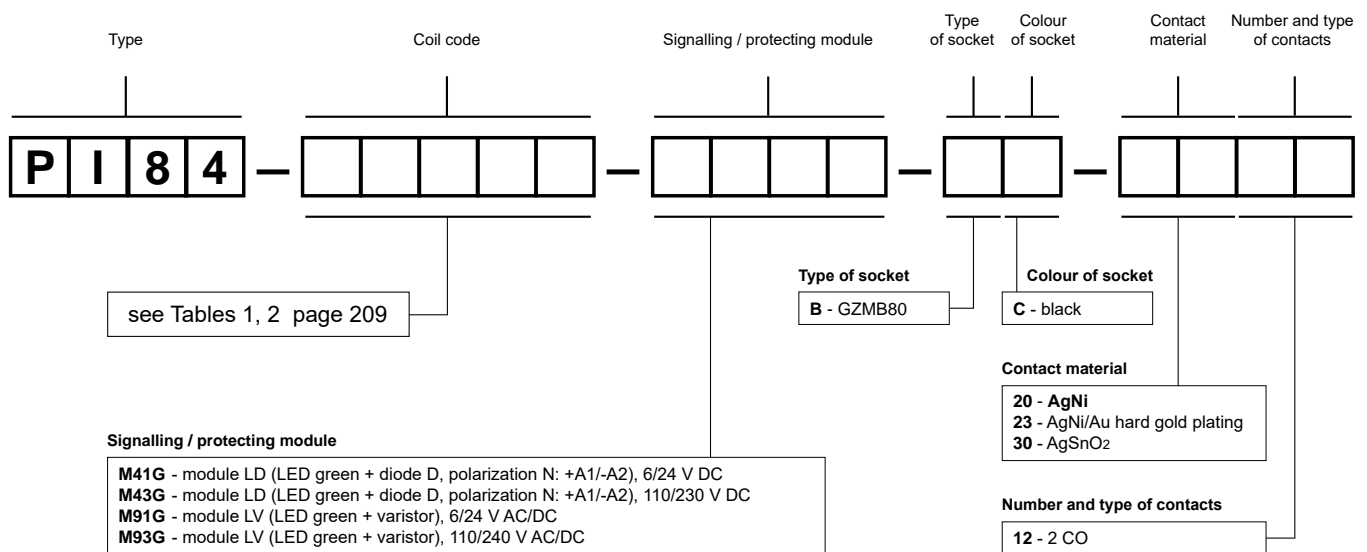

Examples of ordering codes:

PI84-012DC-M41G-BC-2012

interface relay **PI84** consists of: relay **RM84** (two changeover contacts, contact material AgNi, coil voltage 12 V DC), socket **GZMB80** (black, spring terminals), signalling / protecting module **M41G** (version LD), retainer / retractor clip **GZMB80-0040** (plastic), description plate **TR** (white)

PI84-230AC-M93G-BC-3012

interface relay **PI84** consists of: relay **RM84** (two changeover contacts, contact material AgSnO₂, coil voltage 230 V AC 50/60 Hz), socket **GZMB80** (black, spring terminals), signalling / protecting module **M93G** (version LV), retainer / retractor clip **GZMB80-0040** (plastic), description plate **TR** (white)

RM85 + GZT80



- Interface relay **PI85 with socket GZT80** consists of: electromagnet relay **RM85**, grey plug-in socket **GZT80**, signalling / protecting module **type M...**, retainer / retractor clip **GZT80-0040** (plastic), white description plate **GZT80-0035**
- 35 mm rail mount acc. to EN 60715 or on panel mounting with one M3 screw • May be linked with interconnection strip type **ZGGZ80**
- Recognitions, certifications, directives: recognitions RM85, RoHS,





Contact data

Number and type of contacts		1 CO
Contact material		AgNi , AgNi/Au hard gold plating, AgSnO ₂
Rated / max. switching voltage	AC	250 V / 300 V
Min. switching voltage		5 V AgNi, 5 V AgNi/Au hard gold plating, 10 V AgSnO ₂
Rated load (capacity)	AC1	16 A / 250 V AC ①
	AC15	3 A / 120 V 1,5 A / 240 V (B300)
	DC1	16 A / 24 V DC (see Fig. 3)
	DC13	0,22 A / 120 V 0,1 A / 250 V (R300)
Motor load	acc. to UL 508	1/2 HP 240 V AC, 4,9 FLA, single-phase motor ②
	AC3 acc. to IEC 60947-4-1	0,5 kW 240 V AC, single-phase motor
Min. switching current		5 mA AgNi, 2 mA AgNi/Au hard gold plating, 10 mA AgSnO ₂
Max. inrush current		30 A
Rated current		16 A
Max. breaking capacity	AC1	4 000 VA
Min. breaking capacity		0,3 W AgNi, 0,05 W AgNi/Au hard gold plating, 1 W AgSnO ₂
Contact resistance		≤ 100 mΩ
Max. operating frequency	• at rated load	600 cycles/hour
	• no load	72 000 cycles/hour
Coil data		
Rated voltage	50/60 Hz AC	12, 24 , 48, 120, 230 , 240 V
	DC	12, 24 , 48, 110 V
Must release voltage		AC: ≥ 0,15 U _n DC: ≥ 0,1 U _n
Operating range of supply voltage		see Tables 1, 2 and Fig. 4, 5
Rated power consumption	AC	0,75 VA
	DC	0,4 ... 0,48 W
Insulation according to EN 60664-1		
Insulation rated voltage		250 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		3
Dielectric strength	• between coil and contacts	5 000 V AC type of insulation: reinforced
	• contact clearance	1 000 V AC type of clearance: micro-disconnection
Contact - coil distance	• clearance	≥ 10 mm
	• creepage	≥ 10 mm
General data		
Operating / release time (typical values)		7 ms / 3 ms
Electrical life	• resistive AC1	> 0,7 x 10 ⁵ 16 A, 250 V AC
	• cosφ	see Fig. 2
	• DC L/R=40 ms	> 10 ⁵ 0,12 A, 220 V DC
Mechanical life (cycles)		> 3 x 10 ⁷
Dimensions (L x W x H)		80 x 15,6 x 67 mm
Weight		61 g
Ambient temperature	• storage	-40...+85 °C
	(non-condensation and/or icing) • operating	AC: -40...+70 °C DC: -40...+85 °C
Cover protection category		IP 20 EN 60529
Environmental protection		RM85: RTII GZT80: RT0 EN 61810-7
Shock resistance		30 g
Vibration resistance		10 g 10...150 Hz


The data in bold type relate to the standard versions of the relays. ① Loads above 12 A require bridging pairs of screw terminals: 11 with 21, 12 with 22, 14 with 24 - see page 211. ② For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.

Dimensions

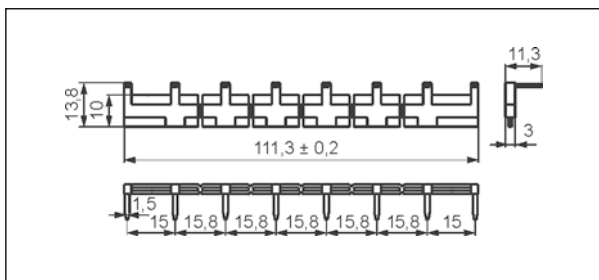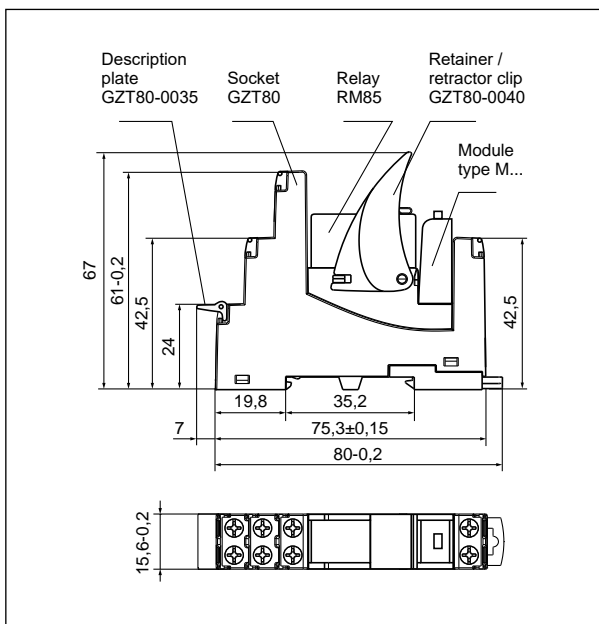


Interconnection strip type **ZGGZ80**

Connection diagrams (screw terminals side view)

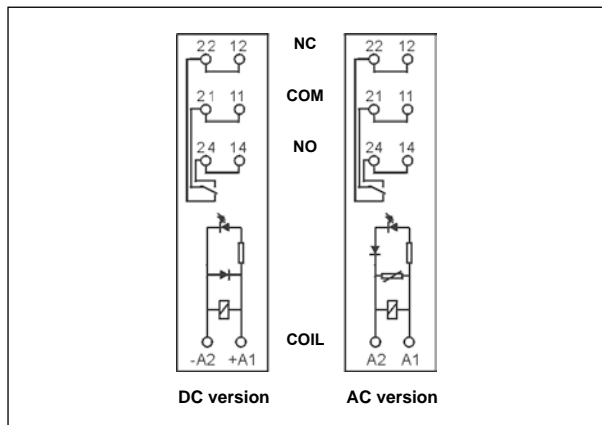

Connection of GZT80 socket

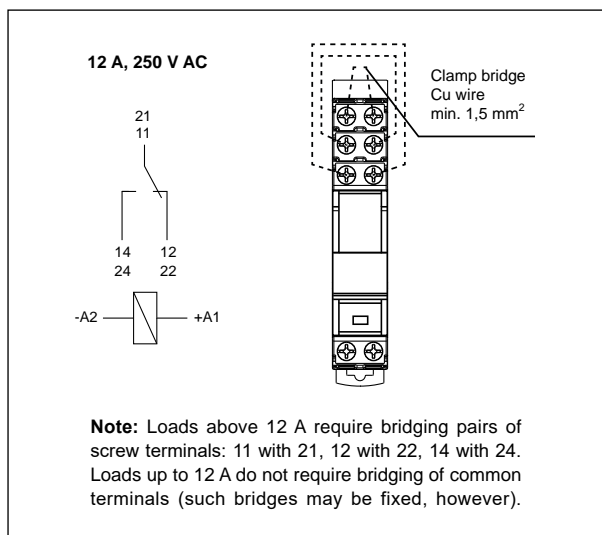


Note: Loads above 12 A require bridging pairs of screw terminals: 11 with 21, 12 with 22, 14 with 24. Loads up to 12 A do not require bridging of common terminals (such bridges may be fixed, however).

Mounting

Relays **PI85 with socket GZT80** are designed for direct mounting on 35 mm rail mount acc. to EN 60715 or on panel mounting with one M3 screw. **Connections:** max. cross section of the cables (stranded): 2 x 2,5 mm² (2 x 14 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,7 Nm.

Plug-in sockets **GZT80** may be linked with interconnection strip type **ZGGZ80**. Strip **ZGGZ80** bridges common input signals, maximum permissible current is 10 A / 250 V AC. Possibility of connection of 8 sockets. Colours of strips: **ZGGZ80-1** grey, **ZGGZ80-2** black (see page 377).

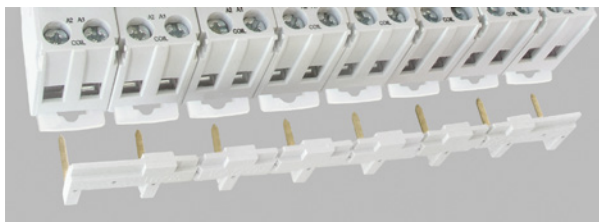


ZGGZ80

Interconnection strip ZGGZ80: bridging of common input signals.


Electrical life at AC resistive load.
Switching frequency: 600 cycles/hour

Fig. 1

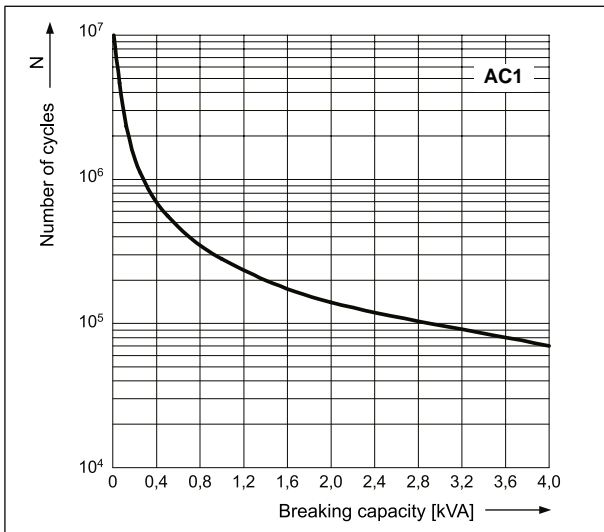


Electrical life reduction factor
at AC inductive load

Fig. 2

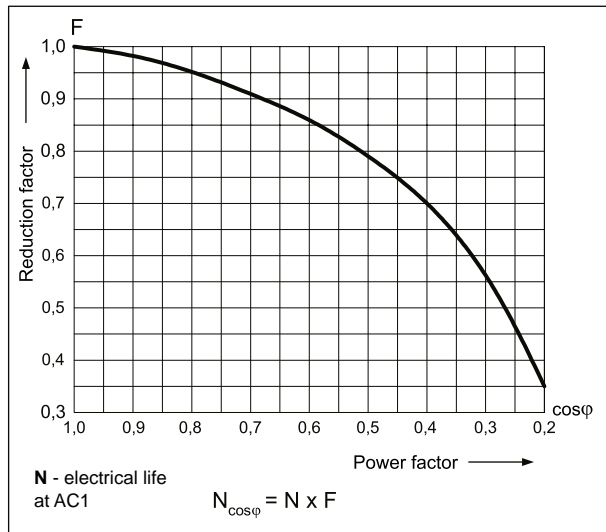


Max. DC resistive load breaking capacity

Fig. 3

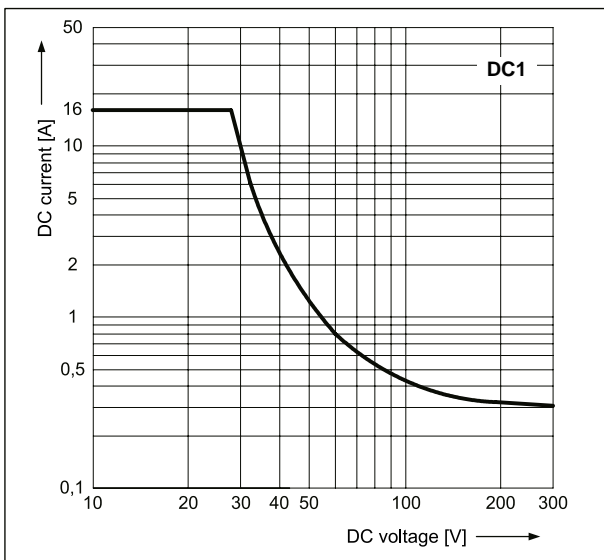


Coil operating range - DC

Fig. 4

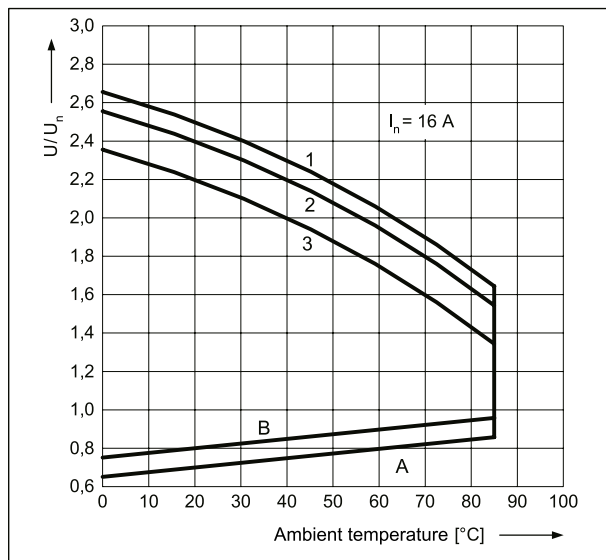

Coil operating range - AC 50 Hz

Fig. 5

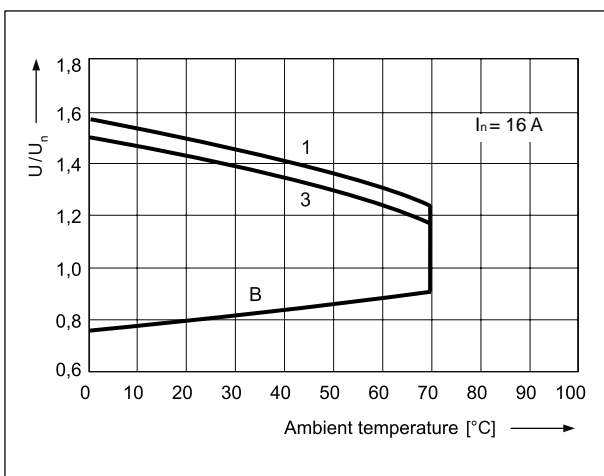

Description of Fig. 4 and 5

A - relations between make voltage and ambient temperature at no load on contacts. Coil temperature and ambient temperature are equal before coil energizing. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).

B - relations between make voltage and ambient temperature after initial coil heating up with $1,1 U_n$, at continues load of I_n on contacts. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).

1, 2, 3 - values on Y axis represent allowed overvoltage on coil at certain ambient temperature and contact load:

- 1 - no load
- 2 - 50% of rated load
- 3 - rated load

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
012DC	12	360	± 10%	8,4	30,6
024DC	24	1 440	± 10%	16,8	61,2
048DC	48	5 700	± 10%	33,6	122,4
110DC	110	25 200	± 10%	77,0	280,0

The data in bold type relate to the standard versions of the relays.


Coil data - AC 50/60 Hz voltage version

Table 2

Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC 50 Hz	
				min. (at 20 °C)	max. (at 20 °C)
012AC	12	100	± 10%	9,6	13,2
024AC	24	400	± 10%	19,2	28,8
048AC	48	1 550	± 10%	38,4	57,6
120AC	120	10 200	± 10%	96,0	144,0
230AC	230	38 500	± 10%	184,0	276,0
240AC	240	42 500	± 15%	192,0	288,0

The data in bold type relate to the standard versions of the relays.

Ordering codes

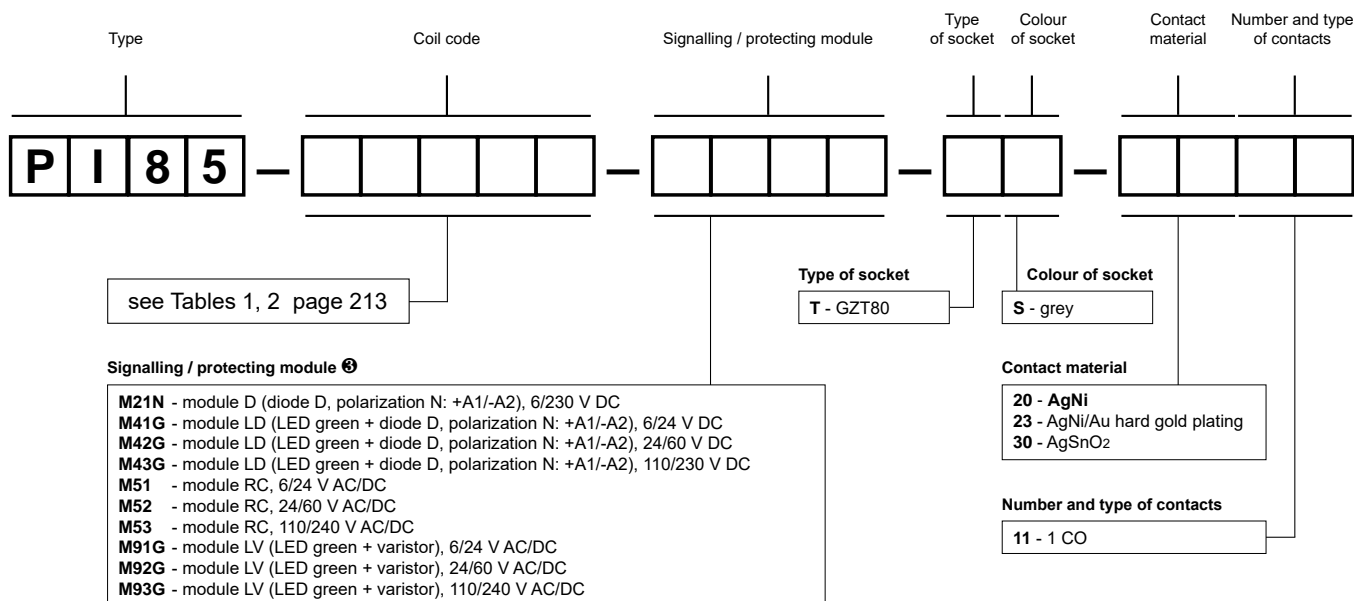

⑥ Modules D, RC - only for versions with contacts AgNi

Examples of ordering codes:

PI85-012DC-M41G-TS-2011

interface relay **PI85** consists of: relay **RM85** (one changeover contact, contact material AgNi, coil voltage 12 V DC), socket **GZT80** (grey, screw terminals), signalling / protecting module **M41G** (version LD), retainer / retractor clip **GZT80-0040** (plastic), description plate **GZT80-0035** (white)

PI85-230AC-M93G-TS-3011

interface relay **PI85** consists of: relay **RM85** (one changeover contact, contact material AgSnO₂, coil voltage 230 V AC 50/60 Hz), socket **GZT80** (grey, screw terminals), signalling / protecting module **M93G** (version LV), retainer / retractor clip **GZT80-0040** (plastic), description plate **GZT80-0035** (white)

PI85 with socket GZM80 interface relays

214

RM85 + GZM80



- Interface relay **PI85 with socket GZM80** consists of: electromagnetic relay **RM85**, grey plug-in socket **GZM80**, signalling / protecting module **type M...**, retainer / retractor clip **GZT80-0040** (plastic), white description plate **GZT80-0035**
- 35 mm rail mount acc. to EN 60715 or on panel mounting with one M3 screw • May be linked with interconnection strip type **ZGGZ80**
- Recognitions, certifications, directives: recognitions RM85, RoHS,





Contact data

Number and type of contacts		1 CO
Contact material		AgNi , AgNi/Au hard gold plating, AgSnO ₂
Rated / max. switching voltage	AC	250 V / 300 V
Min. switching voltage		5 V AgNi, 5 V AgNi/Au hard gold plating, 10 V AgSnO ₂
Rated load (capacity)	AC1	16 A / 250 V AC ①
	AC15	3 A / 120 V 1,5 A / 240 V (B300)
	DC1	16 A / 24 V DC (see Fig. 3)
	DC13	0,22 A / 120 V 0,1 A / 250 V (R300)
Motor load	acc. to UL 508	1/2 HP 240 V AC, 4,9 FLA, single-phase motor ②
	AC3 acc. to IEC 60947-4-1	0,5 kW 240 V AC, single-phase motor
Min. switching current		5 mA AgNi, 2 mA AgNi/Au hard gold plating, 10 mA AgSnO ₂
Max. inrush current		30 A
Rated current		16 A
Max. breaking capacity	AC1	4 000 VA
Min. breaking capacity		0,3 W AgNi, 0,05 W AgNi/Au hard gold plating, 1 W AgSnO ₂
Contact resistance		≤ 100 mΩ
Max. operating frequency	• at rated load	600 cycles/hour
	• no load	72 000 cycles/hour
Coil data		
Rated voltage	50/60 Hz AC	12, 24 , 120, 230 , 240 V
	DC	12, 24 , 48, 60, 110 V
Must release voltage		AC: ≥ 0,15 U _n DC: ≥ 0,1 U _n
Operating range of supply voltage		see Tables 1, 2 and Fig. 4, 5
Rated power consumption	AC	0,75 VA
	DC	0,4 ... 0,48 W
Insulation according to EN 60664-1		
Insulation rated voltage		300 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		3
Dielectric strength	• between coil and contacts	5 000 V AC type of insulation: reinforced
	• contact clearance	1 000 V AC type of clearance: micro-disconnection
Contact - coil distance	• clearance	≥ 10 mm
	• creepage	≥ 10 mm
General data		
Operating / release time (typical values)		7 ms / 3 ms
Electrical life	• resistive AC1	> 0,7 x 10 ⁵ 16 A, 250 V AC
	• cosφ	see Fig. 2
	• DC L/R=40 ms	> 10 ⁵ 0,12 A, 220 V DC
Mechanical life (cycles)		> 3 x 10 ⁷
Dimensions (L x W x H)		81,6 x 15,9 x 67 mm
Weight		60 g
Ambient temperature	• storage	-40...+85 °C
	(non-condensation and/or icing) • operating	AC: -40...+70 °C DC: -40...+85 °C
Cover protection category		IP 20 EN 60529
Environmental protection		RM85: RTII GZM80: RTO EN 61810-7
Shock resistance		30 g
Vibration resistance		10 g 10...150 Hz


The data in bold type relate to the standard versions of the relays. ① Loads above 12 A require bridging pairs of screw terminals: 11 with 21, 12 with 22, 14 with 24 - see page 215. ② For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.

Dimensions

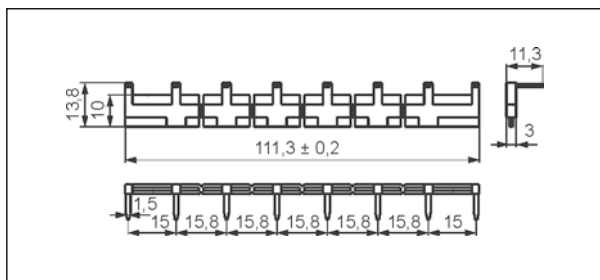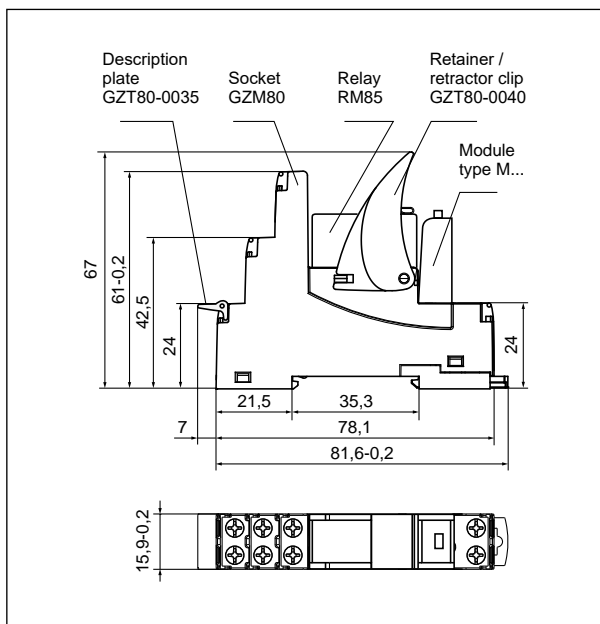


Interconnection strip type **ZGGZ80**

Connection diagrams (screw terminals side view)

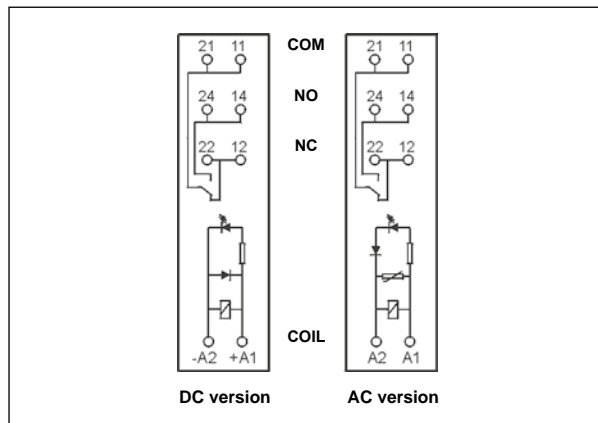


Connection of GZM80 socket

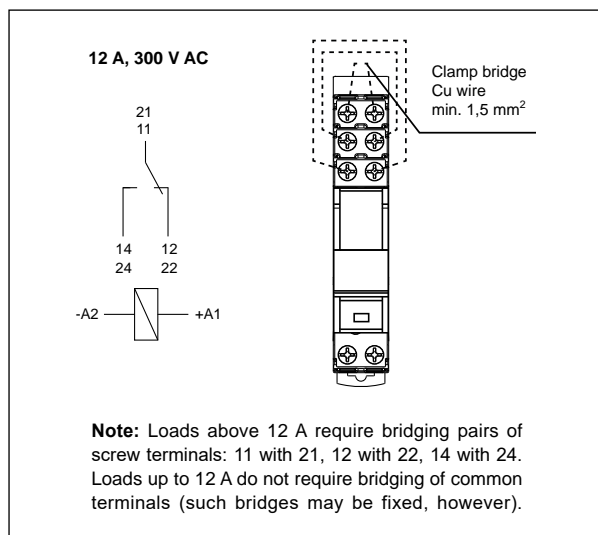

Mounting

Relays **PI85 with socket GZM80** are designed for direct mounting on 35 mm rail mount acc. to EN 60715 or on panel mounting with one M3 screw. **Connections:** max. cross section of the cables (stranded): 2 x 2,5 mm² (2 x 14 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,7 Nm.


Plug-in sockets **GZM80** may be linked with interconnection strip type **ZGGZ80**. Strip **ZGGZ80** bridges common input signals, maximum permissible current is 10 A / 250 V AC. Possibility of connection of 8 sockets. Colours of strips: **ZGGZ80-1** grey, **ZGGZ80-2** black (see page 377).

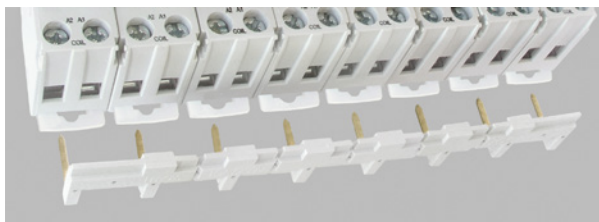

Interconnection strip ZGGZ80: bridging of common input signals.


Electrical life at AC resistive load.
Switching frequency: 600 cycles/hour

Fig. 1

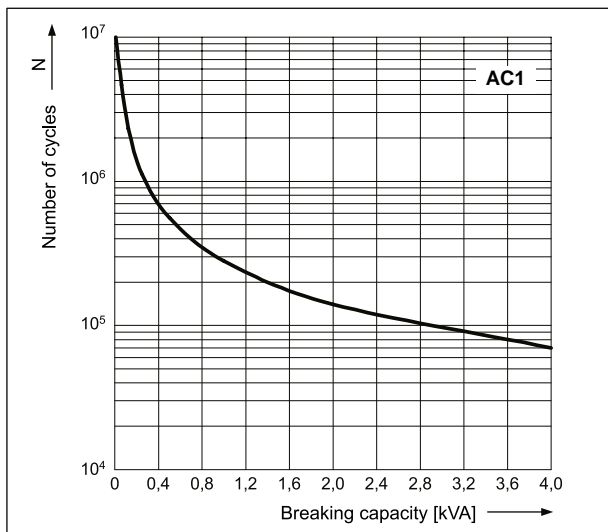


Electrical life reduction factor
at AC inductive load

Fig. 2

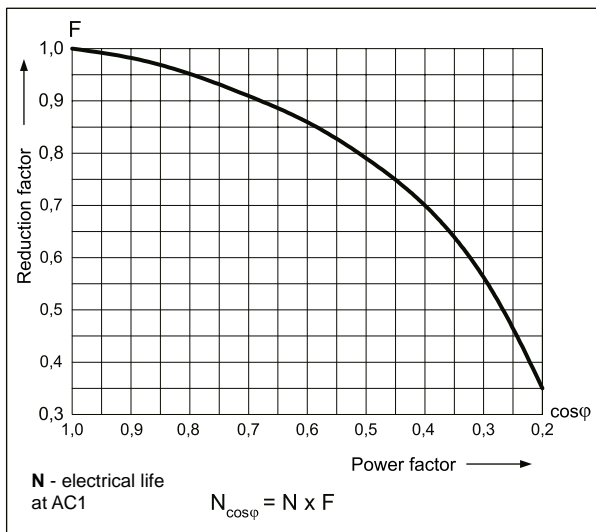


Max. DC resistive load breaking capacity

Fig. 3

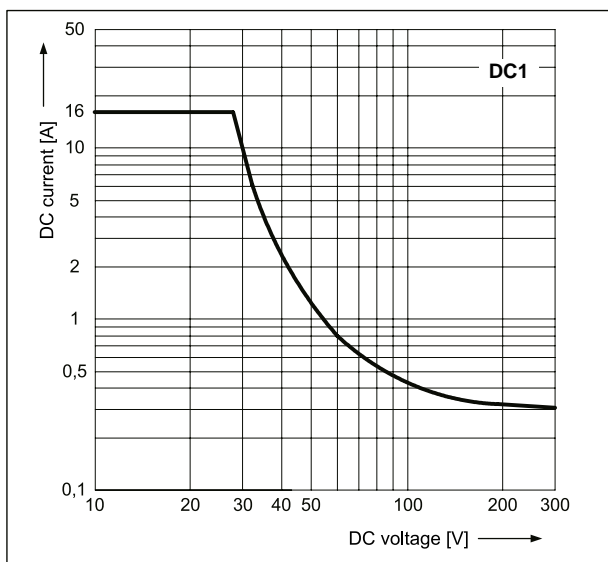


Coil operating range - DC

Fig. 4

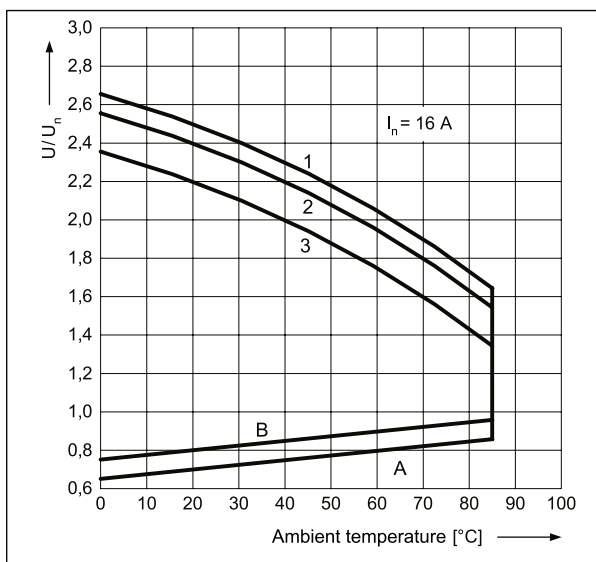

Coil operating range - AC 50 Hz

Fig. 5

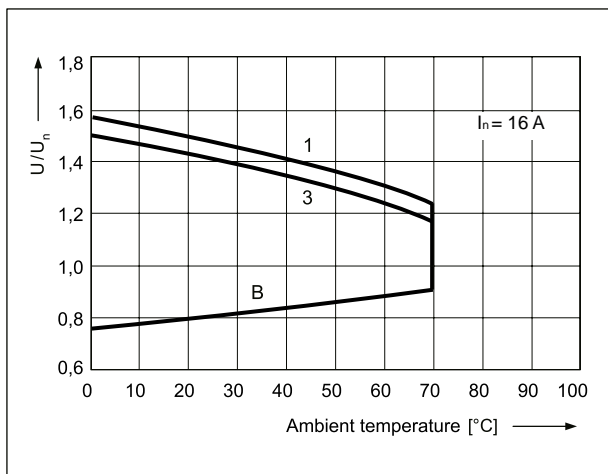

Description of Fig. 4 and 5

A - relations between make voltage and ambient temperature at no load on contacts. Coil temperature and ambient temperature are equal before coil energizing. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).

B - relations between make voltage and ambient temperature after initial coil heating up with $1,1 U_n$, at continues load of I_n on contacts. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).

1, 2, 3 - values on Y axis represent allowed overvoltage on coil at certain ambient temperature and contact load:

- 1 - no load
- 2 - 50% of rated load
- 3 - rated load

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
012DC	12	360	± 10%	8,4	30,6
024DC	24	1 440	± 10%	16,8	61,2
048DC	48	5 700	± 10%	33,6	122,4
060DC	60	7 500	± 10%	42,0	153,0
110DC	110	25 200	± 10%	77,0	280,0

The data in bold type relate to the standard versions of the relays.


Coil data - AC 50/60 Hz voltage version

Table 2

Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC 50 Hz	
				min. (at 20 °C)	max. (at 20 °C)
012AC	12	100	± 10%	9,6	13,2
024AC	24	400	± 10%	19,2	28,8
120AC	120	10 200	± 10%	96,0	144,0
230AC	230	38 500	± 10%	184,0	276,0
240AC	240	42 500	± 15%	192,0	288,0

The data in bold type relate to the standard versions of the relays.

Ordering codes

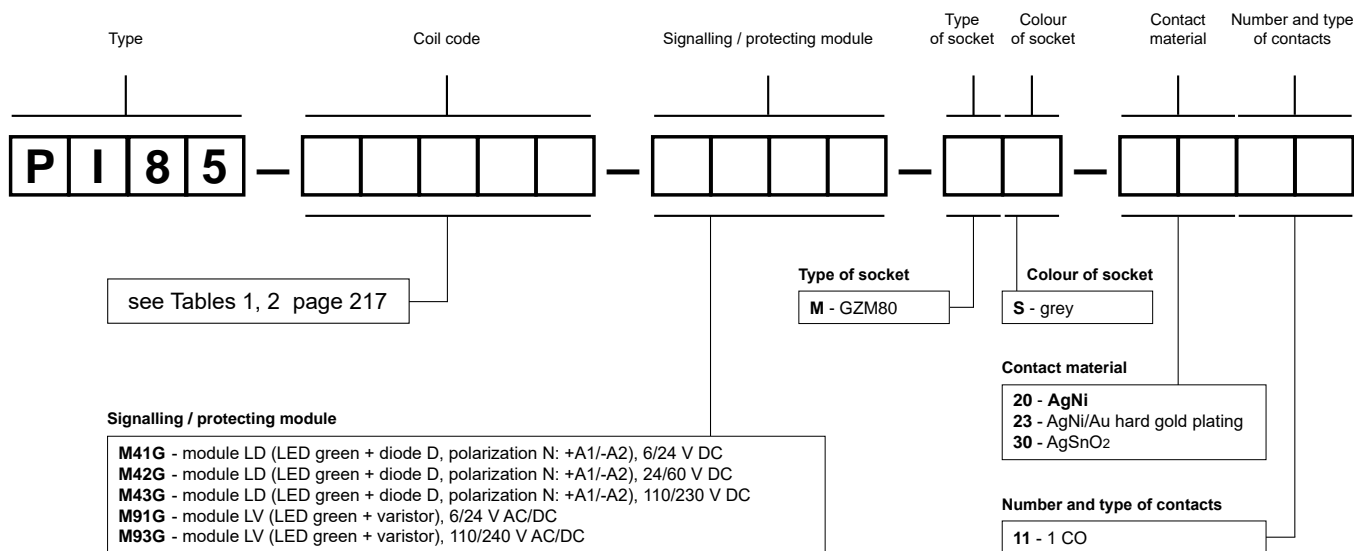

Examples of ordering codes:

PI85-012DC-M41G-MS-2011

interface relay **PI85** consists of: relay **RM85** (one changeover contact, contact material AgNi, coil voltage 12 V DC), socket **GZM80** (grey, screw terminals), signalling / protecting module **M41G** (version LD), retainer / retractor clip **GZT80-0040** (plastic), description plate **GZT80-0035** (white)

PI85-230AC-M93G-MS-3011

interface relay **PI85** consists of: relay **RM85** (one changeover contact, contact material AgSnO₂, coil voltage 230 V AC 50/60 Hz), socket **GZM80** (grey, screw terminals), signalling / protecting module **M93G** (version LV), retainer / retractor clip **GZT80-0040** (plastic), description plate **GZT80-0035** (white)

PI85 with socket GZMB80

interface relays with spring terminals

218

RM85 + GZMB80



- Interface relay **PI85 with socket GZMB80** consists of: electromagnetic relay **RM85**, black plug-in socket **GZMB80**, signalling / protecting module **type M...**, retainer / retractor clip **GZMB80-0040** (plastic), white description plate **TR**
- 35 mm rail mount acc. to EN 60715
- Recognitions, certifications, directives: recognitions RM85, RoHS,




Contact data

Number and type of contacts		1 CO
Contact material		AgNi , AgNi/Au hard gold plating, AgSnO ₂
Rated / max. switching voltage	AC	250 V / 300 V
Min. switching voltage		5 V AgNi, 5 V AgNi/Au hard gold plating, 10 V AgSnO ₂
Rated load (capacity)	AC1	10 A / 250 V AC; 16 A / 250 V AC ①
	AC15	3 A / 120 V 1,5 A / 240 V (B300)
	DC1	16 A / 24 V DC (see Fig. 3)
	DC13	0,22 A / 120 V 0,1 A / 250 V (R300)
Motor load	acc. to UL 508	1/2 HP 240 V AC, 4,9 FLA, single-phase motor ②
	AC3 acc. to IEC 60947-4-1	0,5 kW 240 V AC, single-phase motor
Min. switching current		5 mA AgNi, 2 mA AgNi/Au hard gold plating, 10 mA AgSnO ₂
Max. inrush current		30 A AgSnO ₂
Rated current		16 A
Max. breaking capacity	AC1	4 000 VA
Min. breaking capacity		0,3 W AgNi, 0,05 W AgNi/Au hard gold plating, 1 W AgSnO ₂
Contact resistance		≤ 100 mΩ
Max. operating frequency		600 cycles/hour
• at rated load	AC1	72 000 cycles/hour
• no load		
Coil data		
Rated voltage	50/60 Hz AC	12, 24 , 110, 120, 230 V
	DC	12, 24 , 110 V
Must release voltage		AC: ≥ 0,15 U _n DC: ≥ 0,1 U _n
Operating range of supply voltage		see Tables 1, 2 and Fig. 4, 5
Rated power consumption	AC	0,75 VA
	DC	0,4 ... 0,48 W
Insulation according to EN 60664-1		
Insulation rated voltage		300 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		3
Dielectric strength		4 000 V AC
• between coil and contacts		1 000 V AC type of clearance: micro-disconnection
• contact clearance		
Contact - coil distance		≥ 10 mm
• clearance		≥ 10 mm
• creepage		
General data		
Operating / release time (typical values)		7 ms / 3 ms
Electrical life		> 0,7 x 10 ⁵ 16 A, 250 V AC
• resistive AC1		see Fig. 2
• cosφ		
• DC L/R=40 ms		> 10 ⁵ 0,12 A, 220 V DC
Mechanical life (cycles)		> 3 x 10 ⁷
Dimensions (L x W x H)		97 x 16 x 69 mm
Weight		60 g
Ambient temperature	• storage	-40...+85 °C
(non-condensation and/or icing)	• operating	AC: -40...+70 °C DC: -40...+85 °C
Cover protection category		IP 20 EN 60529
Environmental protection		RM85: RTII GZMB80: RT0 EN 61810-7
Shock resistance		30 g
Vibration resistance		10 g 10...150 Hz

The data in bold type relate to the standard versions of the relays. ① Loads above 10 A require bridging pairs of spring terminals: 11 with 21, 12 with 22, 14 with 24 - see page 219. ② For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.


Dimensions

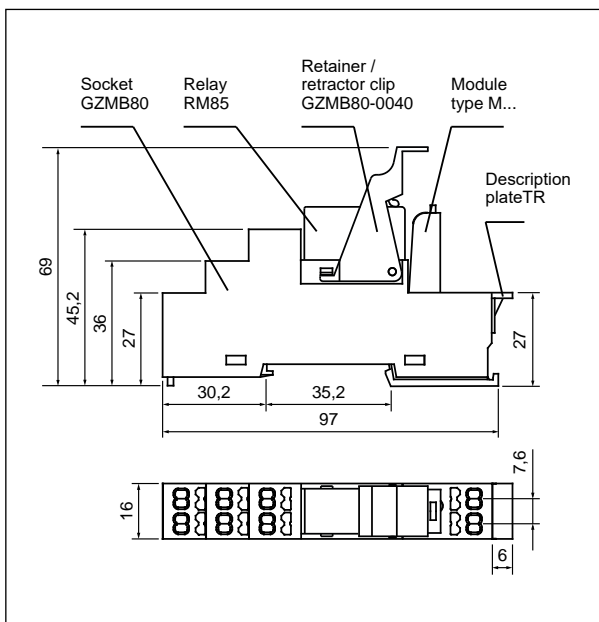


Mounting

Relays **PI85 with socket GZMB80** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. **Connections:** max. cross section of the cables: 1 x 0,2... 1,5 mm² (1 x 24...16 AWG), stripping length: 9...11 mm.

Connection diagrams (spring terminals side view)

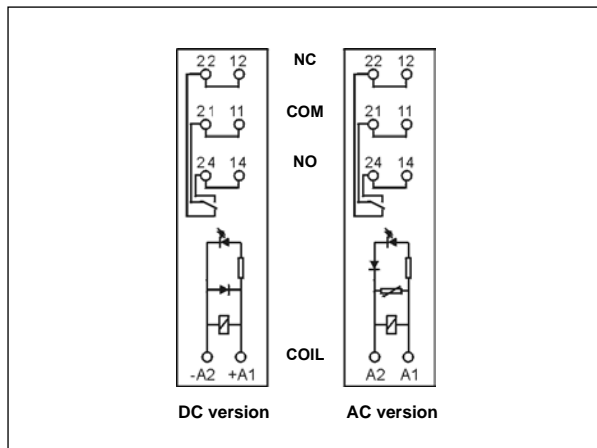


Connection of GZMB80 socket

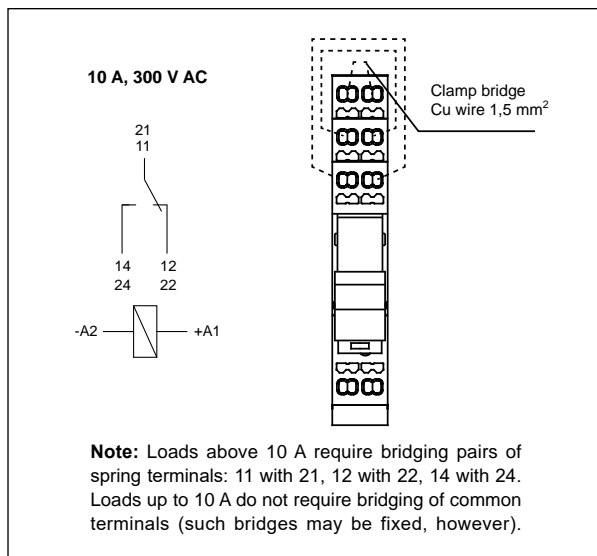


Wire connection

The drawings present the sequence of operations in course of inserting wires to the spring terminal, and the recommended screwdriver to be used for opening of case springs, comply with the DIN 5264 FORM "A".

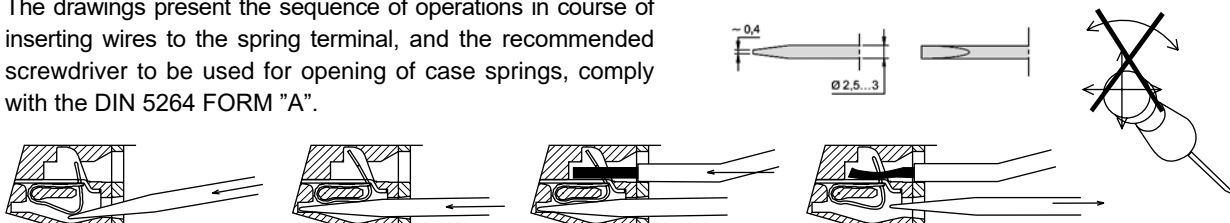


Electrical life at AC resistive load.
Switching frequency: 600 cycles/hour

Fig. 1

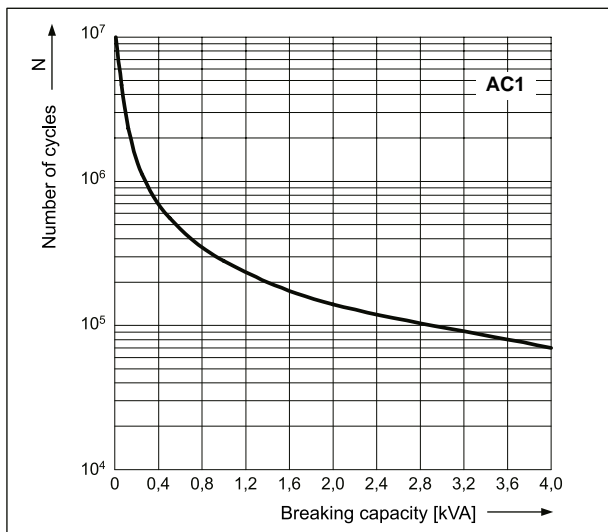


Electrical life reduction factor
at AC inductive load

Fig. 2

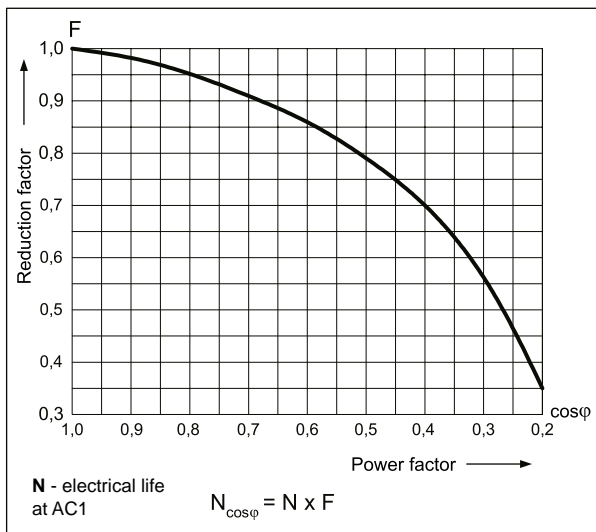


Max. DC resistive load breaking capacity

Fig. 3

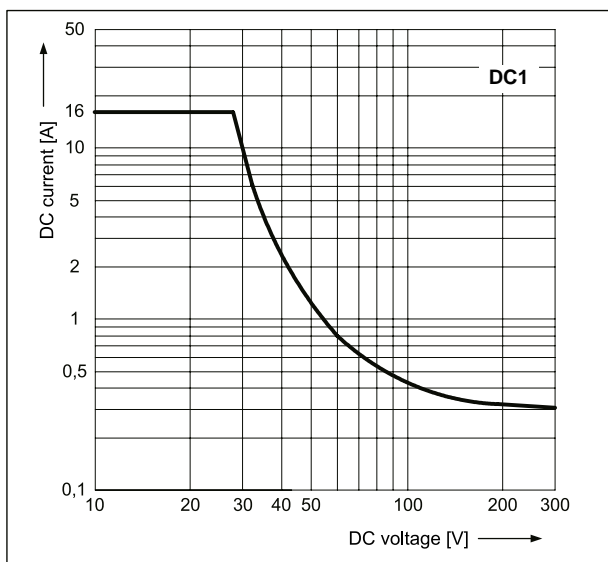


Coil operating range - DC

Fig. 4

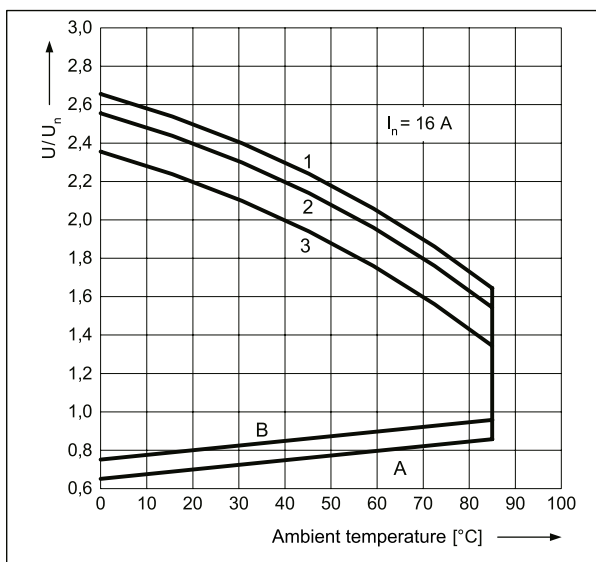

Coil operating range - AC 50 Hz

Fig. 5

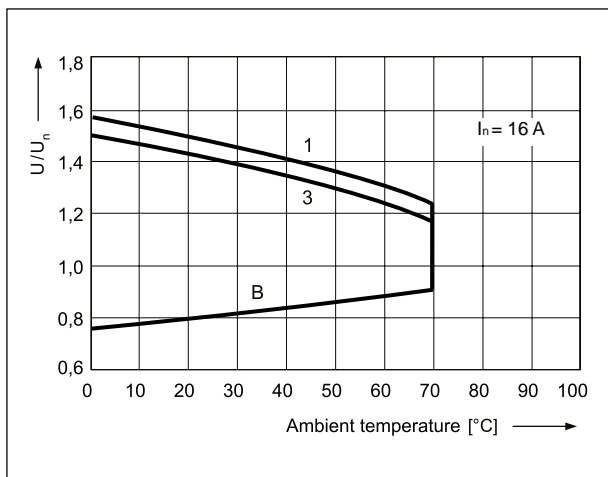

Description of Fig. 4 and 5

A - relations between make voltage and ambient temperature at no load on contacts. Coil temperature and ambient temperature are equal before coil energizing. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).

B - relations between make voltage and ambient temperature after initial coil heating up with $1,1 U_n$, at continues load of I_n on contacts. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).

1, 2, 3 - values on Y axis represent allowed overvoltage on coil at certain ambient temperature and contact load:

- 1 - no load
- 2 - 50% of rated load
- 3 - rated load

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
012DC	12	360	± 10%	8,4	30,6
024DC	24	1 440	± 10%	16,8	61,2
110DC	110	25 200	± 10%	77,0	280,0

The data in bold type relate to the standard versions of the relays.


Coil data - AC 50/60 Hz voltage version

Table 2

Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC 50 Hz	
				min. (at 20 °C)	max. (at 20 °C)
012AC	12	100	± 10%	9,6	13,2
024AC	24	400	± 10%	19,2	28,8
110AC	110	8 900	± 10%	88,0	132,0
120AC	120	10 200	± 10%	96,0	144,0
230AC	230	38 500	± 10%	184,0	276,0

The data in bold type relate to the standard versions of the relays.

Ordering codes

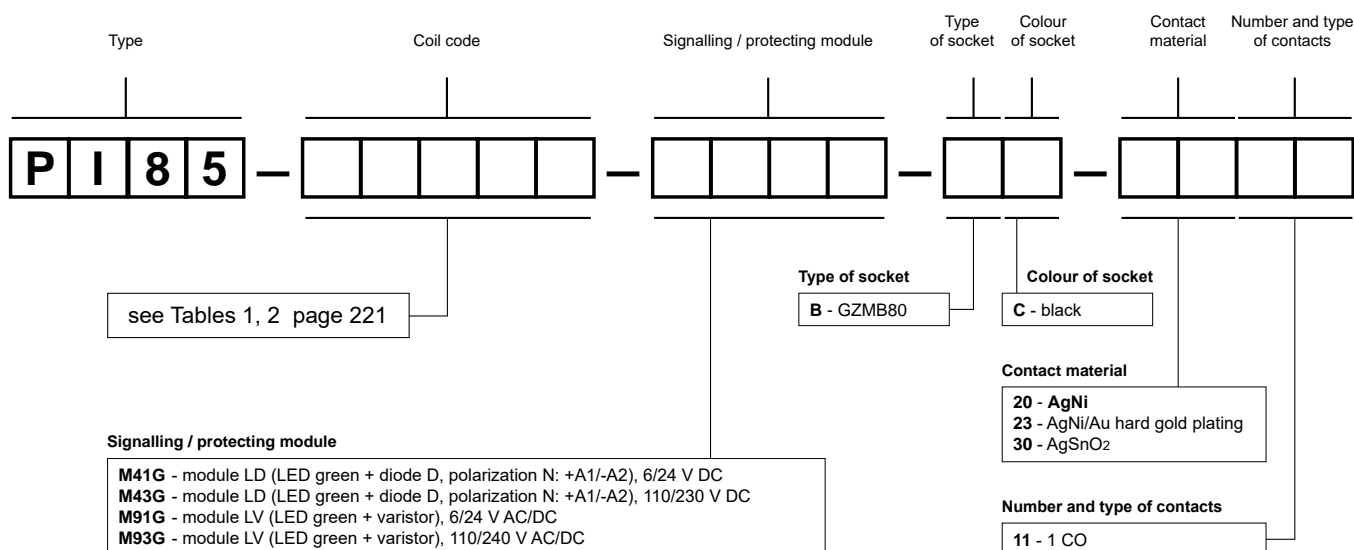

Examples of ordering codes:

PI85-012DC-M41G-BC-2011

interface relay **PI85** consists of: relay **RM85** (one changeover contact, contact material AgNi, coil voltage 12 V DC), socket **GZMB80** (black, spring terminals), signalling / protecting module **M41G** (version LD), retainer / retractor clip **GZMB80-0040** (plastic), description plate **TR** (white)

PI85-230AC-M93G-BC-3011

interface relay **PI85** consists of: relay **RM85** (one changeover contact, contact material AgSnO₂, coil voltage 230 V AC 50/60 Hz), socket **GZMB80** (black, spring terminals), signalling / protecting module **M93G** (version LV), retainer / retractor clip **GZMB80-0040** (plastic), description plate **TR** (white)

PI85 inrush with socket GZT80 interface relays

222

RM85 inrush + GZT80



- Interface relay **PI85 inrush with socket GZT80** consists of: electromagnetic relay **RM85 inrush**, grey plug-in socket **GZT80**, signalling / protecting module **type M...**, retainer / retractor clip **GZT80-0040** (plastic), white description plate **GZT80-0035**
- 35 mm rail mount acc. to EN 60715 or on panel mounting with one M3 screw • May be linked with interconnection strip type **ZGGZ80**
- **Resistance to inrush current 80 A (20 ms)** • Recognitions, certifications, directives: recognitions RM85 inrush, RoHS, **CE EAC**

Contact data

Number and type of contacts		1 NO
Contact material		AgSnO₂
Rated / max. switching voltage	AC	250 V / 300 V
Min. switching voltage		10 V
Rated load (capacity)	AC1	16 A / 250 V AC ①
	AC15	3 A / 120 V 1,5 A / 240 V (B300)
	DC1	16 A / 24 V DC (see Fig. 2)
	DC13	0,22 A / 120 V 0,1 A / 250 V (R300)
Motor load	acc. to UL 508	1 HP 240 V AC, 8 FLA, single-phase motor ②
	AC3 acc. to IEC 60947-4-1	0,75 kW 240 V AC, single-phase motor
Min. switching current		10 mA
Max. inrush current		80 A 20 ms
Rated current		16 A
Max. breaking capacity	AC1	4 000 VA
Min. breaking capacity		1 W
Contact resistance		≤ 100 mΩ
Max. operating frequency	AC1	• at rated load
		• no load
		600 cycles/hour 72 000 cycles/hour

Coil data

Rated voltage	DC	12, 24, 110 V
Must release voltage		DC: ≥ 0,1 U _n
Operating range of supply voltage		see Table 1 and Fig. 3
Rated power consumption	DC	0,4 ... 0,48 W

Insulation according to EN 60664-1



Insulation rated voltage		250 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		3
Dielectric strength	• between coil and contacts	5 000 V AC type of insulation: reinforced
	• contact clearance	1 000 V AC type of clearance: micro-disconnection
Contact - coil distance	• clearance	≥ 10 mm
	• creepage	≥ 10 mm

General data

Operating / release time (typical values)		8 ms / 3 ms
Electrical life	• resistive AC1 600 cycles/hour	> 10 ⁵ 16 A, 250 V AC
	• cosφ	see Fig. 1
	• resistive DC1 600 cycles/hour	> 10 ⁵ 16 A, 24 V DC
	• inductive AC3, I = 3,5 A	> 2,5 x 10 ⁵
	• at incandescent lamp load, 1000 W	> 0,9 x 10 ⁵
Mechanical life (cycles)		> 3 x 10 ⁷
Dimensions (L x W x H)		80 x 15,6 x 67 mm
Weight		61 g
Ambient temperature	• storage	-40...+85 °C
	(non-condensation and/or icing) • operating	-40...+85 °C
Cover protection category		IP 20 EN 60529
Environmental protection		RM85 inrush: RTII GZT80: RT0 EN 61810-7
Shock resistance		30 g
Vibration resistance		10 g 10...150 Hz


The data in bold type relate to the standard versions of the relays. ① Loads above 12 A require bridging pairs of screw terminals: 11 with 21, 14 with 24 - see page 223. ② For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.

Dimensions

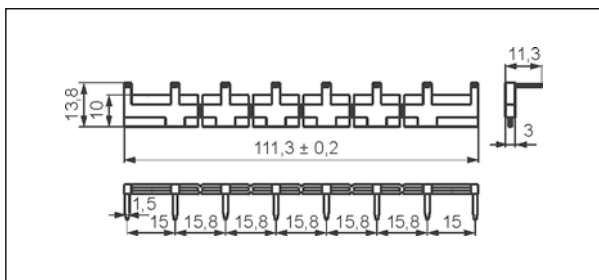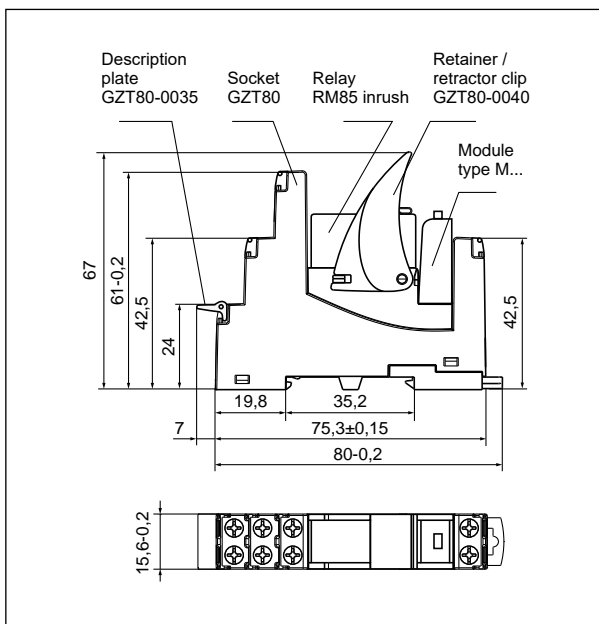


Interconnection strip type **ZGGZ80**

Connection diagram (screw terminals side view)

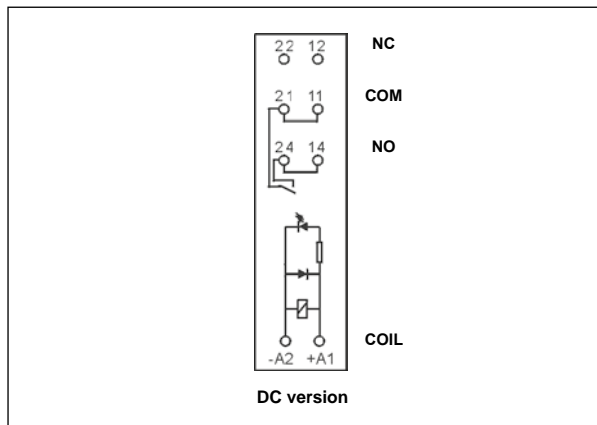


Connection of GZT80 socket

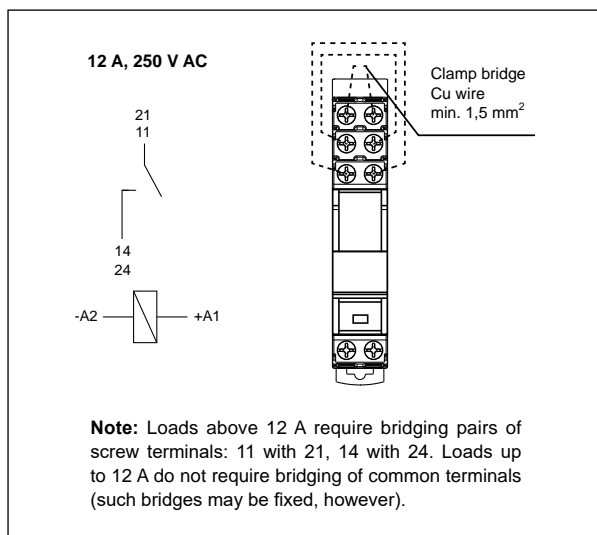

Mounting

Relays **PI85 inrush with socket GZT80** are designed for direct mounting on 35 mm rail mount acc. to EN 60715 or on panel mounting with one M3 screw. **Connections:** max. cross section of the cables (stranded): 2 x 2,5 mm² (2 x 14 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,7 Nm.


Plug-in sockets **GZT80** may be linked with interconnection strip type **ZGGZ80**. Strip **ZGGZ80** bridges common input signals, maximum permissible current is 10 A / 250 V AC. Possibility of connection of 8 sockets. Colours of strips: **ZGGZ80-1** grey, **ZGGZ80-2** black (see page 5).

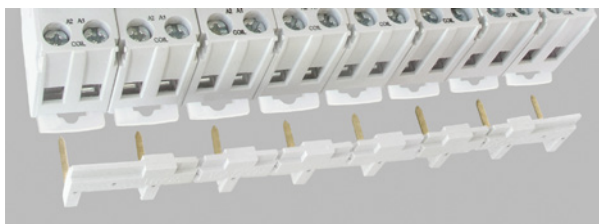

Interconnection strip ZGGZ80: bridging of common input signals.


Electrical life reduction factor at AC inductive load

Fig. 1

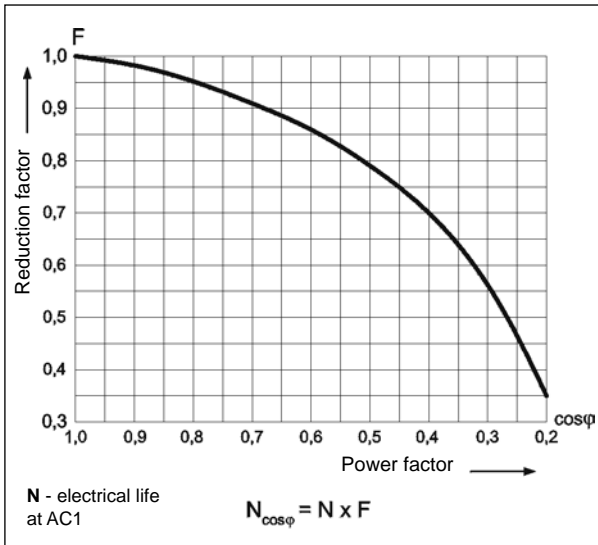


Max. DC resistive load breaking capacity

Fig. 2

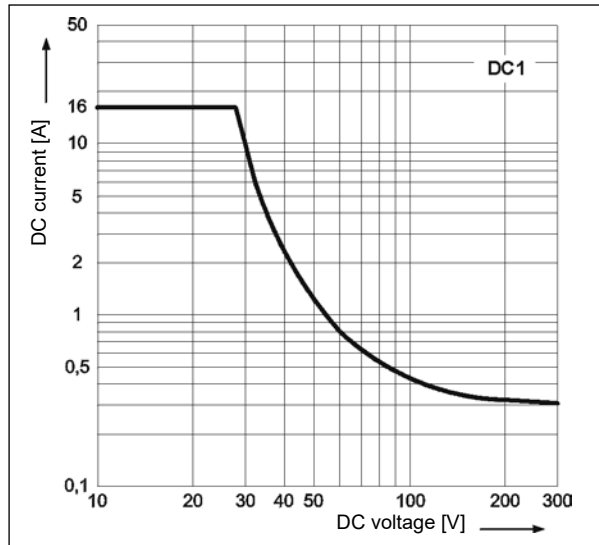

Coil operating range - DC

Fig. 3

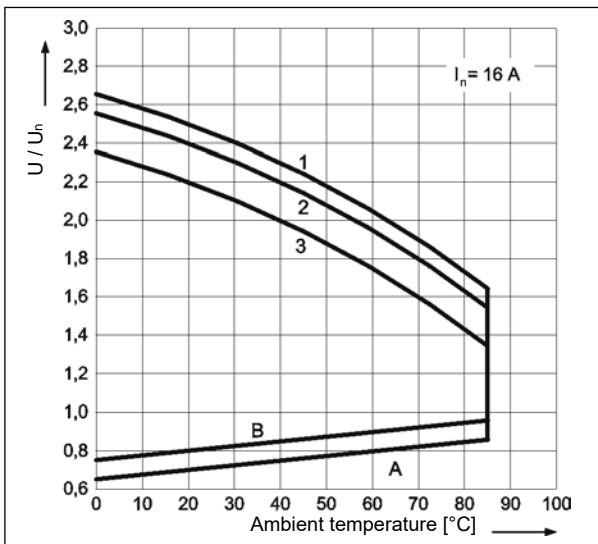

Description of Fig. 3

A - relations between make voltage and ambient temperature at no load on contacts. Coil temperature and ambient temperature are equal before coil energizing. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).

B - relations between make voltage and ambient temperature after initial coil heating up with $1,1 U_n$, at continues load of I_n on contacts. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).

1, 2, 3 - values on Y axis represent allowed overvoltage on coil at certain ambient temperature and contact load:

- 1** - no load
- 2** - 50% of rated load
- 3** - rated load


Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 20 °C)
012DC	12	360	± 10%	8,4	30,6
024DC	24	1 440	± 10%	16,8	61,2
110DC	110	25 200	± 10%	77,0	280,0

The data in bold type relate to the standard versions of the relays.

Ordering codes

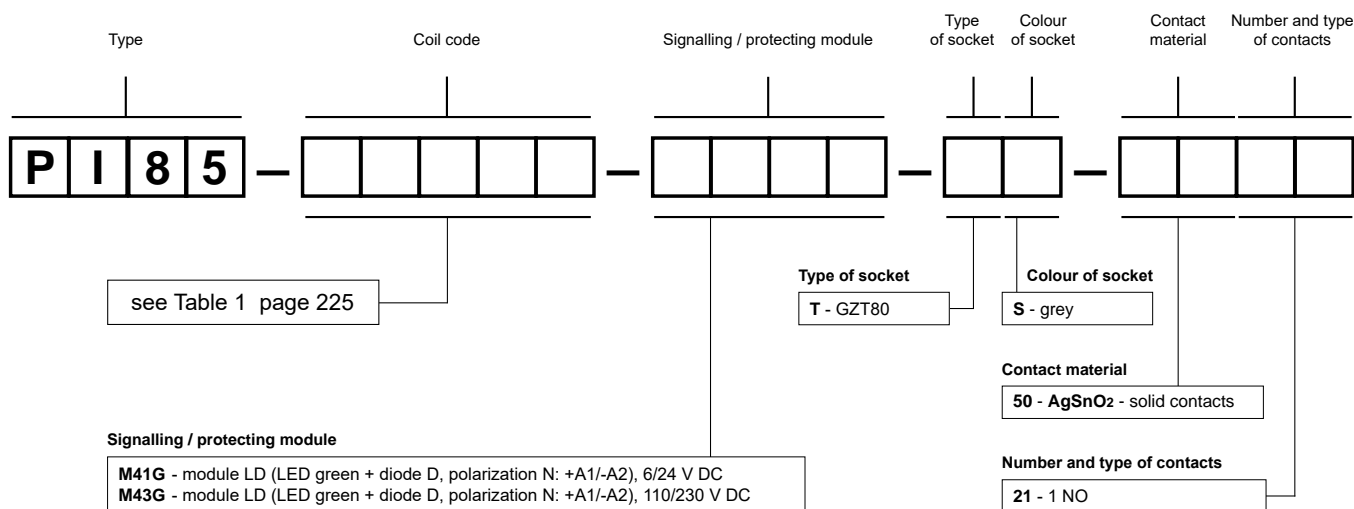

Example of ordering code:

PI85-012DC-M41G-TS-5021

interface relay **PI85 inrush** consists of: relay **RM85 inrush** (one normally open contact, contact material AgSnO₂ - solid contacts, coil voltage 12 V DC), socket **GZT80** (grey, screw terminals), signalling / protecting module **M41G** (version LD), retainer / retractor clip **GZT80-0040** (plastic), description plate **GZT80-0035** (white)

INTERFACE

PI84P with socket GZMB80

interface relays with spring terminals

226

RMP84 (AC) + GZMB80

RMP84 (DC) + GZMB80



NEW

- Interface relay **PI84P with socket GZMB80** consists of: electromagnetic relay **RMP84**, black plug-in socket **GZMB80**, signalling / protecting module **type M...**, retainer / retractor clip **GZMB80-0025** (plastic), white description plate **TR**
- 35 mm rail mount acc. to EN 60715
- Recognitions, certifications, directives: recognitions RMP84, RoHS,



Contact data

Number and type of contacts		2 CO
Contact material		AgNi
Rated / max. switching voltage	AC	250 V / 300 V
Min. switching voltage		12 V 10 mA
Rated load	AC1	8 A / 250 V AC
Min. switching current		10 mA 12 V
Max. inrush current		16 A 20 ms
Rated current		8 A
Max. breaking capacity	AC1	2 000 VA
Min. breaking capacity		0,12 W 10 mA / 12 V
Contact resistance		≤ 100 mΩ 1 A / 6 V DC
Max. operating frequency		
• at rated load	AC1	360 cycles/hour
• no load		18 000 cycles/hour

Coil data

Rated voltage	50 Hz AC	24, 115, 230 V
	DC	12, 24, 48, 110 V
Must release voltage		AC: ≥ 0,15 U _n DC: ≥ 0,1 U _n
Operating range of supply voltage		see Tables 1, 2
Rated power consumption	AC	0,75 VA
	DC	0,4 ... 0,48 W

Insulation according to EN 60664-1


Insulation rated voltage		300 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		3
Dielectric strength		
• between coil and contacts		4 000 V AC type of insulation: reinforced
• contact clearance		1 000 V AC type of clearance: micro-disconnection
• pole - pole		2 500 V AC type of insulation: basic
Contact - coil distance		
• clearance		≥ 8 mm
• creepage		≥ 8 mm

General data


Operating / release time (typical values)		15 ms / 8 ms
Electrical life (number of cycles)		
• resistive AC1		> 3 x 10 ⁴ AC coils, 8 A, 250 V AC, ON for 5 s / OFF for 5 s
		> 10 ⁴ DC coils, 8 A, 250 V AC, ON for 5 s / OFF for 5 s
		> 5 x 10 ⁴ 8 A, 250 V AC, 70 °C, ON for 1 s / OFF for 9 s
Mechanical life (cycles)		> 10 ⁶ AC coils
		> 5 x 10 ⁶ DC coils
Dimensions (L x W x H)		97 x 16 x 78 mm
Weight		60 g
Ambient temperature	• storage	-40...+70 °C
(non-condensation and/or icing)	• operating	-40...+55 °C
Cover protection category		IP 20 EN 60529
Environmental protection		RMP84: RTII GZMB80: RT0 EN 61810-7
Shock resistance		10 g
Vibration resistance	(NO/NC)	10 g / 5 g length direction: 10 g / 2 g 10...150 Hz

The data in bold type relate to the standard versions of the relays.


Dimensions

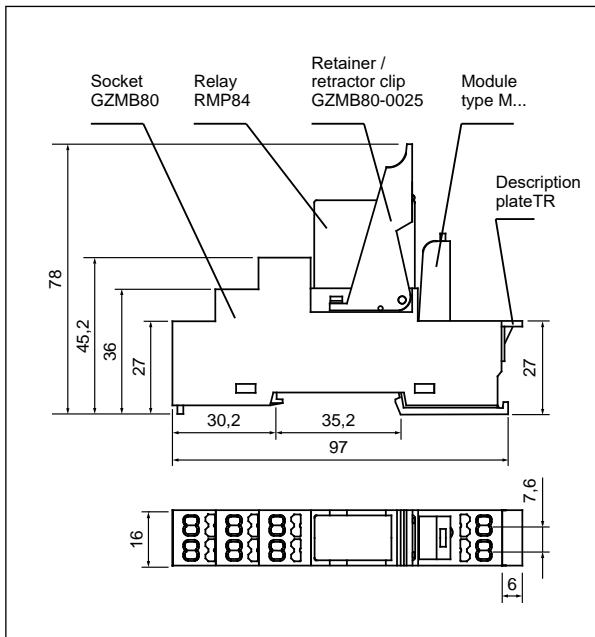

Connection diagrams (spring terminals side view)

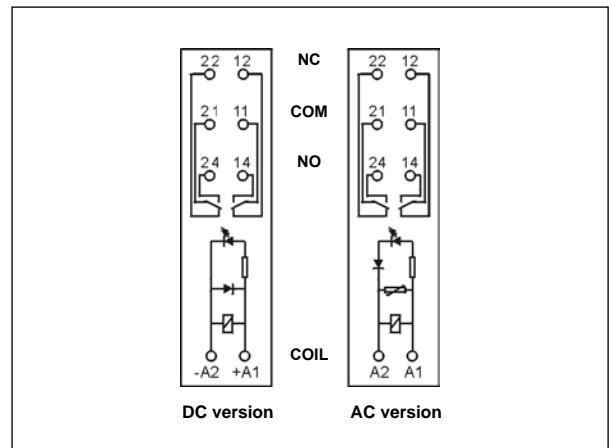


Connection of GZMB80 socket

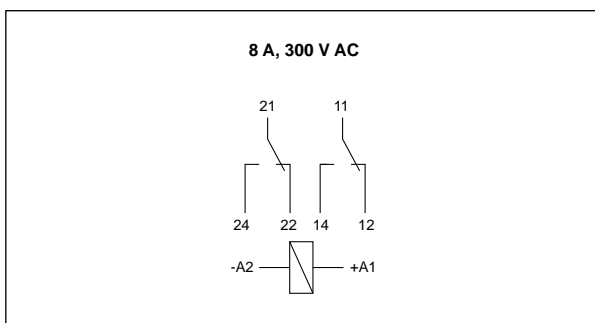


Wire connection

The drawings present the sequence of operations in course of inserting wires to the spring terminal, and the recommended screwdriver to be used for opening of case springs, comply with the DIN 5264 FORM "A".

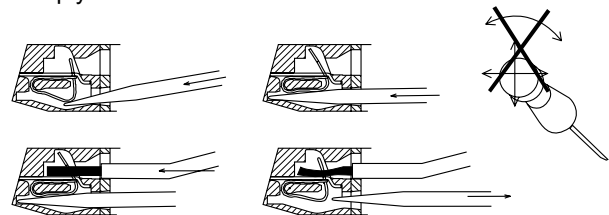


Electrical life at AC resistive load. Switching frequency: 360 cycles/hour

Fig. 1

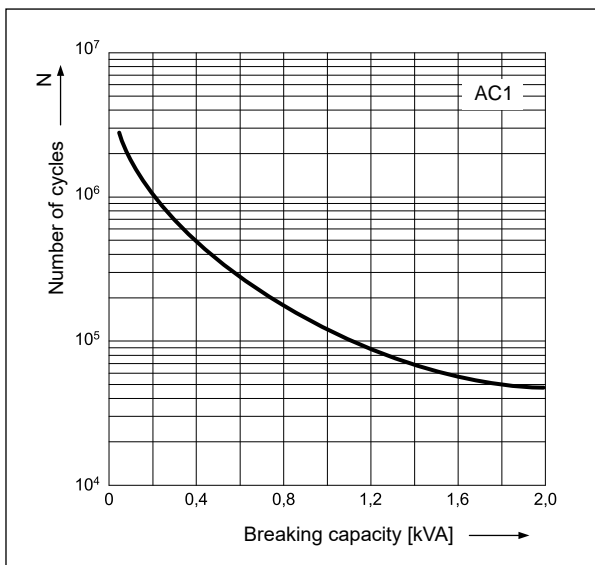

Max. AC 50 Hz resistive load breaking capacity

Fig. 2

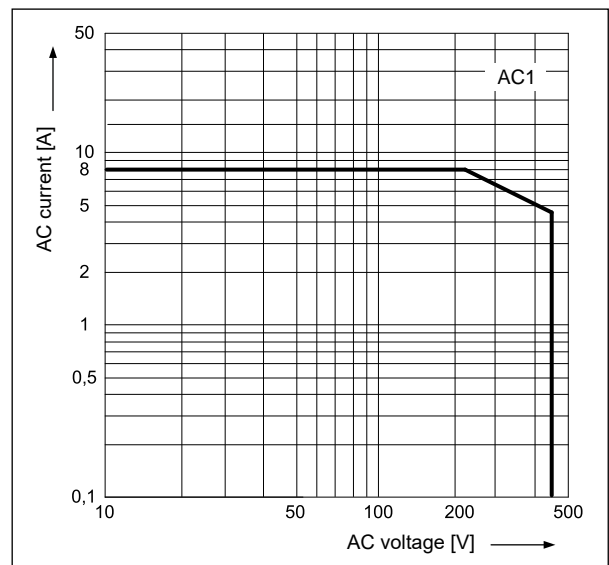

PI84P with socket GZMB80 interface relays with spring terminals

228

Mounting

Relays **PI84P with socket GZMB80** are designed for direct mounting on 35 mm rail mount acc. to EN 60715.
Connections: max. cross section of the cables: 1 x 0,2...1,5 mm² (1 x 24...16 AWG), stripping length: 9...11 mm.

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 23 °C Ω	Acceptable resistance	Coil operating range V DC ①	
				min. (0...+70 °C)	max. (0...+70 °C)
012DC	12	360	± 10%	8,4	18,0
024DC	24	1 440	± 10%	16,8	36,0
048DC	48	5 760	± 15%	33,6	72,0
110DC	110	25 200	± 15%	77,0	165,0

The data in bold type relate to the standard versions of the relays. ① The max. allowable voltage is coil overdrive voltage, it is the instantaneous max. voltage which the relay coil could endure in very short time. Relays with 48 V DC and 110 V DC coils shall be absolutely protected against any possibility of operation at voltages higher than the rated voltage.


Coil data - AC 50 Hz voltage version

Table 2

Coil code	Rated voltage V AC	Coil resistance at 23 °C Ω	Acceptable resistance	Coil operating range V AC 50 Hz	
				min. (0...+70 °C)	max. (0...+70 °C)
024AC	24	350	± 10%	18,0	26,4
115AC	115	8 100	± 15%	86,3	126,5
230AC	230	32 500	± 15%	172,5	253,0

The data in bold type relate to the standard versions of the relays.

Ordering codes

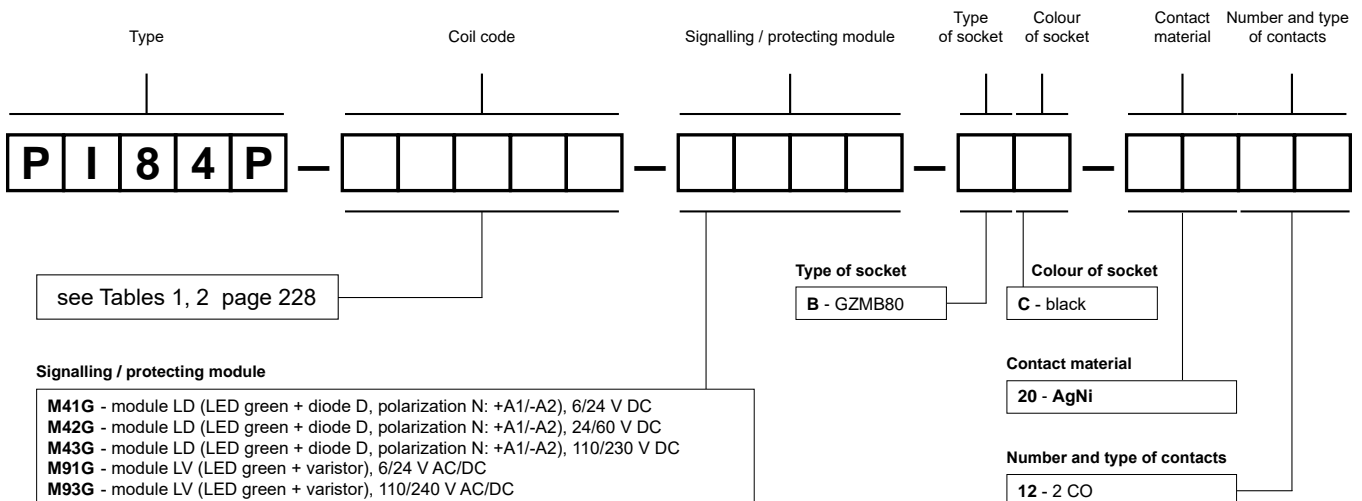

Examples of ordering codes:

PI84P-012DC-M41G-BC-2012

interface relay **PI84P** consists of: relay **RMP84** (two changeover contacts, contact material AgNi, coil voltage 12 V DC), Socket **GZMB80** (black, spring terminals), signalling / protecting module **M41G** (version LD), retainer / retractor clip **GZMB80-0025** (plastic), description plate **TR** (white)

PI84P-230AC-M93G-BC-2012



interface relay **PI84P** consists of: relay **RMP84** (two changeover contacts, contact material AgNi, coil voltage 230 V AC 50 Hz), Socket **GZMB80** (black, spring terminals), signalling / protecting module **M93G** (version LV), retainer / retractor clip **GZMB80-0025** (plastic), description plate **TR** (white)

PI85P with socket GZMB80

interface relays with spring terminals

RMP85 (AC) + GZMB80

RMP85 (DC) + GZMB80



NEW

- Interface relay **PI85P with socket GZMB80** consists of: electromagnetic relay **RMP85**, black plug-in socket **GZMB80**, signalling / protecting module **type M...**, retainer / retractor clip **GZMB80-0025** (plastic), white description plate **TR**
- 35 mm rail mount acc. to EN 60715
- Recognitions, certifications, directives: recognitions RMP85, RoHS,




Contact data

Number and type of contacts		1 CO
Contact material		AgNi
Rated / max. switching voltage	AC	250 V / 300 V
Min. switching voltage		12 V 10 mA
Rated load	AC1	16 A / 250 V AC ⓘ
Min. switching current		10 mA 12 V
Max. inrush current		32 A 20 ms
Rated current		16 A
Max. breaking capacity	AC1	4 000 VA
Min. breaking capacity		0,12 W 10 mA / 12 V
Contact resistance		≤ 100 mΩ 1 A / 6 V DC
Max. operating frequency		
• at rated load	AC1	360 cycles/hour
• no load		18 000 cycles/hour
Coil data		
Rated voltage	50 Hz AC	24, 115, 230 V
	DC	12, 24, 48, 110 V
Must release voltage		AC: ≥ 0,15 U _n DC: ≥ 0,1 U _n
Operating range of supply voltage		see Tables 1, 2
Rated power consumption	AC	0,75 VA
	DC	0,4 ... 0,48 W
Insulation according to EN 60664-1		
Insulation rated voltage		300 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overtoltage category		III
Insulation pollution degree		3
Dielectric strength		
• between coil and contacts		4 000 V AC type of insulation: reinforced
• contact clearance		1 000 V AC type of clearance: micro-disconnection
Contact - coil distance		
• clearance		≥ 8 mm
• creepage		≥ 8 mm
General data		
Operating / release time (typical values)		15 ms / 8 ms
Electrical life (number of cycles)		
• resistive AC1		> 3 x 10 ⁴ AC coils, 16 A, 250 V AC, ON for 5 s / OFF for 5 s
		> 10 ⁴ DC coils, 16 A, 250 V AC, ON for 5 s / OFF for 5 s
		> 3 x 10 ⁴ 16 A, 250 V AC, 70 °C, ON for 1 s / OFF for 9 s
Mechanical life (cycles)		> 10 ⁶ AC coils
		> 5 x 10 ⁶ DC coils
Dimensions (L x W x H)		97 x 16 x 78 mm
Weight		60 g
Ambient temperature	• storage	-40...+70 °C
(non-condensation and/or icing)	• operating	-40...+55 °C
Cover protection category		IP 20 EN 60529
Environmental protection		RMP85: RTII GZMB80: RTO EN 61810-7
Shock resistance		10 g
Vibration resistance	(NO/NC)	10 g / 5 g length direction: 10 g / 2 g 10...150 Hz


The data in bold type relate to the standard versions of the relays. ⓘ Loads above 10 A require bridging pairs of spring terminals: 11 with 21, 12 with 22, 14 with 24 - see page 230.

Dimensions

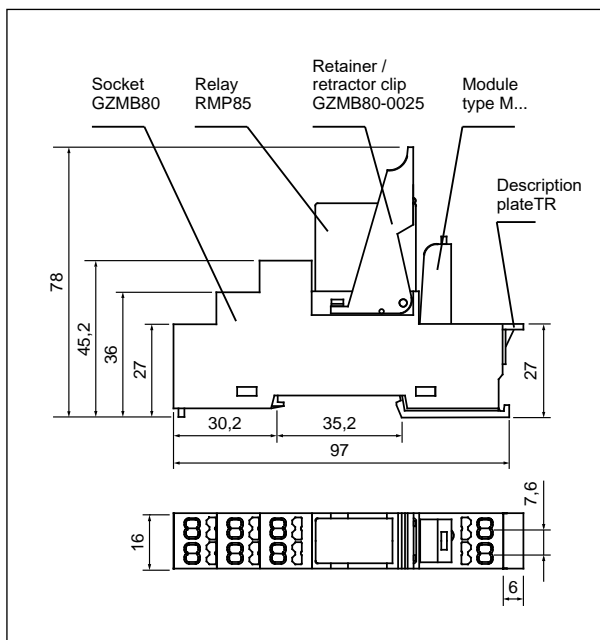


Wire connection


The drawings present the sequence of operations in course of inserting wires to the spring terminal, and the recommended screwdriver to be used for opening of case springs, comply with the DIN 5264 FORM "A".

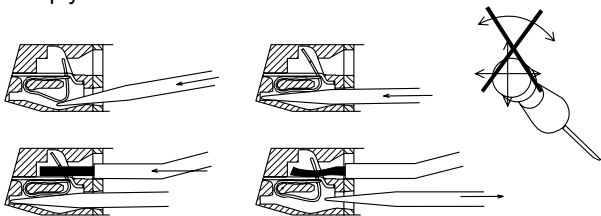

Connection diagrams (spring terminals side view)

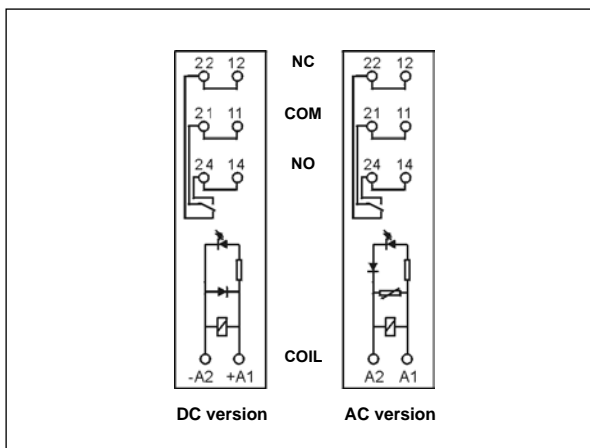


Connection of GZMB80 socket

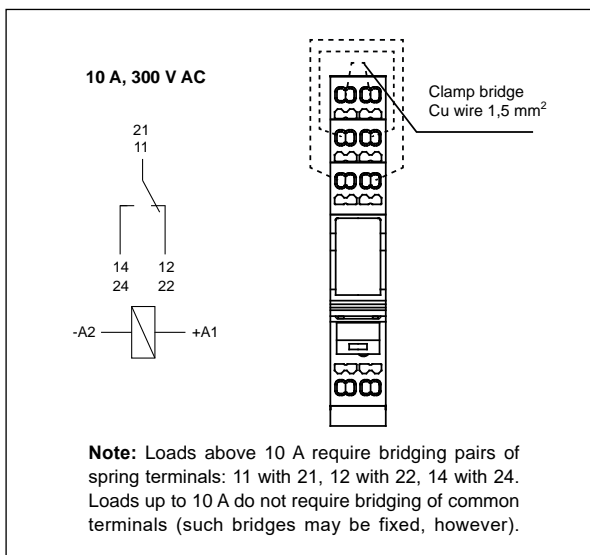


Electrical life at AC resistive load. Switching frequency: 360 cycles/hour

Fig. 1

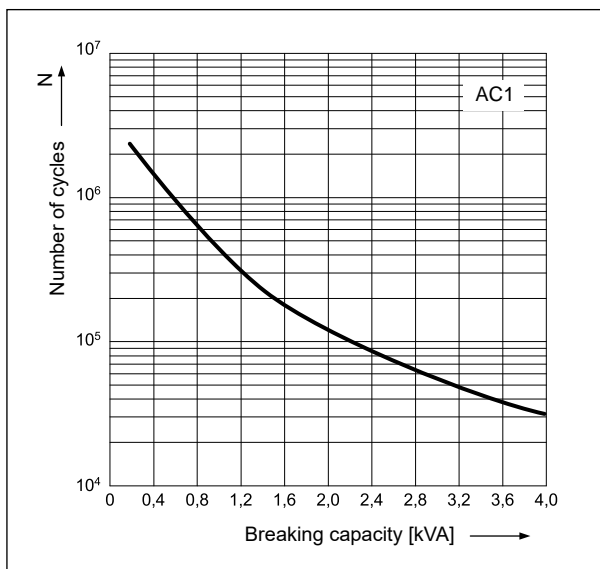

Max. AC 50 Hz resistive load breaking capacity

Fig. 2

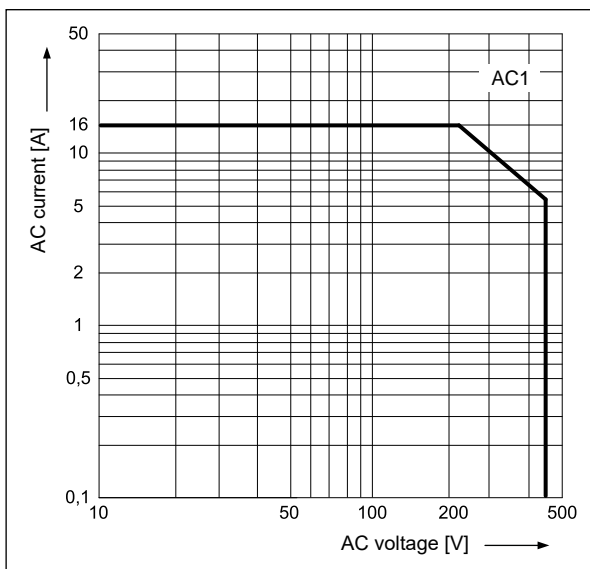

Mounting

Relays **PI85P with socket GZMB80** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. **Connections:** max. cross section of the cables: 1 x 0,2...1,5 mm² (1 x 24...16 AWG), stripping length: 9...11 mm.

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 23 °C Ω	Acceptable resistance	Coil operating range V DC Ⓣ	
				min. (0...+70 °C)	max. (0...+70 °C)
012DC	12	360	± 10%	8,4	18,0
024DC	24	1 440	± 10%	16,8	36,0
048DC	48	5 760	± 15%	33,6	72,0
110DC	110	25 200	± 15%	77,0	165,0

The data in bold type relate to the standard versions of the relays. Ⓣ The max. allowable voltage is coil overdrive voltage, it is the instantaneous max. voltage which the relay coil could endure in very short time. Relays with 48 V DC and 110 V DC coils shall be absolutely protected against any possibility of operation at voltages higher than the rated voltage.


Coil data - AC 50 Hz voltage version

Table 2

Coil code	Rated voltage V AC	Coil resistance at 23 °C Ω	Acceptable resistance	Coil operating range V AC 50 Hz	
				min. (0...+70 °C)	max. (0...+70 °C)
024AC	24	350	± 10%	18,0	26,4
115AC	115	8 100	± 15%	86,3	126,5
230AC	230	32 500	± 15%	172,5	253,0

The data in bold type relate to the standard versions of the relays.

Ordering codes

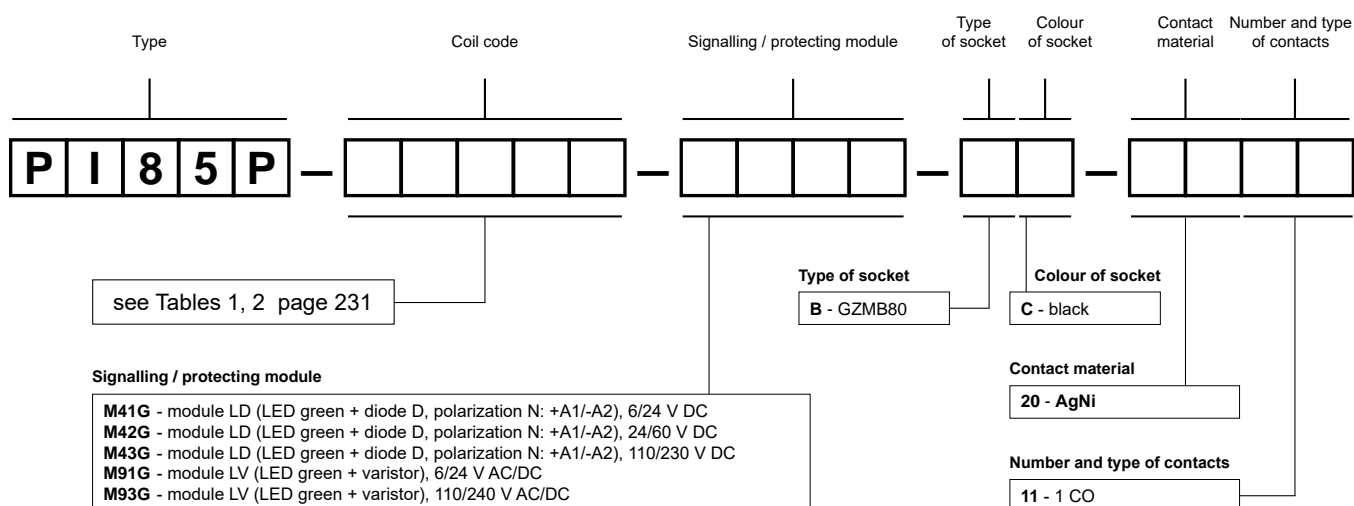

Examples of ordering codes:

PI85P-012DC-M41G-BC-2011

interface relay **PI85P** consists of: relay **RMP85** (one changeover contact, contact material AgNi, coil voltage 12 V DC), socket **GZMB80** (black, spring terminals), signalling / protecting module **M41G** (version LD), retainer / retractor clip **GZMB80-0025** (plastic), description plate **TR** (white)

PI85P-230AC-M93G-BC-2011

interface relay **PI85P** consists of: relay **RMP85** (one changeover contact, contact material AgNi, coil voltage 230 V AC 50 Hz), socket **GZMB80** (black, spring terminals), signalling / protecting module **M93G** (version LV), retainer / retractor clip **GZMB80-0025** (plastic), description plate **TR** (white)

PIR2 with socket GZM2 interface relays

232



R2N + GZM2

- Interface relay **PIR2 with socket GZM2** consists of: electromagnetic relay **R2N**, grey plug-in socket **GZM2**, signalling / protecting module **type M...**, retainer / retractor clip **GZT4-0040** (plastic), white description plate **GZT4-0035**
- 35 mm rail mount acc. to EN 60715 or on panel mounting with two M3 screws • May be linked with interconnection strip type **ZGGZ4**
- Recognitions, certifications, directives: recognitions R2N, RoHS,



Contact data

Number and type of contacts		2 CO	
Contact material		AgNi	
Rated / max. switching voltage	AC	250 V / 300 V	
Min. switching voltage		5 V	
Rated load (capacity)	AC1	12 A / 250 V AC	
	AC15	3 A / 120 V 1,5 A / 240 V (B300)	
	DC1	12 A / 24 V DC (see Fig. 3)	
	DC13	0,22 A / 120 V 0,1 A / 250 V (R300)	
Motor load	acc. to UL 508	1/2 HP 240 V AC, 4,9 FLA, single-phase motor ①	
	AC3 acc. to IEC 60947-4-1	0,37 kW 240 V AC, single-phase motor	
Min. switching current		5 mA	
Max. inrush current		24 A	
Rated current		12 A	
Max. breaking capacity	AC1	3 000 VA	
Min. breaking capacity		0,3 W	
Contact resistance		≤ 100 mΩ	
Max. operating frequency	AC1	• at rated load	1 200 cycles/hour
		• no load	18 000 cycles/hour

Coil data

Rated voltage	50/60 Hz AC	12, 24 , 48, 120, 230 V
	DC	12, 24 , 48, 110 V
Must release voltage		AC: ≥ 0,2 U _n DC: ≥ 0,1 U _n
Operating range of supply voltage		see Tables 1,2
Rated power consumption	AC	50 Hz: 1,6 VA 60 Hz: 1,3 VA
	DC	0,9 W

Insulation according to EN 60664-1



Insulation rated voltage		300 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		3
Dielectric strength	• between coil and contacts	2 500 V AC type of insulation: basic
	• contact clearance	1 500 V AC type of clearance: micro-disconnection
	• pole - pole	2 500 V AC type of insulation: basic
Contact - coil distance	• clearance	≥ 2,5 mm
	• creepage	≥ 4 mm

General data

Operating / release time (typical values)		AC: 10 ms / 8 ms DC: 13 ms / 3 ms
Electrical life	• resistive AC1	> 10 ⁵ 12 A, 250 V AC
	• cosφ	see Fig. 2
Mechanical life (cycles)		> 2 x 10 ⁷
Dimensions (L x W x H)		75 x 27 x 82 mm
Weight		97 g
Ambient temperature	• storage	-40...+85 °C
	(non-condensation and/or icing) • operating	AC: -40...+55 °C DC: -40...+70 °C
Cover protection category		IP 20 EN 60529
Environmental protection		R2N: RTI GZM2: RT0 EN 61810-7
Shock resistance	(NO/NC)	10 g / 5 g
Vibration resistance		5 g 10...150 Hz


The data in bold type relate to the standard versions of the relays. ① For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.

Dimensions

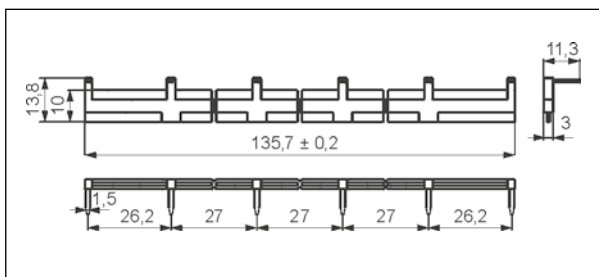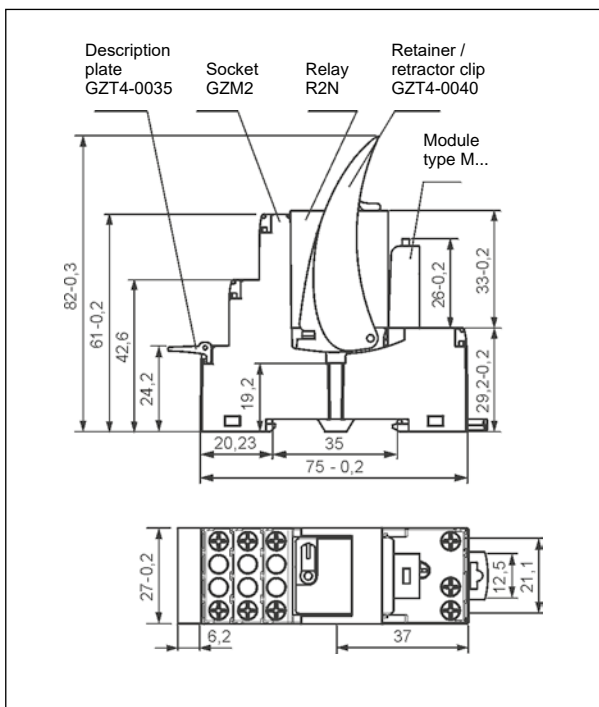

Interconnection strip type **ZGGZ4**

Connection diagrams (screw terminals side view)

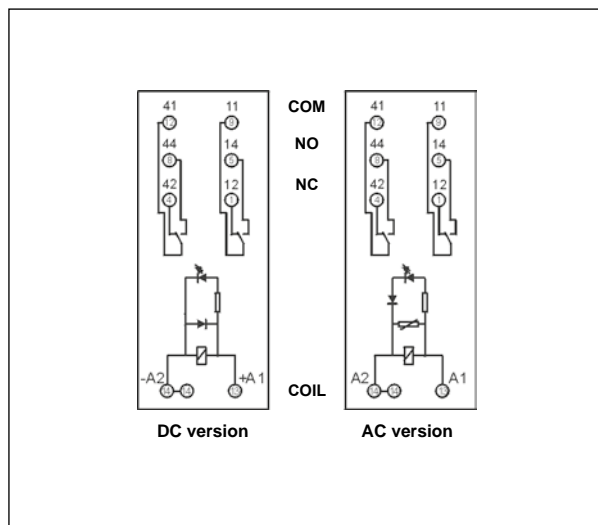

Mounting

Relays **PIR2 with socket GZM2** are designed for direct mounting on 35 mm rail mount acc. to EN 60715 or on panel mounting with two M3 screws. **Connections:** max. cross section of the cables (stranded): 2 x 2,5 mm² (2 x 14 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,7 Nm.


Plug-in sockets **GZM2** may be linked with interconnection strip type **ZGGZ4**. Strip **ZGGZ4** bridges common input signals, maximum permissible current is 10 A / 250 V AC. Possibility of connection of 6 sockets. Colours of strips: **ZGGZ4-1** grey, **ZGGZ4-2** black (see page 378).




ZGGZ4

Interconnection strip ZGGZ4:
bridging of common input signals.


Electrical life at AC resistive load. Fig. 1
Switching frequency: 1 200 cycles/hour

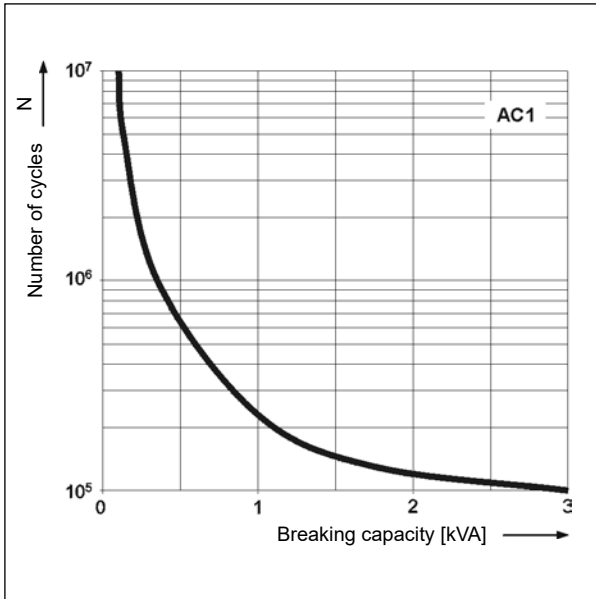

Electrical life reduction factor at AC inductive load Fig. 2

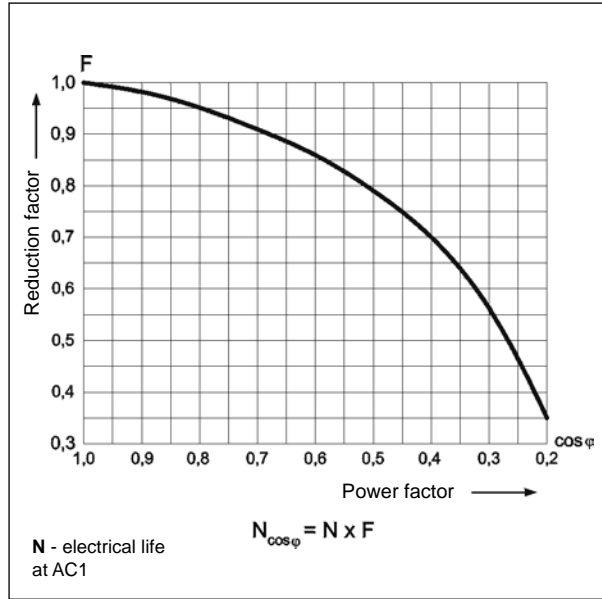

Max. DC resistive load breaking capacity Fig. 3

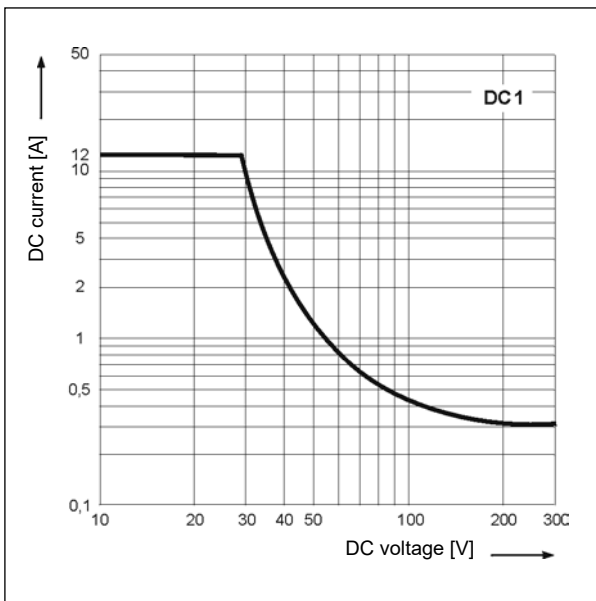

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 70 °C)
012DC	12	160	± 10%	9,6	13,2
024DC	24	640	± 10%	19,2	26,4
048DC	48	2 600	± 10%	38,4	52,8
110DC	110	13 600	± 10%	88,0	121,0

The data in bold type relate to the standard versions of the relays.


Coil data - AC 50/60 Hz voltage version

Table 2

Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC	
				min. (at 20 °C)	max. (at 55 °C)
012AC	12	39,5	± 10%	9,6	13,2
024AC	24	158	± 10%	19,2	26,4
048AC	48	640	± 10%	38,4	52,8
120AC	120	3 770	± 10%	96,0	132,0
230AC	230	16 100	± 10%	184,0	253,0

The data in bold type relate to the standard versions of the relays.

Ordering codes

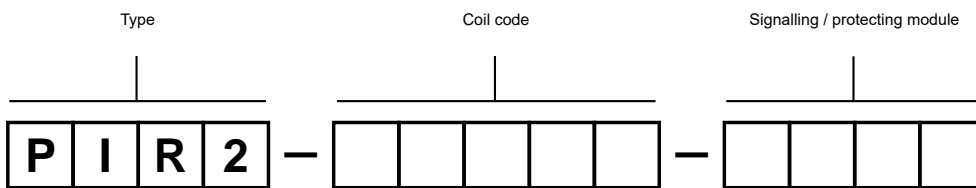

see Tables 1, 2 page 235

Signalling / protecting module

- 00LD** - M41G - module LD (LED green + diode D, polarization N: +A1/-A2), 6/24 V DC
- 00LD** - M42G - module LD (LED green + diode D, polarization N: +A1/-A2), 24/60 V DC
- 00LD** - M43G - module LD (LED green + diode D, polarization N: +A1/-A2), 110/230 V DC
- 00LV** - M91G - module LV (LED green + varistor), 6/24 V AC/DC
- 00LV** - M92G - module LV (LED green + varistor), 24/60 V AC/DC
- 00LV** - M93G - module LV (LED green + varistor), 110/240 V AC/DC

Examples of ordering codes:

PIR2-012DC-00LD

interface relay **PIR2** consists of: relay **R2N** (two changeover contacts, contact material AgNi, coil voltage 12 V DC), socket **GZM2** (grey, screw terminals), signalling / protecting module **M41G** (version LD), retainer / retractor clip **GZT4-0040** (plastic), description plate **GZT4-0035** (white)

PIR2-230AC-00LV

interface relay **PIR2** consists of: relay **R2N** (two changeover contacts, contact material AgNi, coil voltage 230 V AC 50/60 Hz), socket **GZM2** (grey, screw terminals), signalling / protecting module **M93G** (version LV), retainer / retractor clip **GZT4-0040** (plastic), description plate **GZT4-0035** (white)

INTERFACE

PIR3 with socket GZM3 interface relays

236



R3N + GZM3

- Interface relay **PIR3 with socket GZM3** consists of: electromagnetic relay **R3N**, grey plug-in socket **GZM3**, signalling / protecting module **type M...**, retainer / retractor clip **GZT4-0040** (plastic), white description plate **GZT4-0035**
- 35 mm rail mount acc. to EN 60715 or on panel mounting with two M3 screws • May be linked with interconnection strip type **ZGGZ4**
- Recognitions, certifications, directives: recognitions R3N, RoHS,



Contact data

Number and type of contacts		3 CO
Contact material		AgNi
Rated / max. switching voltage	AC	250 V / 300 V
Min. switching voltage		5 V
Rated load (capacity)	AC1	10 A / 250 V AC
	AC15	3 A / 120 V
	DC1	10 A / 24 V DC (see Fig. 3)
	DC13	0,22 A / 120 V
Motor load	acc. to UL 508	1/2 HP
	AC3 acc. to IEC 60947-4-1	0,37 kW
		240 V AC, 4,9 FLA, single-phase motor ①
		240 V AC, single-phase motor
Min. switching current		5 mA
Max. inrush current		20 A
Rated current		10 A
Max. breaking capacity	AC1	2 500 VA
Min. breaking capacity		0,3 W
Contact resistance		≤ 100 mΩ
Max. operating frequency		
• at rated load	AC1	1 200 cycles/hour
• no load		18 000 cycles/hour

Coil data

Rated voltage	50/60 Hz AC	12, 24 , 48, 120, 230 V
	DC	12, 24 , 48, 110 V
Must release voltage		AC: ≥ 0,2 U _n DC: ≥ 0,1 U _n
Operating range of supply voltage		see Tables 1,2
Rated power consumption	AC	50 Hz: 1,6 VA
	DC	0,9 W
		60 Hz: 1,3 VA

Insulation according to EN 60664-1



Insulation rated voltage		300 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		2
Dielectric strength		
• between coil and contacts		2 500 V AC type of insulation: basic
• contact clearance		1 500 V AC type of clearance: micro-disconnection
• pole - pole		2 500 V AC type of insulation: basic
Contact - coil distance		
• clearance		≥ 2,5 mm
• creepage		≥ 4 mm

General data

Operating / release time (typical values)		AC: 10 ms / 8 ms	DC: 13 ms / 3 ms
Electrical life			
• resistive AC1		> 10 ⁵	10 A, 250 V AC
• cosφ		see Fig. 2	
Mechanical life (cycles)		> 2 x 10 ⁷	
Dimensions (L x W x H)		75 x 27 x 82 mm	
Weight		107 g	
Ambient temperature	• storage	-40...+85 °C	
(non-condensation and/or icing)	• operating	AC: -40...+55 °C	DC: -40...+70 °C
Cover protection category		IP 20	EN 60529
Environmental protection		R3N: RTI GZM3: RT0	EN 61810-7
Shock resistance	(NO/NC)	10 g / 5 g	
Vibration resistance		5 g 10...150 Hz	


The data in bold type relate to the standard versions of the relays. ① For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.

Dimensions

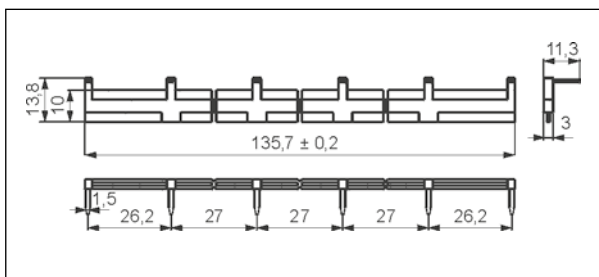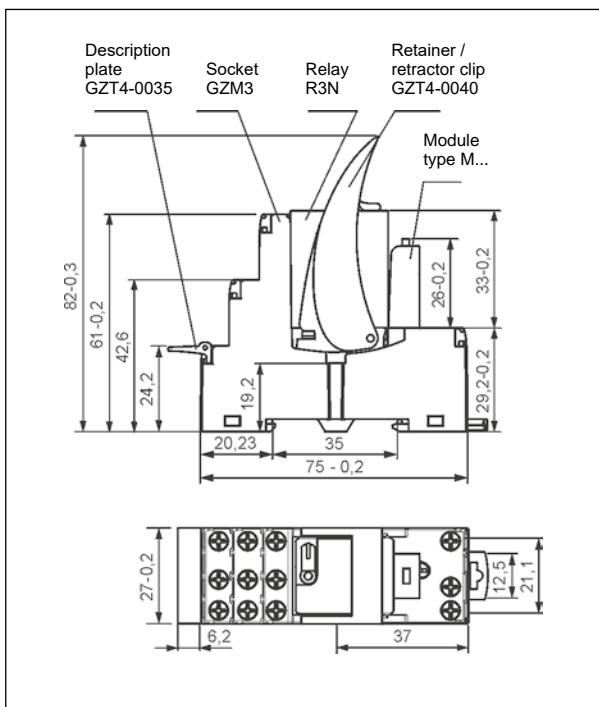

Interconnection strip type **ZGGZ4**

Connection diagrams (screw terminals side view)

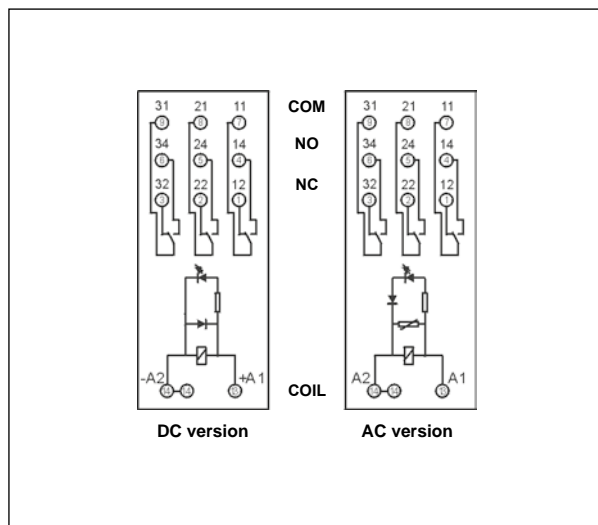

Mounting

Relays **PIR3 with socket GZM3** are designed for direct mounting on 35 mm rail mount acc. to EN 60715 or on panel mounting with two M3 screws. **Connections:** max. cross section of the cables (stranded): 2 x 2,5 mm² (2 x 14 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,7 Nm.


Plug-in sockets **GZM3** may be linked with interconnection strip type **ZGGZ4**. Strip **ZGGZ4** bridges common input signals, maximum permissible current is 10 A / 250 V AC. Possibility of connection of 6 sockets. Colours of strips: **ZGGZ4-1** grey, **ZGGZ4-2** black (see page 378).




ZGGZ4

Interconnection strip ZGGZ4: bridging of common input signals.


Electrical life at AC resistive load. Fig. 1
Switching frequency: 1 200 cycles/hour

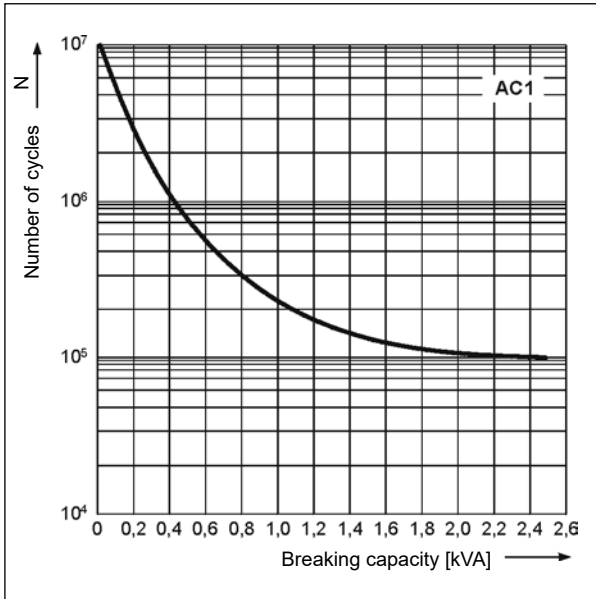

Electrical life reduction factor at AC inductive load Fig. 2

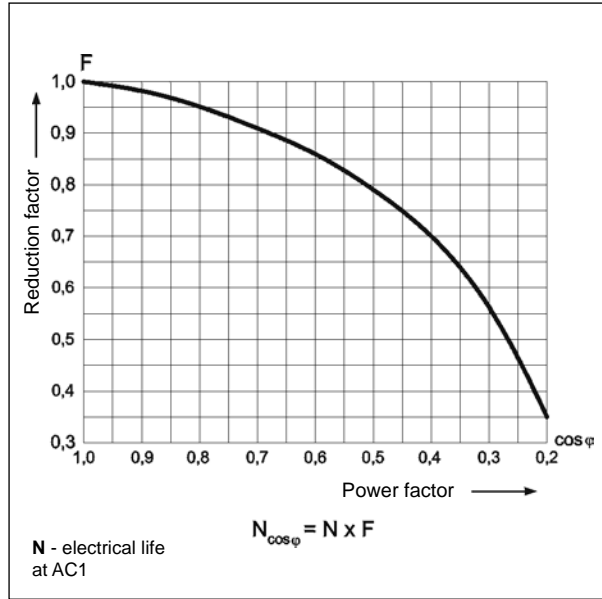

Max. DC breaking capacity Fig. 3
A - resistive load DC1
B - inductive load L/R = 40 ms

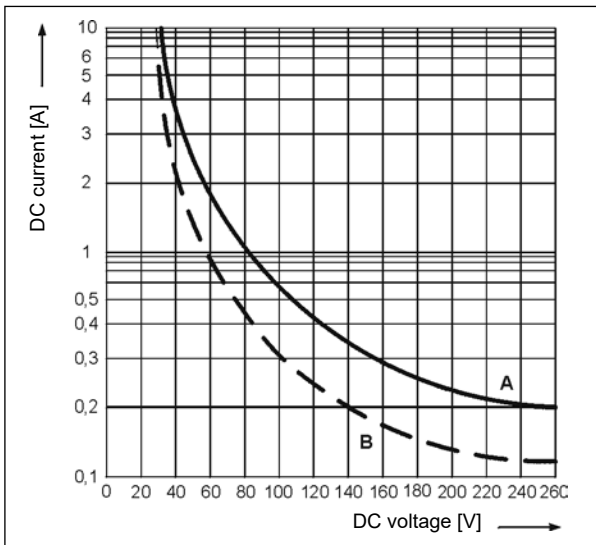

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 70 °C)
012DC	12	160	± 10%	9,6	13,2
024DC	24	640	± 10%	19,2	26,4
048DC	48	2 600	± 10%	38,4	52,8
110DC	110	13 600	± 10%	88,0	121,0

The data in bold type relate to the standard versions of the relays.


Coil data - AC 50/60 Hz voltage version

Table 2

Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC	
				min. (at 20 °C)	max. (at 55 °C)
012AC	12	39,5	± 10%	9,6	13,2
024AC	24	158	± 10%	19,2	26,4
048AC	48	640	± 10%	38,4	52,8
120AC	120	3 770	± 10%	96,0	132,0
230AC	230	16 100	± 10%	184,0	253,0

The data in bold type relate to the standard versions of the relays.

Ordering codes

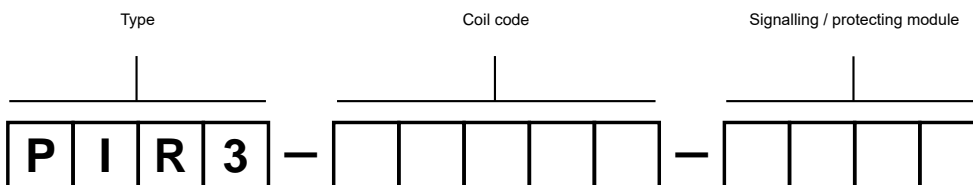

see Tables 1, 2 page 239

Signalling / protecting module

- 00LD - M41G - module LD (LED green + diode D, polarization N: +A1/-A2), 6/24 V DC
- 00LD - M42G - module LD (LED green + diode D, polarization N: +A1/-A2), 24/60 V DC
- 00LD - M43G - module LD (LED green + diode D, polarization N: +A1/-A2), 110/230 V DC
- 00LV - M91G - module LV (LED green + varistor), 6/24 V AC/DC
- 00LV - M92G - module LV (LED green + varistor), 24/60 V AC/DC
- 00LV - M93G - module LV (LED green + varistor), 110/240 V AC/DC

Examples of ordering codes:

PIR3-012DC-00LD

interface relay **PIR3** consists of: relay **R3N** (three changeover contacts, contact material AgNi, coil voltage 12 V DC), socket **GZM3** (grey, screw terminals), signalling / protecting module **M41G** (version LD), retainer / retractor clip **GZT4-0040** (plastic), description plate **GZT4-0035** (white)

PIR3-230AC-00LV

interface relay **PIR3** consists of: relay **R3N** (three changeover contacts, contact material AgNi, coil voltage 230 V AC 50/60 Hz), socket **GZM3** (grey, screw terminals), signalling / protecting module **M93G** (version LV), retainer / retractor clip **GZT4-0040** (plastic), description plate **GZT4-0035** (white)

PIR4 with socket GZM4 interface relays

240



R4N + GZM4

- Interface relay **PIR4 with socket GZM4** consists of: electromagnetic relay **R4N**, grey plug-in socket **GZM4**, signalling / protecting module **type M...**, retainer / retractor clip **GZT4-0040** (plastic), white description plate **GZT4-0035**
- 35 mm rail mount acc. to EN 60715 or on panel mounting with two M3 screws • May be linked with interconnection strip type **ZGGZ4**
- Recognitions, certifications, directives: recognitions R4N, RoHS,



Contact data

Number and type of contacts		4 CO	
Contact material		AgNi	
Rated / max. switching voltage	AC	250 V / 300 V	
Min. switching voltage		5 V	
Rated load (capacity)	AC1	7 A / 230 V AC (VDE) 6 A / 250 V AC	
	AC15	1,5 A / 120 V 0,75 A / 240 V (C300)	
	DC1	6 A / 24 V DC (see Fig. 3)	
	DC13	0,22 A / 120 V 0,1 A / 250 V (R300)	
Motor load	acc. to UL 508	1/3 HP 240 V AC, 3,6 FLA, single-phase motor ①	
	AC3 acc. to IEC 60947-4-1	0,125 kW 240 V AC, single-phase motor	
Min. switching current		5 mA	
Max. inrush current		12 A	
Rated current		6 A	
Max. breaking capacity	AC1	1 500 VA	
Min. breaking capacity		0,3 W	
Contact resistance		≤ 100 mΩ	
Max. operating frequency			
	• at rated load	AC1	1 200 cycles/hour
	• no load		18 000 cycles/hour

Coil data

Rated voltage	50/60 Hz AC	12, 24 , 48, 120, 230 V
	DC	12, 24 , 48, 110 V
Must release voltage		AC: ≥ 0,2 U _n DC: ≥ 0,1 U _n
Operating range of supply voltage		see Tables 1,2
Rated power consumption	AC	50 Hz: 1,6 VA 60 Hz: 1,3 VA
	DC	0,9 W

Insulation according to EN 60664-1



Insulation rated voltage		300 V AC
Rated surge voltage		2 500 V 1,2 / 50 μs
Overtoltage category		II
Insulation pollution degree		2
Dielectric strength	• between coil and contacts	2 500 V AC type of insulation: basic
	• contact clearance	1 500 V AC type of clearance: micro-disconnection
	• pole - pole	2 000 V AC type of insulation: basic
Contact - coil distance	• clearance	≥ 1,6 mm
	• creepage	≥ 3,2 mm

General data

Operating / release time (typical values)		AC: 10 ms / 8 ms DC: 13 ms / 3 ms
Electrical life	• resistive AC1	> 10 ⁵ 6 A, 250 V AC
	• cosφ	see Fig. 2
	Mechanical life (cycles)	> 2 x 10 ⁷
Dimensions (L x W x H)		75 x 27 x 82 mm
Weight		108 g
Ambient temperature	• storage	-40...+85 °C
	(non-condensation and/or icing) • operating	AC: -40...+55 °C DC: -40...+70 °C
Cover protection category		IP 20 EN 60529
Environmental protection		R4N: RTI GZM4: RT0 EN 61810-7
Shock resistance	(NO/NC)	10 g / 5 g
Vibration resistance		5 g 10...150 Hz


The data in bold type relate to the standard versions of the relays. ① For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.

Dimensions

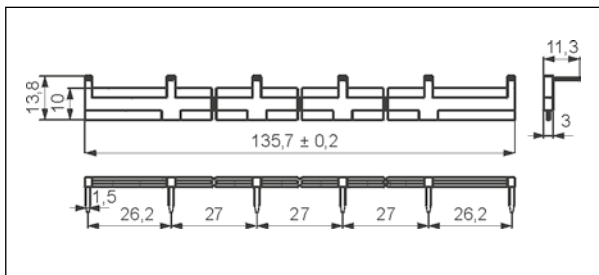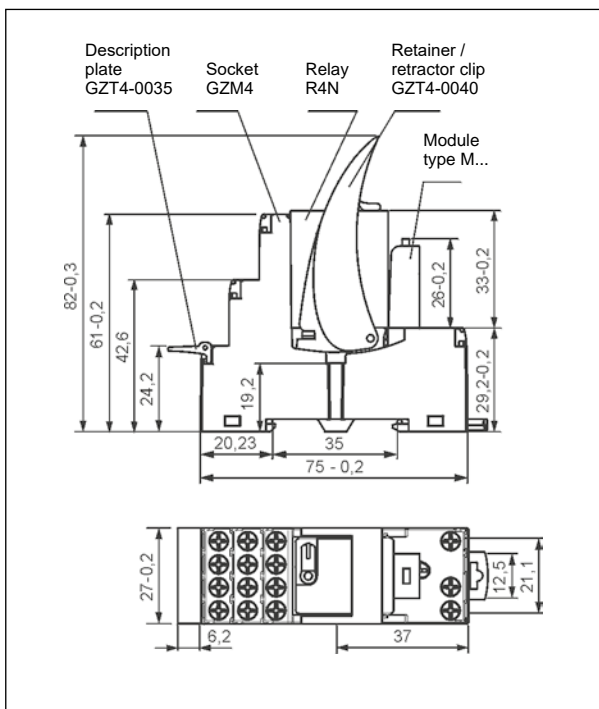

Interconnection strip type **ZGGZ4**

Connection diagrams (screw terminals side view)

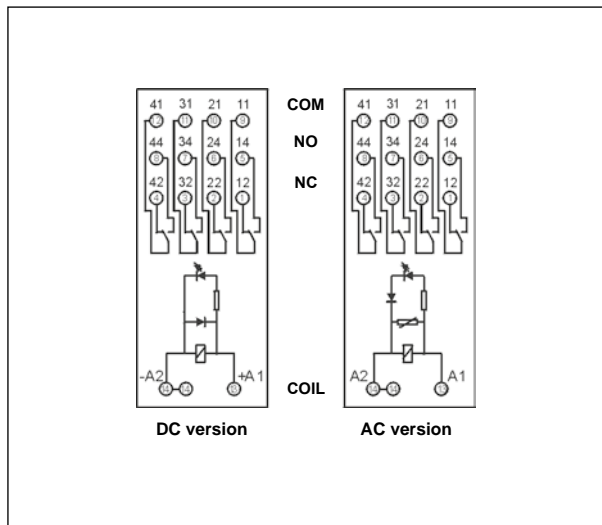

Mounting

Relays **PIR4 with socket GZM4** are designed for direct mounting on 35 mm rail mount acc. to EN 60715 or on panel mounting with two M3 screws. **Connections:** max. cross section of the cables (stranded): 2 x 2,5 mm² (2 x 14 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,7 Nm.


Plug-in sockets **GZM4** may be linked with interconnection strip type **ZGGZ4**. Strip **ZGGZ4** bridges common input signals, maximum permissible current is 10 A / 250 V AC. Possibility of connection of 6 sockets. Colours of strips: **ZGGZ4-1** grey, **ZGGZ4-2** black (see page 378).




ZGGZ4

Interconnection strip ZGGZ4: bridging of common input signals.


Electrical life at AC resistive load.
Switching frequency: 1 200 cycles/hour Fig. 1

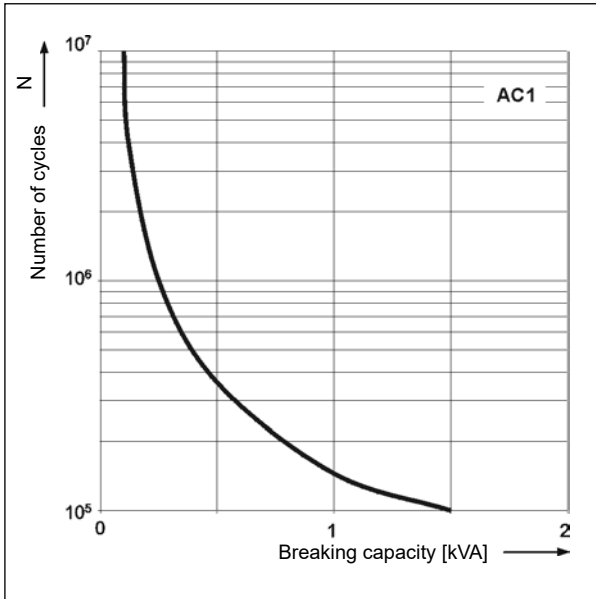

Electrical life reduction factor at AC inductive load Fig. 2

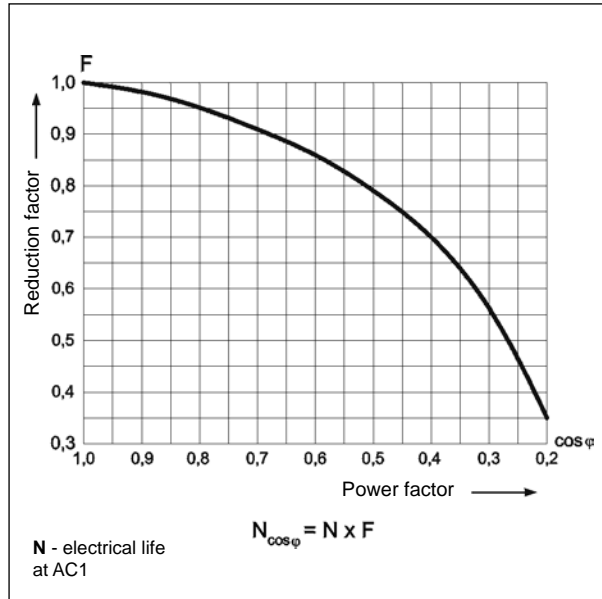

Max. DC breaking capacity
A - resistive load DC1
B - inductive load L/R = 40 ms Fig. 3

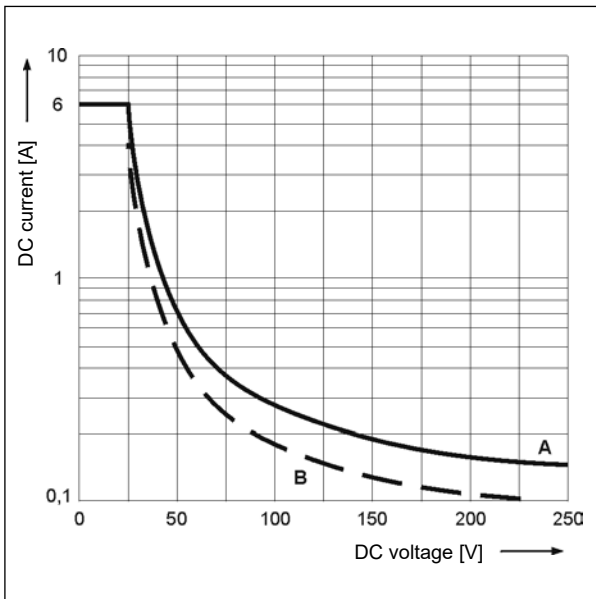

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 70 °C)
012DC	12	160	± 10%	9,6	13,2
024DC	24	640	± 10%	19,2	26,4
048DC	48	2 600	± 10%	38,4	52,8
110DC	110	13 600	± 10%	88,0	121,0

The data in bold type relate to the standard versions of the relays.


Coil data - AC 50/60 Hz voltage version

Table 2

Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC	
				min. (at 20 °C)	max. (at 55 °C)
012AC	12	39,5	± 10%	9,6	13,2
024AC	24	158	± 10%	19,2	26,4
048AC	48	640	± 10%	38,4	52,8
120AC	120	3 770	± 10%	96,0	132,0
230AC	230	16 100	± 10%	184,0	253,0

The data in bold type relate to the standard versions of the relays.

Ordering codes

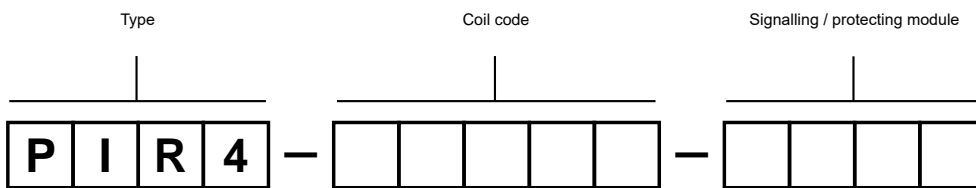

see Tables 1, 2 page 243

Signalling / protecting module

- 00LD - M41G - module LD (LED green + diode D, polarization N: +A1/-A2), 6/24 V DC
- 00LD - M42G - module LD (LED green + diode D, polarization N: +A1/-A2), 24/60 V DC
- 00LD - M43G - module LD (LED green + diode D, polarization N: +A1/-A2), 110/230 V DC
- 00LV - M91G - module LV (LED green + varistor), 6/24 V AC/DC
- 00LV - M92G - module LV (LED green + varistor), 24/60 V AC/DC
- 00LV - M93G - module LV (LED green + varistor), 110/240 V AC/DC

Examples of ordering codes:

PIR4-012DC-00LD


interface relay **PIR4** consists of: relay **R4N** (four changeover contacts, contact material AgNi, coil voltage 12 V DC), socket **GZM4** (grey, screw terminals), signalling / protecting module **M41G** (version LD), retainer / retractor clip **GZT4-0040** (plastic), description plate **GZT4-0035** (white)





PIR4-230AC-00LV

interface relay **PIR4** consists of: relay **R4N** (four changeover contacts, contact material AgNi, coil voltage 230 V AC 50/60 Hz), socket **GZM4** (grey, screw terminals), signalling / protecting module **M93G** (version LV), retainer / retractor clip **GZT4-0040** (plastic), description plate **GZT4-0035** (white)

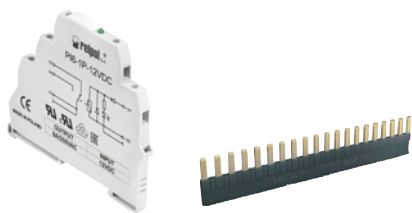PI6-1P

interface relays



- Width 6,2 mm
- Interface relay **PI6-1P** - with 1 CO contact output
- 35 mm rail mount acc. to EN 60715
- May be linked with interconnection strip type **ZG20**
- Equipped in LED green
- Version for long control lines, with anti-interference filter (**PI6-1P-230VAC/DC-10** ☉)
- Recognitions, certifications, directives: : RoHS,    

Output circuit - contact data

Number and type of contacts		1 CO	
Contact material		AgSnO₂	AgSnO ₂ /Au hard gold plating ❶
Max. switching voltage		400 V AC / 250 V DC	30 V AC / 36 V DC ❶
Min. switching voltage	AC / DC	10 V	5 V
Rated load	AC1 DC1	6 A / 250 V AC 6 A / 24 V DC; 0,15 A / 250 V DC	0,05 A / 30 V AC ❶ 0,05 A / 36 V DC ❶
Min. switching current		100 mA	10 mA
Max. inrush current		10 A 20 ms	0,1 A 20 ms ❶
Rated current		6 A	0,05 A ❶
Max. breaking capacity	AC1	1 500 VA	1,2 VA ❶
Min. breaking capacity		1 W	0,05 W
Contact resistance		≤ 100 mΩ 100 mA, 24 V	≤ 30 mΩ 10 mA, 5 V
Max. operating frequency			
• at rated load	AC1	360 cycles/hour	
• no load		72 000 cycles/hour	
Input circuit			
Rated voltage	DC AC: 50/60 Hz AC/DC	12, 24 , 36 V 24, 42, 115, 230 V	
Must release voltage		AC: ≥ 0,2 U _n AC: ≥ 0,35 U _n ☉ DC: ≥ 0,1 U _n	
Operating range of supply voltage		see Table 1	
Must operate voltage		AC: ≤ 0,8 U _n AC: 0,6...0,85 U _n ☉ DC: ≤ 0,8 U _n	
Input polarization current		AC: 8 mA < I _p < 10 mA 230 V AC ☉	
Rated power consumption	DC AC/DC	0,3 ... 0,7 W 0,3 ... 1,6 VA / 0,3 ... 1,6 W	
Max. length of control line		≤ 300 m AC control voltage ☉	
Insulation according to EN 60664-1			
Insulation rated voltage		400 V AC	
Rated surge voltage		4 000 V 1,2 / 50 μs	
Overvoltage category		III	
Insulation pollution degree		3	
Dielectric strength			
• input - output		4 000 V AC 50/60 Hz, 1 min., type of insulation: reinforced	
• input - output		6 000 V 1,2 / 50 μs	
• mass - input, output		2 500 V AC 50/60 Hz, 1 min.	
• contact clearance		1 000 V AC 50/60 Hz, 1 min., type of clearance: micro-disconnection	
Input - output distance			
• clearance		≥ 6 mm	
• creepage		≥ 8 mm	

The data in bold type relate to the standard versions of the relays. ❶ For gold-plated contacts - when the maximum values given have been exceeded, the gold layer is destroyed. Then, the advantages of gold-plating disappear and the values are as for AgSnO₂ contacts (see beside), and electrical life of these contacts may be shorter than of normal contacts. ☉ Refers version for long control lines (max. 300 m) **PI6-1P-230VAC/DC-10** - relay with integrated anti-interference filter, resistant to occurrence of induced voltages in long distances of control wires.


General data

Operating time (typical value)	AC: 7 ms	DC: 6 ms
Release time (typical value)	AC: 15 ms	DC: 10 ms
Electrical life		
• resistive AC1	> 0,6 x 10 ⁵	6 A, 250 V AC
• cos φ = 0,4	> 2 x 10 ⁵	2 A, 250 V AC
• resistive DC1	10 ⁵	6 A, 30 V DC
Mechanical life (cycles)	> 2 x 10 ⁷	
Dimensions (L x W x H)	93,8 x 6,2 x 80 mm	
Weight	40 g	
Ambient temperature	• storage	-40...+70 °C
(non-condensation and/or icing)	• operating	-40...+55 °C
		-40...+40 °C 230 V AC ② -40...+60 °C 12, 24 V DC
		-40...+40 °C 230 V AC ② -40...+50 °C 230 V DC ②
Cover protection category	IP 20	EN 60529
Environmental protection	RTI	EN 61810-7
Shock resistance	10 g	
Vibration resistance	5 g 10...500 Hz	


② Refers version for long control lines (max. 300 m), with integrated anti-interference filter.

Connection diagrams


PI6-1P-12VDC, PI6-1P-12VDC-01
PI6-1P-24VDC, PI6-1P-24VDC-01
PI6-1P-36VDC, PI6-1P-36VDC-01

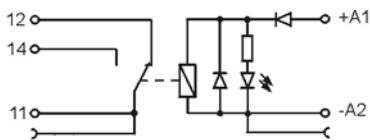


PI6-1P-24VAC/DC, PI6-1P-24VAC/DC-01
PI6-1P-42VAC/DC

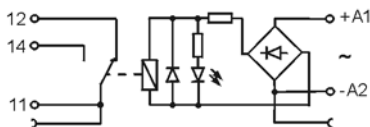



PI6-1P-115VAC/DC
PI6-1P-230VAC/DC, PI6-1P-230VAC/DC-01

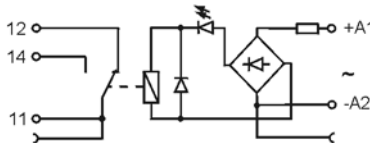

PI6-1P-230VAC/DC-10

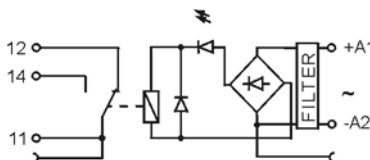

Dimensions

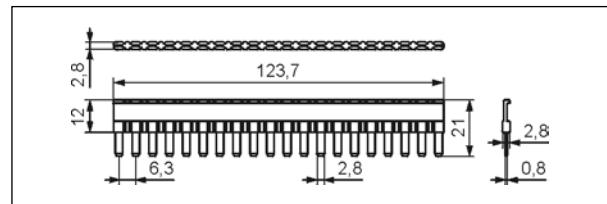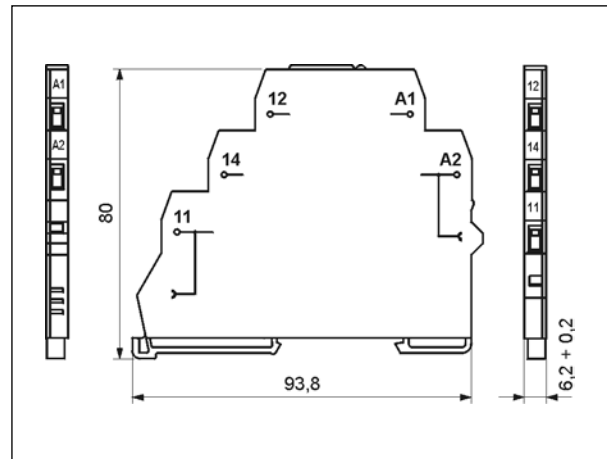

Interconnection strip type **ZG20**


Mounting

Relays **PI6-1P** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. **Connections:** max. cross section of the cables: 1 x 2,5 mm² / 2 x 1,5 mm² (1 x 14 / 2 x 16 AWG), stripping length: 8 mm, max. tightening moment for the terminal: 0,3 Nm.

PI6-1P may be linked with interconnection strip type **ZG20**. Strip **ZG20** bridges common input or output signals, maximum permissible current is 36 A / 250 V AC. Colours of strips: **ZG20-1** red, **ZG20-2** black, **ZG20-3** blue.



Interconnection strip ZG20:
bridging of common
input or output signals.



ZG20

Input data

Table 1

Interface relay code	Rated input voltage U _n	Power of input circuit	Input - voltage range V	
			min. (at 20 °C)	max. (at 55 °C)
PI6-1P-12VDC	12 V DC	0,3 W	9,6	14,4
PI6-1P-24VDC	24 V DC	0,4 W	19,2	28,0
PI6-1P-36VDC	36 V DC	0,7 W	28,8	40,0
PI6-1P-24VAC/DC	24 V AC/DC	0,5 VA / 0,5 W	19,2	26,4
PI6-1P-42VAC/DC	42 V AC/DC	0,3 VA / 0,3 W	33,6	50,0
PI6-1P-115VAC/DC	115 V AC/DC	0,8 VA / 0,8 W	92,0	130,0
PI6-1P-230VAC/DC	230 V AC/DC	0,8 VA / 0,8 W	184,0	253,0
PI6-1P-230VAC/DC-10 ②	230 V AC/DC	1,6 VA / 1,6 W	196,0	253,0
PI6-1P-12VDC-01 ①	12 V DC	0,3 W	9,6	14,4
PI6-1P-24VDC-01 ①	24 V DC	0,4 W	19,2	28,0
PI6-1P-36VDC-01 ①	36 V DC	0,7 W	28,8	40,0
PI6-1P-24VAC/DC-01 ①	24 V AC/DC	0,5 VA / 0,5 W	19,2	26,4
PI6-1P-230VAC/DC-01 ①	230 V AC/DC	0,8 VA / 0,8 W	184,0	253,0

The data in bold type relate to the standard versions of the relays.


① Version with gold-plated contacts. ② Version for long control lines (max. 300 m), with anti-interference filter.

Ordering codes

Ordering codes **PI6-1P** are specified in Table 1, "Interface relay code" column.

Interface relay PI6-1P



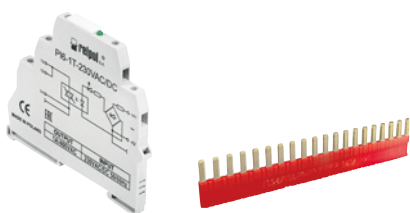

- Width 6,2 mm
- Interface relay **PI6-1T** - with triac output
- 35 mm rail mount acc. to EN 60715
- May be linked with interconnection strip type **ZG20**
- Equipped in LED green
- Recognitions, certifications, directives: RoHS, **CE EAC**

Output circuit - Triac


Number and type of outputs		1 NO
Rated / max. switching voltage	AC	400 V / 440 V
Min. switching voltage	AC	20 V
Rated load	AC1	1,2 A / 400 V AC
Min. switching current		10 mA
Max. non-repeat surge current		30 A $t=20$ ms
Rated current		1,2 A
I^2t for fusing		5,1 A ² s $t=1-10$ ms
dI/dt		50 A/ μ s
dV/dt		40 V/ μ s
Input circuit		
Rated voltage	DC	5...32 V
	AC: 50/60 Hz AC/DC	24, 230 V
Turn-off voltage		AC: $\geq 0,2 U_n$ DC: $\geq 0,1 U_n$
Rated power consumption	DC	0,3 W
	AC/DC	0,3 VA / 0,3 W
	AC/DC	1,6 VA / 1,6 W
		5...32 V DC at 24 V 24 V AC/DC 230 V AC/DC
Insulation according to EN 60664-1		
Insulation rated voltage		600 V AC
Insulation pollution degree		2
Dielectric strength	• input - output	4 000 V AC 50/60 Hz, 1 min., type of insulation: reinforced
General data		
Operating time		10 ms max. (zero turn-on)
Release time		10 ms max.
Dimensions (L x W x H)		93,8 x 6,2 x 80 mm
Weight		40 g
Ambient temperature (non-condensation and/or icing)	• storage	-40...+70 °C
	• operating	-40...+55 °C
Cover protection category		IP 20 EN 60529
Environmental protection		RTI EN 61810-7
Shock resistance		10 g
Vibration resistance		5 g 10...500 Hz

EUROPRODUCT 2003
for interface relays **PI6**


Gold medal
AUTOMATICON 2004
for interface relays **PI6**



Connection diagrams

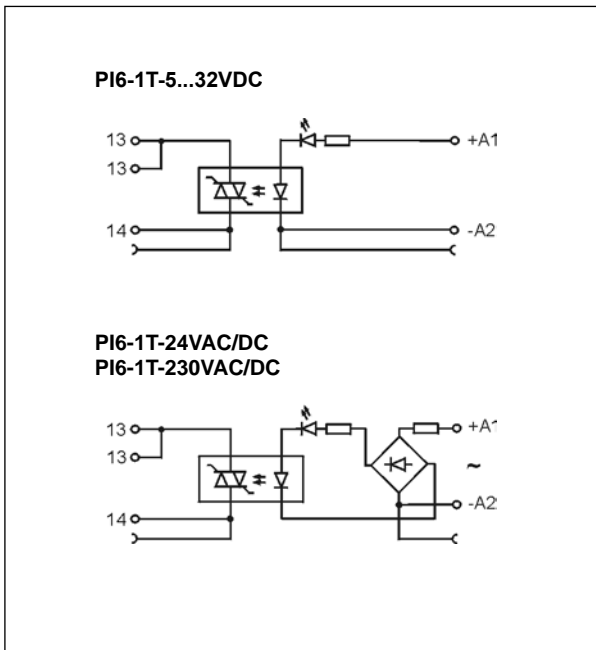

Dimensions

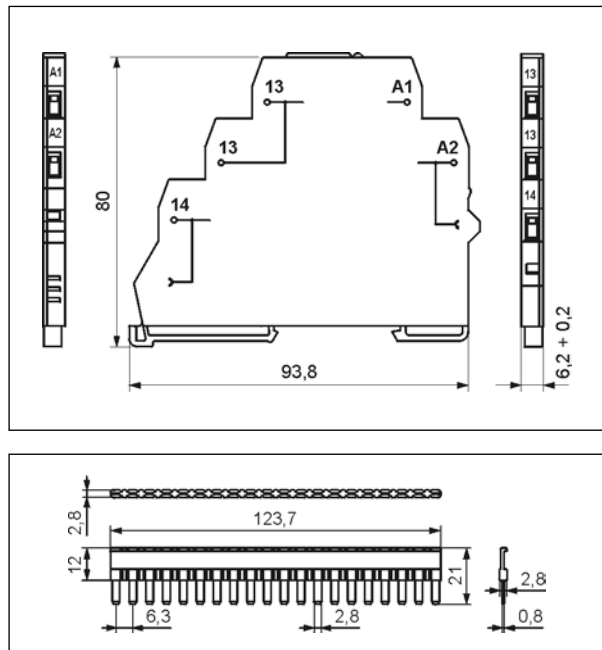


Interconnection strip type **ZG20**

Mounting

Relays **PI6-1T** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. **Connections:** max. cross section of the cables: $1 \times 2,5 \text{ mm}^2 / 2 \times 1,5 \text{ mm}^2$ (1 x 14 / 2 x 16 AWG), stripping length: 8 mm, max. tightening moment for the terminal: 0,3 Nm.

PI6-1T may be linked with interconnection strip type **ZG20**. Strip **ZG20** bridges common input or output signals, maximum permissible current is 36 A / 250 V AC. Colours of strips: **ZG20-1** red, **ZG20-2** black, **ZG20-3** blue.



Interconnection strip ZG20:
bridging of common
input or output signals.



Input data

Table 1





Interface relay code	Rated input voltage U_n	Power of input circuit
PI6-1T-5...32VDC	5...32 V DC	0,3 W at 24 V
PI6-1T-24VAC/DC	24 V AC/DC	0,3 VA / 0,3 W
PI6-1T-230VAC/DC	230 V AC/DC	1,6 VA / 1,6 W

Ordering codes

Ordering codes **PI6-1T** are specified in Table 1, "Interface relay code" column.

RM699BV + PI6W-1P-...



- Width 6,2 mm • Interface relay **PIR6W-1P-...** consists of: screw terminals socket, with electronic **PI6W-1P-...**, miniature operational relay - electromagnetic **RM699BV** ①
- 35 mm rail mount acc. to EN 60715 • May be linked with interconnection strip type **ZG20** • Equipped in LED green • Version for long control lines, with anti-interference filter (**PIR6W-1P-230V...-10** ②)
- Accessories: description plates **PI6W-1246**
- Recognitions, certifications, directives: RoHS,    

Output circuit (RM699BV) - contact data ①

Number and type of contacts	1 CO	
Contact material	AgSnO₂	AgSnO ₂ /Au hard gold plating ②
Max. switching voltage	400 V AC / 250 V DC	30 V AC / 36 V DC ②
Min. switching voltage	AC / DC	10 V / 5 V
Rated load	AC1	6 A / 250 V AC
	DC1	6 A / 24 V DC; 0,15 A / 250 V DC
		0,05 A / 30 V AC ②
		0,05 A / 36 V DC ②
Min. switching current	100 mA	
Max. inrush current	10 A 20 ms	
Rated current	6 A	
		0,05 A ②
Max. breaking capacity	AC1	1 500 VA
Min. breaking capacity	1 W	
		0,05 W
Contact resistance	≤ 100 mΩ 100 mA, 24 V	
		≤ 30 mΩ 10 mA, 5 V
Max. operating frequency		
• at rated load	AC1	360 cycles/hour
• no load		72 000 cycles/hour
Input circuit		
Rated voltage	50/60 Hz AC	230 V
	DC	12, 24 , 36 V
	AC: 50/60 Hz AC/DC	24, 42, 115, 230 V
Must release voltage	AC: ≥ 0,2 U _n	
	AC: ≥ 0,35 U _n 230 V AC ③	AC: ≥ 0,1 U _n 230 V AC
	DC: ≥ 0,1 U _n	AC: ≥ 0,35 U _n 230 V AC/DC ③
Operating range of supply voltage	see Table 1	
Must operate voltage	AC: ≤ 0,8 U _n	
	DC: ≤ 0,8 U _n	AC: 0,6...0,85 U _n ③
Rated power consumption	AC	≤ 0,8 ... 0,9 VA
	DC	0,3 W
	AC/DC	0,3 ... 2,1 VA / 0,3 ... 1,0 W
Max. length of control line	≤ 300 m	AC control voltage ③
Insulation according to EN 60664-1		
Insulation rated voltage	250 V AC	
Rated surge voltage	4 000 V 1,2 / 50 μs	
Overvoltage category	III	
Insulation pollution degree	3	
Dielectric strength		
• input - output	4 000 V AC	50/60 Hz, 1 min., type of insulation: reinforced
• input - output	6 000 V	1,2 / 50 μs
• mass - input, output	2 500 V AC	50/60 Hz, 1 min.
• contact clearance	1 000 V AC	50/60 Hz, 1 min., type of clearance: micro-disconnection
Input - output distance		
• clearance	≥ 6 mm	
• creepage	≥ 8 mm	
Mass - output distance		
• clearance	≥ 3 mm	
• creepage	≥ 3,6 mm	

The data in bold type relate to the standard versions of the relays. ① Characteristics of the contact capacity of relays **PIR6W-1P-...** with **RM699BV** - see page 86 ② For gold-plated contacts - when the maximum values given have been exceeded, the gold layer is destroyed. Then, the advantages of gold-plating disappear and the values are as for AgSnO₂ contacts (see beside), and electrical life of these contacts may be shorter than of normal contacts. ③ Refers version for long control lines (max. 300 m) **PIR6W-1P-230V...-10** - relay which includes the socket **PI6W-1P-230V...-10** with integrated anti-interference filter, resistant to occurrence of induced voltages in long distances of control wires, and operational miniature relay **RM699BV-3011-85-1060**.



General data

Operating time (typical value)	AC: 11 ms	DC: 8 ms	AC, AC/DC: 20 ms 0,85 U _n ②
Release time (typical value)	AC: 15 ms	DC: 10 ms	AC, AC/DC: 18 ms ②
Electrical life			
• resistive AC1	> 0,6 x 10 ⁵	6 A, 250 V AC, 360 cycles/hour	
• cos φ = 0,4	> 2 x 10 ⁵	2 A, 250 V AC	
Mechanical life (cycles)	> 2 x 10 ⁷		
Dimensions (L x W x H)	98,5 x 6,2 x 85,5 mm		
Weight	45 g		
Ambient temperature (non-condensation and/or icing)	• storage	-40...+70 °C	
	• operating	-40...+60 °C	12 V DC, 24 V DC
		-40...+50 °C	230 V AC ③, 230 V AC/DC ④
		-40...+55 °C	other voltages
Cover protection category	IP 20	EN 60529	
Environmental protection	RTI	EN 61810-7	
Shock resistance	10 g		
Vibration resistance	5 g	10...500 Hz	


② Refers version for long control lines (max. 300 m), with integrated anti-interference filter.

④ For versions 230VAC/DC and 230VAC/DC-10: the distance at least 5 mm between the relays mounted side by side.

Dimensions

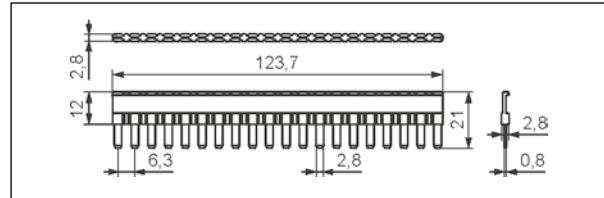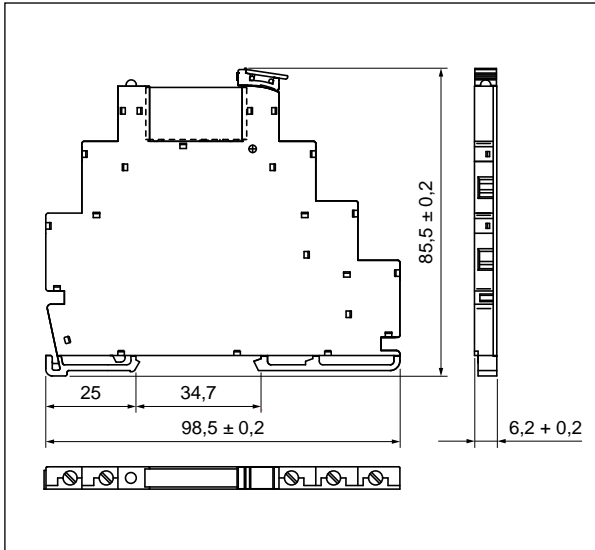

Interconnection strip type **ZG20**

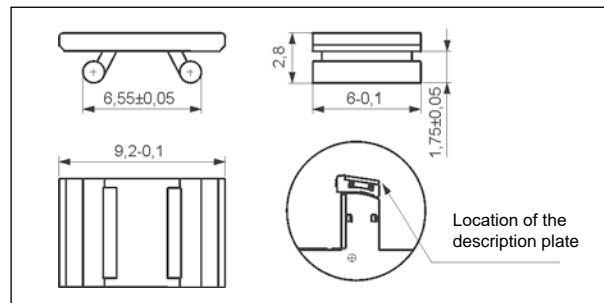

Description plate **PI6W-1246**

Mounting

Relays **PIR6W-1P-...** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. **Connections:** max. cross section of the cables: 1 x 2,5 mm² / 2 x 1,5 mm² (1 x 14 / 2 x 16 AWG), stripping length: 9 mm, max. tightening moment for the terminal: 0,3 Nm.

Interface relay **PIR6W-1P-...** consists of: screw terminals socket, with electronic **PI6W-1P-...**, miniature operational relay - electromagnetic **RM699BV**.

PIR6W-1P-... may be linked with interconnection strip type **ZG20**. Strip **ZG20** bridges common input or output signals, maximum permissible current is 36 A / 250 V AC. Colours of strips: **ZG20-1** red, **ZG20-2** black, **ZG20-3** blue. Description plates of **PI6W-1246** type are offered for **PIR6W-1P-...** relays; they are delivered with the relays, not mounted.


⚡ For versions 230VAC/DC and 230VAC/DC-10: the distance at least 5 mm between the relays mounted side by side.



PI6W-1P-...



RM699BV




ZG20



PI6W-1246



Green LED: signalling the operation status of the relay.



Interconnection strip ZG20: bridging of common input or output signals.



Movable ejector: protection and easy replacement of the operational relay.

Interface relay PIR6W-1P-...

set: relay RM699BV
+ socket PI6W-1P-...



Input data

Table 1

Interface relay code	Input - voltage range V	
	min.	max.
PIR6W-1P-12VDC	9,6	14,4
PIR6W-1P-24VDC	19,2	28,0
PIR6W-1P-36VDC	28,8	40,0
PIR6W-1P-24VAC/DC	19,2	26,4
PIR6W-1P-42VAC/DC	33,6	50,0
PIR6W-1P-115VAC/DC	92,0	130,0
PIR6W-1P-230VAC/DC ④	184,0	253,0
PIR6W-1P-230VAC	184,0	253,0
PIR6W-1P-230VAC/DC-10 ③ ④	⑤ 196,0	253,0
PIR6W-1P-230VAC-10 ③	196,0	253,0
PIR6W-1P-12VDC-01 ②	9,6	14,4
PIR6W-1P-24VDC-01 ②	19,2	28,0
PIR6W-1P-36VDC-01 ②	28,8	40,0
PIR6W-1P-24VAC/DC-01 ②	19,2	26,4
PIR6W-1P-42VAC/DC-01 ②	33,6	50,0
PIR6W-1P-115VAC/DC-01 ②	92,0	130,0
PIR6W-1P-230VAC/DC-01 ② ④	184,0	253,0
PIR6W-1P-230VAC-01 ②	184,0	253,0

Connection diagrams

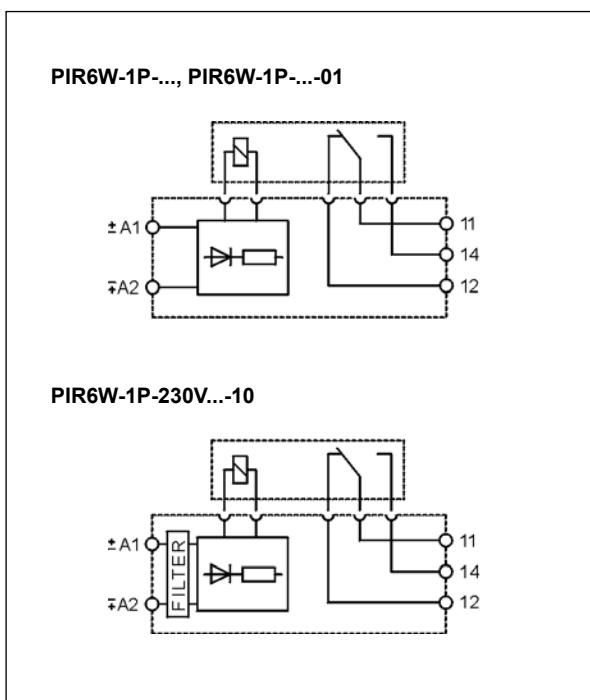


Table of codes

Table 2

Interface relay code	Rated input voltage Un ③	Power of input circuit	Socket code	Operational relay code	Rated voltage of operational relay Us ⑥
PIR6W-1P-12VDC	12 V DC	0,3 W	PI6W-1P-12VDC	RM699BV-3011-85-1012	12 V DC
PIR6W-1P-24VDC	24 V DC	0,3 W	PI6W-1P-24VDC	RM699BV-3011-85-1024	24 V DC
PIR6W-1P-36VDC	36 V DC	0,3 W	PI6W-1P-36VDC	RM699BV-3011-85-1024	24 V DC
PIR6W-1P-24VAC/DC	24 V AC/DC	0,3 VA / 0,3 W	PI6W-1P-24VAC/DC	RM699BV-3011-85-1024	24 V DC
PIR6W-1P-42VAC/DC	42 V AC/DC	0,4 VA / 0,4 W	PI6W-1P-42VAC/DC	RM699BV-3011-85-1024	24 V DC
PIR6W-1P-115VAC/DC	115 V AC/DC	0,9 VA / 0,9 W	PI6W-1P-115VAC/DC	RM699BV-3011-85-1024	24 V DC
PIR6W-1P-230VAC/DC ④	230 V AC/DC	0,8 VA / 0,8 W	PI6W-1P-230VAC/DC	RM699BV-3011-85-1060	60 V DC
PIR6W-1P-230VAC	230 V AC	≤ 0,8 VA	PI6W-1P-230VAC	RM699BV-3011-85-1060	60 V DC
PIR6W-1P-230VAC/DC-10 ③ ④	230 V AC/DC	2,1 VA / 1,0 W	PI6W-1P-230VAC/DC-10	RM699BV-3011-85-1060	60 V DC
PIR6W-1P-230VAC-10 ③	230 V AC	≤ 0,9 VA	PI6W-1P-230VAC-10	RM699BV-3011-85-1060	60 V DC
PIR6W-1P-12VDC-01 ②	12 V DC	0,3 W	PI6W-1P-12VDC	RM699BV-3211-85-1012	12 V DC
PIR6W-1P-24VDC-01 ②	24 V DC	0,3 W	PI6W-1P-24VDC	RM699BV-3211-85-1024	24 V DC
PIR6W-1P-36VDC-01 ②	36 V DC	0,3 W	PI6W-1P-36VDC	RM699BV-3211-85-1024	24 V DC
PIR6W-1P-24VAC/DC-01 ②	24 V AC/DC	0,3 VA / 0,3 W	PI6W-1P-24VAC/DC	RM699BV-3211-85-1024	24 V DC
PIR6W-1P-42VAC/DC-01 ②	42 V AC/DC	0,4 VA / 0,4 W	PI6W-1P-42VAC/DC	RM699BV-3211-85-1024	24 V DC
PIR6W-1P-115VAC/DC-01 ②	115 V AC/DC	0,9 VA / 0,9 W	PI6W-1P-115VAC/DC	RM699BV-3211-85-1024	24 V DC
PIR6W-1P-230VAC/DC-01 ② ④	230 V AC/DC	0,8 VA / 0,8 W	PI6W-1P-230VAC/DC	RM699BV-3211-85-1060	60 V DC
PIR6W-1P-230VAC-01 ②	230 V AC	≤ 0,8 VA	PI6W-1P-230VAC	RM699BV-3211-85-1060	60 V DC

The data in bold type relate to the standard versions of the relays. ② Version with gold-plated contacts. ③ Version for long control lines (max. 300 m), with anti-interference filter. ④ For versions 230VAC/DC and 230VAC/DC-10: the distance at least 5 mm between the relays mounted side by side. ⑤ 196,0 V at supply voltage AC; 184,0 V at supply voltage DC. ⑥ It shall be remarked that rated input voltage of the operational relay Us not always complies with the rated input voltage Un (which is important on ordering operational relays for sockets).

Ordering codes





Ordering codes **PIR6W-1P-...** are specified in Tables 1, 2, "Interface relay code" column.

RM699BV + PI6W-1PS-...



RSR30 + PI6W-1PS-...



- Width 6,2 mm • Interface relay **PIR6W-1PS-...** consists of: screw terminals universal socket, with electronic **PI6W-1PS-...**, miniature operational relay - electromagnetic **RM699BV** or solid state **RSR30**
- 35 mm rail mount acc. to EN 60715 • May be linked with interconnection strip type **ZG20** • Equipped in LED green
- Accessories: description plates **PI6W-1246**
- Recognitions, certifications, directives: RoHS,    

Output circuit (RM699BV) - contact data ①

Number and type of contacts (code of output)	1 CO (R) ②	1 CO (R01) ③
Contact material	AgSnO₂	AgSnO ₂ /Au hard gold plating ②
Max. switching voltage	400 V AC / 250 V DC	30 V AC / 36 V DC ②
Min. switching voltage	AC / DC	10 V
Rated load	AC1	6 A / 250 V AC
	DC1	6 A / 24 V DC; 0,15 A / 250 V DC
Min. switching current	100 mA	10 mA
Max. inrush current	10 A 20 ms	0,1 A 20 ms ②
Rated current	6 A	0,05 A ②
Max. breaking capacity	AC1	1 500 VA
Min. breaking capacity		1,2 VA ②
Contact resistance	≤ 100 mΩ 100 mA, 24 V	
Max. operating frequency	≤ 30 mΩ 10 mA, 5 V	
• at rated load	AC1	360 cycles/hour
		72 000 cycles/hour

Output circuit (RSR30) - output data ①

Type of output (code of output)	Triac (T) ② max. 2 A	Transistor (C) ③ max. 1 A	Transistor (O) ③ max. 2 A
Number and type of outputs	1 NO	1 NO	1 NO
Rated voltage	240 V AC	48 V DC	24 V DC
Max. output voltage	280 V AC	60 V DC	32 V DC
Min. output voltage	12 V AC	1,5 V DC	1,5 V DC
Rated continuous output current	AC1	1 A	2 A
	DC1		
Min. making capacity current	50 mA	1 mA	1 mA
Max. off-state leakage current (rest condition)	1,5 mA	1 mA	1 mA
Max. on-state voltage drop on the connection (operating state)	1,2 V	0,4 V	0,24 V
Operating switching frequency		10 Hz	10 Hz
Input circuit			
Rated voltage	50/60 Hz AC	230 V	
	DC	6, 12, 24 , 36, 48, 60 V	
AC: 50/60 Hz AC/DC	24 , 42, 115, 230 V		
Must release voltage	AC: ≥ 0,2 U _n	AC: ≥ 0,1 U _n 230 V AC	
	DC: ≥ 0,1 U _n		
Operating range of supply voltage	0,8...1,2 U _n	0,85...1,2 U _n 6 V DC	
Must operate voltage	AC: ≤ 0,8 U _n	DC: ≤ 0,85 U _n 6 V DC	
Rated power consumption	AC	≤ 0,8 VA	
	DC	0,2 ... 0,5 W	
	AC/DC	0,5 ... 1,2 VA / 0,4 ... 1,2 W	



The data in bold type relate to the standard versions of the relays. ① Characteristics of the contact capacity of relays **PIR6W-1PS-...** with **RM699BV** - see page 86; **PIR6W-1PS-...** with **RSR30** - see www.relpol.com.pl ② For gold-plated contacts - when the maximum values given have been exceeded, the gold layer is destroyed. Then, the advantages of gold-plating disappear and the values are as for AgSnO₂ contacts (see beside), and electrical life of these contacts may be shorter than of normal contacts. ③ Type of outputs: **R** - contacts AgSnO₂; **R01** - contacts AgSnO₂/Au hard gold plating; **T** - triac; **C** - transistor; **O** - transistor.

Insulation according to EN 60664-1


Insulation rated voltage	250 V AC		
Rated surge voltage	4 000 V 1,2 / 50 μ s		
Overtoltage category	III		
Insulation pollution degree	3		
Dielectric strength			
• input - output	4 000 V AC	50/60 Hz, 1 min., type of insulation: reinforced	
• input - output	6 000 V	1,2 / 50 μ s	
• mass - input, output	2 500 V AC	50/60 Hz, 1 min.	
• contact clearance	1 000 V AC	50/60 Hz, 1 min., output R and R01, type of clearance: micro-disconnection	
Input - output distance	≥ 6 mm / ≥ 8 mm		
• clearance / creepage			
Mass - output distance	≥ 3 mm / $\geq 3,6$ mm		
• clearance / creepage			
General data			
Operating time (typical value)	PIR6W-1PS-...-R/R01:	DC: 8 ms AC: 10 ms AC/DC: 20 ms	
	PIR6W-1PS-...-T:	DC: 100 μ s	AC, AC/DC: 10 ms
	PIR6W-1PS-...-C/-O:	DC: 50 μ s	AC, AC/DC: 10 ms
Release time (typical value)	PIR6W-1PS-...-R/R01:	DC: 10 ms AC: 20 ms AC/DC: 25 ms	
	PIR6W-1PS-...-T:	DC: 1/2 cycle + 1 ms	AC, AC/DC: 30 ms
	PIR6W-1PS-...-C/-O:	DC: 600 μ s	AC, AC/DC: 20 ms
Electrical life			
• resistive AC1	PIR6W-1PS-...-R:	$> 0,5 \times 10^5$ 6 A, 250 V AC	
Mechanical life (cycles)	PIR6W-1PS-...-R/R01:	$> 10^7$	
Dimensions (L x W x H)	98,5 x 6,2 x 85,5 mm		
Weight	45 g		
Ambient temperature	• storage	PIR6W-1PS-...-R/R01/T: -40...+70 $^{\circ}$ C ...-C/-O: -25...+70 $^{\circ}$ C	
(non-condensation and/or icing)	• operating	PIR6W-1PS-...-R/R01: -40...+55 $^{\circ}$ C ...-T/-C/-O: -20...+55 $^{\circ}$ C	
		PIR6W-1PS-230VAC/DC-R/R01: -40...+50 $^{\circ}$ C ④ ...-C/-O: -20...+50 $^{\circ}$ C ④	
Cover protection category	IP 20	EN 60529	
Environmental protection	RTI	EN 61810-7	
Shock resistance	10 g		
Vibration resistance	5 g	10...500 Hz	

④ For versions 230VAC/DC: the distance at least 5 mm between the relays mounted side by side.

Dimensions

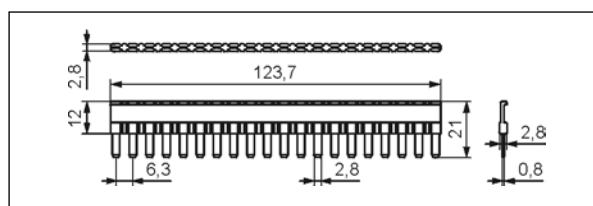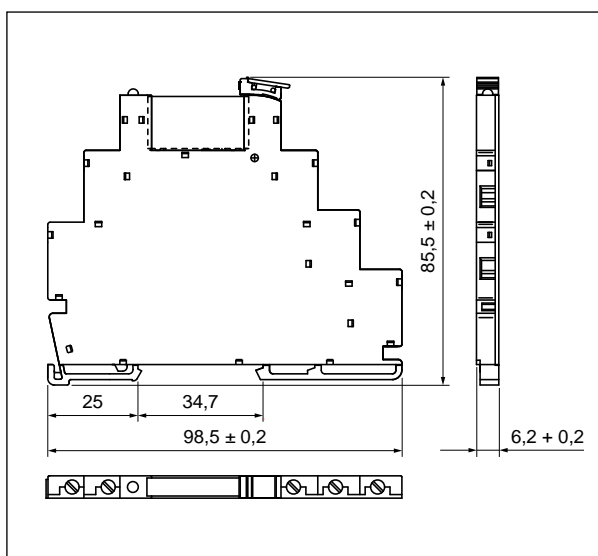


Interconnection strip type **ZG20**

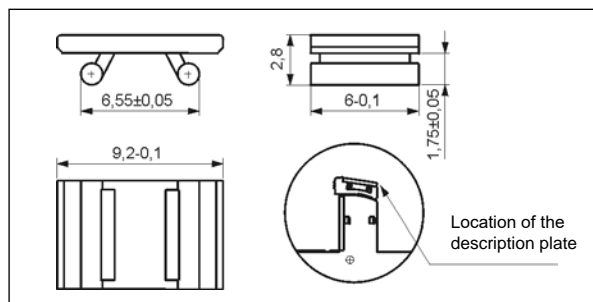

Description plate **PI6W-1246**

Connection diagrams

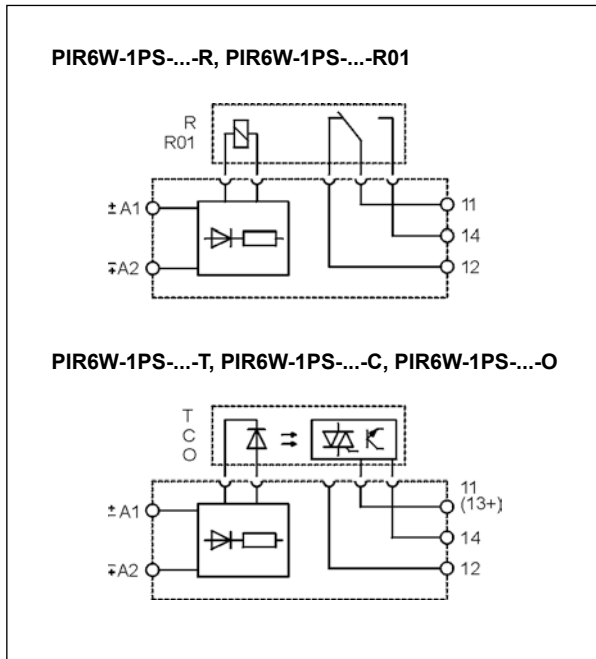


Mounting

Relays **PIR6W-1PS-...** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. **Connections:** max. cross section of the cables: 1 x 2,5 mm² / 2 x 1,5 mm² (1 x 14 / 2 x 16 AWG), stripping length: 9 mm, max. tightening moment for the terminal: 0,3 Nm.

Interface relay **PIR6W-1PS-...** consists of: screw terminals universal socket, with electronic **PI6W-1PS-...**, miniature operational relay - electromagnetic **RM699BV** or solid state **RSR30**.

PIR6W-1PS-... may be linked with interconnection strip type **ZG20**. Strip **ZG20** bridges common input or output signals, maximum permissible current is 36 A / 250 V AC. Colours of strips: **ZG20-1** red, **ZG20-2** black, **ZG20-3** blue. Description plates of **PI6W-1246** type are offered for **PIR6W-1PS-...** relays; they are delivered with the relays, not mounted.

⊕ Type of outputs: **R** - contacts AgSnO₂; **R01** - contacts AgSnO₂/Au hard gold plating; **T** - triac; **C** - transistor; **O** - transistor. ⊕ For versions 230VAC/DC: the distance at least 5 mm between the relays mounted side by side.




PI6W-1PS-...



RM699BV



RSR30




ZG20



PI6W-1246



Green LED: signalling the operation status of the relay.



Interconnection strip ZG20: bridging of common input or output signals.



Movable ejector: protection and easy replacement of the operational relay.

Ordering codes

Ordering codes **PIR6W-1PS-...** are specified in Table 1, "Interface relay code" column.

Table of codes

Table 1

Interface relay code	Rated input voltage U_n Ⓔ	Power of input circuit	Socket code	Operational relay code	Rated voltage of operational relay U_s Ⓔ
PIR6W-1PS-6VDC-R	6 V DC	0,3 W	PI6W-1PS-6VDC	RM699BV-3011-85-1005	5 V DC
PIR6W-1PS-12VDC-R	12 V DC	0,2 W	PI6W-1PS-12/24VDC	RM699BV-3011-85-1012	12 V DC
PIR6W-1PS-24VDC-R	24 V DC	0,3 W	PI6W-1PS-12/24VDC	RM699BV-3011-85-1024	24 V DC
PIR6W-1PS-36VDC-R	36 V DC	0,3 W	PI6W-1PS-36VDC	RM699BV-3011-85-1024	24 V DC
PIR6W-1PS-48VDC-R	48 V DC	0,4 W	PI6W-1PS-48VDC	RM699BV-3011-85-1024	24 V DC
PIR6W-1PS-60VDC-R	60 V DC	0,5 W	PI6W-1PS-60VDC	RM699BV-3011-85-1024	24 V DC
PIR6W-1PS-24VAC/DC-R	24 V AC/DC	0,5 VA / 0,4 W	PI6W-1PS-24VAC/DC	RM699BV-3011-85-1012	12 V DC
PIR6W-1PS-42VAC/DC-R	42 V AC/DC	0,5 VA / 0,4 W	PI6W-1PS-42VAC/DC	RM699BV-3011-85-1024	24 V DC
PIR6W-1PS-115VAC/DC-R	115 V AC/DC	1,2 VA / 1,2 W	PI6W-1PS-115VAC/DC	RM699BV-3011-85-1024	24 V DC
PIR6W-1PS-230VAC/DC-R Ⓔ	230 V AC/DC	1,2 VA / 1,2 W	PI6W-1PS-230VAC/DC	RM699BV-3011-85-1060	60 V DC
PIR6W-1PS-230VAC-R	230 V AC	≤ 0,8 VA	PI6W-1PS-230VAC	RM699BV-3011-85-1060	60 V DC
PIR6W-1PS-6VDC-R01 Ⓔ	6 V DC	0,3 W	PI6W-1PS-6VDC	RM699BV-3211-85-1005	5 V DC
PIR6W-1PS-12VDC-R01 Ⓔ	12 V DC	0,2 W	PI6W-1PS-12/24VDC	RM699BV-3211-85-1012	12 V DC
PIR6W-1PS-24VDC-R01 Ⓔ	24 V DC	0,3 W	PI6W-1PS-12/24VDC	RM699BV-3211-85-1024	24 V DC
PIR6W-1PS-36VDC-R01 Ⓔ	36 V DC	0,3 W	PI6W-1PS-36VDC	RM699BV-3211-85-1024	24 V DC
PIR6W-1PS-48VDC-R01 Ⓔ	48 V DC	0,4 W	PI6W-1PS-48VDC	RM699BV-3211-85-1024	24 V DC
PIR6W-1PS-60VDC-R01 Ⓔ	60 V DC	0,5 W	PI6W-1PS-60VDC	RM699BV-3211-85-1024	24 V DC
PIR6W-1PS-24VAC/DC-R01 Ⓔ	24 V AC/DC	0,5 VA / 0,4 W	PI6W-1PS-24VAC/DC	RM699BV-3211-85-1012	12 V DC
PIR6W-1PS-42VAC/DC-R01 Ⓔ	42 V AC/DC	0,5 VA / 0,4 W	PI6W-1PS-42VAC/DC	RM699BV-3211-85-1024	24 V DC
PIR6W-1PS-115VAC/DC-R01 Ⓔ	115 V AC/DC	1,2 VA / 1,2 W	PI6W-1PS-115VAC/DC	RM699BV-3211-85-1024	24 V DC
PIR6W-1PS-230VAC/DC-R01 Ⓔ Ⓕ	230 V AC/DC	1,2 VA / 1,2 W	PI6W-1PS-230VAC/DC	RM699BV-3211-85-1060	60 V DC
PIR6W-1PS-230VAC-R01 Ⓔ	230 V AC	≤ 0,8 VA	PI6W-1PS-230VAC	RM699BV-3211-85-1060	60 V DC
PIR6W-1PS-6VDC-T	6 V DC	0,2 W	PI6W-1PS-6VDC	RSR30-D05-A1-24-020-1	5 V DC
PIR6W-1PS-12VDC-T	12 V DC	0,2 W	PI6W-1PS-12/24VDC	RSR30-D12-A1-24-020-1	12 V DC
PIR6W-1PS-24VDC-T	24 V DC	0,3 W	PI6W-1PS-12/24VDC	RSR30-D24-A1-24-020-1	24 V DC
PIR6W-1PS-36VDC-T	36 V DC	0,3 W	PI6W-1PS-36VDC	RSR30-D24-A1-24-020-1	24 V DC
PIR6W-1PS-48VDC-T	48 V DC	0,4 W	PI6W-1PS-48VDC	RSR30-D24-A1-24-020-1	24 V DC
PIR6W-1PS-60VDC-T	60 V DC	0,5 W	PI6W-1PS-60VDC	RSR30-D24-A1-24-020-1	24 V DC
PIR6W-1PS-24VAC/DC-T	24 V AC/DC	0,5 VA / 0,4 W	PI6W-1PS-24VAC/DC	RSR30-D12-A1-24-020-1	12 V DC
PIR6W-1PS-42VAC/DC-T	42 V AC/DC	0,5 VA / 0,4 W	PI6W-1PS-42VAC/DC	RSR30-D24-A1-24-020-1	24 V DC
PIR6W-1PS-115VAC/DC-T	115 V AC/DC	1,0 VA / 1,0 W	PI6W-1PS-115VAC/DC	RSR30-D24-A1-24-020-1	24 V DC
PIR6W-1PS-6VDC-C	6 V DC	0,2 W	PI6W-1PS-6VDC	RSR30-D05-D1-04-025-1	5 V DC
PIR6W-1PS-12VDC-C	12 V DC	0,2 W	PI6W-1PS-12/24VDC	RSR30-D12-D1-04-025-1	12 V DC
PIR6W-1PS-24VDC-C	24 V DC	0,3 W	PI6W-1PS-12/24VDC	RSR30-D24-D1-04-025-1	24 V DC
PIR6W-1PS-36VDC-C	36 V DC	0,3 W	PI6W-1PS-36VDC	RSR30-D24-D1-04-025-1	24 V DC
PIR6W-1PS-48VDC-C	48 V DC	0,4 W	PI6W-1PS-48VDC	RSR30-D24-D1-04-025-1	24 V DC
PIR6W-1PS-60VDC-C	60 V DC	0,5 W	PI6W-1PS-60VDC	RSR30-D24-D1-04-025-1	24 V DC
PIR6W-1PS-24VAC/DC-C	24 V AC/DC	0,5 VA / 0,4 W	PI6W-1PS-24VAC/DC	RSR30-D12-D1-04-025-1	12 V DC
PIR6W-1PS-42VAC/DC-C	42 V AC/DC	0,5 VA / 0,4 W	PI6W-1PS-42VAC/DC	RSR30-D24-D1-04-025-1	24 V DC
PIR6W-1PS-115VAC/DC-C	115 V AC/DC	1,0 VA / 1,0 W	PI6W-1PS-115VAC/DC	RSR30-D24-D1-04-025-1	24 V DC
PIR6W-1PS-230VAC/DC-C Ⓔ	230 V AC/DC	1,0 VA / 1,0 W	PI6W-1PS-230VAC/DC	RSR30-D48-D1-04-025-1	48 V DC
PIR6W-1PS-230VAC-C	230 V AC	≤ 0,8 VA	PI6W-1PS-230VAC	RSR30-D48-D1-04-025-1	48 V DC
PIR6W-1PS-6VDC-O	6 V DC	0,2 W	PI6W-1PS-6VDC	RSR30-D05-D1-02-040-1	5 V DC
PIR6W-1PS-12VDC-O	12 V DC	0,2 W	PI6W-1PS-12/24VDC	RSR30-D12-D1-02-040-1	12 V DC
PIR6W-1PS-24VDC-O	24 V DC	0,3 W	PI6W-1PS-12/24VDC	RSR30-D24-D1-02-040-1	24 V DC
PIR6W-1PS-36VDC-O	36 V DC	0,3 W	PI6W-1PS-36VDC	RSR30-D24-D1-02-040-1	24 V DC
PIR6W-1PS-48VDC-O	48 V DC	0,4 W	PI6W-1PS-48VDC	RSR30-D24-D1-02-040-1	24 V DC
PIR6W-1PS-60VDC-O	60 V DC	0,5 W	PI6W-1PS-60VDC	RSR30-D24-D1-02-040-1	24 V DC
PIR6W-1PS-24VAC/DC-O	24 V AC/DC	0,5 VA / 0,4 W	PI6W-1PS-24VAC/DC	RSR30-D12-D1-02-040-1	12 V DC
PIR6W-1PS-42VAC/DC-O	42 V AC/DC	0,5 VA / 0,4 W	PI6W-1PS-42VAC/DC	RSR30-D24-D1-02-040-1	24 V DC
PIR6W-1PS-115VAC/DC-O	115 V AC/DC	1,0 VA / 1,0 W	PI6W-1PS-115VAC/DC	RSR30-D24-D1-02-040-1	24 V DC
PIR6W-1PS-230VAC/DC-O Ⓔ	230 V AC/DC	1,0 VA / 1,0 W	PI6W-1PS-230VAC/DC	RSR30-D48-D1-02-040-1	48 V DC
PIR6W-1PS-230VAC-O	230 V AC	≤ 0,8 VA	PI6W-1PS-230VAC	RSR30-D48-D1-02-040-1	48 V DC

The data in bold type relate to the standard versions of the relays. Ⓔ Version with gold-plated contacts. Ⓕ For versions 230VAC/DC: the distance at least 5 mm between the relays mounted side by side. Ⓔ It shall be remarked that rated input voltage of the operational relay U_s not always complies with the rated input voltage U_n (which is important on ordering operational relays for sockets).

PIR6WB-1PS-...

interface relays with spring terminals

RM699BV + PI6WB-1PS-... RSR30 + PI6WB-1PS-...



- Width 6,2 mm • Interface relay **PIR6WB-1PS-...** consists of: spring terminals ① universal socket, with electronic **PI6WB-1PS-...**, miniature operational relay - electromagnetic **RM699BV** or solid state **RSR30** ②
- 35 mm rail mount acc. to EN 60715 • May be linked with interconnection strip type **ZG20** • Equipped in LED green • Version for long control lines, with anti-interference filter (**PIR6WB-1P-230V...-10** ④)
- Accessories: description plates **PI6W-1246**
- Recognitions, certifications, directives: RoHS,



Output circuit (RM699BV) - contact data ②

Number and type of contacts (code of output)	1 CO (R) ⑤	1 CO (R01) ⑤
Contact material	AgSnO₂	AgSnO ₂ /Au hard gold plating ⑤
Max. switching voltage	400 V AC / 250 V DC	30 V AC / 36 V DC ③
Min. switching voltage	AC / DC	10 V
Rated load	AC1	6 A / 250 V AC
	DC1	6 A / 24 V DC; 0,15 A / 250 V DC
Min. switching current		0,05 A / 30 V AC ③
Max. inrush current		0,05 A / 36 V DC ③
Rated current		100 mA
Max. breaking capacity	AC1	10 mA
Min. breaking capacity		10 A 20 ms
Contact resistance		0,1 A 20 ms ③
Max. operating frequency		6 A
• at rated load	AC1	0,05 A ③
• no load		1 500 VA
		1 W
		0,05 W
		≤ 100 mΩ 100 mA, 24 V
		≤ 30 mΩ 10 mA, 5 V
		360 cycles/hour
		72 000 cycles/hour

Output circuit (RSR30) - output data ②

Type of output (code of output)	Triac (T) ⑤ max. 2 A	Transistor (C) ⑤ max. 1 A	Transistor (O) ⑤ max. 2 A
Number and type of outputs	1 NO	1 NO	1 NO
Rated voltage	240 V AC	48 V DC	24 V DC
Max. output voltage	280 V AC	60 V DC	32 V DC
Min. output voltage	12 V AC	1,5 V DC	1,5 V DC
Rated continuous output current	AC1		
	DC1	1 A	2 A
Min. making capacity current	50 mA	1 mA	1 mA
Max. off-state leakage current (rest condition)	1,5 mA	1 mA	1 mA
Max. on-state voltage drop on the connection (operating state)	1,2 V	0,4 V	0,24 V
Operating switching frequency		10 Hz	10 Hz

Input circuit

Rated voltage	50/60 Hz AC	230 V
	DC	6, 12, 24 , 36, 48, 60 V
	AC: 50/60 Hz AC/DC	24 , 42, 115, 230 V
Must release voltage		AC: ≥ 0,2 U _n
		AC: ≥ 0,35 U _n 230 V AC ④
		DC: ≥ 0,1 U _n
Operating range of supply voltage		AC: ≥ 0,1 U _n 230 V AC
		AC: ≥ 0,35 U _n 230 V AC/DC ④
Must operate voltage		0,8...1,2 U _n
		0,85...1,2 U _n 6 V DC
Rated power consumption	AC	AC: ≤ 0,8 U _n
	DC	DC: ≤ 0,8 U _n
	AC/DC	DC: ≤ 0,85 U _n 6 V DC
Max. length of control line		≤ 0,8 ... 0,9 VA
		0,2 ... 0,5 W
		0,5 ... 1,2 VA / 0,4 ... 1,2 W
		≤ 300 m AC control voltage ④

The data in bold type relate to the standard versions of the relays. ① Spring fixing terminals for electric wires (cage springs CAGE CLAMP® - is the registered trademark of WAGO Kontakttechnik GmbH & Co. KG, Germany). ② Characteristics of the contact capacity of relays **PIR6WB-1PS-...** with **RM699BV** - see page 86; **PIR6WB-1PS-...** with **RSR30** - see www.repol.com.pl ③ For gold-plated contacts - when the maximum values given have been exceeded, the gold layer is destroyed. Then, the advantages of gold-plating disappear and the values are as for AgSnO₂ contacts (see beside), and electrical life of these contacts may be shorter than of normal contacts. ④ Refers version for long control lines (max. 300 m) **PIR6WB-1P-230V...-10** - relay which includes the socket **PI6WB-1P-230V...-10** with integrated anti-interference filter, resistant to occurrence of induced voltages in long distances of control wires, and operational miniature relay **RM699BV-3011-85-1060**. ⑤ Type of outputs: **R** - contacts AgSnO₂; **R01** - contacts AgSnO₂/Au hard gold plating; **T** - triac; **C** - transistor; **O** - transistor.

PIR6WB-1PS-...

interface relays with spring terminals

258



Insulation according to EN 60664-1

Insulation rated voltage	250 V AC	
Rated surge voltage	4 000 V 1,2 / 50 µs	
Overtoltage category	III	
Insulation pollution degree	3	
Dielectric strength	<ul style="list-style-type: none"> • input - output • input - output • mass - input, output • contact clearance 	4 000 V AC 50/60 Hz, 1 min., type of insulation: reinforced 6 000 V 1,2 / 50 µs 2 500 V AC 50/60 Hz, 1 min. 1 000 V AC 50/60 Hz, 1 min., output R and R01, type of clearance: micro-disconnection
Input - output distance	clearance / creepage: ≥ 6 mm / ≥ 8 mm	
Mass - output distance	clearance / creepage: ≥ 3 mm / ≥ 4 mm	
General data		
Operating time (typical value)	PIR6WB-1PS-...-R/-R01: DC: 8 ms AC, AC/DC: 20 ms PIR6WB-1PS-...-T: DC: 100 µs AC, AC/DC: 10 ms PIR6WB-1PS-...-C/-O: DC: 50 µs AC, AC/DC: 10 ms	
Release time (typical value)	PIR6WB-1PS-...-R/-R01: DC: 10 ms AC, AC/DC: 25 ms (18 ms ④) PIR6WB-1PS-...-T: DC: 1/2 cycle + 1 ms AC, AC/DC: 30 ms PIR6WB-1PS-...-C/-O: DC: 600 µs AC, AC/DC: 20 ms	
Electrical life	• resistive AC1	PIR6WB-1PS-...-R: > 0,5 x 10 ⁵ 6 A, 250 V AC
Mechanical life (cycles)	PIR6WB-1PS-...-R/-R01: > 10 ⁷	
Dimensions (L x W x H)	98,3 x 6,2 x 84,6 mm	
Weight	55 g	
Ambient temperature (non-condensation and/or icing)	<ul style="list-style-type: none"> • storage • operating 	PIR6WB-1PS-...-R/-R01/-T: -40...+70 °C ...-C/-O: -25...+70 °C PIR6WB-1P-230V...-10 ④: -25...+70 °C PIR6WB-1PS-...-R/-R01: -40...+55 °C ...-T/-C/-O: -25...+55 °C PIR6WB-1PS-230VAC/DC-R/-R01/-C/-O: -25...+50 °C ⑤ PIR6WB-1P-230V...-10 ④: -25...+50 °C ⑤
Cover protection category	IP 20 EN 60529	
Environmental protection	RTI EN 61810-7	
Shock resistance	10 g	
Vibration resistance	5 g 10...500 Hz	


④ Refers version for long control lines (max. 300 m), with integrated anti-interference filter.

⑤ For versions 230VAC/DC and 230VAC/DC-10: the distance at least 5 mm between the relays mounted side by side.

Dimensions

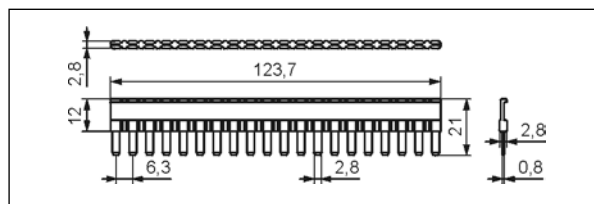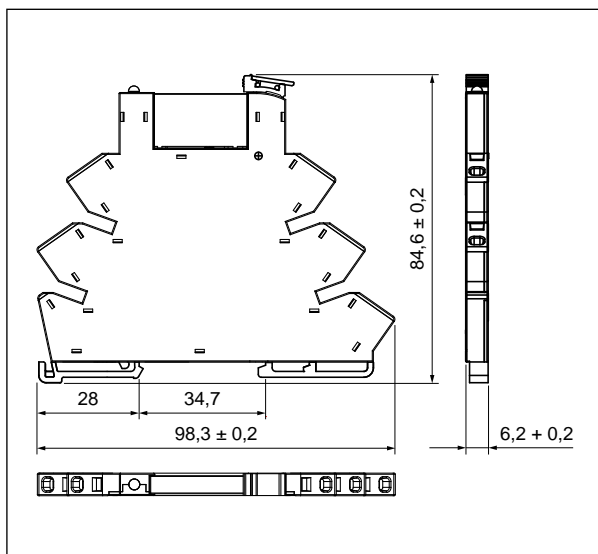

Interconnection strip type **ZG20**

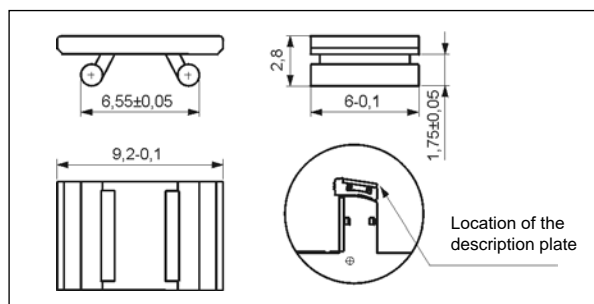


Description plate **PI6W-1246**

PIR6WB-1PS-...


interface relays with spring terminals

Wire connection

The drawings present the sequence of operations in course of inserting wires to the spring terminal, and the recommended screwdriver to be used for opening of case springs, comply with the DIN 5264 FORM "A".

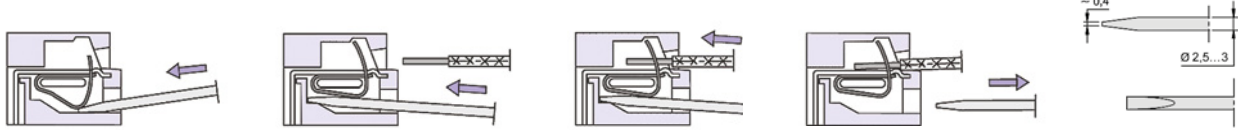

Connection diagrams

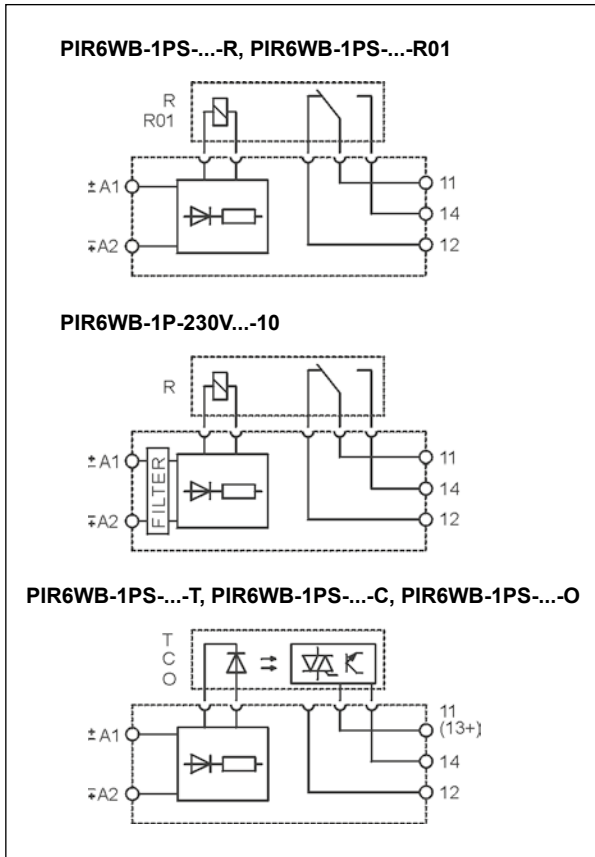

Mounting

Relays **PIR6WB-1PS-...** Ⓞ are designed for direct mounting on 35 mm rail mount acc. to EN 60715. **Connections:** max. cross section of the cables: 1 x 0,22...2,5 mm² (1 x 24...14 AWG), stripping length: 9 mm.

Interface relay **PIR6WB-1PS-...** consists of: spring terminals universal socket, with electronic **PI6WB-1PS-...**, miniature operational relay - electromagnetic **RM699BV** or solid state **RSR30** Ⓞ.

PIR6WB-1PS-... may be linked with interconnection strip type **ZG20**. Strip **ZG20** bridges common input or output signals, maximum permissible current is 36 A / 250 V AC. Colours of strips: **ZG20-1** red, **ZG20-2** black, **ZG20-3** blue. Description plates of **PI6W-1246** type are offered for **PIR6WB-1PS-...** relays; they are delivered with the relays, not mounted.

Ⓞ Type of outputs: **R** - contacts AgSnO₂; **R01** - contacts AgSnO₂/Au hard gold plating; **T** - triac; **C** - transistor; **O** - transistor. Ⓞ For versions 230VAC/DC and 230VAC/DC-10: the distance at least 5 mm between the mounting relays.



PI6WB-1PS-...

RM699BV

RSR30

Ordering codes

Ordering codes **PIR6WB-1PS-...** are specified in Table 1, "Interface relay code" column.




ZG20

PI6W-1246



Green LED: signalling the operation status of the relay.



Interconnection strip ZG20: bridging of common input or output signals.



Movable ejector: protection and easy replacement of the operational relay.

PIR6WB-1PS-...

interface relays with spring terminals

Table of codes

Table 1

Interface relay code	Rated input voltage U_n ⑦	Power of input circuit	Socket code	Operational relay code	Rated voltage of operational relay U_s ⑦
PIR6WB-1PS-6VDC-R	6 V DC	0,3 W	PI6WB-1PS-6VDC	RM699BV-3011-85-1005	5 V DC
PIR6WB-1PS-12VDC-R	12 V DC	0,2 W	PI6WB-1PS-12/24VDC	RM699BV-3011-85-1012	12 V DC
PIR6WB-1PS-24VDC-R	24 V DC	0,3 W	PI6WB-1PS-12/24VDC	RM699BV-3011-85-1024	24 V DC
PIR6WB-1PS-36VDC-R	36 V DC	0,3 W	PI6WB-1PS-36VDC	RM699BV-3011-85-1024	24 V DC
PIR6WB-1PS-48VDC-R	48 V DC	0,4 W	PI6WB-1PS-48VDC	RM699BV-3011-85-1024	24 V DC
PIR6WB-1PS-60VDC-R	60 V DC	0,5 W	PI6WB-1PS-60VDC	RM699BV-3011-85-1024	24 V DC
PIR6WB-1PS-24VAC/DC-R	24 V AC/DC	0,5 VA / 0,4 W	PI6WB-1PS-24VAC/DC	RM699BV-3011-85-1012	12 V DC
PIR6WB-1PS-42VAC/DC-R	42 V AC/DC	0,5 VA / 0,4 W	PI6WB-1PS-42VAC/DC	RM699BV-3011-85-1024	24 V DC
PIR6WB-1PS-115VAC/DC-R	115 V AC/DC	1,2 VA / 1,2 W	PI6WB-1PS-115VAC/DC	RM699BV-3011-85-1024	24 V DC
PIR6WB-1PS-230VAC/DC-R ⑥	230 V AC/DC	1,2 VA / 1,2 W	PI6WB-1PS-230VAC/DC	RM699BV-3011-85-1060	60 V DC
PIR6WB-1PS-230VAC-R	230 V AC	≤ 0,8 VA	PI6WB-1PS-230VAC	RM699BV-3011-85-1060	60 V DC
PIR6WB-1P-230VAC/DC-10 ④ ⑤	230 V AC/DC	2,1 VA / 1,0 W	PI6WB-1P-230VAC/DC-10	RM699BV-3011-85-1060	60 V DC
PIR6WB-1P-230VAC-10 ④	230 V AC	≤ 0,9 VA	PI6WB-1P-230VAC-10	RM699BV-3011-85-1060	60 V DC
PIR6WB-1PS-6VDC-R01 ⑧	6 V DC	0,3 W	PI6WB-1PS-6VDC	RM699BV-3211-85-1005	5 V DC
PIR6WB-1PS-12VDC-R01 ⑧	12 V DC	0,2 W	PI6WB-1PS-12/24VDC	RM699BV-3211-85-1012	12 V DC
PIR6WB-1PS-24VDC-R01 ⑧	24 V DC	0,3 W	PI6WB-1PS-12/24VDC	RM699BV-3211-85-1024	24 V DC
PIR6WB-1PS-36VDC-R01 ⑧	36 V DC	0,3 W	PI6WB-1PS-36VDC	RM699BV-3211-85-1024	24 V DC
PIR6WB-1PS-48VDC-R01 ⑧	48 V DC	0,4 W	PI6WB-1PS-48VDC	RM699BV-3211-85-1024	24 V DC
PIR6WB-1PS-60VDC-R01 ⑧	60 V DC	0,5 W	PI6WB-1PS-60VDC	RM699BV-3211-85-1024	24 V DC
PIR6WB-1PS-24VAC/DC-R01 ⑧	24 V AC/DC	0,5 VA / 0,4 W	PI6WB-1PS-24VAC/DC	RM699BV-3211-85-1012	12 V DC
PIR6WB-1PS-42VAC/DC-R01 ⑧	42 V AC/DC	0,5 VA / 0,4 W	PI6WB-1PS-42VAC/DC	RM699BV-3211-85-1024	24 V DC
PIR6WB-1PS-115VAC/DC-R01 ⑧	115 V AC/DC	1,2 VA / 1,2 W	PI6WB-1PS-115VAC/DC	RM699BV-3211-85-1024	24 V DC
PIR6WB-1PS-230VAC/DC-R01 ⑧ ⑥	230 V AC/DC	1,2 VA / 1,2 W	PI6WB-1PS-230VAC/DC	RM699BV-3211-85-1060	60 V DC
PIR6WB-1PS-230VAC-R01 ⑧	230 V AC	≤ 0,8 VA	PI6WB-1PS-230VAC	RM699BV-3211-85-1060	60 V DC
PIR6WB-1PS-6VDC-T	6 V DC	0,2 W	PI6WB-1PS-6VDC	RSR30-D05-A1-24-020-1	5 V DC
PIR6WB-1PS-12VDC-T	12 V DC	0,2 W	PI6WB-1PS-12/24VDC	RSR30-D12-A1-24-020-1	12 V DC
PIR6WB-1PS-24VDC-T	24 V DC	0,3 W	PI6WB-1PS-12/24VDC	RSR30-D24-A1-24-020-1	24 V DC
PIR6WB-1PS-36VDC-T	36 V DC	0,3 W	PI6WB-1PS-36VDC	RSR30-D24-A1-24-020-1	24 V DC
PIR6WB-1PS-48VDC-T	48 V DC	0,4 W	PI6WB-1PS-48VDC	RSR30-D24-A1-24-020-1	24 V DC
PIR6WB-1PS-60VDC-T	60 V DC	0,5 W	PI6WB-1PS-60VDC	RSR30-D24-A1-24-020-1	24 V DC
PIR6WB-1PS-24VAC/DC-T	24 V AC/DC	0,5 VA / 0,4 W	PI6WB-1PS-24VAC/DC	RSR30-D12-A1-24-020-1	12 V DC
PIR6WB-1PS-42VAC/DC-T	42 V AC/DC	0,5 VA / 0,4 W	PI6WB-1PS-42VAC/DC	RSR30-D24-A1-24-020-1	24 V DC
PIR6WB-1PS-115VAC/DC-T	115 V AC/DC	1,0 VA / 1,0 W	PI6WB-1PS-115VAC/DC	RSR30-D24-A1-24-020-1	24 V DC
PIR6WB-1PS-6VDC-C	6 V DC	0,2 W	PI6WB-1PS-6VDC	RSR30-D05-D1-04-025-1	5 V DC
PIR6WB-1PS-12VDC-C	12 V DC	0,2 W	PI6WB-1PS-12/24VDC	RSR30-D12-D1-04-025-1	12 V DC
PIR6WB-1PS-24VDC-C	24 V DC	0,3 W	PI6WB-1PS-12/24VDC	RSR30-D24-D1-04-025-1	24 V DC
PIR6WB-1PS-36VDC-C	36 V DC	0,3 W	PI6WB-1PS-36VDC	RSR30-D24-D1-04-025-1	24 V DC
PIR6WB-1PS-48VDC-C	48 V DC	0,4 W	PI6WB-1PS-48VDC	RSR30-D24-D1-04-025-1	24 V DC
PIR6WB-1PS-60VDC-C	60 V DC	0,5 W	PI6WB-1PS-60VDC	RSR30-D24-D1-04-025-1	24 V DC
PIR6WB-1PS-24VAC/DC-C	24 V AC/DC	0,5 VA / 0,4 W	PI6WB-1PS-24VAC/DC	RSR30-D12-D1-04-025-1	12 V DC
PIR6WB-1PS-42VAC/DC-C	42 V AC/DC	0,5 VA / 0,4 W	PI6WB-1PS-42VAC/DC	RSR30-D24-D1-04-025-1	24 V DC
PIR6WB-1PS-115VAC/DC-C	115 V AC/DC	1,0 VA / 1,0 W	PI6WB-1PS-115VAC/DC	RSR30-D24-D1-04-025-1	24 V DC
PIR6WB-1PS-230VAC/DC-C ⑥	230 V AC/DC	1,0 VA / 1,0 W	PI6WB-1PS-230VAC/DC	RSR30-D48-D1-04-025-1	48 V DC
PIR6WB-1PS-230VAC-C	230 V AC	≤ 0,8 VA	PI6WB-1PS-230VAC	RSR30-D48-D1-04-025-1	48 V DC
PIR6WB-1PS-6VDC-O	6 V DC	0,2 W	PI6WB-1PS-6VDC	RSR30-D05-D1-02-040-1	5 V DC
PIR6WB-1PS-12VDC-O	12 V DC	0,2 W	PI6WB-1PS-12/24VDC	RSR30-D12-D1-02-040-1	12 V DC
PIR6WB-1PS-24VDC-O	24 V DC	0,3 W	PI6WB-1PS-12/24VDC	RSR30-D24-D1-02-040-1	24 V DC
PIR6WB-1PS-36VDC-O	36 V DC	0,3 W	PI6WB-1PS-36VDC	RSR30-D24-D1-02-040-1	24 V DC
PIR6WB-1PS-48VDC-O	48 V DC	0,4 W	PI6WB-1PS-48VDC	RSR30-D24-D1-02-040-1	24 V DC
PIR6WB-1PS-60VDC-O	60 V DC	0,5 W	PI6WB-1PS-60VDC	RSR30-D24-D1-02-040-1	24 V DC
PIR6WB-1PS-24VAC/DC-O	24 V AC/DC	0,5 VA / 0,4 W	PI6WB-1PS-24VAC/DC	RSR30-D12-D1-02-040-1	12 V DC
PIR6WB-1PS-42VAC/DC-O	42 V AC/DC	0,5 VA / 0,4 W	PI6WB-1PS-42VAC/DC	RSR30-D24-D1-02-040-1	24 V DC
PIR6WB-1PS-115VAC/DC-O	115 V AC/DC	1,0 VA / 1,0 W	PI6WB-1PS-115VAC/DC	RSR30-D24-D1-02-040-1	24 V DC
PIR6WB-1PS-230VAC/DC-O ⑥	230 V AC/DC	1,0 VA / 1,0 W	PI6WB-1PS-230VAC/DC	RSR30-D48-D1-02-040-1	48 V DC
PIR6WB-1PS-230VAC-O	230 V AC	≤ 0,8 VA	PI6WB-1PS-230VAC	RSR30-D48-D1-02-040-1	48 V DC

The data in bold type relate to the standard versions of the relays. ⑧ Version with gold-plated contacts. ④ Version for long control lines (max. 300 m), with anti-interference filter. ⑥ For versions 230VAC/DC and 230VAC/DC-10: the distance at least 5 mm between the relays mounted side by side. ⑦ It shall be remarked that rated input voltage of the operational relay U_s not always complies with the rated input voltage U_n (which is important on ordering operational relays for sockets).

Relays installation



 **relpol**® S.A.

Electromagnetic relays of the MT-PI-... series in modular covers, designed for direct mounting on 35 mm rail mount acc. to EN 60715.



They meet the requirements of REACH and RoHS Directive. The relays are recognized and certified by:



MT-PI-..... 262



- Installation relays - electromagnetic • AC, DC and AC/DC coils
- Cover - modular, width 17,5 mm • Load of AC1 up to 16 A / 250 V (versions 1 CO, 1 NO) and up to 8 A / 250 V (versions 2 CO, 2 NO)
- Light indicator (LED diode) - supply voltage
- Applications: automatic systems in buildings - in cooperation with control timers, switches, control switches; electric systems; industrial automation and power engineering automation; switchgears of modular equipment
- Recognitions, certifications, directives: RoHS,

Contact data

Number and type of contacts		1 CO, 1 NO	2 CO, 2 NO
Contact material		AgSnO₂	
Max. switching voltage		300 V AC / 300 V DC	
Min. switching voltage		10 V	
Rated load	AC1	16 A / 250 V AC	8 A / 250 V AC
	DC1	16 A / 24 V DC	8 A / 24 V DC
Min. switching current		10 mA	
Max. inrush current		30 A	15 A
Rated current		16 A	
Max. breaking capacity	AC1	4 000 VA	2 000 VA
Min. breaking capacity		1 W	
Contact resistance		≤ 100 mΩ	
Max. operating frequency			
• at rated load	AC1	600 cycles/hour	
• no load		72 000 cycles/hour	

Coil data

Rated voltage	• versions 1 CO, 2 CO	50/60 Hz AC	24, 115, 230 V
		DC	12, 24, 48 V
	• versions 1 NO, 2 NO	50 Hz AC	230 V
		AC: 50 Hz AC/DC	12, 24, 48, 115 V
Must release voltage		AC: ≥ 0,15 U _n	DC: ≥ 0,05 U _n
Operating range of supply voltage		0,85...1,1 U _n AC: 50/60 Hz	see Tables 2, 3, 4
Rated power consumption	• versions 1 CO, 2 CO	AC	≤ 1,0 VA 115 V AC, 230 V AC, AC: 50 Hz
		DC	≤ 0,5 W 12 V DC
		DC	≤ 0,65 W 24 V DC, 48 V DC
	• versions 1 NO, 2 NO	AC	≤ 5,5 VA 230 V AC, AC: 50 Hz
		AC/DC	≤ 0,75 VA / 0,75 W 12 V AC/DC, AC: 50 Hz
		AC/DC	≤ 0,65 VA / 0,65 W 24 V AC/DC, 48 V AC/DC, 115 V AC/DC, AC: 50 Hz

Insulation according to EN 60664-1

Insulation rated voltage		250 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		II
Insulation pollution degree		1
Flammability class		contact plate: V-0 cover: V-1 UL 94
Dielectric strength	• between coil and contacts	3 000 V AC contacts 1 CO and 2 CO, type of insulation: basic
		4 000 V AC contacts 1 NO and 2 NO, type of insulation: reinforced
	• contact clearance	1 000 V AC type of clearance: micro-disconnection
	• pole - pole	2 000 V AC contacts 2 CO, type of insulation: basic
		2 500 V AC contacts 2 NO, type of insulation: basic

General data


Operating / release time (typical values)		15 ms / 20 ms
Mechanical life (cycles)		> 10 ⁷
Dimensions (L x W x H)		90 x 17,5 x 63,5 mm
Weight		60 g 65 g
Ambient temperature (non-condensation and/or icing)	• storage	-40...+70 °C
	• operating	-20...+45 °C
Cover protection category		IP 20 EN 60529
Relative humidity		up to 90%
Shock resistance		15 g
Vibration resistance (NO/NC)		9 g / 5 g 10...150 Hz

The data in bold type relate to the standard versions of the relays.

UL only for 15 A.

Length with 35 mm rail catches: 98,8 mm.

Dimensions

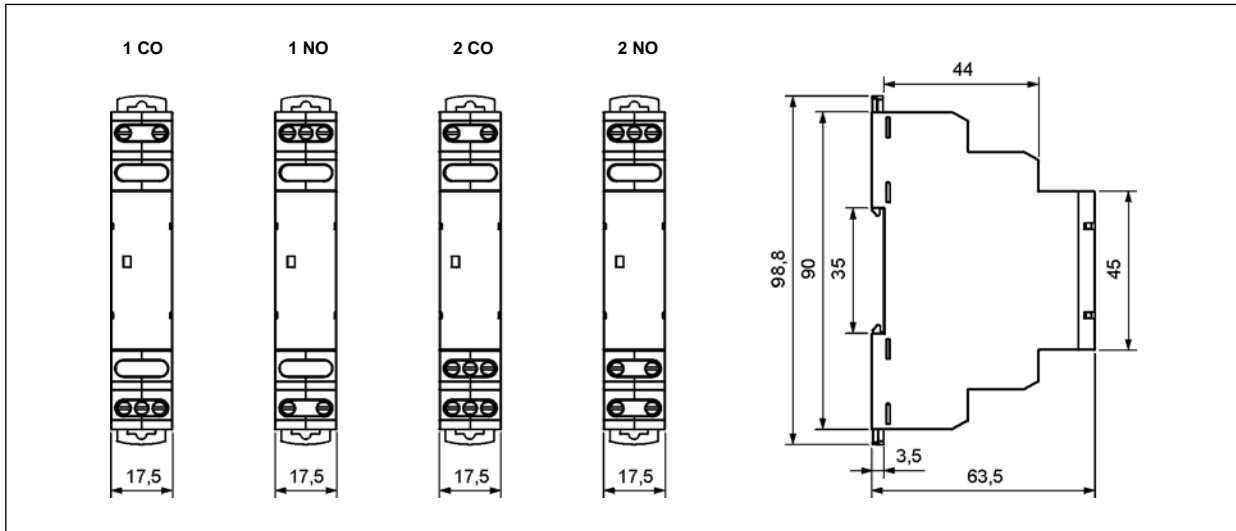

Connection diagrams

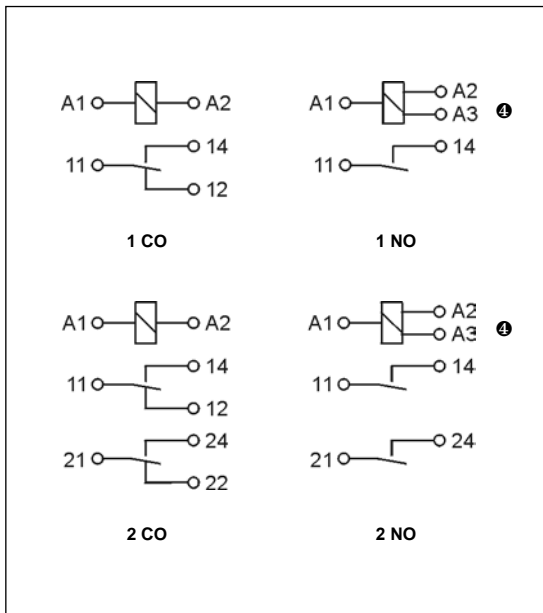


Table of codes

Table 1

Installation relay code		Rated coil voltage
with 1 CO contact	with 2 CO contacts	
MT-PI-17S-11-1012	MT-PI-17S-12-1012	12 V DC
MT-PI-17S-11-1024	MT-PI-17S-12-1024	24 V DC
MT-PI-17S-11-1048	MT-PI-17S-12-1048	48 V DC
MT-PI-17S-11-5024	MT-PI-17S-12-5024	24 V AC 50/60 Hz
MT-PI-17S-11-5115	MT-PI-17S-12-5115	115 V AC 50/60 Hz
MT-PI-17S-11-5230	MT-PI-17S-12-5230	230 V AC 50/60 Hz
with 1 NO contact	with 2 NO contacts	
MT-PI-17S-21-8012	MT-PI-17S-22-8012	12 V AC/DC
MT-PI-17S-21-8048	MT-PI-17S-22-8048	48 V AC/DC
MT-PI-17S-21-8115	MT-PI-17S-22-8115	115 V AC/DC
MT-PI-17S-21-9024	MT-PI-17S-22-9024	24 V AC/DC
Ⓜ	Ⓜ	230 V AC 50 Hz

Ⓜ Selection of supply voltage via wires connection:

24 V AC/DC - to the terminals A1-A2; 230 V AC - to the terminals A1-A3.

Ⓜ Terminal A3 occurs only in versions MT-PI-17S-21-9024, MT-PI-17S-22-9024; used to supply relays with rated voltage 230 V AC 50 Hz - connection to the terminals A1-A3.

Mounting

Relays **MT-PI-...** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - any. **Connections:** max. cross section of the cables: 1 x 2,5 mm² / 2 x 1,5 mm² (1 x 14 / 2 x 16 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,6 Nm.



Two catches:
easy mounting on 35 mm rail,
firm hold (top and bottom).



Green LED:
signalling the operation
status of the relay.

Coil data - DC voltage version (1 CO, 2 CO contacts)

Table 2

Coil code	Coil operating range V DC	Coil operating range V DC	
		min. (at 20 °C)	max. (at 55 °C)
1012	12	10,2	13,2
1024	24	20,4	26,4
1048	48	40,8	52,8

Coil data - AC 50/60 Hz voltage version (1 CO, 2 CO contacts)

Table 3

Coil code	Coil operating range V AC	Coil operating range V AC	
		min. (at 20 °C)	max. (at 55 °C)
5024	24	20,4	26,4
5115	115	97,8	126,5
5230	230	195,5	253,0


Coil data - AC/DC 50 Hz voltage version (1 NO, 2 NO contacts)

Table 4

Coil code	Coil operating range V AC/DC	Coil operating range V AC/DC	
		min. (at 20 °C)	max. (at 55 °C)
8012	12	10,2	13,2
9024 ⑤	24 V AC/DC ⑤	20,4	26,4
	230 V AC ⑤	195,5	253,0
8048	48	40,8	52,8
8115	115	97,8	126,5

⑤ Selection of supply voltage via wires connection: 24 V AC/DC - to the terminals A1-A2; 230 V AC - to the terminals A1-A3.

Ordering codes ⑤

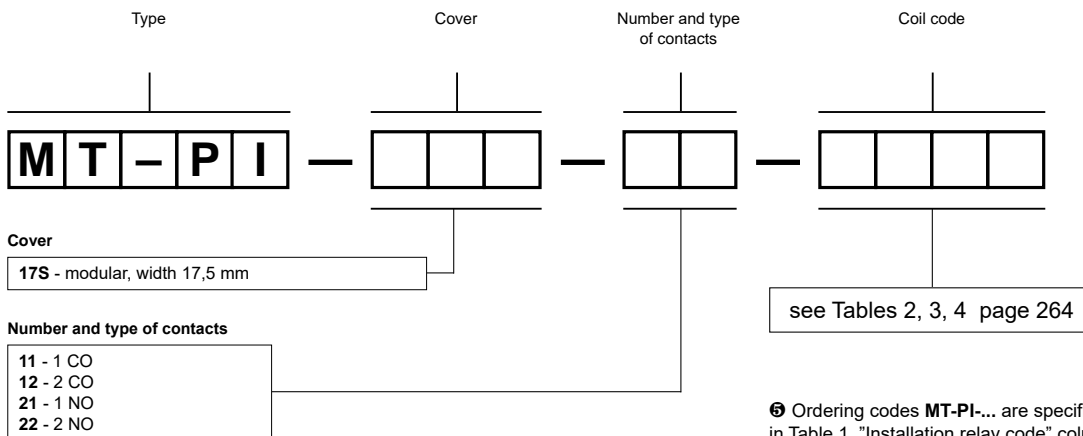

⑤ Ordering codes MT-PI-... are specified in Table 1, "Installation relay code" column.

Example of ordering code ⑤:

MT-PI-17S-22-9024

relay MT-PI-..., cover - modular, width 17,5 mm, two normally open contacts, contact material AgSnO₂, coil voltage 230 V AC 50 Hz or 24 V AC/DC AC: 50 Hz ⑤

Relays programmable



 **relpol**® S.A.

Programmable relays NEED are offered in versions:
8 inputs / 4 relay or transistor outputs, 16 inputs / 8 relay
or transistor outputs; with LCD display, without display.



Supply voltages: 12 V DC, 24 V DC, 220 V DC, 230 V AC;
programming: LAD, STL; LED signaling the status of the
relay and inputs/outputs; designed for direct mounting on
35 mm rail mount acc. to EN 60715 or on panel mounting.



NEED-MODBUS: communication modules NEED Master
/ ModBus RTU Slave; designed for cooperation with
NEED relays; for direct mounting on 35 mm rail mount
acc. to EN 60715.



They meet the requirements of REACH and RoHS Directive.
The relays are recognized and certified by:

CE ENEC

NEED-...-08-4.....	266
NEED-...-16-8.....	270
NEED-MODBUS	276

NEED-...-22-...-D



NEED-...-11-...



- Programmable relays with LCD display or without display, exceptional simplicity of programming in language LAD and STL - page 274
- 8 inputs: AC or DC voltages • 4 outputs: relay or transistor
- LED signaling the status of the relay and inputs/outputs • Cooperation with communication modules NEED-MODBUS • Mounting on 35 mm rail mount or on panel mounting • Control of applications - page 275
- Compliance with standards EN 61131-2, EN 50178
- Recognitions, certifications, directives: RoHS, **CE** **EMC**

Supply voltage

Rated supply voltage	50/60 Hz AC DC	230 V 12, 24, 220 V
Operating range of supply voltage		230 V AC: 95...260 V AC 24 V DC: 19,6...28,8 V DC 12 V DC: 10,2...14,4 V DC 220 V DC: 154...242 V DC
Rated power consumption	AC DC	< 8,0 VA < 3,0 W
Range of supply frequency	AC	47...63 Hz

Inputs

Number of digital inputs	6 (I1 - I6)		
Number and type of analog-digital inputs	2 (I7 - I8) AC or DC voltage		
Rated voltage	• for logic state "1"	230 V AC: 85...260 V AC 50 Hz 24 V DC: 15...40 V DC	12 V DC: 8...26 V DC 220 V DC: 80...260 V DC
	• for logic state "0"	230 V AC: 0...40 V AC 50 Hz 24 V DC: -3...5 V DC	12 V DC: -1,5...4 V DC 220 V DC: 0...40 V DC
Input current for logic state "1" ①	230 V AC: 0,6 mA (I1 - I4)	8,0 mA (I5 - I6)	0,9 mA (I7 - I8)
	12 V DC: 3,3 mA (I1 - I6)		1,1 mA (I7 - I8)
	24 V DC: 3,3 mA (I1 - I6)		2,0 mA (I7 - I8)
	220 V DC: 0,6 mA (I1 - I6)	1,1 mA (I7 - I8)	
Range of analog input signals	230 V AC: 0...255 V AC 50 Hz 12 V DC, 24 V DC: 0...12,75 / 0...25,5 V DC 220 V DC: 0...255 V DC		

Outputs

Number and type of outputs	relay: 4 NO (Q1 - Q4) ② transistor: 4 NO (Q1 - Q4) ③		
Max. voltage	250 V AC ②, 30 V DC ③		
Min. voltage	10 V ②		
Rated load	AC1	10 A / 250 V AC ②	
	DC1	0,5 A / 24 V DC ③	
Min. current	10 mA ②	1 mA ③	
Resistance	≤ 100 mΩ ②		

Insulation according to EN 60664-1

Insulation rated voltage	300 V AC		
Rated surge voltage	2 500 V 1,2 / 50 μs		
• inputs - outputs			
Overtoltage category	II		
Insulation pollution degree	2		
Dielectric strength	• inputs - outputs		
	• contact clearance		
	2 000 V AC	type of insulation: reinforced	
1 000 V AC	type of clearance: micro-disconnection ②		

General data

Operating / release time (typical values)	7 ms / 3 ms ②		
Electrical life	• resistive AC1		
	• DC L/R=40 ms		
	> 0,7 x 10 ⁵	10 A, 250 V AC ②	
	> 10 ⁵	0,15 A, 220 V DC ②	
Mechanical life (cycles)	> 3 x 10 ⁷		
Dimensions (L x W x H)	90 x 72 x 55 mm		
Weight	max. 250 g		
Ambient temperature	• storage		
	• operating		
(non-condensation and/or icing)	-40...+70 °C -20...+55 °C		
Cover protection category	IP 20	EN 60529	


① At rated voltage Un. ② Versions with unprotected relay outputs. ③ Version 24 V DC with protected transistor outputs: max. off-state leakage current < 0,1 mA; max. on-state voltage drop on the connection < 2,5 V.

Physical resources

Mode switch	STOP/RUN
LCD display ④	preview of variables, illuminated, of high contrast (4 lines 12 characters each)
Keyboard ④	set of program parameters
Programmable function buttons ④	4 (B1 - B4)
LED indicators	LED three-coloured - relay status (green: RUN, yellow: STOP, red: ERROR) yellow LEDs - output status green LEDs - input status
Internal potentiometer ⑤	for analog value setting
Real time RTC clock	with automatic time change summer / winter for various time zones (EU, GB, US, RU)
Connection with stopper	for relay programming and external memory card connection
Program resources	
Timers ⑥	NEED-...-22-...-D: 32 (T1 - T32) NEED-...-11-...: 8 (T1 - T8) time range 10 ms...99 h 59 min., resolution 10 ms, accuracy ±1% of the set value +0...1 ms
Bidirectional counters ⑥	8 (C1 - C8), values 0-65535
Fast bidirectional counter / meter ④	measurement of frequency up to 20 kHz (digital input I4)
Clocks	NEED-...-22-...-D: 8 (H1 - H8) NEED-...-11-...: 4 (H1 - H4)
Comparators of analog values	NEED-...-22-...-D: 16 (A1 - A16) NEED-...-11-...: 8 (A1 - A8)
Markers	NEED-...-22-...-D: 64 (M1 - M64) NEED-...-11-...: 16 (M1 - M16)
Text markers ④	8 (MT1 - MT8)
System structure	
NEED-...	programmable relay (see "Table of codes")
NEED-PC-15B (RS232) NEED-PC-15C (USB)	cables for programming and diagnostics, for connection to PC computer
NEED-M-4KB (NEED-...-22-...-D) NEED-M-1KB (NEED-...-11-...)	external memory cards (4 kB or 1 kB) ⑦
PC NEED	software for editing, compiling, programming of the relay and the external memory card (language: graphic LAD and text STL), user's manual: www.need.com.pl
NEED-MODBUS	communication module NEED Master / ModBus RTU Slave

④ Only for NEED-...-22-...-D ⑤ For versions 12 V DC, 24 V DC: possibility of connecting external potentiometer. ⑥ Possibility of configuration from analog inputs. ⑦ The external memory card is not required and is an optional extension of the relay program memory.

Front panel description

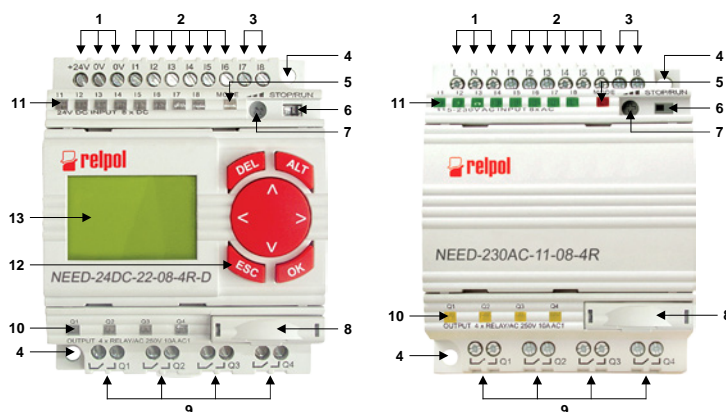


- 1 Supply terminals
- 2 Digital input terminals
- 3 Analog-input terminals
- 4 Openings of 5,5 mm diameter for panel mounting with two M4 screws


- 5 LED indicator (three-coloured) of the relay status
- 6 STOP/RUN mode switch
- 7 Potentiometer for analog value setting
- 8 Relay programming and external memory card connection, secured by stopper

- 9 Output terminals
- 10 LED indicators (yellow) of output status
- 11 LED indicators (green) of input status
- 12 Keyboard
- 13 LCD display


Connection diagram - supply connection

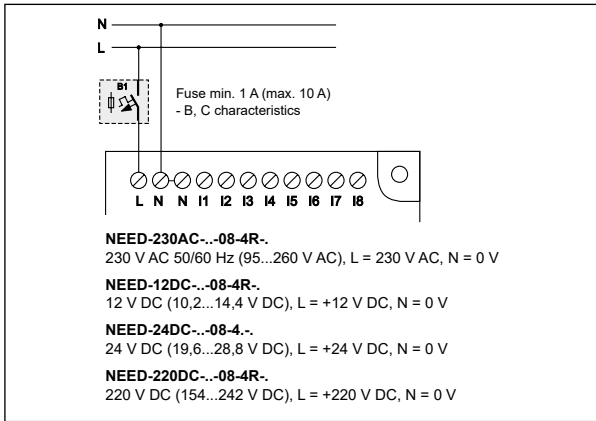


Connection diagrams - digital inputs

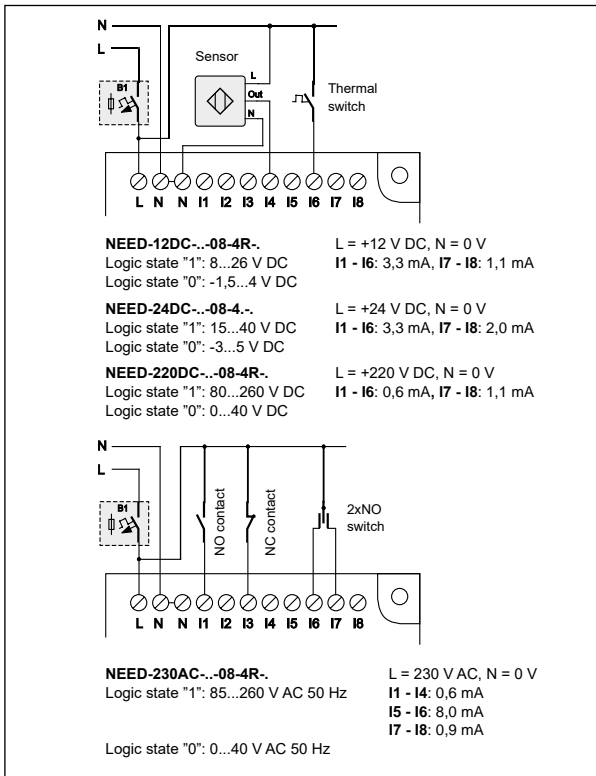


Connection diagram - analog-digital inputs

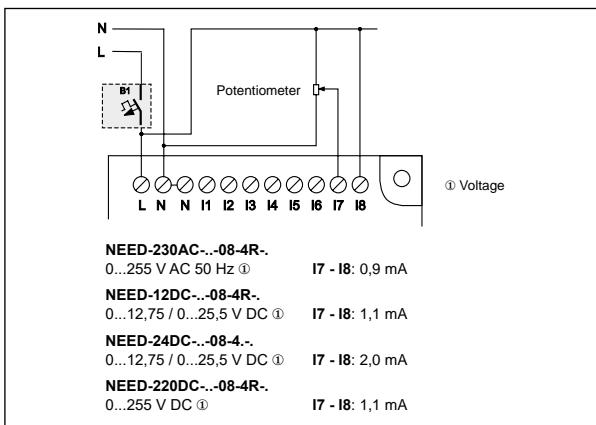


Connection diagrams - digital outputs

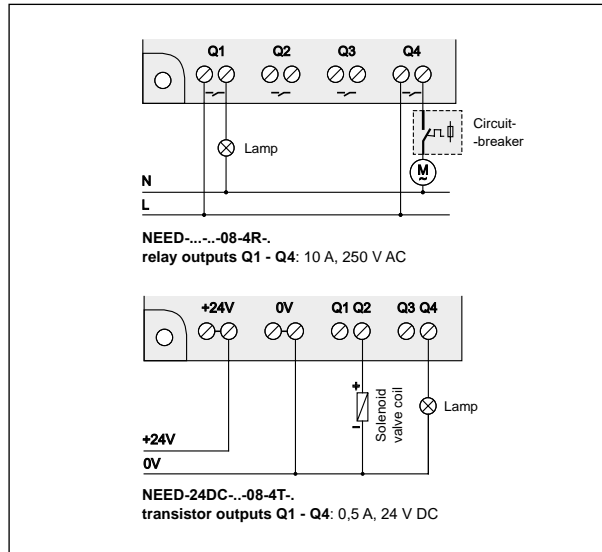


Mechanical mounting

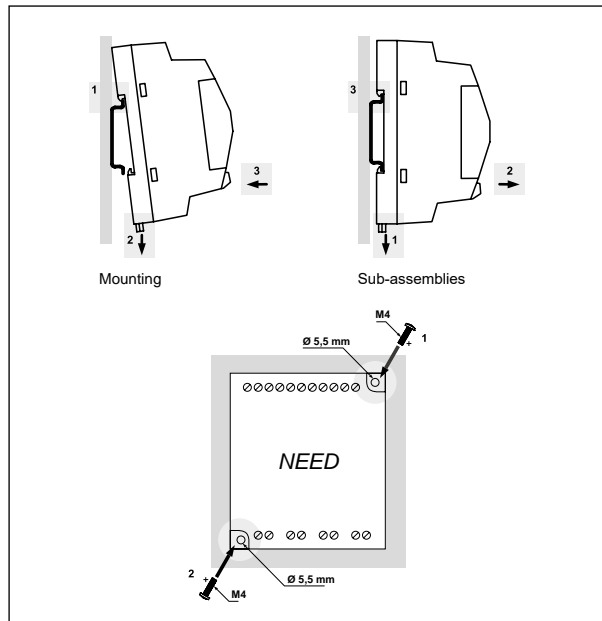

Any operation position - mounting distances for walls with terminals

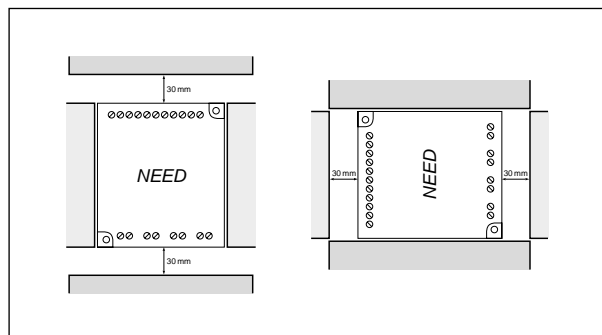

Dimensions

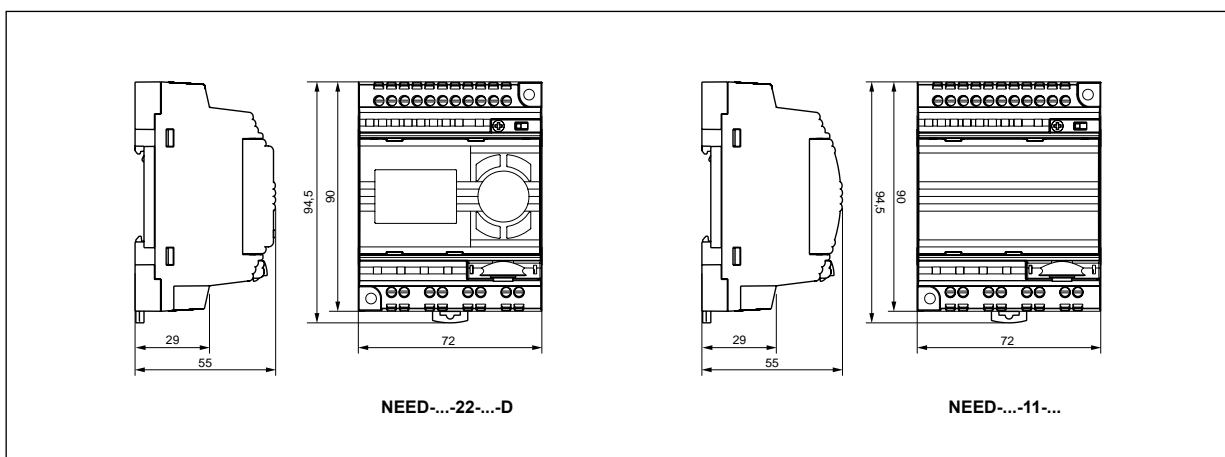

Mounting, connection to PC computer

Relays **NEED-...-08-4...** are designed for direct mounting on 35 mm rail mount acc. to EN 60715 or on panel mounting with two M4 screws). Operational position - any. **Connections:** max. cross section of the cables: 1 x 2,5 mm² / 2 x 1,0 mm² (1 x 14 / 2 x 17 AWG), cables to PC computer: **NEED-PC-15B** (RS232), **NEED-PC-15C** (USB).

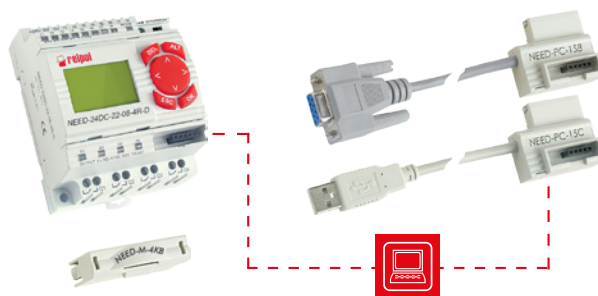


Table of codes

Table 1

Programmable relay code	Supply voltage	Version	Number of inputs	Number and type of outputs	Features
NEED-230AC-22-08-4R-D	230 V AC	22	8	4 relay	LCD display, keyboard
NEED-230AC-11-08-4R	230 V AC	11	8	4 relay	-
NEED-12DC-22-08-4R-D	12 V DC	22	8	4 relay	LCD display, keyboard
NEED-12DC-11-08-4R	12 V DC	11	8	4 relay	-
NEED-24DC-22-08-4R-D	24 V DC	22	8	4 relay	LCD display, keyboard
NEED-24DC-11-08-4R	24 V DC	11	8	4 relay	-
NEED-24DC-22-08-4T-D	24 V DC	22	8	4 transistor	LCD display, keyboard
NEED-24DC-11-08-4T	24 V DC	11	8	4 transistor	-
NEED-220DC-22-08-4R-D	220 V DC	22	8	4 relay	LCD display, keyboard
NEED-220DC-11-08-4R	220 V DC	11	8	4 relay	-

The data in bold type relate to the standard versions of the relays.

NEED-...-16-8... programmable relays

270

NEED-...-22-...-D



NEED-...-11-...



- Programmable relays with LCD display or without display, exceptional simplicity of programming in language LAD and STL - page 274
- 16 inputs: AC or DC voltages • 8 outputs: relay or transistor
- LED signaling the status of the relay and inputs/outputs • Cooperation with communication modules NEED-MODBUS • Mounting on 35 mm rail mount or on panel mounting • Control of applications - page 275
- Compliance with standards EN 61131-2, EN 50178
- Recognitions, certifications, directives: RoHS,

Supply voltage

Rated supply voltage	50/60 Hz AC DC	230 V 12, 24, 220 V
Operating range of supply voltage		230 V AC: 95...260 V AC 24 V DC: 19,6...28,8 V DC 12 V DC: 10,2...14,4 V DC 220 V DC: 154...242 V DC
Rated power consumption	AC DC	< 10,0 VA 12 V DC, 24 V DC: < 5,0 W 220 V DC: < 6,0 W
Range of supply frequency	AC	47...63 Hz

Inputs

Number of digital inputs		13 (I1 - I13)
Number and type of analog-digital inputs		3 (I14 - I16) AC or DC voltage ②
Rated voltage	• for logic state "1" • for logic state "0"	230 V AC: 85...260 V AC 50 Hz 24 V DC: 15...40 V DC 12 V DC: 8...26 V DC 220 V DC: 80...260 V DC 230 V AC: 0...32 V AC 50 Hz 24 V DC: -3...5 V DC 12 V DC: -1,5...4 V DC 220 V DC: 0...40 V DC
Input current for logic state "1" ①		230 V AC: 0,6 mA (I1 - I11) 8,0 mA (I12 - I13) 1,5 mA (I14 - I16) 12 V DC: 3,3 mA (I1 - I13) 1,1 mA (I14 - I16) 24 V DC: 3,3 mA (I1 - I13) 2,0 mA (I14 - I16) 220 V DC: 0,6 mA (I1 - I13) 1,1 mA (I14 - I16)
Range of analog input signals		230 V AC: 0...255 V AC 50 Hz 12 V DC, 24 V DC: 0...12,75 / 0...25,5 V DC 0...25,5 / 0...51 mA ③ 220 V DC: 0...255 V DC

Outputs

Number and type of outputs		relay: 8 NO (Q1 - Q8) ④ transistor: 8 NO (Q1 - Q8) ⑤
Max. voltage		250 V AC ④, 30 V DC ⑤
Min. voltage		10 V ④
Rated load	AC1 DC1	10 A / 250 V AC ④ 0,5 A / 24 V DC ⑤
Min. current		10 mA ④ 1 mA ⑤
Resistance		≤ 100 mΩ ④

Insulation according to EN 60664-1

Insulation rated voltage		300 V AC
Rated surge voltage		2 500 V 1,2 / 50 μs
• inputs - outputs		
Overtoltage category		II
Insulation pollution degree		2
Dielectric strength		
• inputs - outputs		2 000 V AC type of insulation: reinforced
• contact clearance		1 000 V AC type of clearance: micro-disconnection ④

General data

Operating / release time (typical values)		7 ms / 3 ms ④
Electrical life		
• resistive AC1		> 0,7 x 10 ⁵ 10 A, 250 V AC ④
• DC L/R=40 ms		> 10 ⁵ 0,15 A, 220 V DC ④
Mechanical life (cycles)		> 3 x 10 ⁷
Dimensions (L x W x H)		90 x 132 x 55 mm
Weight		max. 413 g
Ambient temperature	• storage (non-condensation and/or icing)	-40...+70 °C • operating -20...+55 °C
Cover protection category		IP 20 EN 60529

① At rated voltage U_n. ② For versions 12 V DC, 24 V DC: it is possible to program configuration the type of inputs as voltage or current ones.
③ Range for current mode in versions DC. ④ Versions with unprotected relay outputs. ⑤ Version 24 V DC with protected transistor outputs:
max. off-state leakage current < 0,1 mA; max. on-state voltage drop on the connection < 2,5 V.


Physical resources

Mode switch	STOP/RUN
LCD display ⑬	preview of variables, illuminated, of high contrast (4 lines 12 characters each)
Keyboard ⑫	set of program parameters
Programmable function buttons ⑩	4 (B1 - B4)
LED indicators	LED three-coloured - relay status (green: RUN, yellow: STOP, red: ERROR) yellow LEDs - output status green LEDs - input status
Internal potentiometer ⑦	for analog value setting
Real time RTC clock	with automatic time change summer / winter for various time zones (EU, GB, US, RU)
Connection with stopper	for relay programming and external memory card connection
Three-phase network equipment control system	monitoring of voltage, asymmetry and phase sequence ⑨
Program resources	
Timers ⑨	NEED-...-22-...-D: 32 (T1 - T32) NEED-...-11-...: 16 (T1 - T16) time range 10 ms...99 h 59 min., resolution 10 ms, accuracy ±1% of the set value +0...1 ms
Bidirectional counters ⑧	8 (C1 - C8), values 0-65535
Fast bidirectional counter / meter ⑩	measurement of frequency up to 20 kHz (digital input I11)
Clocks	NEED-...-22-...-D: 8 (H1 - H8) NEED-...-11-...: 4 (H1 - H4)
Comparators of analog values	NEED-...-22-...-D: 16 (A1 - A16) NEED-...-11-...: 12 (A1 - A12)
Markers	NEED-...-22-...-D: 64 (M1 - M64) NEED-...-11-...: 16 (M1 - M16)
Text markers ⑩	8 (MT1 - MT8)
Marker of phase sequence	⑩
System structure	
NEED-...	programmable relay (see "Table of codes")
NEED-PC-15B (RS232) NEED-PC-15C (USB)	cables for programming and diagnostics, for connection to PC computer
NEED-M-4KB (NEED-...-22-...-D) NEED-M-1KB (NEED-...-11-...)	external memory cards (4 kB or 1 kB) ⑩
PC NEED	software for editing, compiling, programming of the relay and the external memory card (language: graphic LAD and text STL), user's manual: www.need.com.pl
NEED-MODBUS	communication module NEED Master / ModBus RTU Slave

③ Only for NEED-...-22-...-D ⑦ For versions 12 V DC, 24 V DC: possibility of connecting external potentiometer. ⑩ Only for version 230 V AC.
⑨ Possibility of configuration from analog inputs. ⑪ The external memory card is not required and is an optional extension of the relay program memory.


PROGRAMMABLE

Front panel description

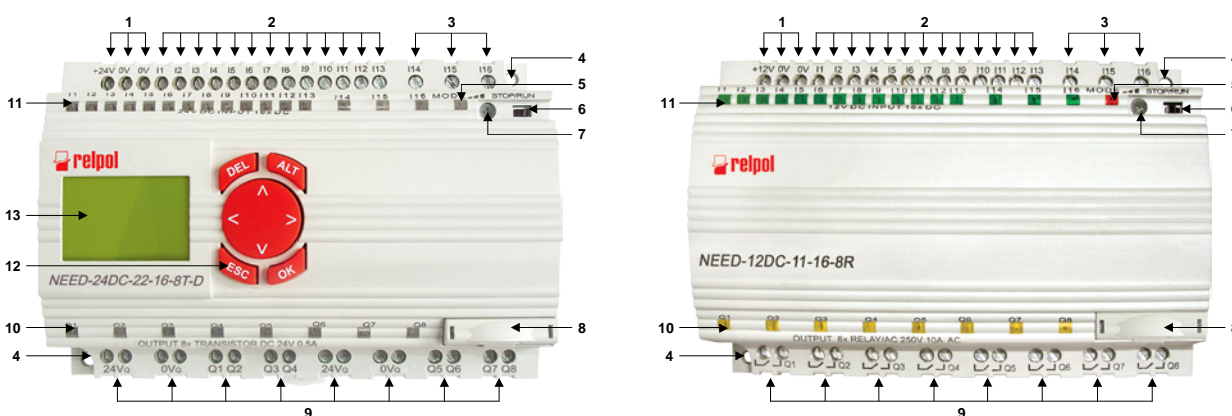


- | | | |
|---|---|---|
| 1 Supply terminals | 5 LED indicator (three-coloured) of the relay status | 9 Output terminals |
| 2 Digital input terminals | 6 STOP/RUN mode switch | 10 LED indicators (yellow) of output status |
| 3 Analog-digital input terminals | 7 Potentiometer for analog value setting | 11 LED indicators (green) of input status |
| 4 Openings of 5,5 mm diameter for panel mounting with two M4 screws | 8 Relay programming and external memory card connection, secured by stopper | 12 Keyboard |
| | | 13 LCD display |


Connection diagram - supply connection

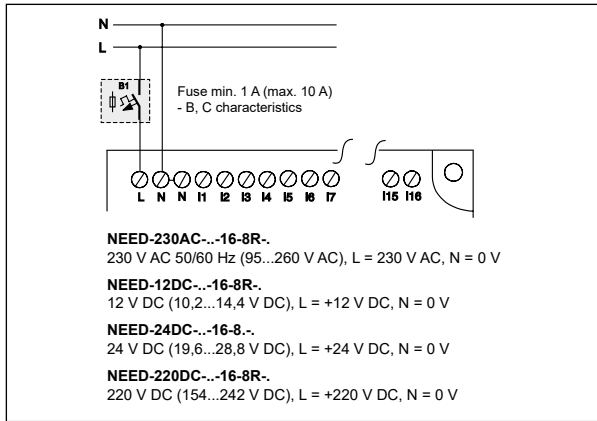


Connection diagrams - digital inputs

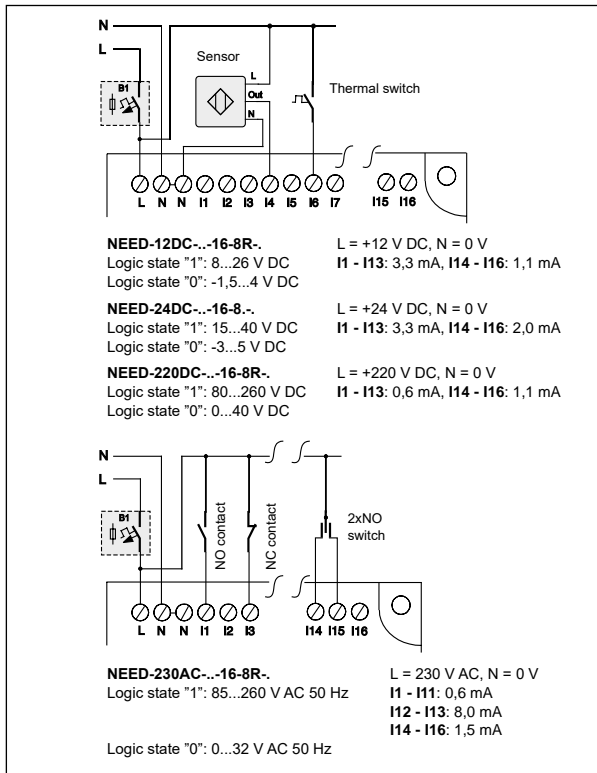


Connection diagrams - digital outputs

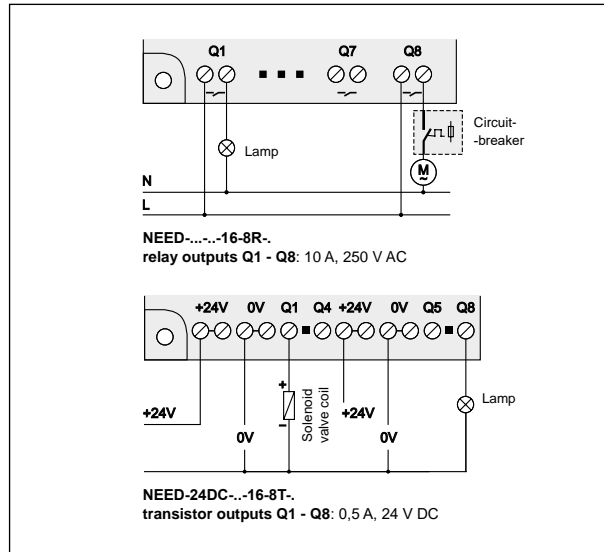


Mechanical mounting

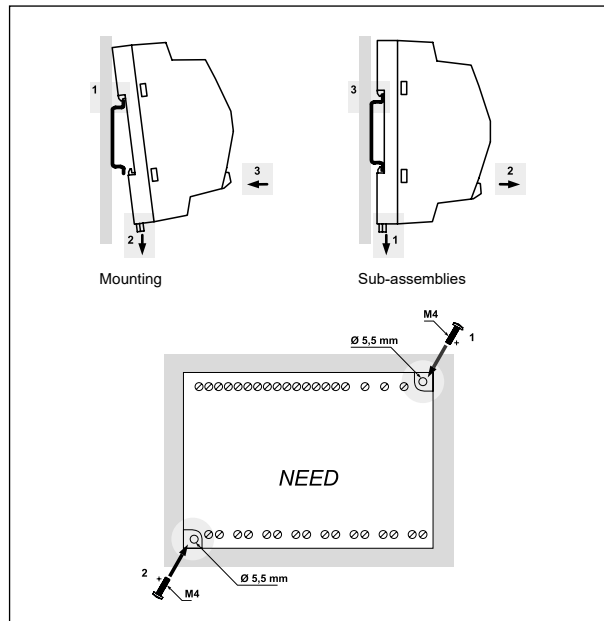


Any operation position - mounting distances for walls with terminals

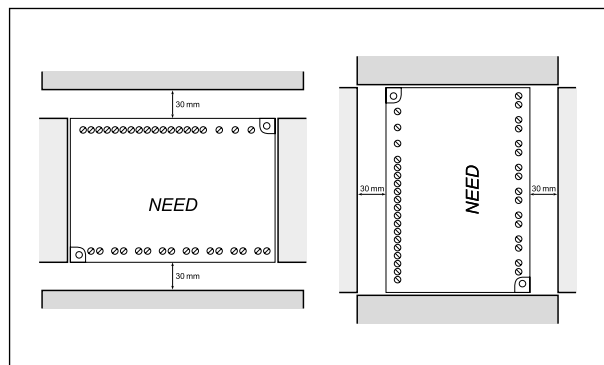

Connection diagram - analog-digital inputs

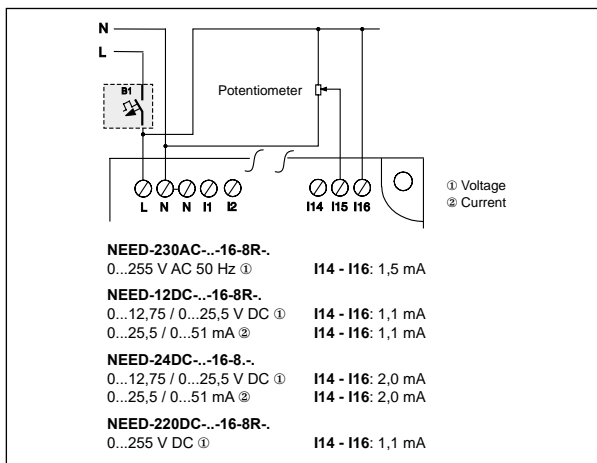

Dimensions

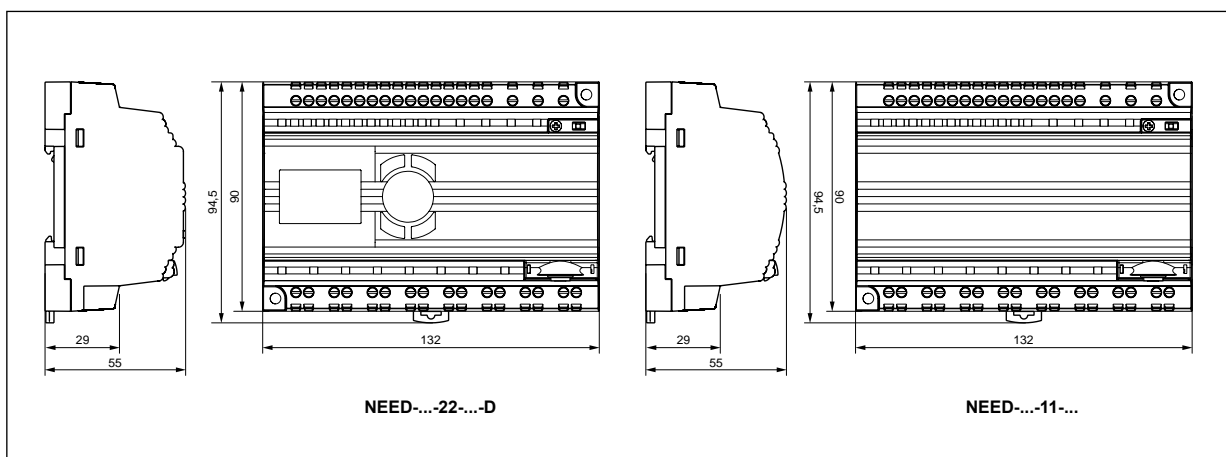

Mounting, connection to PC computer

Relays **NEED-...-16-8...** are designed for direct mounting on 35 mm rail mount acc. to EN 60715 or on panel mounting with two M4 screws). Operational position - any. **Connections:** max. cross section of the cables: 1 x 2,5 mm² / 2 x 1,0 mm² (1 x 14 / 2 x 17 AWG), cables to PC computer: **NEED-PC-15B** (RS232), **NEED-PC-15C** (USB).

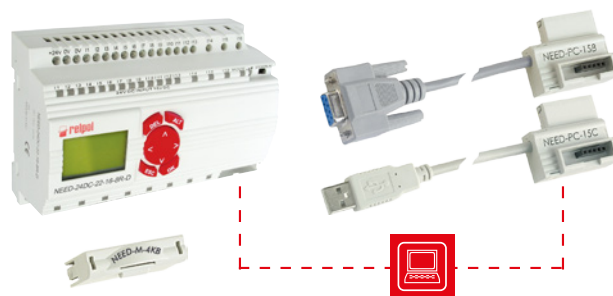


Table of codes

Table 1

Programmable relay code	Supply voltage	Version	Number of inputs	Number and type of outputs	Features
NEED-230AC-22-16-8R-D	230 V AC	22	16	8 relay	LCD display, keyboard
NEED-230AC-11-16-8R	230 V AC	11	16	8 relay	-
NEED-12DC-22-16-8R-D	12 V DC	22	16	8 relay	LCD display, keyboard
NEED-12DC-11-16-8R	12 V DC	11	16	8 relay	-
NEED-24DC-22-16-8R-D	24 V DC	22	16	8 relay	LCD display, keyboard
NEED-24DC-11-16-8R	24 V DC	11	16	8 relay	-
NEED-24DC-22-16-8T-D	24 V DC	22	16	8 transistor	LCD display, keyboard
NEED-24DC-11-16-8T	24 V DC	11	16	8 transistor	-
NEED-220DC-22-16-8R-D	220 V DC	22	16	8 relay	LCD display, keyboard
NEED-220DC-11-16-8R	220 V DC	11	16	8 relay	-

The data in bold type relate to the standard versions of the relays.

Exceptional simplicity of programming

Software PC NEED

A computer program which allows editing, compiling and downloading of a program to the memory of a programmable relay.

The resources of the relay may be monitored in course of operation, owing to which the user may be currently informed about the status of the inputs, outputs, timers, counters, clocks, comparators, etc.

The simplicity and variety of the program edition (text or graphics) make the PC NEED a very convenient tool, owing to which even complex applications are made very quickly, and their start-up time is short.

Hardware requirements: any computer of PC class with RS232 or USB interface and VGA graphic card, operating system – Windows 2000®, Windows XP®, Windows Vista®, Windows 7®, Windows 8®.

Program printout:

- LAD or STL,
- configuration parameters.

Preview of variables:


- possibility to monitor the relay's resources.

Resources settings:

- possibility to set the parameters of timers, counters, clocks, comparators, etc.,
- simple operation and understandable menu,
- editable alert texts and definitions of keyboard buttons.


STL language:

- possibility of conversion from LAD to text language,
- possibility of programming in text editor and further copying of the application,
- the language syntax highlighted,
- setting customized colors and fonts.

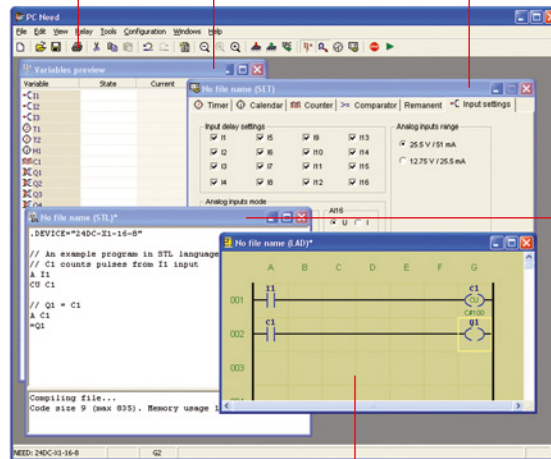

LAD language:

- simplicity of programming which allows quick application designing,
- symbolic labels of individual elements,
- easy creation of applications based upon an electrical chart,
- possibility of inserting comments, color and font configurations,
- ladder preview to facilitate the start of the software.

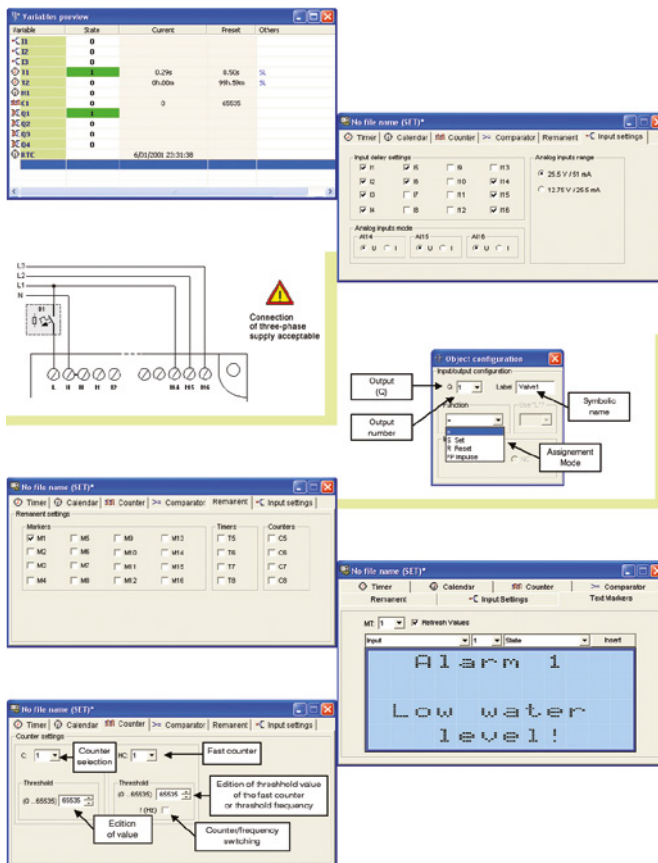

Functions of NEED relay

The NEED programmable relay is a product based on the Polish know-how which is perfectly implemented in applications of industrial automatics. The relay is an interesting alternative for similar solutions offered by other manufacturers due to its numerous outstanding advantages.

- 1) Preview of variables as a tool for monitoring all the resources in the relay.
- 2) A wide range of analog-digital inputs and possibility of configuration of DC inputs as voltage or current ones.
- 3) The mode of monitoring three-phase voltage for the 230AC-...-16-8R- version.
- 4) Possibility to read the program structure existing in the relay, including the symbolic names assigned to individual elements.
- 5) Remanence mode - possibility of identifying some resources of the relay, which might be maintained when the supply voltage is off.
- 6) Fast bidirectional counter / meter of frequency - measurement up to 20 kHz.
- 7) Edition of texts of alerts shown on the display, which include the variables of the relay.
- 8) Four keys of the keyboard to be used in LAD or STL languages.

Control of applications




Management of a parking lot with limited number of places

The parking lot may operate in timing mode (from ... to ...) or in permanent mode. The sensors at the entrance and exit help to define the number of cars in the parking lot and to compare the number with the preset number of places. When the maximum number of vehicles are parked, the information "NO PLACES AVAILABLE" is lit at the entrance. Additionally, the entrance gate remains closed as long as a vehicle leaves the parking lot.



Controller of two pumps – direct start-up

Alternate operation of pumps - automatic or manual. Sequence control of the pumps - two levels of switching on, one level of switching off. Automatic start-up of the second pump in case of a failure of the first one. Protection against dry operation. Outlets to the external alarm signaling (failure of the pump).

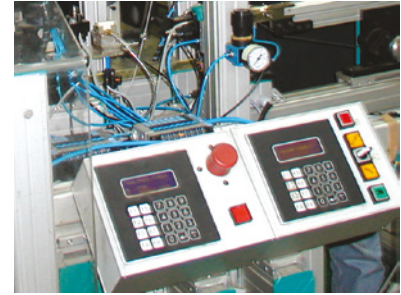

Control of a machine for wire mesh production

Control of the squashing unit which bends the end parts of the wires of the mesh so to avoid injuries. The design of the unit is based on two pneumatic servo-motors connected to the compressed air supply source. The control system protects also against failures in course of production.



Segregation of details in production process

Segregation of details on stroke feed according to their height. Two height sensors of the appropriate range.




Control of lighting and drives of ventilators

Voltage central switching on and off - manual or automatic switching according to timing schedule. Possibility of flexible shaping of the function of lighting for each room.



Control of moving stairways

Control of the direction of movement (up and down). Detection of passengers on the stairway on the basis of the signals from movement detectors.

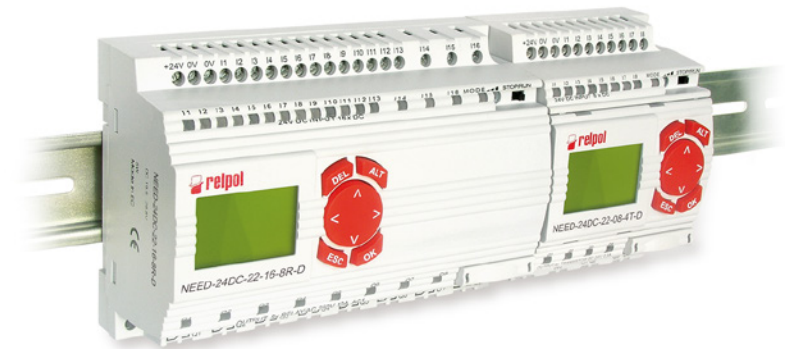

NEED-MODBUS

communication modules NEED Master / ModBus RTU Slave




- **Appropriation:** data reading from NEED relays and availability of the data values with the ModBus RTU protocol; transmission of control commands to NEED; modification of the real time RTC clock setting; operation from COM1 side as NEED Master and from COM2 side as a device of ModBus RTU Slave type
- **Options:** operation mode change: STOP/RUN; RTC clock: current data reading (in the RUN mode) and setting change record (in the STOP mode); current data reading (in the RUN mode): status, program name and version, digital and analog inputs, digital outputs, phase sequence, timers, counters, fast counter current value, clocks, comparators, markers; setting reading and record (in the STOP mode): timers, counters, fast counter, comparators.


Input circuit

Rated supply voltage	7...26 V AC 50/60 Hz	7...35 V DC
Max. power consumption	no load: 2 VA	
Max. power consumption		
Parameter memory	EEPROM	
Introduction of the basic parameter transmission	with the use of DIP SWITCH	
Transmission parameters for ModBus RTU Slave	9600 bits/s, 1 bit start, 8 bits of data, 1 bit stop, without parity control	
RS232	standard EIA/TIA-574	
• max. length of line	15 m	
RS485	standard EIA/TIA-485	
• max. length of line	1200 m	
• max. number of devices on the line	32	
• port protection	100 mA / 600 W surge and short circuit protection	
• port line terminator	yes	
Connections	<ul style="list-style-type: none"> • RS232 (COM1) • RS485/RS232 (COM2) 	
EMC electromagnet compatibility	SUB-D 9M connection N/O connectors	
EMC electromagnet compatibility	according to EN-61000-6-1/2/3/4ABS	
General data		
Cover	ABS	
Insulation rated voltage	COM1: supply	COM2: 1 kV DC
Dimensions with connectors / Weight	108 x 53 x 58 mm / 116 g	
Ambient temperature	<ul style="list-style-type: none"> • storage • operating 	-30...70 °C -30...60 °C
Protection category	cover: IP 43	terminals: IP 20
Relative humidity	20...95%	

Dimensions

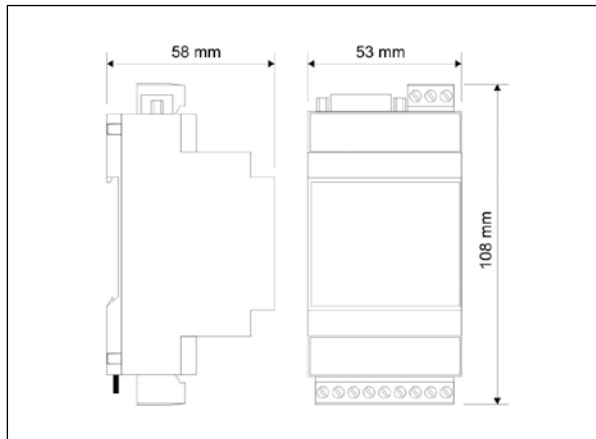

Connection manner

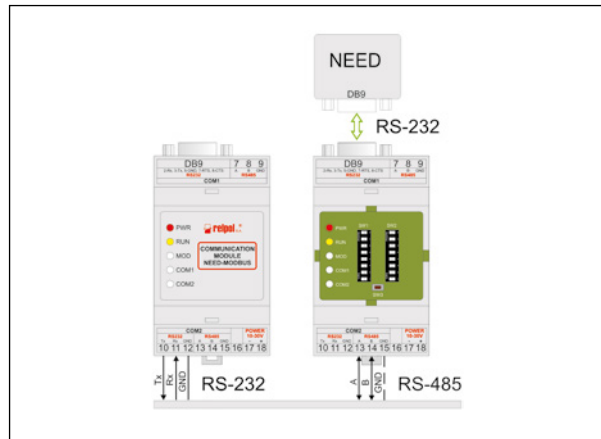

Mounting

Modules **NEED-MODBUS** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. **Connections:** max. cross section of the cables: 1 x 0,22...2,5 mm² (1 x 24...14 AWG).

Relays time



 **repol**® S.A.

Time relays are available in modular covers (MT-W...M with LED display, RPC series) and in industrial covers (TR4N series, T-R4, PIR15...T).

■ Design features (depending on the type of relay): multifunctions, single-functions; with settings of T interval, with independent settings of T1 and T2 intervals, with independent settings of T1, T2 and T3 intervals (MT-W...M); contacts / outputs: 1 CO, 2 CO, 3 CO, 4 CO; supply: universal AC/DC; specified voltage.

■ Applications in low voltage systems: in industrial automation; in BMS automation; in air-conditioning, ventilation, heating systems; in protection, signalling, alarm systems; in lighting systems; various other applications.

■ They meet the requirements of REACH and RoHS Directive. The relays are recognized and certified by:

CE ENEC TIK

modular covers

MT-W...M	278
RPC-MA-.....	285
RPC-MB-.....	289
RPC-1MC-UNI	293
RPC-E/WU/BP-.....	297
RPC-1ER/EA/ES/ EU/IP/SA/WT-.....	300
RPC-2SD-UNI	304

industrial covers

TR4N 1 CO, 2 CO	307
TR4N 4 CO	311
T-R4	315
PIR15...T with time module COM3 ...	319
COM3	324



- **Universal, multifunction time relays with independently controlled times T1, T2 and T3 (25 time functions + functions ON and OFF; quick times set with the accuracy of 0,1 s)**
- Two digit LED display • Programming with two buttons only • Cadmium - free contacts
- AC/DC input voltages • Cover - modular, width 17,5 mm • Direct mounting on 35 mm rail mount acc. to EN 60715 • Applications: in low-voltage systems
- Compliance with standards: EN 45545-2 (category EL5, requirement R23 - flammability class V-0 as per EN 60695-11-10); EN 61373:2011 category 1, class B (mechanical shock and vibration resistance); EN 50121-3-2 (railroad applications - electromagnetic compatibility); EN 50155:2007; EN 60077-1; EN 61810-1; EN 61812-1
- Recognitions, certifications, directives: RoHS, **CE** **EMC** **CTK**

Output circuit - contact data

Number and type of contacts		1 CO	
Contact material		AgSnO ₂	
Max. switching voltage		300 V	
Rated load	AC1 DC1	10 A / 250 V AC 10 A / 24 V DC	
Max. inrush current		16 A	
Rated current		10 A	
Max. breaking capacity	AC1	2 500 VA	
Min. breaking capacity		1 W 10 V, 10 mA	
Contact resistance		≤ 100 mΩ	
Max. operating frequency		600 cycles/hour 72 000 cycles/hour	
• at rated load	AC1		
• no load			
Input circuit			
Rated voltage	AC: 50/60 Hz AC/DC	12...240 V	terminals (+)A1 – (-)A2
Operating range of supply voltage		0,9...1,1 U _n	
Rated power consumption	AC DC	≤ 2,0 VA AC: 50 Hz ≤ 1,5 W	
Range of supply frequency	AC	48...63 Hz	
Residual ripple to DC		5%	
Control contact S ①			
• min. voltage ②		0,9 U _n	
• min. time of pulse duration ②		AC: > 50 ms DC: > 20 ms	
• max. length of control line		10 m	
Insulation according to EN 60664-1			
Insulation rated voltage		250 V AC	
Rated surge voltage		2 500 V 1,2 / 50 μs	
Overvoltage category		II	
Insulation pollution degree		1	
Flammability class		V-0 UL 94 , EN 60695-11-10	
Dielectric strength			
• input - output		2 500 V AC	type of insulation: basic
• contact clearance		1 000 V AC	type of clearance: micro-disconnection
General data			
Electrical life			
• resistive AC1		> 0,5 x 10 ⁵	10 A, 250 V AC
Mechanical life (cycles)		> 3 x 10 ⁷	
Dimensions (L x W x H)		90 ③ x 17,5 x 65,5 mm	
Weight		70 g	
Ambient temperature	• storage	-40...+85 °C	
(non-condensation and/or icing)	• operating	-20...+50 °C	
Cover protection category		IP 20	EN 60529
Environmental protection		RTI	EN 61810-7
Relative humidity		up to 85%	
Shock resistance		15 g	
Vibration resistance		0,35 mm DA 10...55 Hz	

① The control terminal S is activated by connection to A1 terminal via the external control contact S. ② Where the control signal is recognizable.
③ Length with 35 mm rail catches: 98,8 mm.

Time module data

Functions	Es, E, E(S), E(r), R, Wu, Wu(S), Wu(r), Ws, Wa, B, Wi, ER, EWs, EWa, EWu, WsWa, EWf, Wt, Pi, Pi(S), Pp, Pp(S), Est, Esp, ON, OFF
Selection of function and settings of T1, T2, T3 intervals	with two buttons: "F/T" and "OK", to be with viewed on the LED display
Timing adjustments	0,1 s ... 99 h 59 min. 59,9 s
Setting accuracy / Repeatability	0,1 s / 0,12 s
Values affecting the timing adjustment	temperature: ≤ 0,01% / °C supply voltage: ≤ 0,1% / V
Recovery time	controlled by contact S / supply voltage: ≤ 50 ms / ≤ 650 ms
LED indicator	LEDs green "U" - indication of supply voltage U yellow "h" - indication of setting hours T1, T2, T3 times ❶ yellow "m" - indication of setting minutes T1, T2, T3 times ❷ yellow "s" - indication of setting seconds T1, T2, T3 times ❸ green "T2" - indication of setting T2 time ❹ green "T3" - indication of setting T3 time ❺ ❻ green "T3" flashing - measurement of T3 time / request for programming T3 time ❼ yellow "R" - status ON of operational relay R
	LED display strip spinning to the right - measurement of T1 time strip spinning to the left - measurement of T2 time message "End" - stop of the function being carried out pulsating point during programming - indication of setting decimal parts of a second

Instruction of programming

- Hold the lower button "F/T" for a longer time (> 2 s). A symbol of service function F0 will appear on LED display.
- By pressing the button "F/T" choose the required number of function (F0 ... F21 - see table below).
- Save the number of the selected function by shortly pressing the upper button "OK". The display will show two digits "Zero" and the yellow LED "h" will appear (T1 time hours setting). The first "Zero" is for tens of hours, the other "Zero" specifies the units of hours. Each number set has to be confirmed with the "OK" button. Note: similar situation applies for setting minutes and seconds.
- By clicking the lower button "F/T" select the required number of T1 time hours.
- After selecting the number of T1 time hours click the "OK" button in order to confirm the selection.
- Again two digits "Zero" will appear and the yellow LED "m" will appear - setting minutes. Next, act accordingly to points 4 and 5. Similarly set seconds when the yellow LED "s" appears. Then set decimal parts of second when a point is pulsing on the display.
- After confirming with the "OK" button the decimal parts of second the green LED "T2" will start flashing (if T2 time appears in a given function).
- If we select T2 time, then we do everything accordingly to the way of T1 time setting.
- Next the green LED "T3" will start flashing (if T3 time appears in a given function) - request for setting T3 time ❸. T3 time setting may be confirmed with "OK" or rejected with "F/T". T3 time is set similarly to T1 or T2.
- Turn off feeding. After another provision of feeding the function will start. Some functions are started by the external control contact S ❶.
- During carrying out of the function (lasting longer than 60 s) it is possible to check the used time [%] by shortly pressing the "OK" button. A longer pressing will show the "presentation" of settings (checking the set function and times).
- In order to "exit" the set service function F0 or F1 press the lower button "F/T" for a longer time until the symbol of a given function disappears from the display.

Note: a new function can be programmed during the operation of the relay (during the operation of any function). The newly programmed function will be active only after turning on and providing feeding voltage.

Number	Name	Times ❸	Control ❶
F0	OFF	–	U
F1	ON	–	U
F2	Es	T1	U, S
F3	E	T1	U
	E(S)	T1	U, S
F4	E(r)	T1	U, S
F5	R	T1	U, S
F6	Wu	T1	U
	Wu(S)	T1	U, S
F7	Wu(r)	T1	U, S
F8	Ws	T1	U, S
F9	Wa	T1	U, S
F10	B	T1 = 0 ❹	U, S
	Wi	T1	U, S
F11	ER	T1, T2	U, S
F12	EWs	T1, T2	U, S
F13	EWa	T1, T2	U, S
F14	EWu	T1, T2	U
F15	WsWa	T1, T2	U, S
F16	EWf	T1, T2	U, S
F17	Wt	T1, T2	U, S
F18	Pi	T1, T2, T3	U
	Pi(S)	T1, T2, T3	U, S
F19	Pp	T1, T2, T3	U
	Pp(S)	T1, T2, T3	U, S
F20	Est	T1	U, S
F21	Esp	T1	U, S

❶ The control terminal S is activated by connection to A1 terminal via the external control contact S. ❷ View on LED display. ❸ Option: possibility of turning on or omitting T3 time. ❹ Time T1 has to be set with "Zero" value.

Time functions


F0 – OFF - Constant service off.

F0 function can be turned on at any time, during feeding the time relay with U_n voltage. Turning on F0 function during carrying out any time function will cause the function to stop as well as constant operating relay R off (LED diode "R" is off). Function F0 is activated by pressing "F/T" button for a longer time (more than 2 seconds) and selecting F0 function. Confirm this function with red button "OK" (after confirmation display will show digit 0). Exiting the service function needs a longer pressing of "F/T" button - until the display stops showing F0 function symbol. Next, after a short time, display will show "End". Going back to the function previously carried out is done by turning off feeding voltage U_n and turning it on again. If the "T/F" button is being pressed for too long and it will cause, after turning off F0 function symbol, showing the symbols of other functions, then going back to the function previously carried out (set before F0 function) is done by turning off feeding voltage U_n and turning it on again.

F1 – ON - Constant service on.


F1 function can be turned on at any time, during feeding the time relay with U_n voltage. Turning on F1 function during carrying out any time function will cause the function to stop as well as constant operating relay R on (LED diode "R" is on). Function F1 is activated by pressing "F/T" button for a longer time (more than 2 seconds) and selecting F1 function. Confirm this function with red button "OK" (after confirmation display will show digit 1). Exiting the service function needs a longer pressing of "F/T" button - until the display stops showing F1 function symbol. Next, after a short time, display will show "End". Going back to the function previously carried out is done by turning off feeding voltage U_n and turning it on again. If the "T/F" button is being pressed for too long and it will cause, after turning off F1 function symbol, showing the symbols of other functions, then going back to the function previously carried out (set before F1 function) is done by turning off feeding voltage U_n and turning it on again.

F2 – Es - ON delay with the control contact S.



Feeding voltage U has to be put onto time relay in a constant way (LED diode "U" gives constant light). Turning off controlling contact S starts measuring the set time T1 (display shows a vertical strip spinning to the right). When T1 time is finished operating relay R turns on (display shows "End", LED diode "R" is on). Such state lasts until the moment of opening control contact S. Opening the control contact S causes immediate turning off the operating relay R (display still shows "End", and LED diode "R" is off). When the control contact S is open before T1 time is finished, the operating relay will not turn on and the measurement of T time will be cancelled.


F3 – E - ON delay.



Turning on the feeding voltage U starts measuring set T1 time (display shows vertical strip spinning to the right). After measuring T1 time the operating relay R turns on and stays in this state until feeding U is turned off (display shows "End", and LED diode "R" is on).


U - supply voltage; R - output state of the relay; S - control contact state; T1, T2, T3 - measured times; Ts - pause in function performance - time measurement stop period (applies to F18 and F19); t - time axis

F3 – E(S) - ON delay, with time measurement stopped with contact S.




Turning on the feeding voltage U starts measuring set T1 time (display shows vertical strip spinning to the right). If during measuring T1 time control contact S is closed, measuring of T1 time is stopped for the time of closing contact S (display shows two horizontal strips). Opening of control contact S resumes measuring of T1 time (display shows a vertical strip spinning to the right). After finishing measuring T1 time the operating relay R turns on and stays in this state until feeding U is turned off (display shows "End", and LED diode "R" is on).

F4 – E(r) - ON delay with the Reset function.




Turning on the feeding voltage U starts measuring set T1 time (display shows vertical strip spinning to the right). After measuring T1 time operating relay R turns on. If control contact S is closed during measuring T1 time measuring of T1 time is stopped for the time of closing contact S (display shows two horizontal strips). After opening contact S T1 time is measured from the start. After measuring T1 time operating relay R turns on (display shows "End", and LED diode "R" is on). and this state lasts until the moment of turning off feeding voltage U or when the control contact is closed again.

F5 – R - OFF delay with the control contact S.



Time relay input is powered by voltage U in a constant way. Closing the control contact S causes immediate turning on of the operating relay R (display shows two horizontal strips, LED diode "R" is on). Opening the control contact S starts measuring of the set T1 time (display shows vertical strip spinning to the right). After measuring T1 time the operating relay turns off (display shows "End", and LED diode "R" is off). If control contact S is closed before T1 time is finished, the previously measured time will be restarted and the operating relay will stay on. The delay of turning off the operating relay R will start at the moment of another opening of control contact S.


F6 – Wu - ON for the set interval.



Turning on the feeding voltage U causes immediate turning on of the operating relay R at the set time T1 (display shows vertical strip spinning to the right, LED diode "R" is on). After measuring T1 time the operating relay R turns off (display shows "End", and LED diode "R" is off).


Time functions

F6 – Wu(S) - ON for the set interval, with time measurement stopped with contact S closing.




Turning on the feeding voltage U causes immediate turning on the operating relay R at the set time T1 (display shows vertical strip spinning to the right, LED diode "R" is on). If the control contact S is closed, measuring T1 time will be stopped (display shows two horizontal strips) until the moment when control contact is opened. Opening contact S starts further measuring of T1 time. After finishing measuring T1 time the operating relay turns off (display shows "End", and LED diode "R" is off).

F7 – Wu(r) - ON for the set interval with the Reset function.




Turning on feeding voltage U causes immediate turning on the operating relay R at the set time T1 (display shows vertical strip spinning to the right, LED diode "R" is on). When control contact S is closed, measuring time T1 is stopped for the time of closing contact S (with operating relay being on, and display showing two horizontal strips). After opening contact S T1 time is measured from the start. After measuring T1 time the operating relay R turns off (display shows "End", and LED diode "R" is off).

F8 – Ws - Single shot for the set interval triggered by closing of the control contact S.




Time relay input is powered by voltage U in a constant way. Closing the control contact S causes immediate turning on operating relay R for the T1 time (display shows vertical strip spinning to the right, LED diode "R" is on). After measuring T1 time the operating relay R turns off display shows "End", and LED diode "R" is off). Opening and closing the control contact S during measuring T1 time does not affect the function being carried out. Turning on the operating relay R again is possible (after measuring T1 time) by another closing of control contact S.

F9 – Wa - ON for the set interval triggered with the control contact S.




Time relay input is powered by voltage U in a constant way. Opening the control contact S causes immediate turning on operating relay R for the T1 time (display shows vertical strip spinning to the right, LED diode "R" is on). After measuring T1 time the operating relay R turns off display shows "End", and LED diode "R" is off). Opening and closing the control contact S during measuring T1 time does not affect the function being carried out. Turning on the operating relay R again is possible (after measuring T1 time) by another closing of control contact S.

F10 – B - Cyclical operation with the control contact S (the feature of a bistable relay) - setting T1 time to the value of "Zero" is required.




Time relay input is powered by voltage U in a constant way. Each closing of control contact S causes the change of the state of the operating relay R into the opposite one (the feature of a bistable relay).

F10 – Wi - ON for the set interval controlled by closing of the control contact S, with the function of switching off the output relay R prior to the lapse of the interval T1 (the feature of a bistable relay).




Time relay input is powered by voltage U in a constant way. Closing the control contact S causes immediate turning on the operating relay for T1 time (display shows a vertical strip spinning to the right, and LED diode "R" is on). After measuring T1 time the operating relay R turns off (display shows "End", and LED diode "R" is off). If during the measuring T1 time the control contact is closed, the measured time T1 will be restarted, and the operating relay R turns off. Another closing of the control contact S causes another turning on the operating relay R for the T1 time. Relay with this function adopts the feature of bistable relay.

F11 – ER - ON delay and OFF delay with control contact S. Independent settings of T1 and T2 intervals.



Time relay input is powered by voltage U in a constant way Closing the control contact S starts measuring the T1 time (display shows a vertical strip spinning to the right) and after measuring the T1 time the operating relay R turns on (display shows two horizontal strips, and LED diode "R" is on). Opening the control contact S starts measuring T1 time - the delayed turning off the operating relay R (display shows a vertical strip spinning to the left) and after the time is finished the operating relay R turns off display shows "End", and LED diode "R" is off). If during the measuring T2 time the control contact S is closed, the measured time will be restarted, and the operating relay R stays on. If the control contact S is closed for a shorter time than T1 time, the system will not turn on the operating relay R.

F12 – EWs - ON delay and ON for the set time with closing of the control contact S. Independent settings of T1 and T2 intervals.




Time relay input is powered by voltage U in a constant way. Closing the control contact (impulsive or constant) starts measuring T1 time (Time relay input is powered by voltage U in a constant way.), and after its completion the operating relay R turns on for T2 time (display shows a vertical strip spinning to the left, LED diode "R" is on). After the T2 time the operating relay R turns off (display shows "End", and LED diode is off). The system is waiting for another closing of the control contact S. During measuring times T1 and T2 the state of the contact S does not matter.

U - supply voltage; R - output state of the relay; S - control contact state; T1, T2, T3 - measured times; Ts - pause in function performance - time measurement stop period (applies to F18 and F19); t - time axis


Time functions

F13 – EWa - OFF delay and breaking time delay with opening of the control contact S. Independent settings of T1 and T2 intervals.




Time relay input is powered by voltage U in a constant way. Closing the control contact S causes immediate turning on the operating relay R (display shows two horizontal strips, and LED diode "R" is on). Opening the control contact S starts measuring the time T1 (display shows a vertical strip spinning to the right), and after measuring is finished the operating relay R turns off and measuring of T2 time starts (display shows a vertical strip spinning to the left, and LED diode "R" is off). After measuring T2 time display shows "End", and the operating relay R - depending on the state of the control contact S - stays off when the control contact S is open or turns on when the control contact S is closed, and LED diode "R" goes on.

F14 – EWu - ON delay for the set interval. Independent settings of T1 and T2 intervals.



Turning on feeding U starts work from measuring the time T1 (display shows a vertical strip spinning to the right), and after its completion the operating relay R starts at T2 time (display shows a vertical strip spinning to the left, and LED diode "R" is on). After measuring T2 time the operating relay turns off (display shows "End", and LED diode "R" is off).


F15 – WsWa - ON for the set intervals T1 and T2 with the control contact S. Independent settings of T1 and T2 intervals.




Time relay input is powered by voltage U in a constant way. Closing the control contact S turns on the operating relay R for T1 time (display shows a vertical strip spinning to the right, and the LED diode "R" is on). After measuring T1 time the operating relay R turns off (display shows two horizontal strips, and LED diode "R" is off). Opening the control contact S causes another turning on the operating relay R for T2 time (display shows a vertical strip spinning to the left, and the LED diode "R" is on). After measuring T2 time the operating relay turns off (display shows "End", and LED diode "R" is off).

a/ If during measuring T1 time the control contact S is opened, then (after measuring T1 time) the operating relay will stay on until the moment of the end of measuring T2 time. After measuring T2 time the operating relay R will turn off (display shows "End", and LED diode "R" turns off) - see Diagram 1.

b/ If during measuring T1 time the control contact S is opened, and next, during measuring T2 time, it is closed, then (after measuring T1 and T2 times) the operating relay R will turn on for the additional T1 time. After measuring additional T1 time the operating relay R will turn off (display shows two horizontal strips, and LED diode will turn off). Such state will last until the opening of the control contact S. After opening the control contact S the operating relay R will turn on again and the measuring of T2 time will start (display shows a vertical strip spinning to the left, and LED diode "R" is on). After measuring T2 time the operating relay R will turn off (display shows "End", and LED diode "R" will turn off) - see Diagram 2.




F16 – EWf - ON delay and OFF delay with the control contact S. Independent settings of T1 and T2 intervals.




Time relay input is powered by voltage U in a constant way. Closing the control contact S starts measuring the time T1 (display shows a vertical strip spinning to the right). After T1 time is finished, the relay R turns on (display shows two horizontal strips, and LED diode "R" is on). Opening the control contact S starts measuring the time T2 - delayed turning off the operating relay R (display shows a vertical strip spinning to the left). After measuring T2 time the operating relay R turns off (display shows "End", and LED diode "R" is off).

F17 – Wt - Monitoring of the sequence of pulses. Switching on T2 interval is extended with consecutive pulses (closing and opening of the contact S). Independent settings of T1 and T2 intervals.




Turning on the feeding voltage U causes immediate turning on of the operating relay R for the set T1 time (display shows a vertical strip spinning to the right, and LED diode "R" is on). After measuring T1 time measuring T2 time starts with the operating relay R still being on (display shows a vertical strip spinning to the left, and LED diode "R" is on). In order to keep the operating relay R on, during measuring T2 time closing, and next opening of the control contact S must occur (single impulse), which will cause resetting the time measured so far and start measuring T2 time again. If before T2 time is finished the single impulse of the control contact S does not occur, the operating relay will turn off (display shows "End", and LED diode "R" will turn off). Another turning on of the operating relay will be possible after turning off feeding U and turning it on again.

F18 – Pi - Cyclical operation pulse first. Independent settings of T1 and T2 intervals. Possibility of turning on or omitting T3 time.

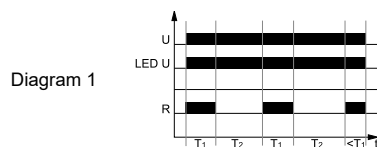

Turning on feeding voltage U starts cyclic work from turning on the operating relay R for the T1 time (display shows a vertical strip spinning to the right, and LED diode "R" is on), after which occurs turning off of the operating relay R for T2 time (display shows a vertical strip spinning to the left, and LED diode "R" is off). Cyclic work lasts until the moment of turning off feeding voltage - see Diagram 1.

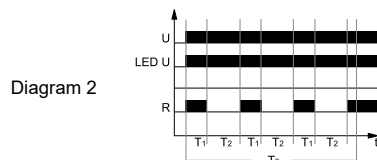


Note: it is possible to turn on T3 time (i.e. the time of cyclic work) during programming the relay (when the LED T3 diode is flashing) by confirming it with the OK button, or omitting the T3 time by pressing "F/T" button. When T3 time has been turned on and set, during cyclic work green LED diode T3 is flashing. After T3 time is finished display shows "End", LED diode T3 is off, and operating relay R remains in the state which it was in at the moment of the end of T3 time. If T3 time finishes during measuring T1 time, the operating relay R will remain on (LED "R" is on), and if it finishes during measuring T2 time, the operating relay R will remain off (LED diode "R" is off). Another turning on the function of cyclic work will be possible after turning off feeding U and turning it on again - see Diagram 2.

U - supply voltage; R - output state of the relay; S - control contact state; T1, T2, T3 - measured times; Ts - pause in function performance - time measurement stop period (applies to F18 and F19); t - time axis

Time functions

F18 – Pi(S) - Cyclical operation pulse first. Independent settings of T1 and T2 intervals. Possibility of turning on or omitting T3 time. Possibility of stopping and resuming cyclic work by control contact S.




Turning on the feeding voltage U starts cyclic work from turning on the operating relay R for the T1 time (display shows a vertical strip spinning to the right, and LED diode "R" is on), after which the operating relay turns off for T2 time (display shows a vertical strip spinning to the left, and LED diode "R" is off). Cyclic work lasts until the moment of turning off feeding voltage U.

Note: it is possible to turn on T3 time (i.e. the time of cyclic work) during programming the relay (when the LED T3 diode is flashing) by confirming it with the OK button, or omitting the T3 time by pressing "F/T" button. When T3 time has been turned on and set, during cyclic work green LED diode T3 is flashing. After T3 time is finished display shows "End", LED diode T3 is off, and operating relay R remains in the state which it was in at the moment of the end of T3 time. If T3 time finishes during measuring T1 time, the operating relay R will remain on (LED "R" is on), and if it finishes during measuring T2 time, the operating relay R will remain off (LED diode "R" is off). Another turning on the function of cyclic work will be possible after turning off feeding U and turning it on again. **Operation of contact S:** closing control contact S immediately stops measuring times. Opening control contact S resumes measuring times. The break in carrying out the function Pi(S) (by the period of closing contact S) is included in T3.

F19 – Pp - Cyclical operation pause first. Independent settings of T1 and T2 intervals. Possibility of turning on or omitting T3 time.


F19 – Pp(S) - Cyclical operation pause first. Independent settings of T1 and T2 intervals. Possibility of turning on or omitting T3 time. Possibility of stopping and resuming cyclic work by control contact S.



Turning on feeding voltage U starts cyclic work from measuring break time T1 - time of turning off the operating relay R (display shows a vertical strip spinning to the right), after which occurs turning on the operating relay R for the T2 time (display shows a vertical strip spinning to the left, and LED diode "R" is on). Cyclic work lasts until the moment of turning off feeding voltage U.


Note: it is possible to turn on T3 time (i.e. the time of cyclic work) during programming the relay (when the LED T3 diode is flashing) by confirming it with the OK button, or omitting the T3 time by pressing "F/T" button. When T3 time has been turned on and set, during cyclic work green LED diode T3 is flashing. After T3 time is finished display shows "End", LED diode T3 is off, and operating relay R remains in the state which it was in at the moment of the end of T3 time. If T3 time finishes during measuring T1 time, the operating relay R will remain on (LED "R" is on), and if it finishes during measuring T2 time, the operating relay R will remain off (LED diode "R" is off). Another turning on the function of cyclic work will be possible after turning off feeding U and turning it on again. **Operation of contact S:** closing control contact S immediately stops measuring times. Opening control contact S resumes measuring times. The break in carrying out the function Pi(S) (by the period of closing contact S) is included in T3.

Diagram 1




Turning on feeding voltage U starts cyclic work from measuring the time of break T1 - the time of turning off the operating relay R (display shows a vertical strip spinning to the right), after which occurs turning off of the operating relay R for the T2 time (Display shows a vertical strip spinning to the left, and LED diode "R" is on). Cyclic work lasts until the moment of turning off feeding voltage U - see Diagram 1.

F20 – Est - ON delay with closing of the control contact S, with the interval T1 extended.




The input of the time relay is supplied with voltage U continuously. Closing of the control contact S for a shorter time than T1 time starts the T1 time, and after the T1 time has lapsed, the output relay R switches on and remains in this position until the control contact S is closed again or until the supply voltage U is interrupted. Closing of the control contact S resets the thus far measured time and starts the new T1 time.

Diagram 2



Note: it is possible to turn on T3 time (i.e. the time of cyclic work) during programming the relay (when the LED T3 diode is flashing) by confirming it with the OK button, or omitting the T3 time by pressing "F/T" button. When T3 time has been turned on and set, during cyclic work green LED diode T3 is flashing. After T3 time is finished display shows "End", LED diode T3 is off, and operating relay R remains in the state which it was in at the moment of the end of T3 time. If T3 time finishes during measuring T1 time, the operating relay R will remain on (LED "R" is on), and if it finishes during measuring T2 time, the operating relay R will remain off (LED diode "R" is off). Another turning on the function of cyclic work will be possible after turning off feeding U and turning it on again - see Diagram 2.


F21 – Esp - ON delay - one cycle, with closing of the control contact S.




The input of the time relay is supplied with voltage U continuously. Closing of the control contact S starts the T1 time, and after the T1 time has lapsed, the output relay R switches on and remains in this position until the supply voltage U is interrupted. When the output relay R is on, opening or closing of the control contact S does not affect its status.

U - supply voltage; R - output state of the relay; S - control contact state; T1, T2, T3 - measured times; Ts - pause in function performance - time measurement stop period (applies to F18 and F19); t - time axis


Dimensions

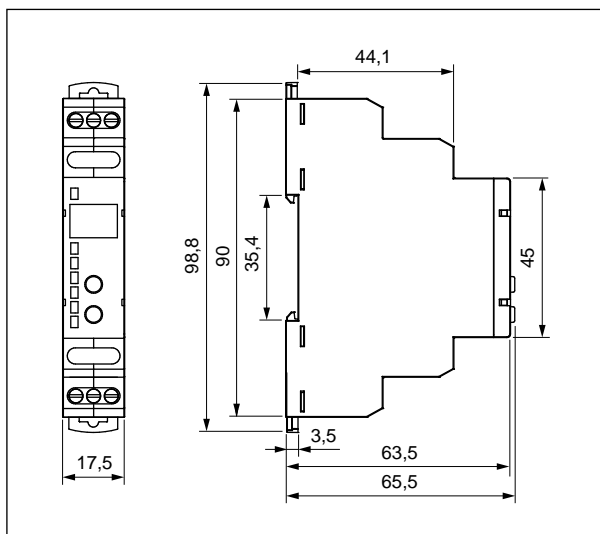

Front panel description

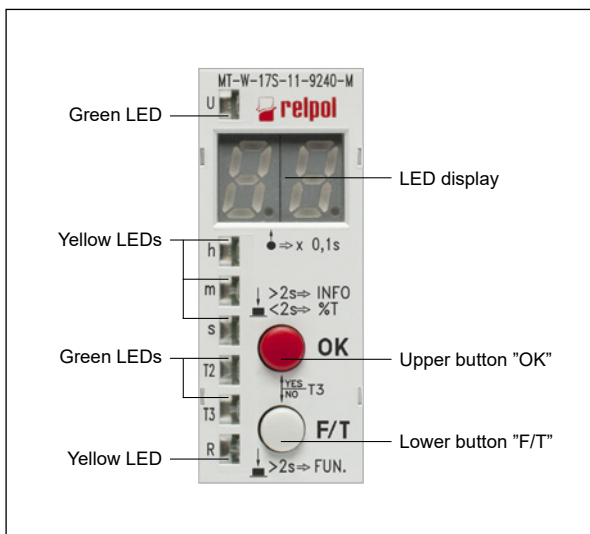

Connection diagram

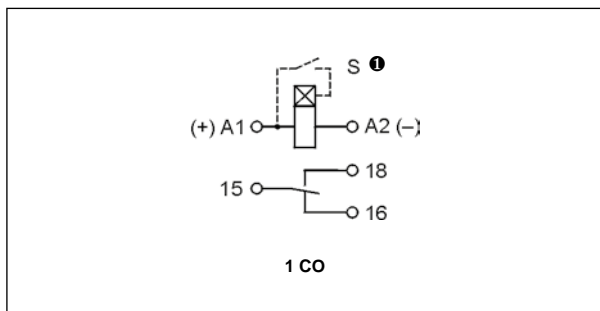

❶ The control terminal S is activated by connection to A1 terminal via the external control contact S.


Mounting

Relays **MT-W...M** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - any. **Connections:** max. cross section of the cables: 1 x 2,5 mm² / 2 x 1,5 mm² (1 x 14 / 2 x 16 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,6 Nm.

Two catches:
easy mounting on 35 mm rail,
firm hold (top and bottom).



Ordering codes

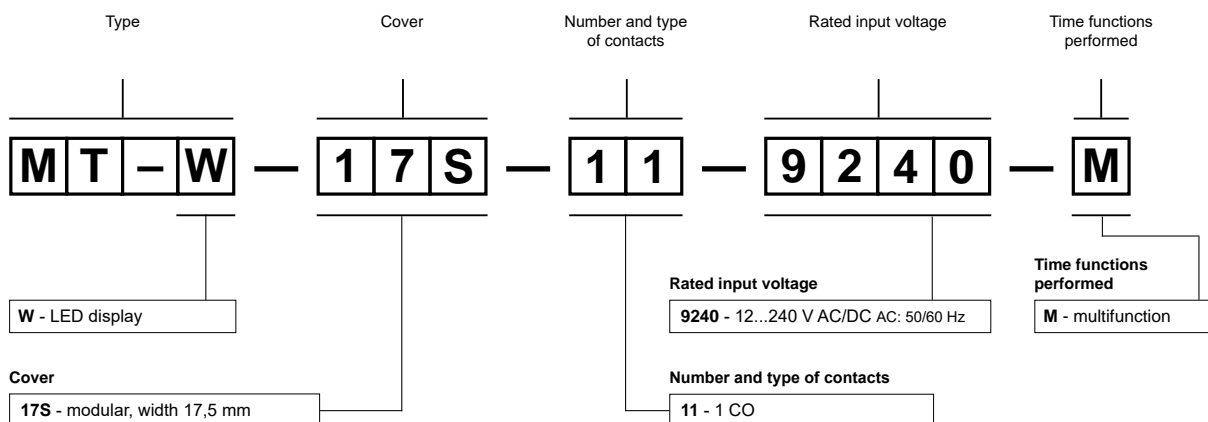

Example of ordering codes:

MT-W-17S-11-9240-M

universal time relay **MT-W...M** with LED display, multifunction (relay perform 6 functions), cover - modular, width 17,5 mm, one changeover contact, contact material AgSnO₂, rated input voltage 12...240 V AC/DC AC: 50/60 Hz



RPC-1MA-UNI



RPC-2MA-A230



- **Multifunction time relays (10 time functions; 8 time ranges)**
- Cadmium - free contacts 1 CO and 2 CO
- AC and AC/DC input voltages
- Cover - modular, width 17,5 mm
- Direct mounting on 35 mm rail mount acc. to EN 60715
- Applications: in low-voltage systems
- Compliance with standard EN 61812-1
- Recognitions, certifications, directives: RoHS, **CE ENEC**


Output circuit - contact data

Number and type of contacts		1 CO	2 CO
Contact material		AgSnO ₂	
Max. switching voltage	AC	300 V	
Rated load	AC1	16 A / 250 V AC	8 A / 250 V AC
	DC1	16 A / 24 V DC	8 A / 24 V DC
	DC1	0,3 A / 250 V DC	0,3 A / 250 V DC
Rated current		16 A / 250 V AC	8 A / 250 V AC
Max. breaking capacity	AC1	4 000 VA	2 000 VA
Min. breaking capacity		1 W 10 mA	
Contact resistance		≤ 100 mΩ	
Max. operating frequency		600 cycles/hour at rated load AC1	
Input circuit			
Rated voltage	50/60 Hz AC	230 V terminals A1, A2	
	AC: 50/60 Hz AC/DC	12...240 V terminals (+)A1, (-)A2	
Must release voltage		≥ 0,1 U _n	
Operating range of supply voltage		0,9...1,1 U _n	
Rated power consumption	AC	≤ 3,5 VA 230 V AC, 50 Hz	≤ 1,5 VA 12...240 V AC/DC, AC: 50 Hz
	DC	≤ 1,5 W 12...240 V AC/DC	
Range of supply frequency	AC	48...63 Hz	
Control contact S ①	• min. voltage ②	0,7 U _n	
	• min. time of pulse duration ③	AC: ≥ 50 ms	DC: ≥ 30 ms
	• max. length of control line	10 m	
Insulation according to EN 60664-1			
Insulation rated voltage		250 V AC	
Rated surge voltage		4 000 V 1,2 / 50 μs	
Overvoltage category		III	
Insulation pollution degree		2	
Flammability class		cover: V-0	front panel: V-2 UL 94
Dielectric strength	• input - output	4 000 V AC	type of insulation: basic
	• contact clearance	1 000 V AC	type of clearance: micro-disconnection
	• pole - pole	2 000 V AC	contacts 2 CO, type of insulation: basic
General data			
Electrical life	• resistive AC1	> 0,5 x 10 ⁵	8 A/16 A, 250 V AC
Mechanical life (cycles)		> 3 x 10 ⁷	
Dimensions (L x W x H) / Weight		90 ④ x 17,5 x 64,5 mm / contact 1 CO: 65...66 g, contacts 2 CO: 72...73 g	
Ambient temperature (non-condensation and/or icing)	• storage	-40...+70 °C	
	• operating	-20...+50 °C	
Cover protection category		IP 20	EN 60529
Relative humidity		up to 85%	
Shock / vibration resistance		15 g / 0,35 mm DA 10...55 Hz	
Time module data			
Functions		E, Wu, Bp, Bi, R, Ws, Wa, Esa, B, T	
Time ranges		OFF - permanent switching off; ON - permanent switching on 1 s ⑤; 10 s; 1 min.; 10 min.; 1 h; 10 h; 1 d; 10 d	
Timing adjustment		smooth - (0,1...1) x time range (does not refer to range ON / OFF)	
Setting accuracy / Repeatability		± 5% ⑥ ⑦ / ± 0,5% ⑧	
Values affecting the timing adjustment		temperature: ± 0,05% / °C	supply voltage: ± 0,01% / V
Recovery time	AC	≤ 150 ms 230 V AC, 50 Hz	≤ 400 ms 12...240 V AC/DC, AC: 50 Hz
	DC	≤ 150 ms 12...240 V AC/DC	
LED indicator		green LED U ON - indication of supply voltage U green LED U flashing - measurement of T time yellow LED R ON/OFF - output relay status	

① The control terminal S is activated by connection to A1 terminal via the external control contact S. ② Where the control signal is recognizable.
③ Length with 35 mm rail catches: 98,8 mm. ④ For first range setpoint (1 s) setting accuracy and repeatability are smaller than the given ones in technical parameters (significant influence of the operational relay operating time, processor start-time, and the moment of supply switching as referred to the AC supply course). ⑤ Calculated from the final range values, for the setting direction from minimum to maximum.


Time functions

E - ON delay.




On applying the supply voltage U the set interval T begins - off-delay of the output relay R. After the interval T has lapsed, the output relay R switches on and remains on until supply voltage U is interrupted.

Wu - ON for the set interval.




Applying the supply voltage U immediately switches the output relay R on for the set interval T. After the interval T has lapsed, the output relay R switches off.

Bp - Symmetrical cyclical operation pause first.




Applying the supply voltage U starts the cyclical operation from the interval T - switching the output relay R off followed by switching on the output relay R for the interval T. The cyclical operation lasts until the supply voltage U is interrupted.

Bi - Symmetrical cyclical operation pulse first.




Applying the supply voltage U starts the cyclical operation from switching on the output relay R for the set interval T. After the interval T has lapsed, the output relay R switches off for the interval T. The cyclical operation lasts until the supply voltage U is interrupted.

R - OFF delay with the control contact S.




The input of the time relay is supplied with voltage U continuously. Closing of the control contact S immediately switches on the output relay R. Opening of the control contact S starts the set time of the delayed switching off of the output relay R. After the interval T has lapsed, the output relay R switches off. If the control contact S is closed during the interval T, the already measured time is reset, and the output relay R is switched on again. The OFF delay of the output relay R will start when the control contact S is opened again.

Ws - Single shot for the set interval triggered by closing of the control contact S.




The input of the time relay is supplied with voltage U continuously. Closing of the control contact S immediately switches the output relay R on for the set interval T. After the interval T has lapsed, the output relay R is switched off. In the course of the interval T, any opening of the control contact S does not affect the function to be performed. The output relay R may be switched on again for the set interval, after the interval T has lapsed, by closing the control contact S again.

Wa - ON for the set interval triggered with the control contact S.



The input of the time relay is supplied with voltage U continuously. Closing of the control contact S does not start the interval T, and it does not change the position of the output relay R. Opening of the control contact S immediately switches on the output relay R for the set time. After the interval T has lapsed, the output relay R switches off. Opening and closing of the control contact S in the course of the interval T does not affect the function to be performed. The output relay R may be switched on again for the set interval with another closing and opening of the control contact S.

Esa - ON and OFF delay with the control contact S.




The input of the time relay is supplied with voltage U continuously. Closing of the control contact S starts the interval T - on-delay of the output relay R. After the interval T has lapsed, the output relay R switches on. Opening of the control contact S begins further measurement of the interval T - off-delay of the output relay R, and after the interval has lapsed, the output relay switches off. In case the time for which the control contact S is closed in the course of measurement of the on-delay of the output relay R is shorter than the set interval T, the output relay R will switch on after the set interval T, and the output relay R will remain in on position for the interval T. When the output relay R is in on position, closing of the control contact S does not affect the function to be performed.

U - supply voltage; R - output state of the relay; S - control contact state; T - measured time; t - time axis

Time functions


B - Cyclical operation controlled with closing of the control contact S.



The input of the time relay is supplied with U voltage continuously. Closing of the control contact S immediately switches on the output relay R. Each next closing of the control contact S results in a change of the status of the output relay R to an opposite one (the feature of a bistable relay).

U - supply voltage; R - output state of the relay; S - control contact state; T - measured time; t - time axis

T - Generation of the 0,5 s pulse after the interval T.



Applying the supply voltage U starts the interval T. After the interval T has lapsed, the output relay switches on for 0,5 s (the time of the NO contact of the output relay).

ON / OFF - Permanent switching on / off.
The functions ON and OFF are selected with T time range adjusting knob. In the ON function, the normally open contacts are closed all the time whereas in the OFF function they are open. The position of the function-adjusting knob is of no significance in these functions as is the preset measurement time. The ON or OFF functions are used for the time relay operation control in electric systems.

Additional functions


Supply diode: it is lit permanently when the time is not being measured. In course of the T time measurement, it flashes at 500 ms period where it is lit for 50% of the time, and off for 50% of the time.

Adjustment of the set values:
- the values of time and range are read in the course of the relay's operation. The set values may be modified at any moment,
- no change of the function is possible in the course of the relay's operation. Any change of the settings of the relay shall be read only after the supply voltage has been switched off and on again.

Release: depending on the function to be performed, the relay is released with the supply voltage or by connection of the S contact to the A1 line. For DC supply, the positive pole must be connected to the A1 line. The level of the S contact activation is adjusted automatically depending on the supply voltage.


Supply:
- **RPC-...-A230:** the relay may be supplied with AC voltage 48...63 Hz of 207...253 V,
- **RPC-...-UNI:** the relay may be supplied with DC voltage or AC voltage 48...63 Hz of 10,8...264 V.

Dimensions

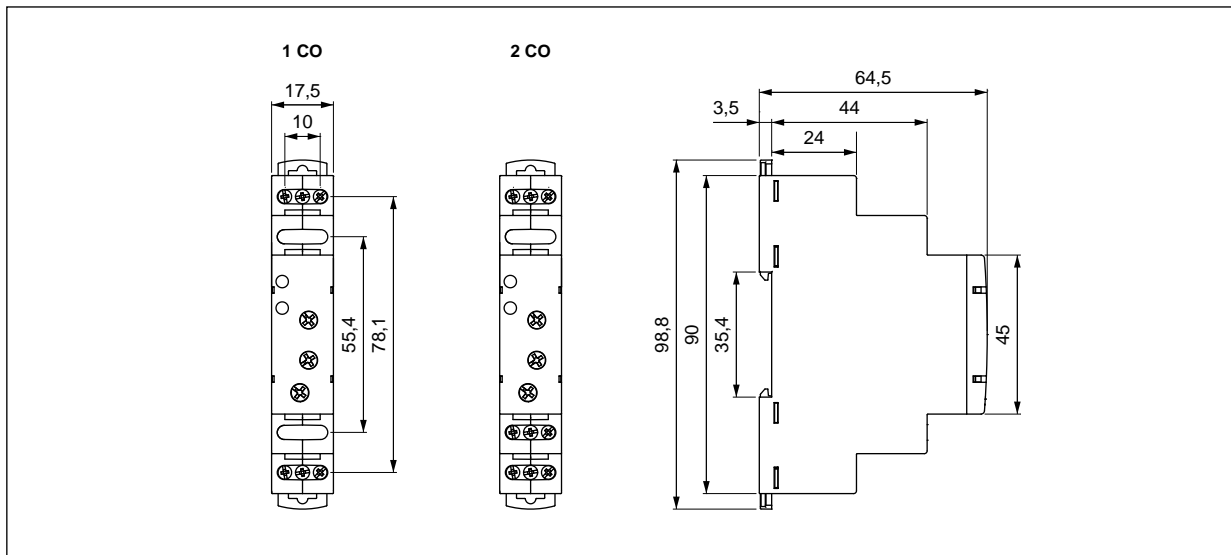


TIME

Front panel description

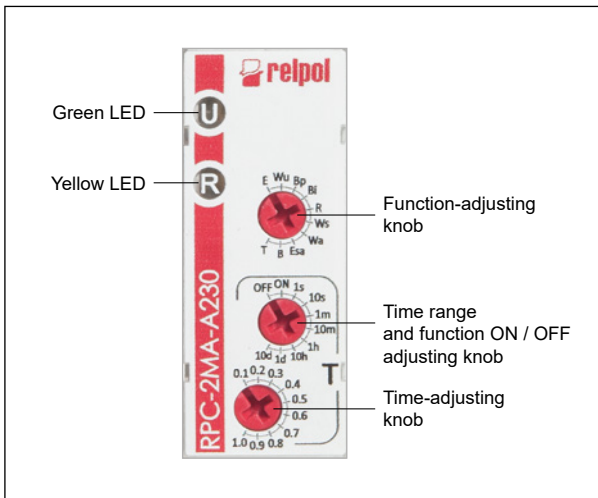

Connection diagrams

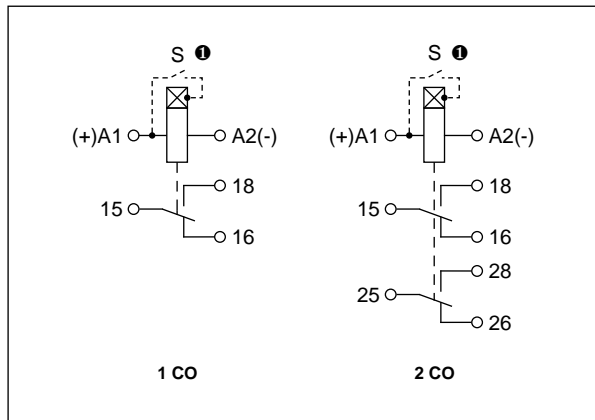

Note: the indicated polarity of the supply refers only to the relays RPC-...-UNI. ❶ The control terminal S is activated by connection to A1 terminal via the external control contact S.

Mounting

Relays **RPC-.MA-...** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - any. **Connections:** max. cross section of the cables: 1 x 2,5 mm² (1 x 14 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,5 Nm.




Two catches: easy mounting on 35 mm rail, firm hold (top and bottom).



Mounting wires in clamps: universal screw (cross-recessed or slotted head).

Ordering codes

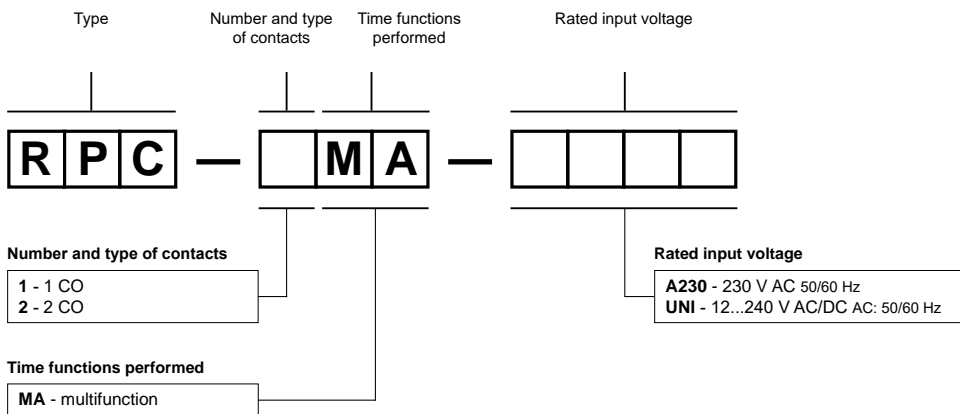

Examples of ordering codes:

RPC-1MA-A230

time relay **RPC-.MA-...**, multifunction (relay perform 10 functions), cover - modular, width 17,5 mm, one changeover contact, contact material AgSnO₂, rated input voltage 230 V AC 50/60 Hz

RPC-2MA-UNI

time relay **RPC-.MA-...**, multifunction (relay perform 10 functions), cover - modular, width 17,5 mm, two changeover contacts, contact material AgSnO₂, rated input voltage 12...240 V AC/DC AC: 50/60 Hz



RPC-1MB-UNI



RPC-2MB-A230



- **Multifunction time relays (10 time functions; 8 time ranges)** • Cadmium - free contacts 1 CO and 2 CO
- AC and AC/DC input voltages
- Cover - modular, width 17,5 mm
- Direct mounting on 35 mm rail mount acc. to EN 60715
- Applications: in low-voltage systems
- Compliance with standard EN 61812-1
- Recognitions, certifications, directives: RoHS, **CE ENEC**


Output circuit - contact data

Number and type of contacts		1 CO	2 CO
Contact material		AgSnO ₂	
Max. switching voltage	AC	300 V	
Rated load	AC1	16 A / 250 V AC	8 A / 250 V AC
	DC1	16 A / 24 V DC	8 A / 24 V DC
	DC1	0,3 A / 250 V DC	0,3 A / 250 V DC
Rated current		16 A / 250 V AC	8 A / 250 V AC
Max. breaking capacity	AC1	4 000 VA	2 000 VA
Min. breaking capacity		1 W 10 mA	
Contact resistance		≤ 100 mΩ	
Max. operating frequency		600 cycles/hour at rated load AC1	
Input circuit			
Rated voltage	50/60 Hz AC	230 V terminals A1, A2	
	AC: 50/60 Hz AC/DC	12...240 V terminals (+)A1, (-)A2	
Must release voltage		≥ 0,1 U _n	
Operating range of supply voltage		0,9...1,1 U _n	
Rated power consumption	AC	≤ 3,5 VA 230 V AC, 50 Hz	≤ 1,5 VA 12...240 V AC/DC, AC: 50 Hz
	DC	≤ 1,5 W 12...240 V AC/DC	
Range of supply frequency	AC	48...63 Hz	
Control contact S ①	• min. voltage ②	0,7 U _n	
	• min. time of pulse duration ③	AC: ≥ 50 ms	DC: ≥ 30 ms
	• max. length of control line	10 m	
Insulation according to EN 60664-1			
Insulation rated voltage		250 V AC	
Rated surge voltage		4 000 V 1,2 / 50 μs	
Overvoltage category		III	
Insulation pollution degree		2	
Flammability class		cover: V-0	front panel: V-2 UL 94
Dielectric strength	• input - output	4 000 V AC	type of insulation: basic
	• contact clearance	1 000 V AC	type of clearance: micro-disconnection
	• pole - pole	2 000 V AC	contacts 2 CO, type of insulation: basic
General data			
Electrical life	• resistive AC1	> 0,5 x 10 ⁵	8 A/16 A, 250 V AC
Mechanical life (cycles)		> 3 x 10 ⁷	
Dimensions (L x W x H) / Weight		90 ④ x 17,5 x 64,5 mm / contact 1 CO: 65...66 g, contacts 2 CO: 72...73 g	
Ambient temperature	• storage	-40...+70 °C	
	• operating	-20...+50 °C	
Cover protection category		IP 20	EN 60529
Relative humidity		up to 85%	
Shock / vibration resistance		15 g / 0,35 mm DA 10...55 Hz	
Time module data			
Functions		E, Wu, Bp, Bi, Ra, Wst, Wi, Esp, Est	
Time ranges		OFF - permanent switching off; ON - permanent switching on 1 s ⑤; 10 s; 1 min.; 10 min.; 1 h; 10 h; 1 d; 10 d	
Timing adjustment		smooth - (0,1...1) x time range (does not refer to range ON / OFF)	
Setting accuracy / Repeatability		± 5% ⑥ ⑦ / ± 0,5% ⑧	
Values affecting the timing adjustment		temperature: ± 0,05% / °C	supply voltage: ± 0,01% / V
Recovery time	AC	≤ 150 ms 230 V AC, 50 Hz	≤ 400 ms 12...240 V AC/DC, AC: 50 Hz
	DC	≤ 150 ms 12...240 V AC/DC	
LED indicator		green LED U ON - indication of supply voltage U green LED U flashing - measurement of T time yellow LED R ON/OFF - output relay status	

① The control terminal S is activated by connection to A1 terminal via the external control contact S. ② Where the control signal is recognizable.
③ Length with 35 mm rail catches: 98,8 mm. ④ For first range setpoint (1 s) setting accuracy and repeatability are smaller than the given ones in technical parameters (significant influence of the operational relay operating time, processor start-time, and the moment of supply switching as referred to the AC supply course). ⑤ Calculated from the final range values, for the setting direction from minimum to maximum.


Time functions

E - ON delay.




On applying the supply voltage U the set interval T begins - off-delay of the output relay R. After the interval T has lapsed, the output relay R switches on and remains on until supply voltage U is interrupted.

Wu - ON for the set interval.




Applying the supply voltage U immediately switches the output relay R on for the set interval T. After the interval T has lapsed, the output relay R switches off.

Bp - Symmetrical cyclical operation pause first.




Applying the supply voltage U starts the cyclical operation from the interval T - switching the output relay R off followed by switching on the output relay R for the interval T. The cyclical operation lasts until the supply voltage U is interrupted.

Bi - Symmetrical cyclical operation pulse first.



Applying the supply voltage U starts the cyclical operation from switching on the output relay R for the set interval T. After the interval T has lapsed, the output relay R switches off for the interval T. The cyclical operation lasts until the supply voltage U is interrupted.

Ra - OFF delay with the control contact S, without the interval T extension.



The input of the time relay is supplied with voltage U continuously. Closing of the control contact S immediately switches on the output relay R. Opening of the control contact S starts the set time of the delayed switching off of the output relay R. After the interval T has lapsed, the output relay R switches off. Opening or closing of the control contact S within the interval T does not affect the function to be performed.


U - supply voltage; **R** - output state of the relay; **S** - control contact state; **T** - measured time; **t** - time axis

Wst - ON for the set interval by closing the control contact S, with extension of the interval T - extension of the time of switching on the output relay R.




The input of the time relay is supplied with voltage U continuously. Closing of the control contact S immediately switches the output relay R on for the set interval T. After the interval T has lapsed, the output relay R is switched off. The next closing of the control contact S immediately switches on the output relay R for the interval T. In case the control contact S is closed within the interval T, the measured time is cancelled, and the interval T starts again.

Wi - ON for the set interval controlled by closing of the control contact S, with the function of switching off the output relay R prior to the lapse of the interval T.




The input of the time relay is supplied with voltage U continuously. Closing of the control contact S immediately switches the output relay R on for the set interval T. After the interval T has lapsed, the output relay R is switched off. Any next closing of the control contact S switches on the output relay R again. In case the control contact S is closed again during the interval T, the output relay is immediately switched off, and the measured interval is cancelled. In the course of the interval T, any opening of the control contact S does not affect the function to be performed.

Esf - ON delay with the control contact S, without the interval T extension.



The input of the time relay is supplied with voltage U continuously. Closing of the control contact S starts the interval T - on-delay of the output relay R. After the interval T has lapsed, the output relay R switches on and remains in this position until the control contact S is closed again, which instantly switches the output relay off for the time T, and after the interval T has lapsed, the output relay R switches on again. In the course of measurement of the interval T, opening or closing of the control contact S does not affect the status of the output relay R. The output relay R may be switched on again after the current cycle has been completed.


Esp - ON delay - one cycle, with closing of the control contact S.



The input of the time relay is supplied with voltage U continuously. Closing of the control contact S starts the interval T, and after the interval T has lapsed, the output relay R switches on and remains in this position until the supply voltage U is interrupted. When the output relay R is on, opening or closing of the control contact S does not affect its status.

Time functions

Est - ON delay with closing of the control contact S, with the interval T extended.



The input of the time relay is supplied with voltage U continuously. Closing of the control contact S starts the interval T, and after the interval T has lapsed, the output relay R switches on and remains in this position until the control contact S is closed again or until the supply voltage U is interrupted. Closing of the control contact S resets the thus far measured time and starts the new interval T.

ON / OFF - Permanent switching on / off.

The functions ON and OFF are selected with T time range adjusting knob. In the ON function, the normally open contacts are closed all the time whereas in the OFF function they are open. The position of the function-adjusting knob is of no significance in these functions as is the preset measurement time. The ON or OFF functions are used for the time relay operation control in electric systems.

U - supply voltage; R - output state of the relay; S - control contact state; T - measured time; t - time axis

Additional functions

Supply diode: it is lit permanently when the time is not being measured. In course of the T time measurement, it flashes at 500 ms period where it is lit for 50% of the time, and off for 50% of the time.

Adjustment of the set values:


- the values of time and range are read in the course of the relay's operation. The set values may be modified at any moment,
- no change of the function is possible in the course of the relay's operation. Any change of the settings of the relay shall be read only after the supply voltage has been switched off and on again.

Release: depending on the function to be performed, the relay is released with the supply voltage or by connection of the S contact to the A1 line. For DC supply, the positive pole must be connected to the A1 line. The level of the S contact activation is adjusted automatically depending on the supply voltage.

Supply:


- **RPC-...-A230:** the relay may be supplied with AC voltage 48...63 Hz of 207...253 V,
- **RPC-...-UNI:** the relay may be supplied with DC voltage or AC voltage 48...63 Hz of 10,8...264 V.

Dimensions

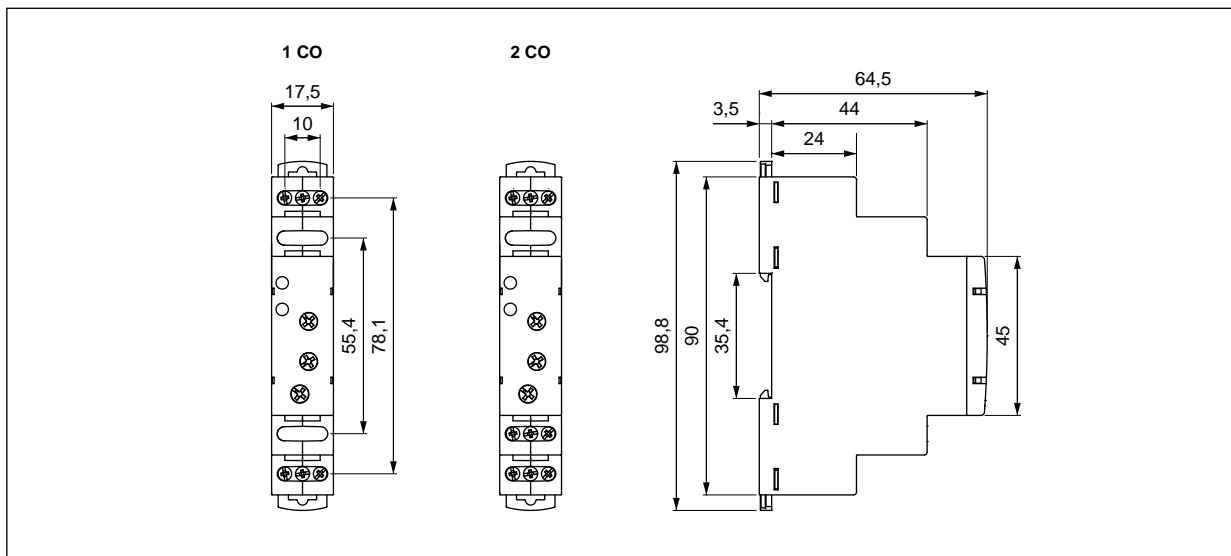


TIME

Front panel description

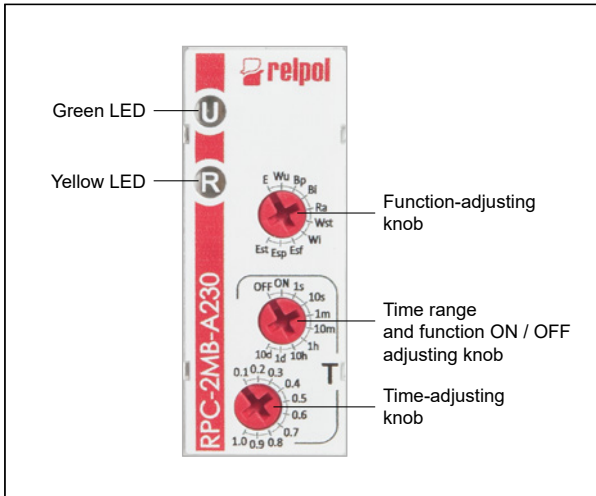


Connection diagrams

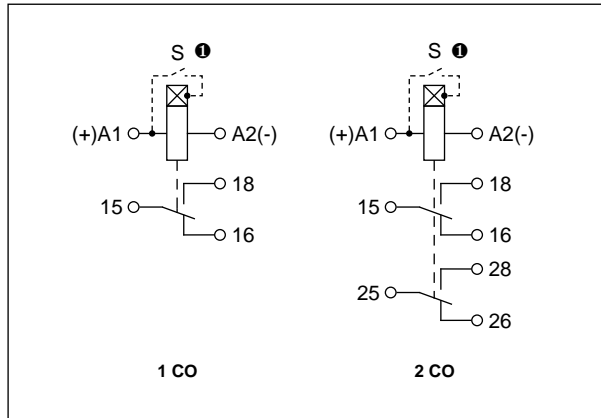


Note: the indicated polarity of the supply refers only to the relays RPC-...-UNI. ❶ The control terminal S is activated by connection to A1 terminal via the external control contact S.

Mounting

Relays **RPC-.MB-...** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - any. **Connections:** max. cross section of the cables: 1 x 2,5 mm² (1 x 14 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,5 Nm.




Two catches:
easy mounting
on 35 mm rail,
firm hold
(top and bottom).



**Mounting wires
in clamps:**
universal screw
(cross-recessed
or slotted head).

Ordering codes

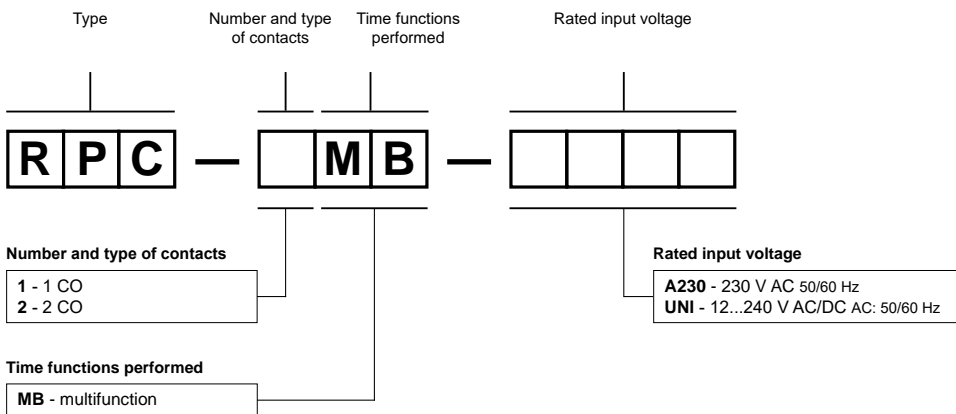

Examples of ordering codes:

RPC-1MB-A230

time relay **RPC-.MB-...**, multifunction (relay perform 10 functions), cover - modular, width 17,5 mm, one changeover contact, contact material AgSnO₂, rated input voltage 230 V AC 50/60 Hz

RPC-2MB-UNI

time relay **RPC-.MB-...**, multifunction (relay perform 10 functions), cover - modular, width 17,5 mm, two changeover contacts, contact material AgSnO₂, rated input voltage 12...240 V AC/DC AC: 50/60 Hz



RPC-1MC-UNI



- **Multifunction time relays (14 time functions; 8 time ranges)**
- Cadmium - free contacts 1 CO
- AC/DC input voltages
- Cover - modular, width 17,5 mm
- Direct mounting on 35 mm rail mount acc. to EN 60715
- Applications: in low-voltage systems
- Compliance with standard EN 61812-1
- Recognitions, certifications, directives: RoHS, **CE EAC**


Output circuit - contact data

Number and type of contacts		1 CO
Contact material		AgSnO ₂
Max. switching voltage	AC	300 V
Rated load	AC1	16 A / 250 V AC
	DC1	16 A / 24 V DC; 0,3 A / 250 V DC
Rated current		16 A / 250 V AC
Max. breaking capacity	AC1	4 000 VA
Min. breaking capacity		1 W 10 mA
Contact resistance		≤ 100 mΩ
Max. operating frequency		
• at rated load	AC1	600 cycles/hour
Input circuit		
Rated voltage	AC: 50/60 Hz AC/DC	12...240 V terminals (+)A1, (-)A2
Must release voltage		≥ 0,1 U _n
Operating range of supply voltage		0,9...1,1 U _n
Rated power consumption	AC	≤ 1,5 VA AC: 50 Hz
	DC	≤ 1,5 W
Range of supply frequency	AC	48...63 Hz
Control contact S ①	• min. voltage ②	0,7 U _n
	• min. time of pulse duration ③	AC: ≥ 50 ms DC: ≥ 30 ms
	• max. length of control line	10 m
Insulation according to EN 60664-1		
Insulation rated voltage		250 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		2
Flammability class		cover: V-0 front panel: V-2 UL 94
Dielectric strength	• input - output	4 000 V AC type of insulation: basic
	• contact clearance	1 000 V AC type of clearance: micro-disconnection
General data		
Electrical life	• resistive AC1	> 0,5 x 10 ⁵ 16 A, 250 V AC
Mechanical life (cycles)		> 3 x 10 ⁷
Dimensions (L x W x H) / Weight		90 ④ x 17,5 x 64,5 mm / 65 g
Ambient temperature	• storage	-40...+70 °C
(non-condensation and/or icing)	• operating	-20...+50 °C
Cover protection category		IP 20 EN 60529
Relative humidity		up to 85%
Shock / vibration resistance		15 g / 0,35 mm DA 10...55 Hz
Time module data		
Functions		E, E(S), Wu, Wu(S), Bp, Bp(S), Bi, Bi(S), R, Ws, Wa, Esa(R), E(R), Wu(R)
Time ranges		OFF - permanent switching off; ON - permanent switching on 1 s ⑤; 10 s; 1 min.; 10 min.; 1 h; 10 h; 1 d; 10 d
Timing adjustment		smooth - (0,1...1) x time range (does not refer to range ON / OFF)
Setting accuracy		± 5% ⑥ ④
Repeatability		± 0,5% ④
Values affecting the timing adjustment		temperature: ± 0,05% / °C supply voltage: ± 0,01% / V
Recovery time		AC: ≤ 400 ms DC: ≤ 150 ms
LED indicator		green LED U ON - indication of supply voltage U green LED U flashing - measurement of T time yellow LED R ON/OFF - output relay status

① The control terminal S is activated by connection to A1 terminal via the external control contact S. ② Where the control signal is recognizable. ③ Length with 35 mm rail catches: 98,8 mm. ④ For first range setpoint (1 s) setting accuracy and repeatability are smaller than the given ones in technical parameters (significant influence of the operational relay operating time, processor start-time, and the moment of supply switching as referred to the AC supply course). ⑤ Calculated from the final range values, for the setting direction from minimum to maximum.


Time functions

E - ON delay.




On applying the supply voltage U the set interval T begins - off-delay of the output relay R. After the interval T has lapsed, the output relay R switches on and remains on until supply voltage U is interrupted.

E(S) - ON delay, with time measurement stopped with contact S.




On applying the supply voltage U the set interval T begins. If during measuring time T control contact S is closed, measuring of time T is stopped for the time of closing contact S. Opening of control contact S resumes measuring of time T. After finishing measuring time T, the output relay R switches on and remains on until supply voltage U is interrupted.

Wu - ON for the set interval.




Applying the supply voltage U immediately switches the output relay R on for the set interval T. After the interval T has lapsed, the output relay R switches off.

Wu(S) - ON for the set interval, with time measurement stopped with closing of contact S.



Applying the supply voltage U immediately switches the output relay R on for the set interval T. If the control contact S is closed, the interval T measurement will be stopped until the moment when control contact is opened. Opening contact S starts further measuring of time T. After finishing measuring time T, the output relay R switches off.


Bp - Symmetrical cyclical operation pause first.



Applying the supply voltage U starts the cyclical operation from the interval T - switching the output relay R off followed by switching on the output relay R for the interval T. The cyclical operation lasts until the supply voltage U is interrupted.


U - supply voltage; R - output state of the relay; S - control contact state; T - measured time; t - time axis

Bp(S) - Symmetrical cyclical operation pause first, with interval T measurement stopped for the time the S contact is switched on.




Applying the supply voltage U starts the cyclical operation from the interval T - switching the output relay R off. If in the course of measurement of the interval T the control contact S is closed, the measurement of the time of switching off the R relay will be interrupted for the time the S contact remains closed. Opening of the control contact S triggers further measurement of the interval T. After the interval T has lapsed, the output relay R switches on for the set interval T. If during the measurement of the interval T the control contact S is closed, measurement of the time of switching on the R relay will be interrupted for the time the S contact remains closed. Opening of the control contact S triggers further measurement of the interval T. The cyclical operation lasts until the supply voltage U is interrupted.

Bi - Symmetrical cyclical operation pulse first.




Applying the supply voltage U starts the cyclical operation from switching on the output relay R for the set interval T. After the interval T has lapsed, the output relay R switches off for the interval T. The cyclical operation lasts until the supply voltage U is interrupted.

Bi(S) - Symmetrical cyclical operation pulse first, with interval T measurement stopped for the time the S contact is switched on.



Applying the supply voltage U starts cyclical operation from measurement of the interval T - switching on the output relay R. If in the course of measurement of the interval T the control contact S is closed, the measurement of the time of switching off the R relay will be interrupted for the time the S contact remains closed. Opening of the control contact S triggers further measurement of the interval T. After the interval T has lapsed, the output relay R switches on for the set interval T. If during the measurement of the interval T the control contact S is closed, measurement of the time of switching off the R relay will be interrupted for the time the S contact remains closed. Opening of the control contact S triggers further measurement of the interval T. The cyclical operation lasts until the supply voltage U is interrupted.


R - OFF delay with the control contact S.



The input of the time relay is supplied with voltage U continuously. Closing of the control contact S immediately switches on the output relay R. Opening of the control contact S starts the set time of the delayed switching off of the output relay R. After the interval T has lapsed, the output relay R switches off. If the control contact S is closed during the interval T, the already measured time is reset, and the output relay R is switched on again. The OFF delay of the output relay R will start when the control contact S is opened again.


Time functions

Ws - Single shot for the set interval triggered by closing of the control contact S.




The input of the time relay is supplied with voltage U continuously. Closing of the control contact S immediately switches the output relay R on for the set interval T. After the interval T has lapsed, the output relay R is switched off. In the course of the interval T, any opening of the control contact S does not affect the function to be performed. The output relay R may be switched on again for the set interval, after the interval T has lapsed, by closing the control contact S again.

Wa - ON for the set interval triggered with the control contact S.



The input of the time relay is supplied with voltage U continuously. Closing of the control contact S does not start the interval T, and it does not change the position of the output relay R. Opening of the control contact S immediately switches on the output relay R for the set time. After the interval T has lapsed, the output relay R switches off. Opening and closing of the control contact S in the course of the interval T does not affect the function to be performed. The output relay R may be switched on again for the set interval with another closing and opening of the control contact S.


Esa(R) - ON and OFF delay controlled with on and off of the S contact with the Reset function.



The input of the time relay is supplied with voltage U continuously. Closing of the control contact S begins the measurement of the set interval T - ON delay of the output relay R. If the control contact S is opened during the measurement of the interval T - ON delay of the output relay R, the measured time will be reset. The interval T measurement will start after the control contact S has been closed. After the set interval T has lapsed,


the output relay R switches on. Opening of the control contact S will again trigger measurement of the set interval T - OFF delay of the output relay R, and after the interval has been measured, the output relay R switches off. If the control contact S is closed during the interval T measurement, the measured time will be reset. Opening of the control contact S will again trigger measurement of the interval T.

E(R) - ON delay with the Reset function.



On applying the supply voltage U the set interval T begins. After the interval T has lapsed, output relay R turns on. If control contact S is closed during the measurement T, measuring of interval T is stopped for the time the S contact remains closed. After opening contact S, time T is measured from the start. After the interval T has lapsed, the output relay R switches on until the moment of turning off supply voltage U or when the control contact S is closed again.

Wu(R) - ON for the set interval with the Reset function.



Applying the supply voltage U immediately switches the output relay R on for the set interval T. When control contact S is closed, measurement of the interval T is stopped for the time of closing contact S (with output relay R on). After opening contact S, time T is measured from the beginning. After the interval T has lapsed, the output relay R switches off.

ON / OFF - Permanent switching on / off.

The functions ON and OFF are selected with T time range adjusting knob. In the ON function, the normally open contacts are closed all the time whereas in the OFF function they are open. The position of the function-adjusting knob is of no significance in these functions as is the preset measurement time. The ON or OFF functions are used for the time relay operation control in electric systems.

U - supply voltage; R - output state of the relay; S - control contact state; T - measured time; t - time axis

Additional functions

Supply diode: it is lit permanently when the time is not being measured. In course of the T time measurement, it flashes at 500 ms period where it is lit for 50% of the time, and off for 50% of the time.


Adjustment of the set values:

- the values of time and range are read in the course of the relay's operation. The set values may be modified at any moment,
- it is possible to change the function during operation of the relay, which results in triggering operation with a new setting. It is not necessary to switch the supply off and on again for the relay to start operating with a new setting.

Release: depending on the function to be performed, the relay is released with the supply voltage or by connection of the S contact to the A1 line. For DC supply, the positive pole must be connected to the A1 line. The level of the S contact activation is adjusted automatically depending on the supply voltage.


Supply: the relay may be supplied with DC voltage or AC voltage 48...63 Hz of 10,8...264 V.

Connection diagram




① The control terminal S is activated by connection to A1 terminal via the external control contact S.

Front panel description

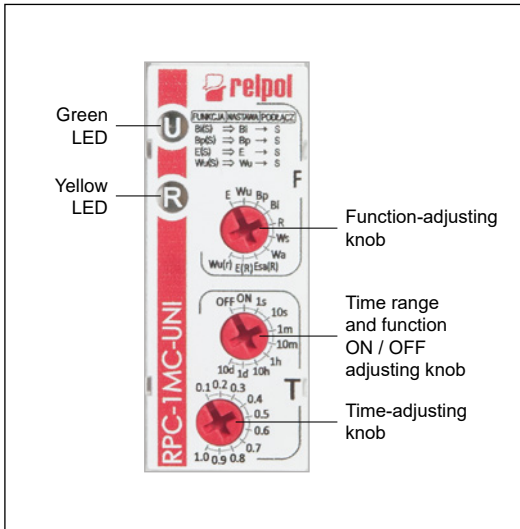


Dimensions

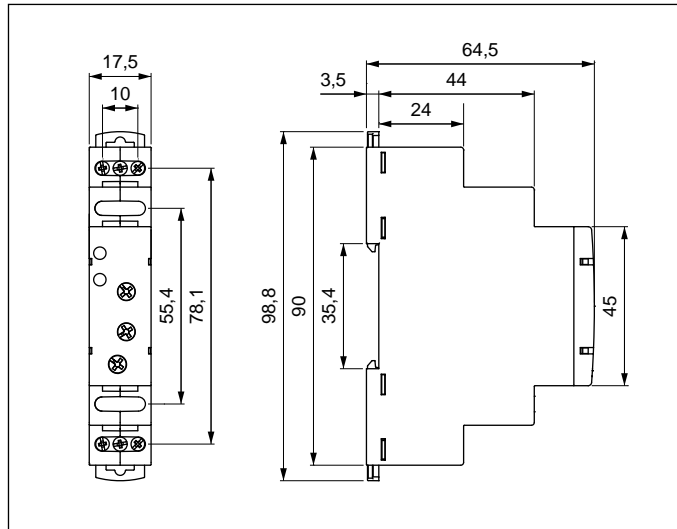


Mounting

Relays **RPC-1MC-UNI** are designed for direct mounting on 35 mm rail acc. to EN 60715. Operational position - any. **Connections:** max. cross section of the cables: 1 x 2,5 mm² (1 x 14 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,5 Nm.




Two catches:
easy mounting on 35 mm rail, firm hold (top and bottom).



Mounting wires in clamps:
universal screw (cross-recessed or slotted head).

Ordering codes

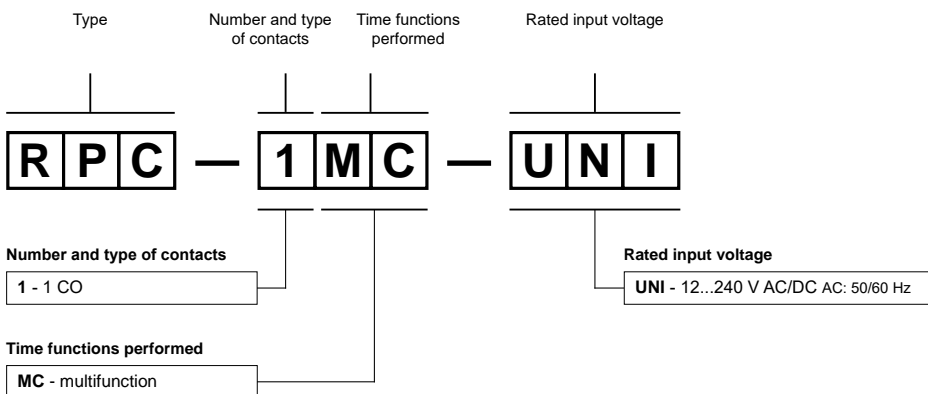

Example of ordering codes:

RPC-1MC-UNI

time relay **RPC-1MC-UNI**, multifunction (relay perform 14 functions), cover - modular, width 17,5 mm, one changeover contact, contact material AgSnO₂, rated input voltage 12...240 V AC/DC AC: 50/60 Hz



RPC-1E-UNI



RPC-2BP-UNI



- **Single-function time relays (3 versions of relays with 1 time function 0; 8 time ranges)** • Cadmium - free contacts 1 CO and 2 CO • AC and AC/DC input voltages
- Cover - modular, width 17,5 mm
- Direct mounting on 35 mm rail mount acc. to EN 60715
- Applications: in low-voltage systems
- Compliance with standard EN 61812-1
- Recognitions, certifications, directives: RoHS, **CE ENEC**

Output circuit - contact data


Number and type of contacts		1 CO	2 CO
Contact material		AgSnO ₂	
Max. switching voltage AC		300 V	
Rated load	AC1	16 A / 250 V AC	8 A / 250 V AC
	DC1	16 A / 24 V DC	8 A / 24 V DC
	DC1	0,3 A / 250 V DC	0,3 A / 250 V DC
Rated current		16 A / 250 V AC	8 A / 250 V AC
Max. breaking capacity AC1		4 000 VA	2 000 VA
Min. breaking capacity		1 W 10 mA	
Contact resistance		≤ 100 mΩ	
Max. operating frequency		600 cycles/hour	
• at rated load AC1			
Input circuit			
Rated voltage	50/60 Hz AC	230 V terminals A1, A2	
	AC: 50/60 Hz AC/DC	12...240 V terminals (+)A1, (-)A2	
Must release voltage		≥ 0,1 U _n	
Operating range of supply voltage		0,9...1,1 U _n	
Rated power consumption	AC	≤ 3,5 VA 230 V AC, 50 Hz	≤ 1,5 VA 12...240 V AC/DC, AC: 50 Hz
	DC	≤ 1,5 W 12...240 V AC/DC	
Range of supply frequency AC		48...63 Hz	
Insulation according to EN 60664-1			
Insulation rated voltage		250 V AC	
Rated surge voltage		4 000 V 1,2 / 50 μs	
Overvoltage category		III	
Insulation pollution degree		2	
Flammability class		cover: V-0	front panel: V-2 UL 94
Dielectric strength	• input - output	4 000 V AC type of insulation: basic	
	• contact clearance	1 000 V AC type of clearance: micro-disconnection	
	• pole - pole	2 000 V AC contacts 2 CO, type of insulation: basic	
General data			
Electrical life • resistive AC1		> 0,5 x 10 ⁵ 8 A/16 A, 250 V AC	
Mechanical life (cycles)		> 3 x 10 ⁷	
Dimensions (L x W x H) / Weight		90 ② x 17,5 x 64,5 mm / contact 1 CO: 64...71 g, contacts 2 CO: 70...71 g	
Ambient temperature (non-condensation and/or icing)		-40...+70 °C • storage	
Cover protection category		IP 20 EN 60529	
Relative humidity		up to 85%	
Shock / vibration resistance		15 g / 0,35 mm DA 10...55 Hz	
Time module data			
Functions ①		E, Wu, Bp	
Time ranges		OFF - permanent switching off; ON - permanent switching on 1 s ③; 10 s; 1 min.; 10 min.; 1 h; 10 h; 1 d; 10 d	
Timing adjustment		smooth - (0,1...1) x time range (does not refer to range ON / OFF)	
Setting accuracy / Repeatability		± 5% ④ ⑤ / ± 0,5% ⑥	
Values affecting the timing adjustment		temperature: ± 0,05% / °C	supply voltage: ± 0,01% / V
Recovery time	AC	≤ 150 ms 230 V AC, 50 Hz	≤ 400 ms 12...240 V AC/DC, AC: 50 Hz
	DC	≤ 150 ms 12...240 V AC/DC	
LED indicator		green LED U ON - indication of supply voltage U green LED U flashing - measurement of T time yellow LED R ON/OFF - output relay status	

① Codes of versions - see "Ordering codes", page 299 and descriptions of time functions, page 298. ② Length with 35 mm rail catches: 98,8 mm. ③ For first range setpoint (1 s) setting accuracy and repeatability are smaller than the given ones in technical parameters (significant influence of the operational relay operating time, processor start-time, and the moment of supply switching as referred to the AC supply course). ④ Calculated from the final range values, for the setting direction from minimum to maximum.

Time functions

E - ON delay.


Codes of versions: **RPC-.E-...**



On applying the supply voltage U the set interval T begins - off-delay of the output relay R. After the interval T has lapsed, the output relay R switches on and remains on until supply voltage U is interrupted.

Wu - ON for the set interval.


Codes of versions: **RPC-.WU-...**



Applying the supply voltage U immediately switches the output relay R on for the set interval T. After the interval T has lapsed, the output relay R switches off.

Bp - Symmetrical cyclical operation pause first.

Codes of versions: **RPC-.BP-...**



Applying the supply voltage U starts the cyclical operation from the interval T - switching the output relay R off followed by switching on the output relay R for the interval T. The cyclical operation lasts until the supply voltage U is interrupted.

ON / OFF - Permanent switching on / off.

The functions ON and OFF are selected with T time range adjusting knob. In the ON function, the normally open contacts are closed all the time whereas in the OFF function they are open. The preset measurement time is of no significance in these functions. The ON or OFF functions are used for the time relay operation control in electric systems.

U - supply voltage; R - output state of the relay; S - control contact state; T - measured time; t - time axis

Additional functions

Supply diode: it is lit permanently when the time is not being measured. In course of the T time measurement, it flashes at 500 ms period where it is lit for 50% of the time, and off for 50% of the time.


Adjustment of the set values: the values of time and range are read in the course of the relay's operation. The set values may be modified at any moment.

Release: the relay is released with the supply voltage.


Supply:

- **RPC-...-A230:** the relay may be supplied with AC voltage 48...63 Hz of 207...253 V,
- **RPC-...-UNI:** the relay may be supplied with DC voltage or AC voltage 48...63 Hz of 10,8...264 V.


Dimensions

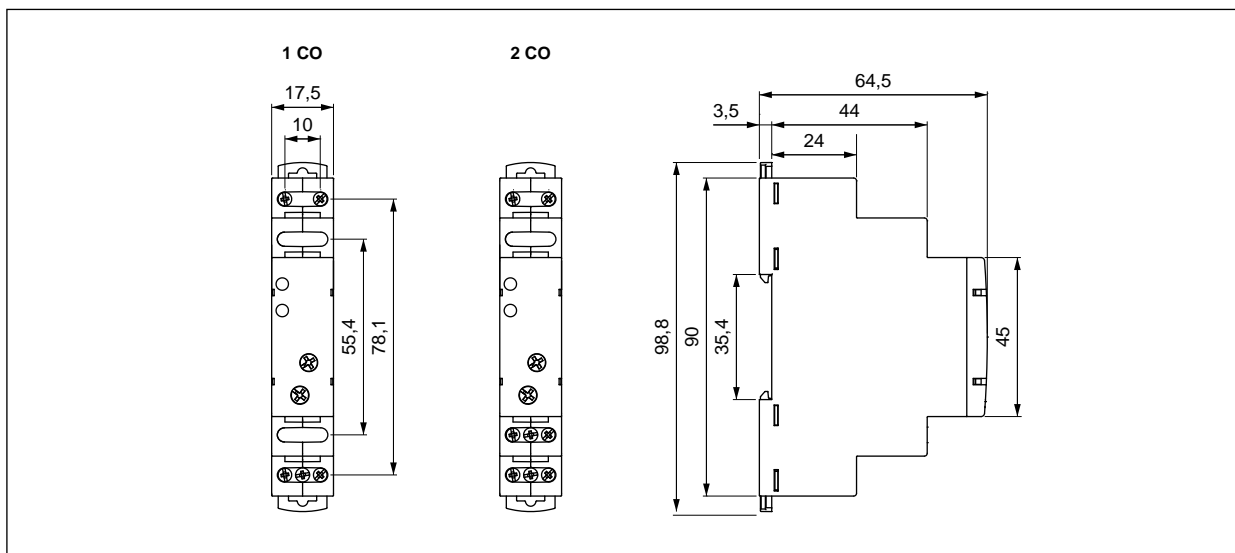

Front panel description

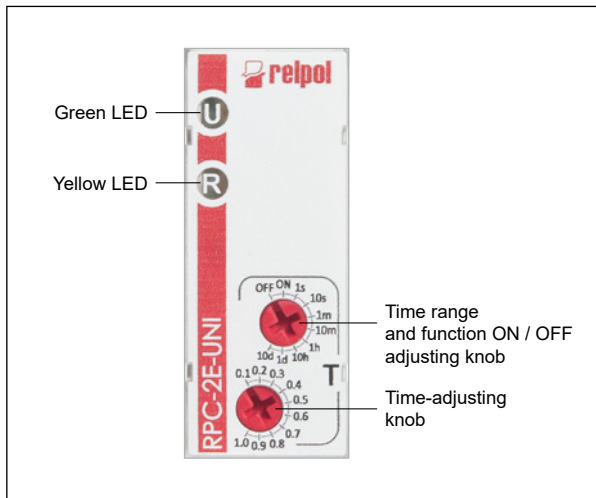

Connection diagrams

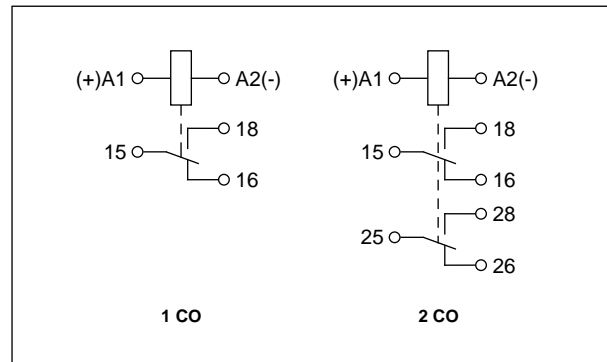

Note: the indicated polarity of the supply refers only to the relays RPC-...-UNI.

Mounting

Relays **RPC-...-...** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - any. **Connections:** max. cross section of the cables: 1 x 2,5 mm² (1 x 14 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,5 Nm.




Two catches:
easy mounting
on 35 mm rail,
firm hold
(top and bottom).



**Mounting wires
in clamps:**
universal screw
(cross-recessed
or slotted head).

Ordering codes

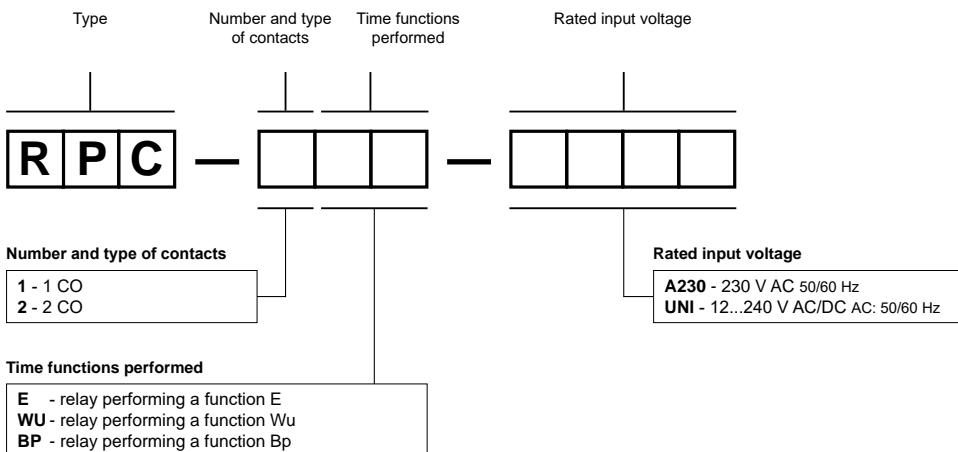

Examples of ordering codes:

RPC-1E-A230

time relay **RPC-E-...**, single-function (relay perform function E), cover - modular, width 17,5 mm, one changeover contact, contact material AgSnO₂, rated input voltage 230 V AC 50/60 Hz

RPC-2BP-UNI

time relay **RPC-BP-...**, single-function (relay perform function Bp), cover - modular, width 17,5 mm, two changeover contacts, contact material AgSnO₂, rated input voltage 12...240 V AC/DC AC: 50/60 Hz

RPC-1ER/EA/ES/EU/IP/SA/WT-...

time relays

300



RPC-1ER-UNI



RPC-1WT-UNI



- **Single-function time relays with independently controlled times T1 and T2 (7 versions of relays with 1 time function 0; 8 time ranges)** • Cadmium - free contacts 1 CO
- AC and AC/DC input voltages • Cover - modular, width 17,5 mm
- Direct mounting on 35 mm rail mount acc. to EN 60715
- Applications: in low-voltage systems
- Compliance with standard EN 61812-1
- Recognitions, certifications, directives: RoHS, **CE** **EAC**

Output circuit - contact data

Number and type of contacts		1 CO
Contact material		AgSnO ₂
Max. switching voltage	AC	300 V
Rated load	AC1	16 A / 250 V AC
	DC1	16 A / 24 V DC; 0,3 A / 250 V DC
Rated current		16 A / 250 V AC
Max. breaking capacity	AC1	4 000 VA
Min. breaking capacity		1 W 10 mA
Contact resistance		≤ 100 mΩ
Max. operating frequency		600 cycles/hour at rated load AC1

Input circuit

Rated voltage	50/60 Hz AC	230 V	terminals A1, A2
	AC: 50/60 Hz AC/DC	12...240 V	terminals (+)A1, (-)A2
Must release voltage		≥ 0,1 U _n	
Operating range of supply voltage		0,9...1,1 U _n	
Rated power consumption	AC	≤ 3,5 VA 230 V AC, 50 Hz	≤ 1,5 VA 12...240 V AC/DC, AC: 50 Hz
	DC	≤ 1,5 W 12...240 V AC/DC	
Range of supply frequency	AC	48...63 Hz	
Control contact S 1	• min. voltage 2	0,7 U _n	
	• min. time of pulse duration 2	AC: ≥ 50 ms	DC: ≥ 30 ms
	• max. length of control line	10 m	

Insulation according to EN 60664-1

Insulation rated voltage	250 V AC	
Rated surge voltage	4 000 V 1,2 / 50 μs	
Overvoltage category	III	
Insulation pollution degree	2	
Flammability class	cover: V-0 front panel: V-2 UL 94	
Dielectric strength	• input - output	4 000 V AC type of insulation: basic
	• contact clearance	1 000 V AC type of clearance: micro-disconnection

General data

Electrical life	• resistive AC1	> 0,5 x 10 ⁵ 16 A, 250 V AC
Mechanical life (cycles)		> 3 x 10 ⁷
Dimensions (L x W x H) / Weight		90 4 x 17,5 x 64,5 mm / 65...66 g
Ambient temperature	• storage	-40...+70 °C
(non-condensation and/or icing)	• operating	-20...+50 °C
Cover protection category		IP 20 EN 60529
Relative humidity		up to 85%
Shock / vibration resistance		15 g / 0,35 mm DA 10...55 Hz

Time module data


Functions 1		ER, EWa, EWs, EWu + NWu, li + lp, WsWa, Wt
Time ranges		OFF - permanent switching off; ON - permanent switching on 1 s 2; 10 s; 1 min.; 10 min.; 1 h; 10 h; 1 d; 10 d
Timing adjustment		smooth - (0,1...1) x time range (does not refer to range ON / OFF)
Setting accuracy / Repeatability		± 5% 3 4 / ± 0,5% 5
Values affecting the timing adjustment		temperature: ± 0,05% / °C supply voltage: ± 0,01% / V
Recovery time	AC	≤ 150 ms 230 V AC, 50 Hz
	DC	≤ 150 ms 12...240 V AC/DC
LED indicator		green LED U ON - indication of supply voltage U green LED U slow flashing - measurement of T1 time green LED U fast flashing - measurement of T2 time yellow LED R ON/OFF - output relay status

1 Codes of versions - see "Ordering codes", page 303 and descriptions of time functions, pages 301, 302. 2 The control terminal S is activated by connection to A1 terminal via the external control contact S. 3 Where the control signal is recognizable. 4 Length with 35 mm rail catches: 98,8 mm. 5 For first range setpoint (1 s) setting accuracy and repeatability are smaller than the given ones in technical parameters (significant influence of the operational relay operating time, processor start-time, and the moment of supply switching as referred to the AC supply course). 6 Calculated from the final range values, for the setting direction from minimum to maximum.

Time functions

ER - ON delay and OFF delay with control contact S. Independent settings of T1 and T2 intervals.


Codes of versions: **RPC-1ER-...**



The input of the time relay is supplied with voltage U continuously. Closing of the control contact S starts the interval T1, and after it has lapsed, the output relay R switches on. Opening of the control contact S starts the interval T2, and after it has lapsed, the output relay R switches off. In case the control contact S is closed in the course of the interval T2, the measured time is reset and the output relay R remains switched on. In case the control contact S is closed for time shorter than T1, the unit will not switch the output relay R on.

EWa - OFF delay and breaking time delay with opening of the control contact S. Independent settings of T1 and T2 intervals.


Codes of versions: **RPC-1EA-...**



The input of the time relay is supplied with voltage U continuously. Closing of the control contact S switches on the output relay R. Opening of the control contact S starts the interval T1, and after the interval has lapsed, the output relay R switches off for the interval T2. Following the interval T2, the output relay R will be switched on again when the control contact S is closed on the lapse of the interval. In the course of the intervals T1 and T2 the position of the control contact S is of no importance.

EWs - ON delay and ON for the set time with closing of the control contact S. Independent settings of T1 and T2 intervals.

Codes of versions: **RPC-1ES-...**




The input of the time relay is supplied with voltage U continuously. Closing of the control contact S starts the interval T1, and after the interval has lapsed, the output relay R switches on for the interval T2. Following the interval T2, the output relay switches off, and the circuit awaits for the control contact S to be closed again. In the course of the intervals T1 and T2 the position of the control contact S is of no importance.

U - supply voltage; **R** - output state of the relay;
S - control contact state; **T1**, **T2** - measured times; **t** - time axis

EWu + NWu - ON delay for the set interval (EWu) or switching ON for the set interval-switching OFF for the set interval-continuous ON with the control contact S (NWu). Independent settings of T1 and T2 intervals.


Codes of versions: **RPC-1EU-...**

function EWu



When the control contact S is open, application of the supply voltage U starts operation in the EWu function - the interval T1, and after the interval T1 has lapsed, the output relay switches on for the interval T2.

function NWu




When the control contact S is closed, application of the supply voltage U starts operation in the NWu function - from switching on the output relay R for the interval T1, and after the interval T1 has lapsed, the output relay switches off for the interval T2, and following the interval T2, the output relay R switches on for continuous time.

In the course of the relay operation, closing of the control contact S at any time will cause reset and the operation in the NWu function will start whereas opening of the control contact S at any time will cause reset and the operation in the EWu function will start.

li + lp - Cyclical operation in two independent intervals T1 and T2. Operation in the function li or lp depending on the position of the control contact S.


Codes of versions: **RPC-1IP-...**

function lp



Application of the supply voltage U when the control contact S is open start the cyclical operation in the lp function - from the interval T1 (time of switching off the output relay R), following which the output relay R is switched on for the interval T2. The cyclical operation continues until the supply voltage U is interrupted.

function li



When the control contact S is closed, application of the supply voltage U starts operation in the li function - from switching on the output relay R for the interval T1, and after the interval T1 has lapsed, the output relay switches off for the interval T2. The cyclical operation continues until the supply voltage U is interrupted.

In the course of the relay operation, closing of the control contact S at any time will cause reset and the operation in the li function will start whereas opening of the control contact S at any time will cause reset and the operation in the lp function will start.

Time functions

WsWa - ON for the set intervals T1 and T2 with the control contact S. Independent settings of T1 and T2 intervals.
Codes of versions: **RPC-1SA-...**



The input of the time relay is supplied with voltage U continuously. Closing of the control contact S switches the output relay R for the interval T1, and after the interval has lapsed, the relay R is switched off. Opening of the control contact S switches on the output relay R for the interval T2. If the control contact S is open when the interval T1 lapses, the output relay R will remain on for the interval T2. If the control contact S is closed when the interval T2 lapses, the output relay R will remain on for the interval T1.

U - supply voltage; R - output state of the relay;
S - control contact state; T1, T2 - measured times; t - time axis

Wt - Monitoring of the sequence of pulses. Switching on extended with consecutive pulses / closings of the contact S. Independent settings of T1 and T2 intervals.
Codes of versions: **RPC-1WT-...**



On applying the supply voltage U the output relay R is switched on for the set interval T1. After the interval T1 has lapsed, the interval T2 starts with the output relay R still switched on. For the output relay to switch on, the control contact S must be closed and then opened (single pulse) during the interval T2, which cancels the time already measured and starts the interval T2 again. In case of absence of a single pulse prior to lapse of the interval T2, the output relay R will switch off, and it may be switched on after the supply voltage has been interrupted and applied again.

ON / OFF - Permanent switching on / off.
The functions ON and OFF are selected with T1, T2 time range adjusting knobs. In the ON function, the normally open contacts are closed all the time whereas in the OFF function they are open. The ON state is implemented only when both T1, T2 time range adjusting knobs are set to ON. The OFF state is implemented only when at least one of the T1, T2 time range adjusting knobs is set to OFF or when one of these knobs is set to time range 1 s, 10 s, etc., and the other is set to ON. The ON or OFF functions are used for the time relay operation control in electric systems.

Additional functions


Supply diode: it is lit permanently when the time is not being measured. In course of the T1 time measurement, it flashes at 500 ms period, in course of the T2 time measurement at 250 ms period, where it is lit for 50% of the time, and off for 50% of the time.

Adjustment of the set values: the values of time and range are read in the course of the relay's operation. The set values may be modified at any moment.


Release: depending on the function to be performed, the relay is released with the supply voltage or by connection of the S contact to the A1 line. For DC supply, the positive pole must be connected to the A1 line. The level of the S contact activation is adjusted automatically depending on the supply voltage.

Supply:
- **RPC-...-A230:** the relay may be supplied with AC voltage 48...63 Hz of 207...253 V,
- **RPC-...-UNI:** the relay may be supplied with DC voltage or AC voltage 48...63 Hz of 10,8...264 V.

Dimensions

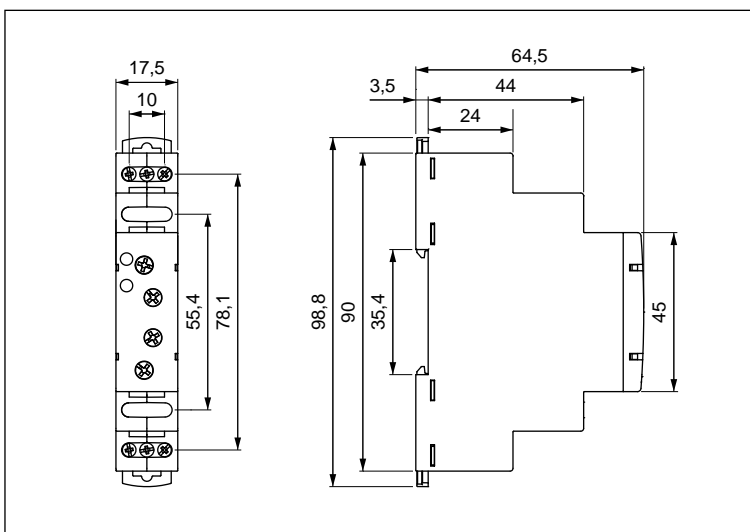


Connection diagram

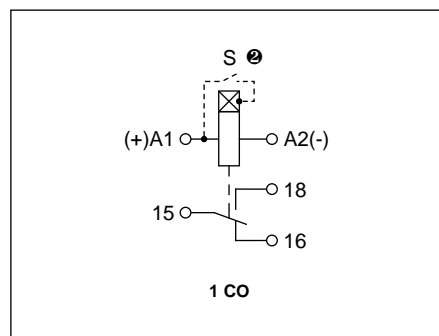

Note: the indicated polarity of the supply refers only to the relays RPC-...-UNI. The control terminal S is activated by connection to A1 terminal via the external control contact S.

Front panel description

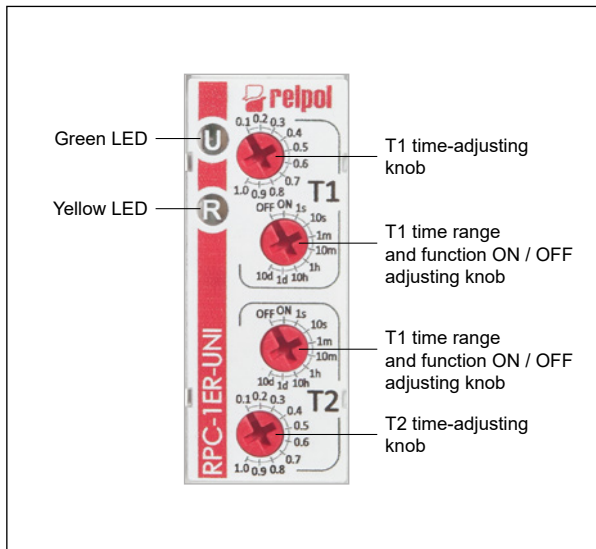

Mounting

Relays **RPC-1-...** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - any. **Connections:** max. cross section of the cables: 1 x 2,5 mm² (1 x 14 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,5 Nm.




Two catches:
easy mounting on 35 mm rail, firm hold (top and bottom).



Mounting wires in clamps:
universal screw (cross-recessed or slotted head).

Ordering codes

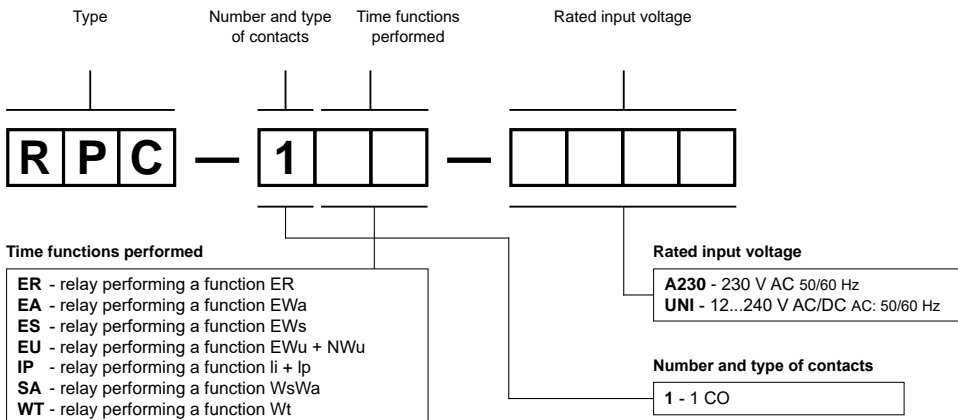

Examples of ordering codes:

RPC-1ER-A230

time relay **RPC-1ER-...**, single-function (relay perform function ER), cover - modular, width 17,5 mm, one changeover contact, contact material AgSnO₂, rated input voltage 230 V AC 50/60 Hz

RPC-1WT-UNI

time relay **RPC-1WT-...**, single-function (relay perform function Wt), cover - modular, width 17,5 mm, one changeover contact, contact material AgSnO₂, rated input voltage 12...240 V AC/DC AC: 50/60 Hz



RPC-2SD-UNI



- **Single-function time relays with independently controlled times T1 and T2 (time function SD - Star-Delta start-up; 10 time ranges)**
- Cadmium - free contacts 2 x 1 CO • AC/DC input voltages
- Cover - modular, width 17,5 mm
- Direct mounting on 35 mm rail mount acc. to EN 60715
- Applications: in low-voltage systems
- Compliance with standard EN 61812-1
- Recognitions, certifications, directives: RoHS, **CE ENEC**


Output circuit - contact data

Number and type of contacts		2 x 1 CO
Contact material		AgSnO ₂
Max. switching voltage	AC	300 V
Rated load	AC1	8 A / 250 V AC
	DC1	8 A / 24 V DC; 0,3 A / 250 V DC
Rated current		8 A / 250 V AC
Max. breaking capacity	AC1	2 000 VA
Min. breaking capacity		1 W 10 mA
Contact resistance		≤ 100 mΩ
Max. operating frequency		600 cycles/hour
	• at rated load	
Input circuit		
Rated voltage	AC: 50/60 Hz AC/DC	12...240 V terminals (+)A1, (-)A2
Must release voltage		≥ 0,1 U _n
Operating range of supply voltage		0,9...1,1 U _n
Rated power consumption	AC	≤ 1,5 VA AC: 50 Hz
	DC	≤ 1,5 W
Range of supply frequency	AC	48...63 Hz
Insulation according to EN 60664-1		
Insulation rated voltage		250 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		2
Flammability class		cover: V-0 front panel: V-2 UL 94
Dielectric strength	• input - output	4 000 V AC type of insulation: basic
	• contact clearance	1 000 V AC type of clearance: micro-disconnection
	• pole - pole	2 000 V AC type of insulation: basic
General data		
Electrical life	• resistive AC1	> 0,5 x 10 ⁵ 8 A, 250 V AC
Mechanical life (cycles)		> 3 x 10 ⁷
Dimensions (L x W x H)		90 ① x 17,5 x 64,5 mm
Weight		83 g
Ambient temperature	• storage	-40...+70 °C
	• operating	-20...+50 °C
Cover protection category		IP 20 EN 60529
Relative humidity		up to 85%
Shock / vibration resistance		15 g / 0,35 mm DA 10...55 Hz
Time module data		
Functions		SD
Time ranges (start-up for the star) T1		1 s ②; 10 s; 30 s; 1 min.; 1,5 min.; 3 min.; 5 min.; 10 min.; 30 min.; 1 h
Timing adjustment T1		smooth - (0,1...1) x time range
Transit time (adjustable) ③ T2		smoothly within the range 0,05...0,9 s (linear adjustment of time)
Setting accuracy		± 5% ④ ②
Repeatability		± 0,5% ②
Values affecting the timing adjustment		temperature: ± 0,05% / °C supply voltage: ± 0,01% / V
Recovery time		AC: ≤ 400 ms DC: ≤ 150 ms
LED indicator		green LED U ON - indication of supply voltage U green LED U slow flashing - measurement of T1 time green LED U fast flashing - measurement of T2 time yellow LEDs ON/OFF - contactors switching signal

① Length with 35 mm rail catches: 98,8 mm. ② For first range setpoint (1 s) setting accuracy and repeatability are smaller than the given ones in technical parameters (significant influence of the operational relay operating time, processor start-time, and the moment of supply switching as referred to the AC supply course). ③ Pause time between switching off the star contactor and switching on the delta contactor. ④ Calculated from the final range values, for the setting direction from minimum to maximum.

Time functions

SD - Star-Delta start-up.



When the supply voltage U is applied, the operating star-contact (15-18) becomes closed, which is signaled with illumination of the yellow LED. Measurement of the set time T1 starts, and the green LED slow flashes. After the T1 time has lapsed, the star contact is disconnected and the relay begins measuring the T2 time, which is signaled with the green LED fast flashing. After the T2 time has lapsed, the delta contact (25-28) is switched on together with the yellow LED, and the green LED remains illuminated.

Additional functions

Supply diode: it is lit permanently when the time is not being measured. In course of the T1 time measurement, it flashes at 500 ms period, in course of the T2 time measurement at 250 ms period, where it is lit for 50% of the time, and off for 50% of the time.


Adjustment of the set values: the values of time and range are read in the course of the relay's operation. The set values may be modified at any moment.

Release: the relay is released with the supply voltage.


Supply: the relay may be supplied with DC voltage or AC voltage 48...63 Hz of 10,8...264 V.

U - supply voltage; T1, T2 - measured times; t - time axis

Dimensions

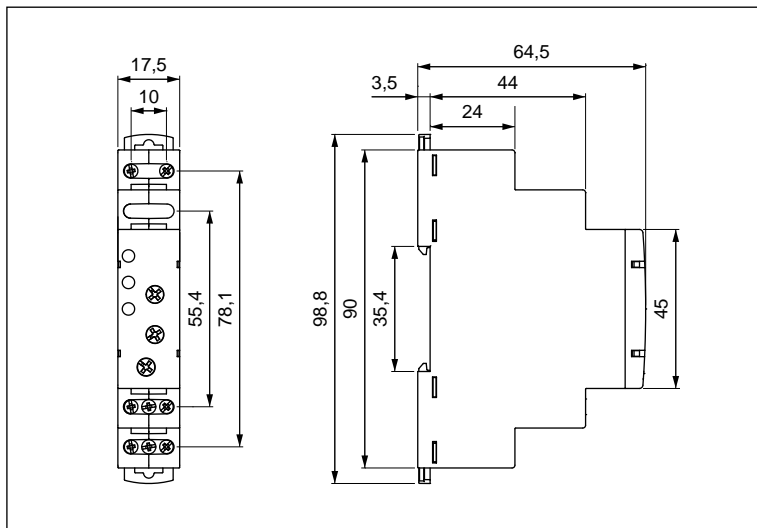


Connection diagram

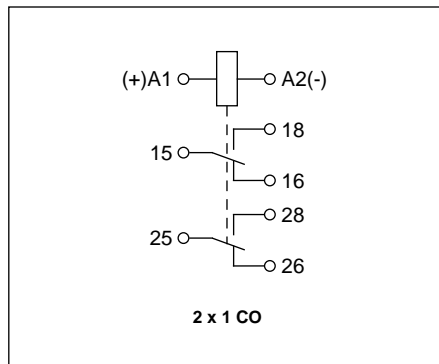

TIME

Front panel description

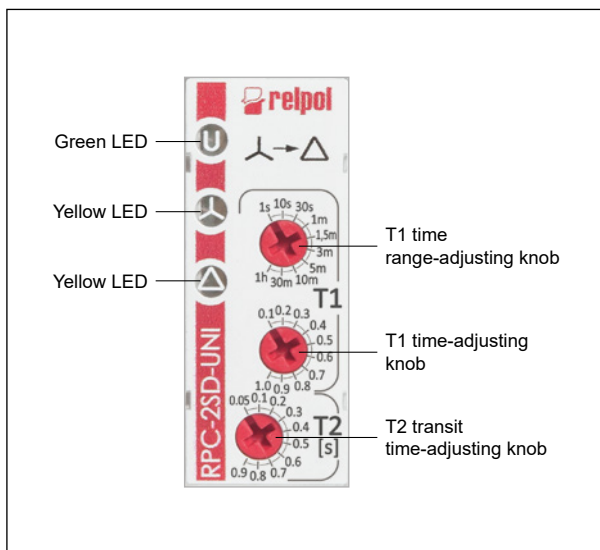


Mounting

Relays **RPC-2SD-UNI** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - any. **Connections:** max. cross section of the cables: 1 x 2,5 mm² (1 x 14 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,5 Nm.




Two catches: easy mounting on 35 mm rail, firm hold (top and bottom).



Mounting wires in clamps: universal screw (cross-recessed or slotted head).

Ordering codes

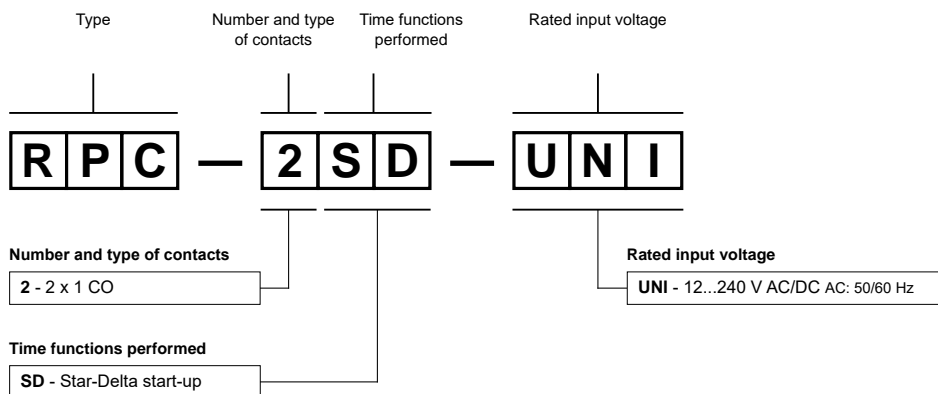

Example of ordering codes:

RPC-2SD-UNI

time relay **RPC-2SD-UNI**, single-function (relay perform function SD), cover - modular, width 17,5 mm, two changeover contacts, contact material AgSnO₂, rated input voltage 12...240 V AC/DC AC: 50/60 Hz



- 10-function electronic time relays in compact cover • Cadmium - free contacts • AC and AC/DC input voltages • Direct mounting on 35 mm rail mount acc. to EN 60715 • The main advantages of application: simple selection of the performed function, possibility to control one or two circuits (1 or 2 changeover contacts), esthetic design in the control cabinet
- The switching capacity of contacts as in RM85 (1 CO) or RM84 (2 CO) electromagnetic relay • Compliance with standard EN 61812-1
- Recognitions, certifications, directives: RoHS, **CE** **EMC**

Output circuits - contact data

Number and type of contacts		1 CO	2 CO
Contact material		AgNi	AgNi
Max. switching voltage		300 V	300 V
Rated load	AC1	16 A / 250 V AC	8 A / 250 V AC
	DC1	16 A / 24 V DC; 0,3 A / 250 V DC	8 A / 24 V DC; 0,3 A / 250 V DC
Rated current		16 A	8 A
Max. breaking capacity		4 000 VA	2 000 VA
Min. breaking capacity		0,3 W 5 V, 5 mA	
Contact resistance		≤ 100 mΩ	
Max. operating frequency	AC1	• at rated load	
		• no load	
		600 cycles/hour	72 000 cycles/hour
Input circuit			
Rated voltage	50/60 Hz AC	115, 230 V	
	AC: 50/60 Hz AC/DC	12, 24 V	
Operating range of supply voltage		0,9...1,2 U _n 12 V AC/DC	0,85...1,2 U _n 24 V AC/DC, 115 V AC, 230 V AC
Rated power consumption	AC	1,3 VA	115 V AC 1,7 VA 230 V AC
	AC/DC	0,5 VA / 0,5 W	12 V AC/DC 0,7 VA / 0,7 W 24 V AC/DC
Range of supply frequency	AC	48...63 Hz	
	AC/DC	48...100 Hz	
Control contact S ①			
• min. voltage ②		0,6 U _n	
• min. time of pulse duration ②		AC: ≥ 25 ms	DC: ≥ 15 ms
Insulation according to EN 60664-1			
Insulation rated voltage		250 V AC	
Insulation category		B250	
Overvoltage category		III	
Insulation pollution degree		2	
Flammability class		V-1 UL 94	
Dielectric strength	• input - outputs	2 000 V AC	type of insulation: basic
	• contact clearance	1 000 V AC	type of clearance: micro-disconnection
Input - outputs distance		• clearance	
• creepage		≥ 10 mm	
		≥ 10 mm	
General data			
Electrical life		• resistive AC1	
		> 0,7 x 10 ⁵ 16 A, 250 V AC	> 10 ⁵ 8 A, 250 V AC
Mechanical life (cycles)		> 3 x 10 ⁷	
Dimensions (L x W x H)		90 x 17,6 x 55 mm	
Weight		67 g	
Ambient temperature (non-condensation and/or icing)	• storage	-40...+70 °C	
	• operating	-20...+55 °C	
Cover protection category		IP 20	EN 60529
Environmental protection		RTI	EN 61810-7
Shock resistance		15 g	
Vibration resistance		0,35 mm DA 10...55 Hz	

The data in bold type relate to the standard versions of the relays.

① The control terminal S is activated by connection to A1 terminal via the external control contact S.


② Where the control signal is recognizable.

Time module data


Functions	E, Wu, Bp, Bi, PWM, R, Ws, Wa, Esa, B permanent switching ON and OFF
Time ranges	1 s ③; 10 s; 1 min.; 10 min.; 1 h; 10 h; 1 d; 10 d
Timing adjustment	smooth - (0,1...1) x time range
Setting accuracy	± 5% (calculated from the final range values) ③
Repeatability	± 0,5% ③
Temperature influence	± 0,01% / °C
Recovery time	80 ms
LED indicator	green LED - indication of supply voltage U yellow LED - indication of time period T and the status of outputs after the time T has been measured ④

③ For first range setpoint (1 s) setting accuracy and repeatability are smaller than the given ones in technical parameters (significant influence of the operational relay operating time). Recommend to set measuring time by experimental method. ④ The yellow LED - T time measurement (pulsating); excited operational relay; time not measured (steady light); de-excited operational relay, time not measured (no light).

Dimensions

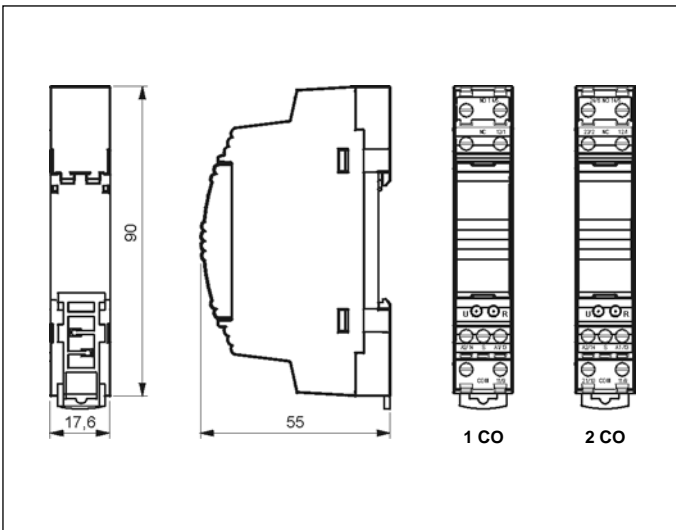


Front panel description

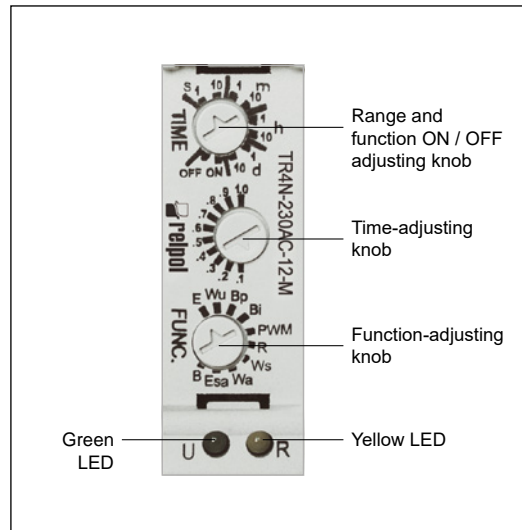


Electrical life at AC resistive current.
Switching frequency: 600 cycles/hour
- TR4N 1 CO

Fig. 1

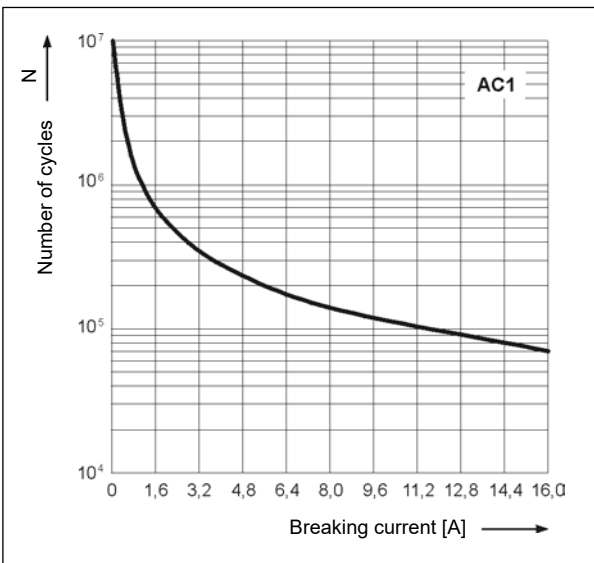


Electrical life at AC resistive current.
Switching frequency: 600 cycles/hour
- TR4N 2 CO

Fig. 2

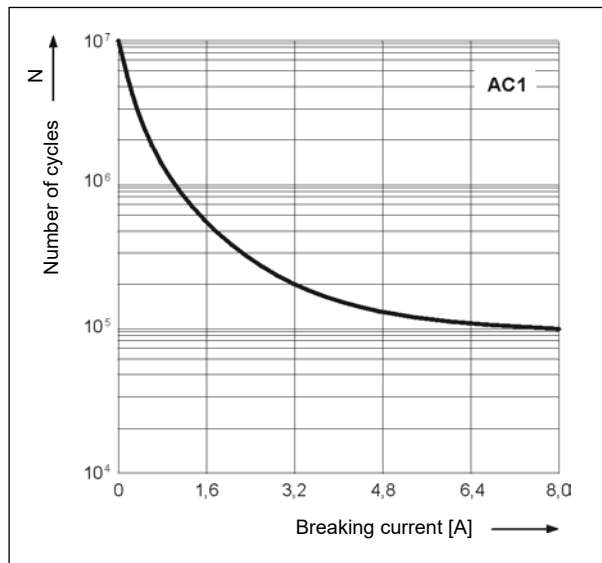


Time functions

E - ON delay.




On applying the supply voltage U the set interval T begins - off-delay of the output relay R. After the interval T has lapsed, the output relay R switches on and remains on until supply voltage U is interrupted.

Wu - ON for the set interval.




Applying the supply voltage U immediately switches the output relay R on for the set interval T. After the interval T has lapsed, the output relay R switches off.

Bp - Symmetrical cyclical operation pause first.




Applying the supply voltage U starts the cyclical operation from the interval T - switching the output relay R off followed by switching on the output relay R for the interval T. The cyclical operation lasts until the supply voltage U is interrupted.

Bi - Symmetrical cyclical operation pulse first.



Applying the supply voltage U starts the cyclical operation from switching on the output relay R for the set interval T. After the interval T has lapsed, the output relay R switches off for the interval T. The cyclical operation lasts until the supply voltage U is interrupted.


PWM - Pulse width modulation.



Set the relay to a single T_z cycle which is one of the time ranges available for a time relay. The cycle shall be set with the time selection knob. Then, set the interval T, i.e. the ON time of the output relay R with the time fine setting knob. The interval T may be set from 0.1 to 1.0 of the time range (T_z cycle). Applying the supply voltage U immediately switches on the output relay R for the set interval, and after the interval has lapsed, the output relay R switches off for the time left until the set time T_z . After the T_z time, consecutive cycles start and are continued until the supply voltage U is interrupted. In the course of the PWM function, the ON time of the output relay R may be changed, and such change does not affect the interval of the T_z cycle. The changed ON time of the output relay R shall be realized starting from the new T_z cycle following the change.


U - supply voltage; R - output state of the relay; S - control contact state; T_z - value of the set interval; T - measured time; t - time axis

R - OFF delay with the control contact S.




The input of the time relay is supplied with voltage U continuously. Closing of the control contact S immediately switches on the output relay R. Opening of the control contact S starts the set time of the delayed switching off of the output relay R. After the interval T has lapsed, the output relay R switches off. If the control contact S is closed during the interval T, the already measured time is reset, and the output relay R is switched on again. The OFF delay of the output relay R will start when the control contact S is opened again.

Ws - Single shot for the set interval triggered by closing of the control contact S.




The input of the time relay is supplied with voltage U continuously. Closing of the control contact S immediately switches the output relay R on for the set interval T. After the interval T has lapsed, the output relay R is switched off. In the course of the interval T, any opening of the control contact S does not affect the function to be performed. The output relay R may be switched on again for the set interval, after the interval T has lapsed, by closing the control contact S again.

Wa - ON for the set interval triggered with the control contact S.



The input of the time relay is supplied with voltage U continuously. Closing of the control contact S does not start the interval T, and it does not change the position of the output relay R. Opening of the control contact S immediately switches on the output relay R for the set time. After the interval T has lapsed, the output relay R switches off. Opening and closing of the control contact S in the course of the interval T does not affect the function to be performed. The output relay R may be switched on again for the set interval with another closing and opening of the control contact S.


Connections diagrams

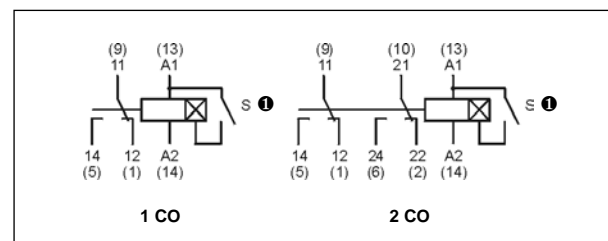

❶ The control terminal S is activated by connection to A1 terminal via the external control contact S.


Time functions

Esa - ON and OFF delay with the control contact S.



The input of the time relay is supplied with voltage U continuously. Closing of the control contact S starts the interval T - on-delay of the output relay R. After the interval T has lapsed, the output relay R switches on. Opening of the control contact S begins further measurement of the interval T - off-delay of the output relay R, and after the interval has lapsed, the output relay switches off. In case the time for which the control contact S is closed in the course of measurement of the on-delay of the output relay R is shorter than the set interval T, the output relay R will switch on after the set interval T, and the output relay R will remain in on position for the interval T. When the output relay R is in on position, closing of the control contact S does not affect the function to be performed.

B - Cyclical operation controlled with closing of the control contact S.



The input of the time relay is supplied with U voltage continuously. Closing of the control contact S immediately switches on the output relay R. Each next closing of the control contact S results in a change of the status of the output relay R to an opposite one (the feature of a bistable relay).

Permanent switching ON and OFF.

The functions ON and OFF are selected with range adjusting knob (TIME). In the ON function, the normally open contacts are closed all the time whereas in the OFF function they are open. The position of the function-adjusting knob (FUNC.) is of no significance in these functions as is the preset measurement time. The ON or OFF functions are used for the time relay operation control in electric systems.

U - supply voltage; R - output state of the relay; S - control contact state; Tz - value of the set interval; T - measured time; t - time axis


Mounting

Relays **TR4N 1 CO, 2 CO** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - any. **Connections:** max. cross section of the cables: 1 x 2,5 mm² / 2 x 1,5 mm² (1 x 14 / 2 x 16 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,6 Nm.

One catch:
easy mounting
on 35 mm rail,
firm hold (bottom).



Ordering codes

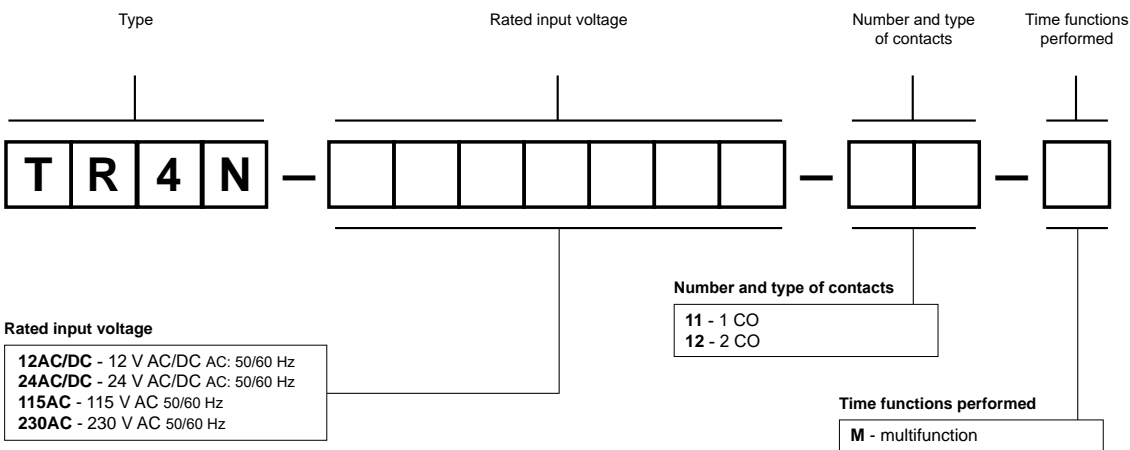

Examples of ordering codes:

TR4N-230AC-11-M

time relay **TR4N 1 CO**, multifunction (relay perform 10 functions), one changeover contact, contact material AgNi, rated input voltage 230 V AC 50/60 Hz

TR4N-24AC/DC-12-M

time relay **TR4N 2 CO**, multifunction (relay perform 10 functions), two changeover contacts, contact material AgNi, rated input voltage 24 V AC/DC AC: 50/60 Hz



- 10-function electronic time relays in compact cover
- Cadmium - free contacts
- AC and AC/DC input voltages
- Direct mounting on 35 mm rail mount acc. to EN 60715
- The main advantages of application: simple selection of the performed function, possibility to control a few circuits (4 changeover contacts), esthetic design in the control cabinet
- The switching capacity of contacts as in R4 electromagnetic relay
- Compliance with standard EN 61812-1
- Recognitions, certifications, directives: RoHS, **CE** **EAC**

Output circuits - contact data

Number and type of contacts	4 CO	
Contact material	AgNi	
Max. switching voltage	250 V AC / 250 V DC	
Rated load	AC1	6 A / 250 V AC
	DC1	6 A / 24 V DC; 0,15 A / 250 V DC
Rated current	6 A	
Max. breaking capacity	AC1	1 500 VA
Min. breaking capacity	0,3 W 5 V, 5 mA	
Contact resistance	≤ 100 mΩ	
Max. operating frequency		
• at rated load	AC1	1 200 cycles/hour
• no load		18 000 cycles/hour
Input circuit		
Rated voltage	50/60 Hz AC	115, 230 V
	AC: 50/60 Hz AC/DC	12, 24 V
Operating range of supply voltage	0,9...1,1 U _n 12 V AC/DC	
	0,85...1,1 U _n 24 V AC/DC, 115 V AC, 230 V AC	
Rated power consumption	AC	2,2 VA 115 V AC, 230 V AC
	AC/DC	1,0 VA / 1,0 W 12 V AC/DC, 24 V AC/DC
Range of supply frequency	AC	48...63 Hz
	AC/DC	48...100 Hz
Control contact S ①		
• min. voltage ②	0,6 U _n	
• min. time of pulse duration ②	AC: ≥ 25 ms	DC: ≥ 15 ms
Insulation according to EN 60664-1		
Insulation rated voltage	250 V AC	
Insulation category	B250	
Overtoltage category	II	
Insulation pollution degree	2	
Flammability class	V-1 UL 94	
Dielectric strength	• input - outputs	2 500 V AC type of insulation: basic
	• contact clearance	1 500 V AC type of clearance: micro-disconnection
Input - outputs distance		
• clearance	≥ 1,6 mm	
• creepage	≥ 3,2 mm	
General data		
Electrical life		
• resistive AC1	> 10 ⁵	6 A, 250 V AC
Mechanical life (cycles)	> 2 x 10 ⁷	
Dimensions (L x W x H)	90 x 36 x 55 mm	
Weight	115 g	
Ambient temperature	• storage	-40...+70 °C
(non-condensation and/or icing)	• operating	-20...+55 °C
Cover protection category	IP 20	EN 60529
Environmental protection	RTI	EN 61810-7
Shock resistance	(NO/NC)	10 g / 5 g
Vibration resistance	0,35 mm DA 10...55 Hz	

The data in bold type relate to the standard versions of the relays.

① The control terminal S is activated by connection to A1 terminal via the external control contact S.


② Where the control signal is recognizable.

Time module data


Functions	E, Wu, Bp, Bi, PWM, R, Ws, Wa, Esa, B permanent switching ON and OFF
Time ranges	1 s ②; 10 s; 1 min.; 10 min.; 1 h; 10 h; 1 d; 10 d
Timing adjustment	smooth - (0,1...1) x time range
Setting accuracy	± 5% (calculated from the final range values) ③
Repeatability	± 0,5% ③
Temperature influence	± 0,01% / °C
Recovery time	90 ms
LED indicator	green LED - indication of supply voltage U yellow LED - indication of time period T and the status of outputs after the time T has been measured ④

② For first range setpoint (1 s) setting accuracy and repeatability are smaller than the given ones in technical parameters (significant influence of the operational relay operating time). Recommend to set measuring time by experimental method. ④ The yellow LED - T time measurement (pulsating); excited operational relay; time not measured (steady light); de-excited operational relay, time not measured (no light).

Dimensions

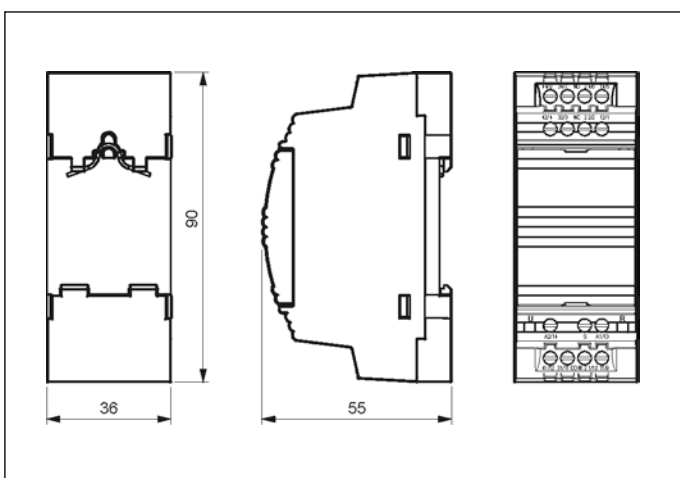


Connections diagram

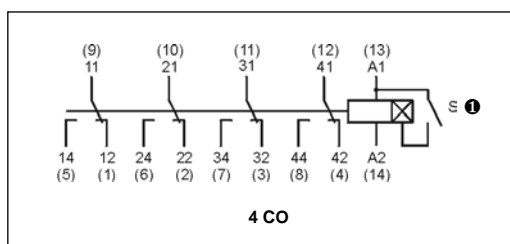


① The control terminal S is activated by connection to A1 terminal via the external control contact S.

Electrical life at AC resistive current. Switching frequency: 1 200 cycles/hour

Fig. 1

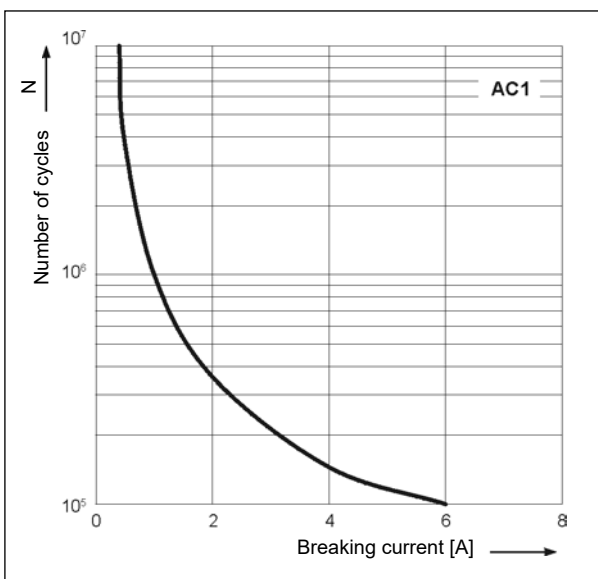


Front panel description

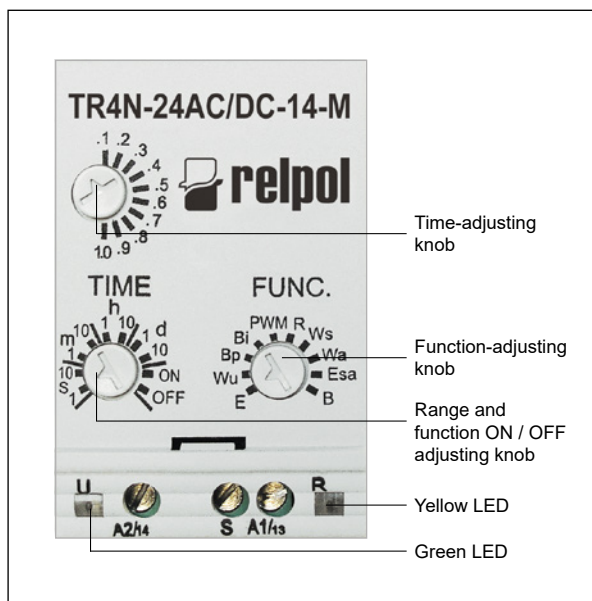


Time functions

E - ON delay.



On applying the supply voltage U the set interval T begins - off-delay of the output relay R. After the interval T has lapsed, the output relay R switches on and remains on until supply voltage U is interrupted.

Wu - ON for the set interval.




Applying the supply voltage U immediately switches the output relay R on for the set interval T. After the interval T has lapsed, the output relay R switches off.

Bp - Symmetrical cyclical operation pause first.




Applying the supply voltage U starts the cyclical operation from the interval T - switching the output relay R off followed by switching on the output relay R for the interval T. The cyclical operation lasts until the supply voltage U is interrupted.

Bi - Symmetrical cyclical operation pulse first.



Applying the supply voltage U starts the cyclical operation from switching on the output relay R for the set interval T. After the interval T has lapsed, the output relay R switches off for the interval T. The cyclical operation lasts until the supply voltage U is interrupted.


PWM - Pulse width modulation.



Set the relay to a single Tz cycle which is one of the time ranges available for a time relay. The cycle shall be set with the time selection knob. Then, set the interval T, i.e. the ON time of the output relay R with the time fine setting knob. The interval T may be set from 0.1 to 1.0 of the time range (Tz cycle). Applying the supply voltage U immediately switches on the output relay R for the set interval, and after the interval has lapsed, the output relay R switches off for the time left until the set time Tz. After the Tz time, consecutive cycles start and are continued until the supply voltage U is interrupted. In the course of the PWM function, the ON time of the output relay R may be changed, and such change does not affect the interval of the Tz cycle. The changed ON time of the output relay R shall be realized starting from the new Tz cycle following the change.


U - supply voltage; R - output state of the relay; S - control contact state; Tz - value of the set interval; T - measured time; t - time axis

R - OFF delay with the control contact S.




The input of the time relay is supplied with voltage U continuously. Closing of the control contact S immediately switches on the output relay R. Opening of the control contact S starts the set time of the delayed switching off of the output relay R. After the interval T has lapsed, the output relay R switches off. If the control contact S is closed during the interval T, the already measured time is reset, and the output relay R is switched on again. The OFF delay of the output relay R will start when the control contact S is opened again.

Ws - Single shot for the set interval triggered by closing of the control contact S.



The input of the time relay is supplied with voltage U continuously. Closing of the control contact S immediately switches the output relay R on for the set interval T. After the interval T has lapsed, the output relay R is switched off. In the course of the interval T, any opening of the control contact S does not affect the function to be performed. The output relay R may be switched on again for the set interval, after the interval T has lapsed, by closing the control contact S again.

Wa - ON for the set interval triggered with the control contact S.




The input of the time relay is supplied with voltage U continuously. Closing of the control contact S does not start the interval T, and it does not change the position of the output relay R. Opening of the control contact S immediately switches on the output relay R for the set time. After the interval T has lapsed, the output relay R switches off. Opening and closing of the control contact S in the course of the interval T does not affect the function to be performed. The output relay R may be switched on again for the set interval with another closing and opening of the control contact S.



TIME


Time functions

Esa - ON and OFF delay with the control contact S.



The input of the time relay is supplied with voltage U continuously. Closing of the control contact S starts the interval T - on-delay of the output relay R. After the interval T has lapsed, the output relay R switches on. Opening of the control contact S begins further measurement of the interval T - off-delay of the output relay R, and after the interval has lapsed, the output relay switches off. In case the time for which the control contact S is closed in the course of measurement of the on-delay of the output relay R is shorter than the set interval T, the output relay R will switch on after the set interval T, and the output relay R will remain in on position for the interval T. When the output relay R is in on position, closing of the control contact S does not affect the function to be performed.

B - Cyclical operation controlled with closing of the control contact S.



The input of the time relay is supplied with U voltage continuously. Closing of the control contact S immediately switches on the output relay R. Each next closing of the control contact S results in a change of the status of the output relay R to an opposite one (the feature of a bistable relay).


Permanent switching ON and OFF.
The functions ON and OFF are selected with range adjusting knob (TIME). In the ON function, the normally open contacts are closed all the time whereas in the OFF function they are open. The position of the function-adjusting knob (FUNC.) is of no significance in these functions as is the preset measurement time. The ON or OFF functions are used for the time relay operation control in electric systems.

U - supply voltage; R - output state of the relay; S - control contact state; Tz - value of the set interval; T - measured time; t - time axis

Mounting

Relays **TR4N 4 CO** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - any. **Connections:** max. cross section of the cables: 1 x 2,5 mm² / 2 x 1,5 mm² (1 x 14 / 2 x 16 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,6 Nm.

Ordering codes

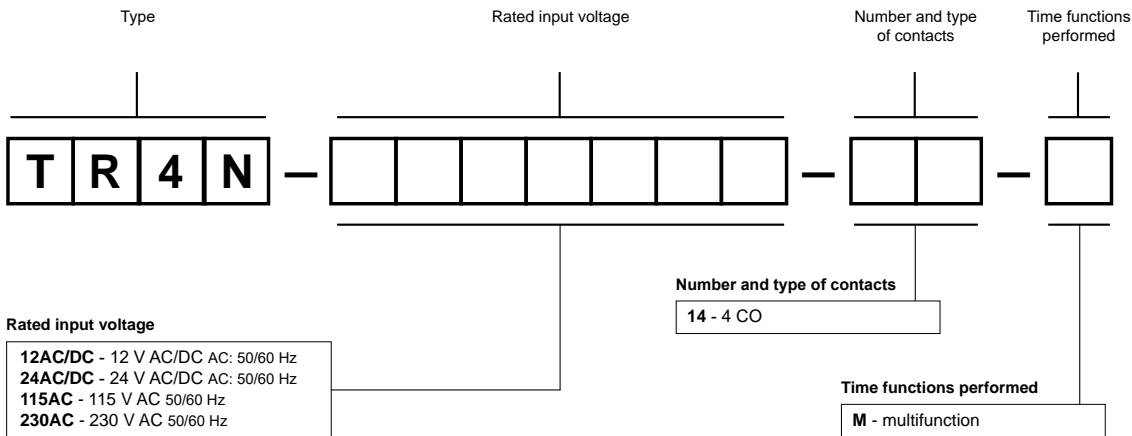

Examples of ordering codes:

TR4N-230AC-14-M

time relay **TR4N 4 CO**, multifunction (relay perform 10 functions), four changeover contacts, contact material AgNi, rated input voltage 230 V AC 50/60 Hz


TR4N-24AC/DC-14-M

time relay **TR4N 4 CO**, multifunction (relay perform 10 functions), four changeover contacts, contact material AgNi, rated input voltage 24 V AC/DC AC: 50/60 Hz




- Single-function, single-voltage time relays offered in the following versions: **T-R4E** - relay with time function E, **T-R4Wu** - relay with time function Wu, **T-R4Bp** - relay with time function Bp, **T-R4Bi** - relay with time function Bi • Cadmium - free contacts • AC and DC input voltages
- For plug-in sockets, 35 mm rail mount acc. to EN 60715 or on panel mounting • Applications: as time systems in electric circuits of machines, technological lines, in automation systems, etc.
- Recognitions, certifications, directives: RoHS, recognitions R4N, **CE**

Output circuits - contact data

Number and type of contacts	4 CO	
Contact material	AgNi	
Max. switching voltage	250 V AC / 250 V DC	
Rated load	AC1	6 A / 230 V AC
Max. inrush current	12 A	
Rated current	6 A	
Max. breaking capacity	AC1	1 500 VA
Min. breaking capacity	0,3 W 5 V, 5 mA	
Contact resistance	≤ 100 mΩ	
Max. operating frequency		
• at rated load	AC1	1 200 cycles/hour
• no load		18 000 cycles/hour
Input circuit		
Rated voltage	50/60 Hz AC DC	24, 115, 230 V 12, 24 V
Must release voltage	AC: ≥ 0,2 U _n	DC: ≥ 0,1 U _n
Operating range of supply voltage	0,8...1,1 U _n	see Tables 1, 2
Rated power consumption	AC DC	2,2 VA 1,2 W
Range of supply frequency	48...63 Hz	
Insulation according to EN 60664-1		
Insulation rated voltage	250 V AC	
Overvoltage category	III	
Dielectric strength		
• input - outputs	2 500 V AC	type of insulation: basic
• contact clearance	1 500 V AC	type of clearance: micro-disconnection
• pole - pole	2 000 V AC	type of insulation: basic
Input - outputs distance		
• clearance	≥ 1,6 mm	
• creepage	≥ 3,2 mm	
General data		
Operating / release time (typical values)	10 ms / 8 ms	
Electrical life		
• resistive AC1	> 10 ⁵	6 A, 250 V AC
• cosφ	see Fig. 2	
Mechanical life (cycles)	> 2 x 10 ⁷	
Dimensions (L x W x H)	T-R4 + GZM4: 75 x 27 x 91,5 mm T-R4 + GZT4: 76,3 x 27 x 90 mm T-R4 + GZMB4: 95  x 31 x 90 mm T-R4: 27,5 x 21,2 x 62,5 mm	
Weight	T-R4 + GZM4: 123 g T-R4 + GZT4: 113 g T-R4 + GZMB4: 124 g T-R4: 49 g	
Ambient temperature	• storage	-20...+85 °C
(non-condensation and/or icing)	• operating	-20...+55 °C
Cover protection category	IP 20 (with socket) EN 60529	
Environmental protection	T-R4: RTI GZM4: RT0 EN 61810-7	
Shock resistance	(NO/NC)	10 g / 5 g
Vibration resistance	5 g 10...150 Hz	

The data in bold type relate to the standard versions of the relays.


 Length with 35 mm rail catch: 100 mm.

Time module data


Functions	E, Wu, Bp, Bi
Time ranges	1 s ❶; 10 s; 1 min.; 10 min.; 1 h; 10 h; 100 h
Timing adjustment	range - with the range-adjusting knob / switch; within the range - with the time-adjusting knob / potentiometer
Setting accuracy	± 5% (calculated from the final range values) ❶
Repeatability	± 1% ❶
Temperature influence	± 0,01% / °C
Recovery time	100 ms
LED indicator	green LED - indication of supply voltage U yellow LED - indication of time period T and the status of outputs after the time T has been measured ❷

❶ For first range setpoint (1 s) setting accuracy and repeatability are smaller than the given ones in technical parameters (significant influence of the operational relay operating time). Recommend to set measuring time by experimental method. ❷ The yellow LED - T time measurement (pulsating); excited operational relay; time not measured (steady light); de-excited operational relay, time not measured (no light).


Electrical life at AC resistive load. Fig. 1
Switching frequency: 1 200 cycles/hour

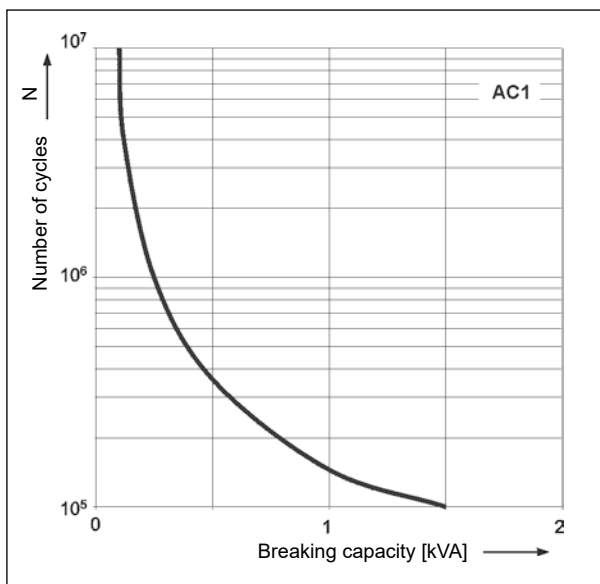


Electrical life reduction factor at AC inductive load Fig. 2

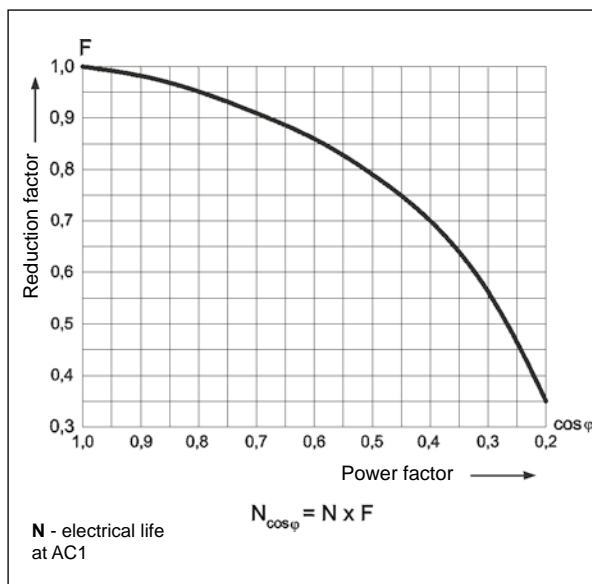

Max. DC resistive load breaking capacity Fig. 3

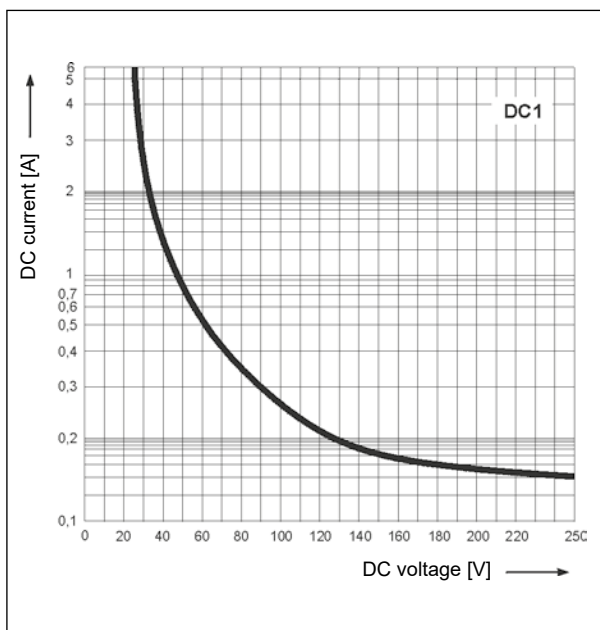


Connection diagrams

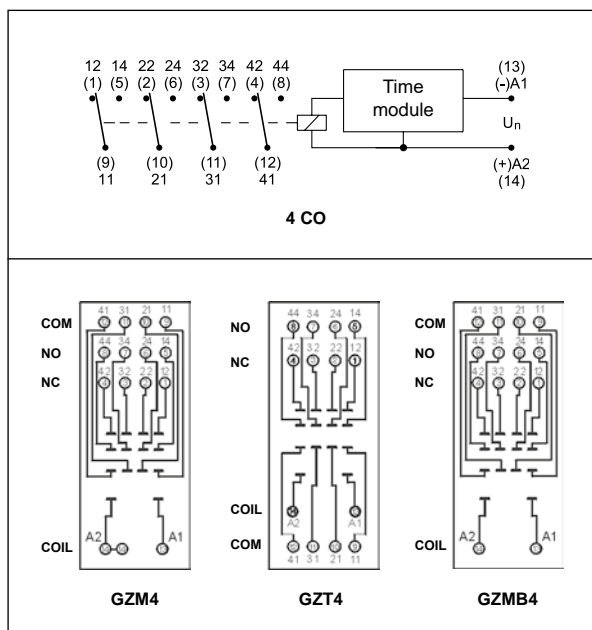


Time functions

E - ON delay.




On applying the supply voltage U the set interval T begins - off-delay of the output relay R. After the interval T has lapsed, the output relay R switches on and remains on until supply voltage U is interrupted.

Wu - ON for the set interval.




Applying the supply voltage U immediately switches the output relay R on for the set interval T. After the interval T has lapsed, the output relay R switches off.

Bp - Symmetrical cyclical operation pause first.



Applying the supply voltage U starts the cyclical operation from the interval T - switching the output relay R off followed by switching on the output relay R for the interval T. The cyclical operation lasts until the supply voltage U is interrupted.


Bi - Symmetrical cyclical operation pulse first.




Applying the supply voltage U starts the cyclical operation from switching on the output relay R for the set interval T. After the interval T has lapsed, the output relay R switches off for the interval T. The cyclical operation lasts until the supply voltage U is interrupted.

U - supply voltage; R - output state of the relay; T - measured time; t - time axis

Dimensions - T-R4

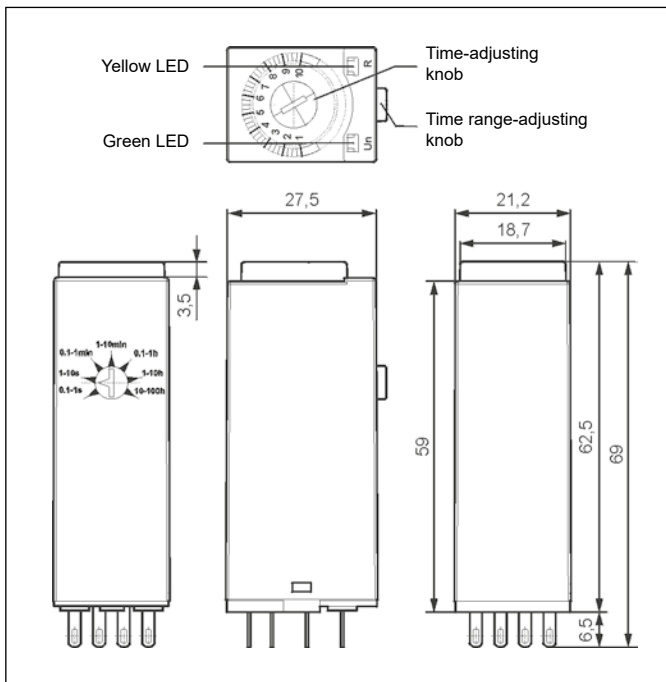

Dimensions - T-R4 with socket GZM4

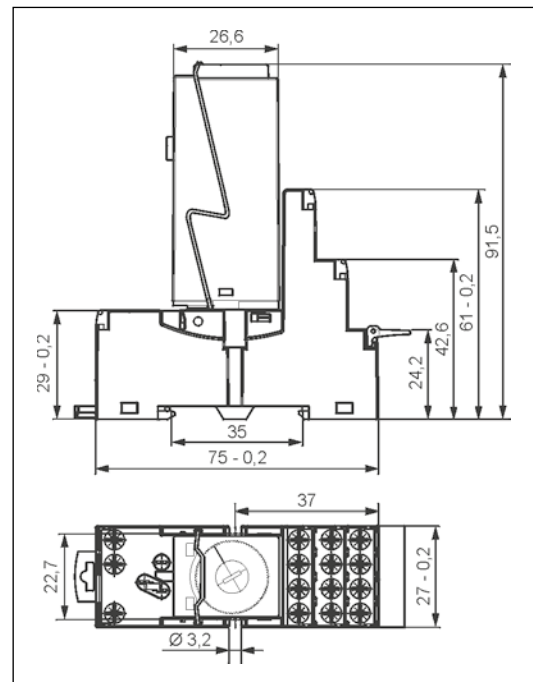

Time relay T-R4

with plug-in socket
GZM4



Mounting, sockets and accessories for relays

Relays **T-R4E**, **T-R4Wu**, **T-R4Bp**, **T-R4Bi** are designed for mounting in plug-in sockets.

Sockets for T-R4	Accessories		Additional features
	Spring wire clips	Description plates	
Screw terminals sockets , 35 mm rail mount (acc. to EN 60715) or on panel mounting (two M3 screws)			
GZT4 ④	TR4-2000	GZT4-0035	strips ⑥
GZM4 ④	TR4-2000	GZT4-0035	strips ⑥
Spring terminals sockets , 35 mm rail mount (acc. to EN 60715)			
GZMB4 ⑤	TR4-2000	TR	–

④ Sockets GZT4, GZM4 - connections: max. cross section of the cables (stranded): 2 x 2,5 mm² (2 x 14 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,7 Nm. ⑤ Sockets GZMB4 - connections: max. cross section of the cables: 1 x 0,2...1,5 mm² (1 x 24...16 AWG), stripping length: 9...11 mm; wire connection - see page 367 ⑥ Interconnection strips ZGGZ4 - see page 378.

Separate T-R4 control circuits from load circuits (T-R4 contacts)	GZM4, GZMB4: yes GZT4: no
Increased dielectric strength spacing between coil and contacts clamps	GZM4: min. 5 kV GZT4, GZMB4: min. 4 kV
Double A2(14) terminal is introduced for easy wiring in electrical devices	GZM4, GZMB4: yes GZT4: no

Input data - DC voltage version

Table 1

Input voltage code	Rated input voltage U _n V DC	Input resistance at 20 °C Ω	Acceptable resistance	Input - voltage range V DC	
				min. (at 20 °C)	max. (at 55 °C)
1012	12	160	± 10%	9,6	13,2
1024	24	640	± 10%	19,2	26,4

The data in bold type relate to the standard versions of the relays.


Input data - AC 50/60 Hz voltage version

Table 2

Input voltage code	Rated input voltage U _n V AC	Input resistance at 20 °C Ω	Acceptable resistance	Input - voltage range V AC	
				min. (at 20 °C)	max. (at 55 °C)
5024	24	158	± 10%	19,2	26,4
5115	115	3 610	± 10%	92,0	127,0
5230	230	16 100	± 10%	184,0	253,0

The data in bold type relate to the standard versions of the relays.

Ordering codes

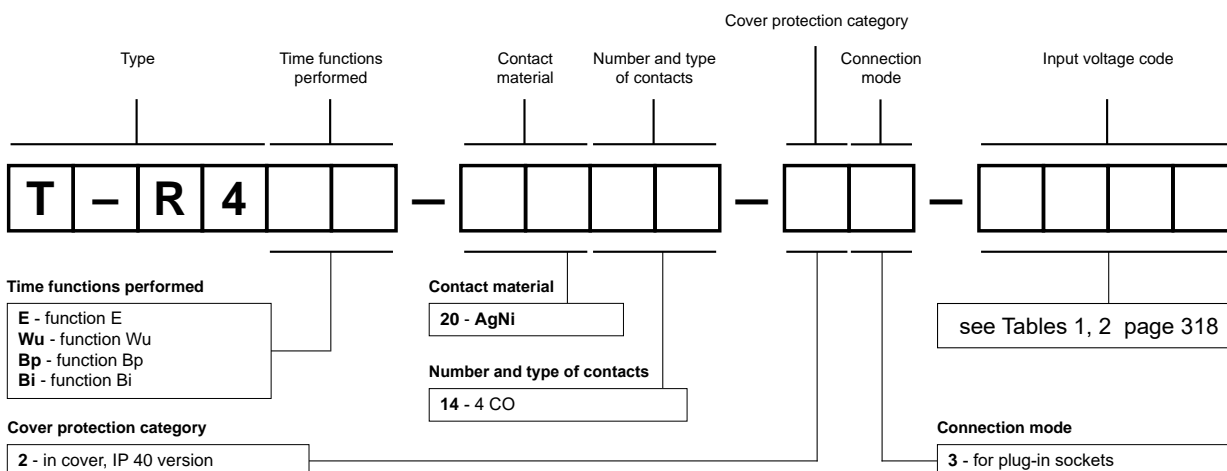

Example of ordering code:

T-R4E-2014-23-1012 time relay **T-R4**, single-function (relay perform function **E** - ON delay), for plug-in sockets, four changeover contacts, contact material AgNi, rated input voltage 12 V DC, in cover IP 40



R15 - 3 CO
+ GZP11
+ COM3

R15 - 2 CO
+ GZP8
+ COM3

- Time relay **PIR15 - 3 CO (standard)** consists of: electromagnetic relay **R15 - 3 CO**, black plug-in socket **GZP11**, time module **COM3**, spring wire clip **GZP-0054**, white description plate **GZP-0035**
- Time relay **PIR15 - 2 CO** consists of: electromagnetic relay **R15 - 2 CO**, black plug-in socket **GZP8**, time module **COM3**, spring wire clip **GZP-0054**, white description plate **GZP-0035**
- 35 mm rail mount acc. to EN 60715 or on panel mounting with two M3 screws
- Recognitions, certifications, directives: recognitions R15, RoHS,



Output circuits - contact data

Number and type of contacts	2 CO, 3 CO	
Contact material	AgNi	
Max. switching voltage	440 V AC / 250 V DC	
Rated load (capacity)	AC1	10 A / 277 V AC UL 508
	AC15	3 A / 120 V 1,5 A / 240 V (B300)
	DC1	10 A / 24 V DC (see Fig. 3)
	DC13	0,22 A / 120 V 0,1 A / 250 V (R300)
Motor load	acc. to UL 508	1/2 HP 240 V AC, 4,9 FLA, single-phase motor ①
	AC3 acc. to IEC 60947-4-1	0,37 kW 240 V AC, single-phase motor
Max. inrush current	20 A	
Rated current	10 A	
Max. breaking capacity	AC1	2 500 VA
Min. breaking capacity	0,3 W 5 V, 5 mA	
Contact resistance	≤ 100 mΩ	
Max. operating frequency	• at rated load AC1	1 200 cycles/hour
	• no load	12 000 cycles/hour
Input circuit		
Rated voltage of output relay R15	50/60 Hz AC	24, 48, 60, 110, 120, 230, 240 V
	DC	24, 48, 60, 110, 120, 220 V
Supply voltage of time module COM3	24...240 V AC/DC (universal module)	
Operating range of supply voltage	0,85...1,1 U _n see Tables 1, 2	
Rated power consumption	AC	3,0 VA
	DC	2,0 W
Range of supply frequency	48...63 Hz	
Control contact S ②		
• connections	not potential free, terminals A1-B1	
• line length	max. 10 m (twisted pair)	
• min. time of pulse duration ③	100 ms	
Insulation according to EN 60664-1		
Insulation rated voltage	250 V AC	
Overvoltage category	III	
Dielectric strength	• input - outputs	2 500 V AC type of insulation: basic
	• contact clearance	1 500 V AC type of clearance: micro-disconnection
	• pole - pole	2 000 V AC type of insulation: basic
	Input - outputs distance	• clearance
	• creepage	≥ 4,2 mm
General data		
Operating / release time (typical values)	AC: 12 ms / 10 ms	DC: 18 ms / 7 ms
Electrical life	• resistive AC1	> 2 x 10 ⁵ 10 A, 250 V AC
	• cosφ	see Fig. 2
Mechanical life (cycles)	> 2 x 10 ⁷	
Dimensions (L x W x H)	73 x 38,2 x 85,4 mm	
Weight	3 CO: 175 g	2 CO: 168 g
Ambient temperature	• storage	-40...+70 °C
	(non-condensation and/or icing) • operating	-40...+55 °C
Cover protection category	IP 20	EN 60529
Environmental protection	R15: RTI GZP11, GZP8: RT0	EN 61810-7
Shock resistance	10 g	
Vibration resistance	5 g 10...500 Hz	

The data in bold type relate to the standard versions of the relays. ① For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC. ② The control terminal B1 is activated by connection to A1 terminal via the external control contact S. ③ Where the control signal is recognizable.

Time module data


Functions	E, Wu, Bp, Bi, R, Ws, Wa, Es
Function adjustment ④	selection with microswitches
Time ranges	1 s; 10 s; 1 min.; 10 min.; 1 h; 10 h; 1 d; 10 d
Timing adjustment ④	time range - with microswitches smooth - (0,05...1) x time range - with potentiometer
Base accuracy	± 1% (calculated from the final range values)
Setting accuracy	± 5% (calculated from the final range values)
Repeatability	± 0,5% or ± 5 ms
Temperature influence	± 0,01% / °C
Recovery time	150 ms
LED indicator	green LED U ON - indication of supply voltage U green LED U flashing - measurement of T time

④ Settings of switches - see below.


Settings of switches

Function adjustment	E	Wu	Bi	Bp	R	Ws	Wa	Es
microswitches 1, 2, 3								
Timing adjustment (max.) microswitches 4, 5, 6	1 s	10 s	1 min.	10 min.	1 h	10 h	1 d	10 d

Connection diagrams (screw terminals side view)

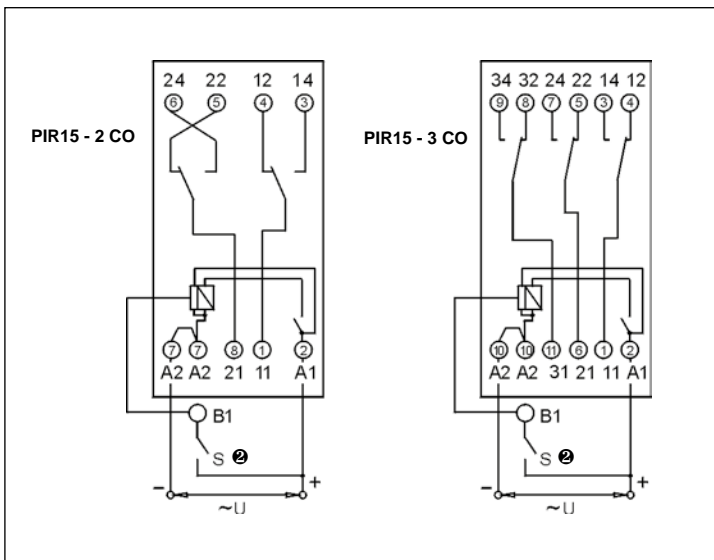

Dimensions - time module COM3

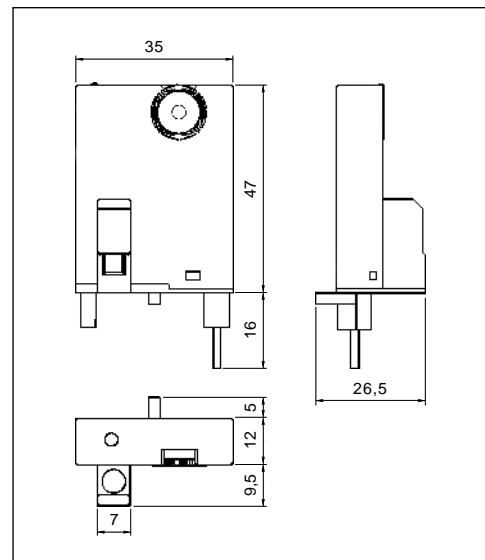

④ The control terminal B1 is activated by connection to A1 terminal via the external control contact S.


COM3

Universal
time module
- see page 324




Time functions

E - ON delay.




When the supply voltage U is applied, the set interval T begins (green LED flashing). After the interval T has expired (green LED illuminated) the output relay R switches into on-position. This status remains until the supply voltage is interrupted - see Diagram 1.

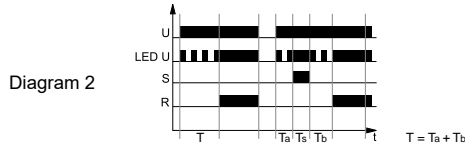


Additional option (ON delay adding): if the control contact S is closed the running interval T is stopped (green LED illuminated) and the interval already expired is saved. When the control contact S is opened once again the interval T is continued (green LED flashing). After the interval T has expired, the control contact S can be operated as you like - see Diagram 2.

Wu - Single shot leading edge voltage controlled.

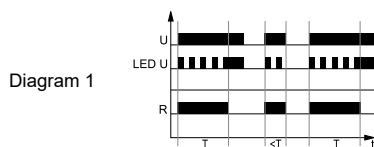


When the supply voltage U is applied, the output relay R switches into on-position and the set interval T begins (green LED flashing). After the interval T has expired (green LED illuminated) the output relay switches into off-position. This status remains until the supply voltage is interrupted. If the supply voltage is interrupted before the interval T has expired, the output relay switches into off-position. The interval already expired is erased and is restarted when the supply voltage is next applied - see Diagram 1.

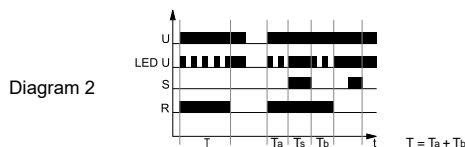


Additional option (Single shot leading edge adding): if the control contact S is closed the running interval T is stopped (green LED illuminated) and the interval already expired is saved. When the control contact S is opened once again the interval T is continued (green LED flashing). After the interval T has expired, the control contact S can be operated as you like - see Diagram 2.

Bp - Symmetrical cyclical operation pause first.




Applying the supply voltage U starts the cyclical operation from the interval T - switching the output relay R off followed by switching on the output relay R for the interval T. The cyclical operation lasts until the supply voltage U is interrupted.

Bi - Symmetrical cyclical operation pulse first.




Applying the supply voltage U starts the cyclical operation from switching on the output relay R for the set interval T. After the interval T has lapsed, the output relay R switches off for the interval T. The cyclical operation lasts until the supply voltage U is interrupted.

R - OFF delay with the control contact S.




The input of the time relay is supplied with voltage U continuously. Closing of the control contact S immediately switches on the output relay R. Opening of the control contact S starts the set time of the delayed switching off of the output relay R. After the interval T has lapsed, the output relay R switches off. If the control contact S is closed during the interval T, the already measured time is reset, and the output relay R is switched on again. The OFF delay of the output relay R will start when the control contact S is opened again.

Ws - Single shot for the set interval triggered by closing of the control contact S.




The input of the time relay is supplied with voltage U continuously. Closing of the control contact S immediately switches the output relay R on for the set interval T. After the interval T has lapsed, the output relay R is switched off. In the course of the interval T, any opening of the control contact S does not affect the function to be performed. The output relay R may be switched on again for the set interval, after the interval T has lapsed, by closing the control contact S again.

Wa - ON for the set interval triggered with the control contact S.



The input of the time relay is supplied with voltage U continuously. Closing of the control contact S does not start the interval T, and it does not change the position of the output relay R. Opening of the control contact S immediately switches on the output relay R for the set time. After the interval T has lapsed, the output relay R switches off. Opening and closing of the control contact S in the course of the interval T does not affect the function to be performed. The output relay R may be switched on again for the set interval with another closing and opening of the control contact S.

Es - ON delay with the control contact S.




The input of the time relay is supplied with voltage U continuously. Closing of the control contact S starts the interval T - on-delay of the output relay R. After the interval T has lapsed, the output relay R switches on and remains in this position until the control contact S is opened. In case the control contact S is closed for time shorter than the set interval T, the output relay R will not activate.

U - supply voltage; **R** - output state of the relay; **S** - control contact state; **T** - measured time; **Ta**, **Tb** - component intervals of T time; **Ts** - period of T time interrupt; **t** - time axis


TIME

Dimensions

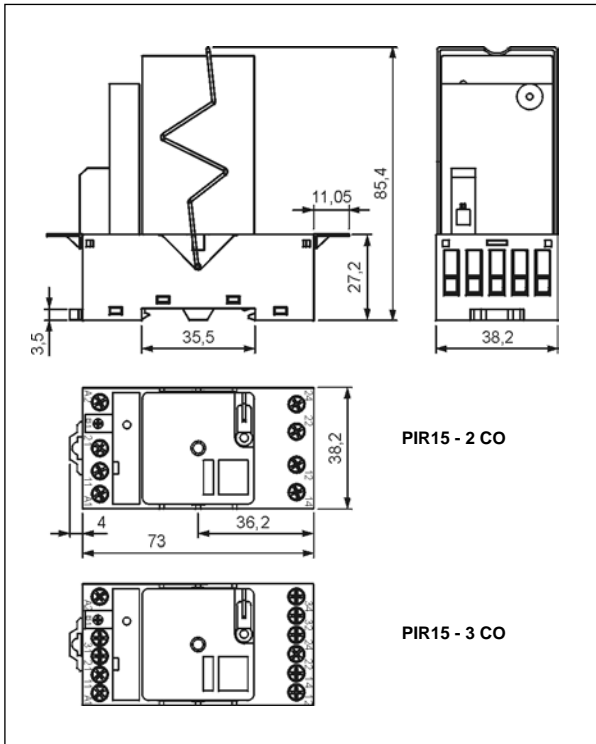


Electrical life at AC resistive load. Switching frequency: 1 200 cycles/hour

Fig. 1

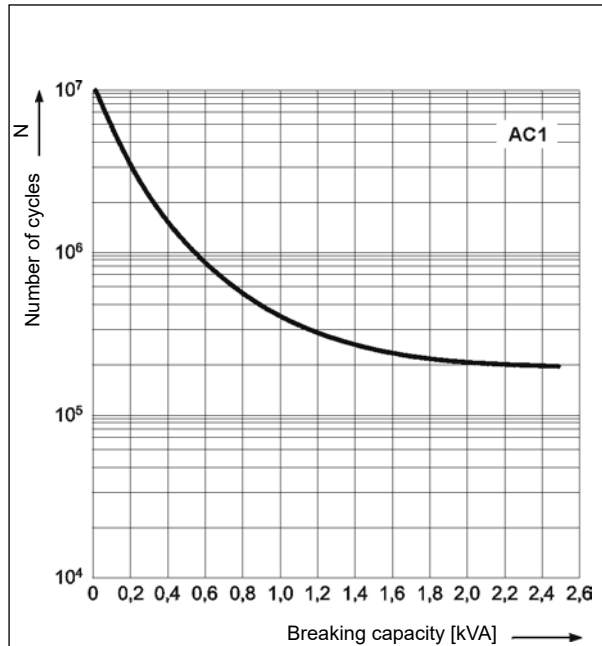


Electrical life reduction factor at AC inductive load

Fig. 2

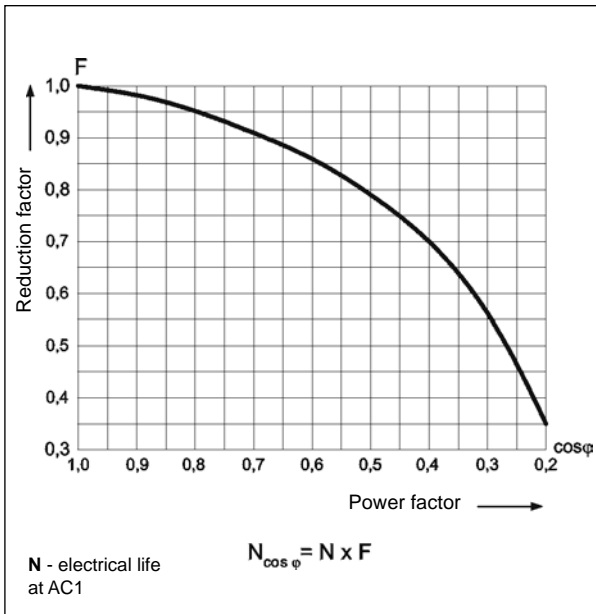

Max. DC breaking capacity A - resistive load DC1 B - inductive load L/R = 40 ms

Fig. 3

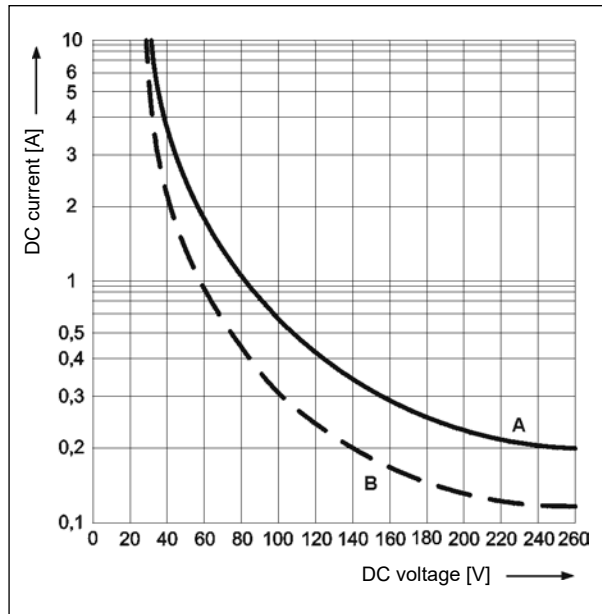

Mounting

Relays PIR15...T are designed for direct mounting on 35 mm rail mount acc. to EN 60715 or on panel mounting with two M3 screws. **Connections:** max. cross section of the cables (stranded): 2 x 2,5 mm² (2 x 14 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,5 Nm.

Input data - DC voltage version

Table 1

Input voltage code	Rated input voltage U_n V DC	Input resistance at 20 °C Ω	Acceptable resistance	Input - voltage range V DC	
				min. (at 20 °C)	max. (at 55 °C)
024DC	24	430	± 10%	19,2	26,4
048DC	48	1 750	± 10%	38,4	52,8
060DC	60	2 700	± 10%	48,0	66,0
110DC	110	9 200	± 10%	88,0	121,0
120DC	120	11 000	± 10%	96,0	132,0
220DC	220	37 000	± 10%	176,0	242,0

The data in bold type relate to the standard versions of the relays.


Input data - AC 50/60 Hz voltage version

Table 2

Input voltage code	Rated input voltage U_n V AC	Input resistance at 20 °C Ω	Acceptable resistance	Input - voltage range V AC	
				min. (at 20 °C)	max. (at 55 °C)
024AC	24	75	± 15%	19,2	26,4
048AC	48	305	± 15%	38,4	52,8
060AC	60	475	± 15%	48,0	66,0
110AC	110	1 700	± 15%	88,0	121,0
120AC	120	1 910	± 15%	96,0	132,0
230AC	230	7 080	± 15%	184,0	253,0
240AC	240	7 760	± 15%	192,0	264,0

The data in bold type relate to the standard versions of the relays.

Ordering codes

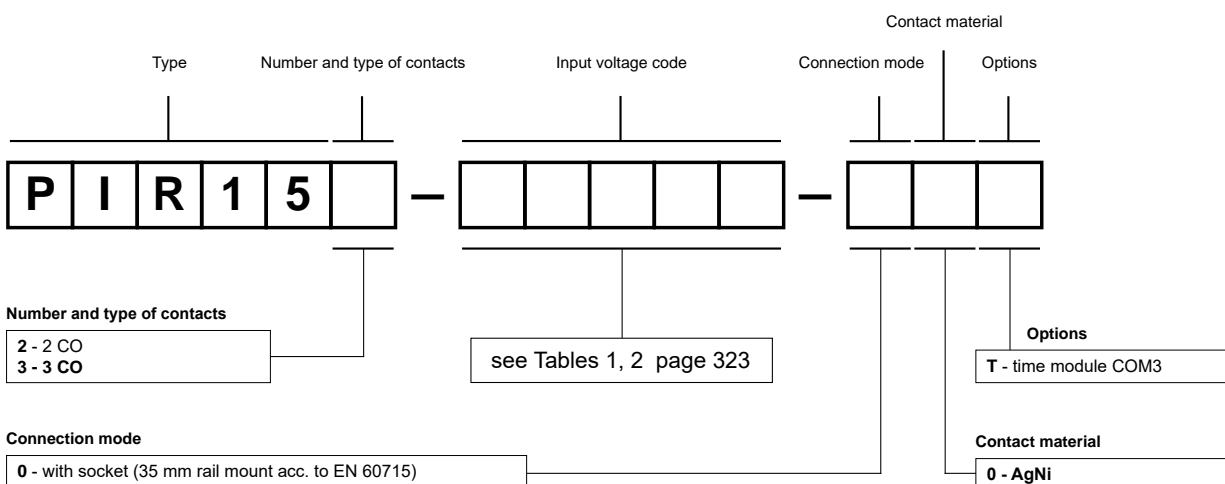

Examples of ordering codes:

PIR153-230AC-00T

time relay **PIR15 - 3 CO** consists of: relay **R15 - 3 CO** (three changeover contacts, contact material AgNi, input voltage 230 V AC 50/60 Hz), socket **GZP11** (black, screw terminals), time module **COM3**, spring wire clip **GZP-0054**, description plate **GZP-0035** (white)

PIR152-024DC-00T

time relay **PIR15 - 2 CO** consists of: relay **R15 - 2 CO** (two changeover contacts, contact material AgNi, input voltage 24 V DC), socket **GZP8** (black, screw terminals), time module **COM3**, spring wire clip **GZP-0054**, description plate **GZP-0035** (white)



- **Multifunction time modules (8 time functions; 8 time ranges)**
- AC/DC input voltages
- Mounting: combinable to relay R15 - 3 CO (2 CO) with plug-in socket GZP11 (GZP8)
- Recognitions, certifications, directives: RoHS,

Output circuits - contact data

Number and type of contacts	according to relays R15 - 3 CO (2 CO)		
Input circuit			
Rated voltage	AC: 50/60 Hz AC/DC	12...240 V	terminals (+)A1 – (-)A2
Must release voltage		> 10 V AC or 10 V DC	
Operating range of supply voltage		0,85...1,1 U _n	
Rated power consumption	AC	80 mVA (54 mW)	24 V AC
		940 mVA (520 mW)	230 V AC
	DC	60 mW	24 V DC
		765 mW	240 V AC
Range of supply frequency	AC	45...65 Hz	
Duty cycle		100%	
Residual ripple to DC		10%	
Control contact S ①			
• connections		not potential free, terminals A1-B1	
• line length		max. 10 m (twisted pair)	
• min. time of pulse duration ②		100 ms	
Insulation according to EN 60664-1			
Insulation pollution degree		2	if built-in: 3
General data			
Dimensions (L x W x H)		26,5 x 35 x 47 mm	
Ambient temperature (non-condensation and/or icing)	• storage	-25...+70 °C	
	• operating	-25...+55 °C	
Cover protection category		IP 40	EN 60529
Relative humidity		15...85%	
Time module data			
Functions		E, Wu, Bp, Bi, R, Ws, Wa, Es	
Function adjustment ③		selection with microswitches	
Time ranges		1 s; 10 s; 1 min.; 10 min.; 1 h; 10 h; 1 d; 10 d	
Timing adjustment ③		time range - with microswitches smooth - (0,05...1) x time range - with potentiometer	
Base accuracy		± 1% (calculated from the final range values)	
Setting accuracy		± 5% (calculated from the final range values)	
Repeatability		± 0,5% or ± 5 ms	
Temperature influence		± 0,01% / °C	
Recovery time		150 ms	
LED indicator		green LED U ON - indication of supply voltage U green LED U flashing - measurement of T time	

① The control terminal B1 is activated by connection to A1 terminal via the external control contact S.

② Where the control signal is recognizable.

③ Settings of switches - see page 326.


Time relay PIR15...T

- set: relay R15 - 3 CO (2 CO)
- + socket GZP11 (GZP8)
- + time module COM3
- see page 319




Time functions

E - ON delay.




When the supply voltage U is applied, the set interval T begins (green LED flashing). After the interval T has expired (green LED illuminated) the output relay R switches into on-position. This status remains until the supply voltage is interrupted - see Diagram 1.

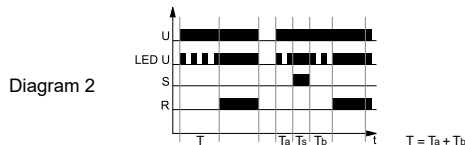


Additional option (ON delay adding): if the control contact S is closed the running interval T is stopped (green LED illuminated) and the interval already expired is saved. When the control contact S is opened once again the interval T is continued (green LED flashing). After the interval T has expired, the control contact S can be operated as you like - see Diagram 2.

Wu - Single shot leading edge voltage controlled.

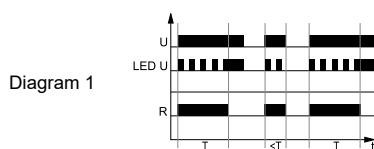


When the supply voltage U is applied, the output relay R switches into on-position and the set interval T begins (green LED flashing). After the interval T has expired (green LED illuminated) the output relay switches into off-position. This status remains until the supply voltage is interrupted. If the supply voltage is interrupted before the interval T has expired, the output relay switches into off-position. The interval already expired is erased and is restarted when the supply voltage is next applied - see Diagram 1.

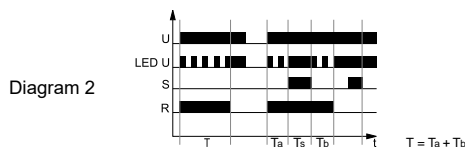


Additional option (Single shot leading edge adding): if the control contact S is closed the running interval T is stopped (green LED illuminated) and the interval already expired is saved. When the control contact S is opened once again the interval T is continued (green LED flashing). After the interval T has expired, the control contact S can be operated as you like - see Diagram 2.

Bp - Symmetrical cyclical operation pause first.




Applying the supply voltage U starts the cyclical operation from the interval T - switching the output relay R off followed by switching on the output relay R for the interval T. The cyclical operation lasts until the supply voltage U is interrupted.

Bi - Symmetrical cyclical operation pulse first.




Applying the supply voltage U starts the cyclical operation from switching on the output relay R for the set interval T. After the interval T has lapsed, the output relay R switches off for the interval T. The cyclical operation lasts until the supply voltage U is interrupted.

R - OFF delay with the control contact S.




The input of the time relay is supplied with voltage U continuously. Closing of the control contact S immediately switches on the output relay R. Opening of the control contact S starts the set time of the delayed switching off of the output relay R. After the interval T has lapsed, the output relay R switches off. If the control contact S is closed during the interval T, the already measured time is reset, and the output relay R is switched on again. The OFF delay of the output relay R will start when the control contact S is opened again.

Ws - Single shot for the set interval triggered by closing of the control contact S.




The input of the time relay is supplied with voltage U continuously. Closing of the control contact S immediately switches the output relay R on for the set interval T. After the interval T has lapsed, the output relay R is switched off. In the course of the interval T, any opening of the control contact S does not affect the function to be performed. The output relay R may be switched on again for the set interval, after the interval T has lapsed, by closing the control contact S again.

Wa - ON for the set interval triggered with the control contact S.



The input of the time relay is supplied with voltage U continuously. Closing of the control contact S does not start the interval T, and it does not change the position of the output relay R. Opening of the control contact S immediately switches on the output relay R for the set time. After the interval T has lapsed, the output relay R switches off. Opening and closing of the control contact S in the course of the interval T does not affect the function to be performed. The output relay R may be switched on again for the set interval with another closing and opening of the control contact S.

Es - ON delay with the control contact S.




The input of the time relay is supplied with voltage U continuously. Closing of the control contact S starts the interval T - on-delay of the output relay R. After the interval T has lapsed, the output relay R switches on and remains in this position until the control contact S is opened. In case the control contact S is closed for time shorter than the set interval T, the output relay R will not activate.

U - supply voltage; **R** - output state of the relay; **S** - control contact state; **T** - measured time; **T_a**, **T_b** - component intervals of T time; **T_s** - period of T time interrupt; **t** - time axis


Settings of switches

Function adjustment	E	Wu	Bi	Bp	R	Ws	Wa	Es
microswitches 1, 2, 3								
Timing adjustment (max.)	1 s	10 s	1 min.	10 min.	1 h	10 h	1 d	10 d
microswitches 4, 5, 6								

Panels description

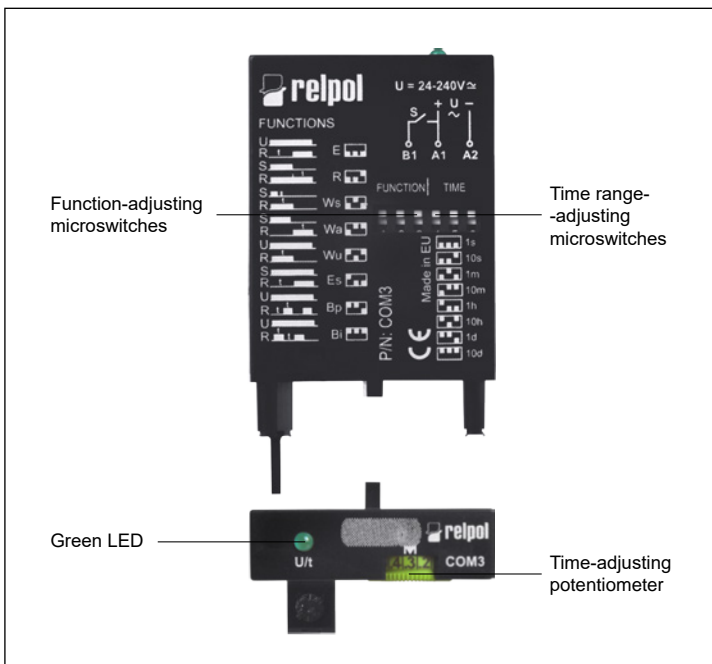


Dimensions - time module COM3

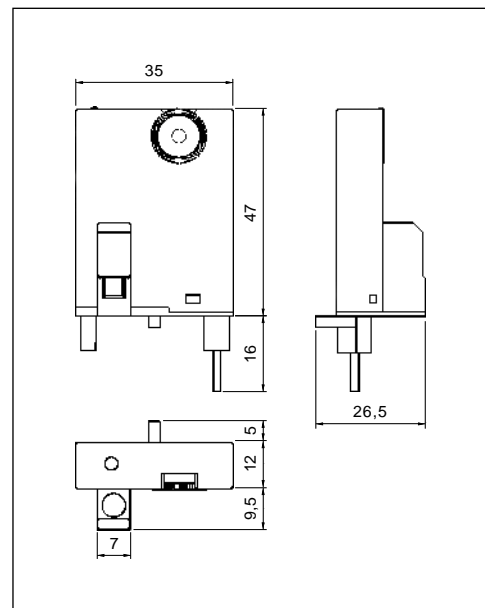

Mounting


Modules **COM3** are designed for mounting on plug-in sockets GZP11 or GZP8 (combinable to relays R15 - 3 CO or R15 - 2 CO). Operational position - any.

Ordering codes



❶ The control terminal B1 is activated by connection to A1 terminal via the external control contact S.

Connection diagram (COM3 + GZP11 + R15 - 3 CO)

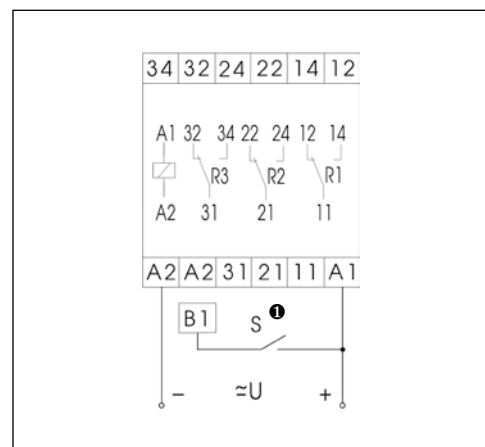

Relays monitoring



 **repol**® S.A.

Multifunctions monitoring relays for power-engineering and industrial automation systems.

Monitoring relays MR-E... series in modular covers and MR-G... series in industrial covers are designed for direct mounting on 35 mm rail mount acc. to EN 60715.

They meet the requirements of REACH and RoHS Directive. The relays are recognized and certified by:



modular covers

MR-EU1W1P	328
MR-EU31UW1P	331
MR-EU3M1P	334
MR-EI1W1P	337
MR-ET1P	340

industrial covers

MR-GU32P-TR2	343
MR-GU3M2P-TR2	346
MR-GU3M2P	349
MR-GI1M2P-TR2	352
MR-GT2P-TR2	355
TR2	358



- **Multifunctions monitoring relays (DC and AC voltage monitoring in 1-phase network, with adjustable thresholds)**
- Minimum value monitoring with the hysteresis mode
- Supply voltage = monitoring voltage
- Output: 1 CO (1 changeover contact)
- Cover - modular, width 17,5 mm
- Direct mounting on 35 mm rail mount acc. to EN 60715
- Recognitions, certifications, directives: RoHS,


Output circuit - contact data

Number and type of contacts		1 CO
Rated voltage		250 V AC
Max. breaking capacity	AC1	1 250 VA (5 A / 250 V AC)
Max. operating frequency		3 600 cycles/hour
• at resistive load 100 VA		360 cycles/hour
• at resistive load 1 000 VA		
Input circuit		
Supply voltage		= monitoring voltage
Rated voltage	AC	24, 230 V
	DC	24 V
Must release voltage		determined by undervoltage detection (see measured circuit)
Operating range of supply voltage		0,75...1,2 U _n
Rated power consumption	AC	230 V AC: 10,0 VA / 0,6 W
	DC	24 V AC: 1,3 VA / 0,8 W 24 V DC: 0,6 W
Range of supply frequency	AC	48...63 Hz
Duty cycle		100%
Measuring circuit	• measuring variable • measuring inputs	DC or AC sinus, 48...63 Hz = supply voltage AC: 230 V terminals E-F3 AC: 24 V terminals E-F2 DC: 24 V terminals E-F1 ≥ 1,2 U _n MIN: 0,75...1,15 U _n MAX: 0,8...1,2 U _n see printing on the unit
	• overload capacity • swithing threshold • hysteresis H	
Insulation according to EN 60664-1		
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		2 if built-in: 3
General data		
Electrical life	• resistive AC1	> 2 x 10 ⁵ 1 000 VA
Mechanical life (cycles)		> 2 x 10 ⁷
Dimensions (L x W x H)		87 x 17,5 x 65 mm
Weight		72 g
Ambient temperature	• storage	-25...+70 °C
(non-condensation and/or icing)	• operating	-25...+55 °C
Cover protection category		IP 20 EN 60529
Relative humidity		15...85%
Shock resistance		15 g 11 ms
Vibration resistance		0,35 mm DA 10...55 Hz
Measuring circuit data		
Functions		UNDER, WIN minimum value monitoring with the hysteresis mode
Base accuracy		± 5% (calculated from the final range values)
Setting accuracy		± 5% (calculated from the final range values)
Repeatability		± 2%
Temperature influence		± 1% / °C
Recovery time		500 ms
LED indicator		green LED U ON - indication of supply voltage U red LEDs MIN and MAX ON/OFF - indication of failure yellow LED R ON/OFF - output relay status

Indication of relay status - according to the set threshold.


Functions

UNDER - Undervoltage monitoring.

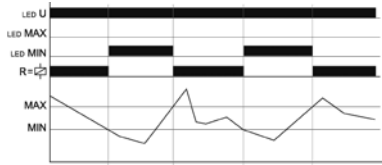

When the supply voltage **U** is applied, the output relay **R** switches into on-position, if the measured voltage is beyond the **MIN**-value. When the measured voltage falls below the **MIN**-value, the output relay **R** switches into off-position. The output relay **R** switches into on-position again, if the voltage exceeds the **MAX**-value.


WIN - Voltage monitoring in windowfunction between **MIN** and **MAX** values.

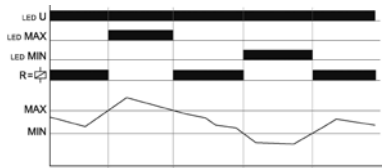


When the supply voltage **U** is applied, the output relay **R** switches into on-position, if the measured voltage is within the adjusted window. When the measured voltage left the window between **MIN** and **MAX**, the output relay **R** switches into off-position. The output relay **R** switches into on-position again, if the voltage re-enter the adjusted window.

U - supply voltage; **R** - output state of the relay; **MIN**, **MAX** - relay status


Front panel description

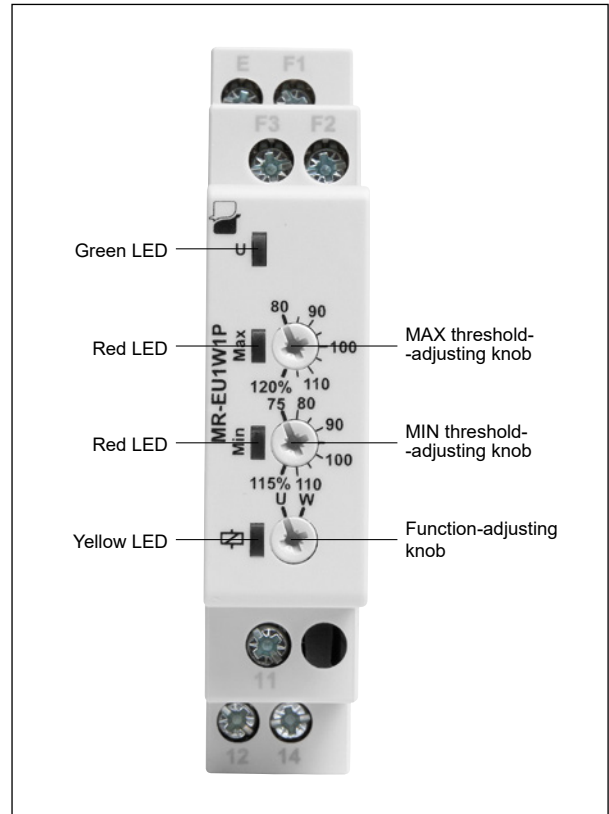

Dimensions

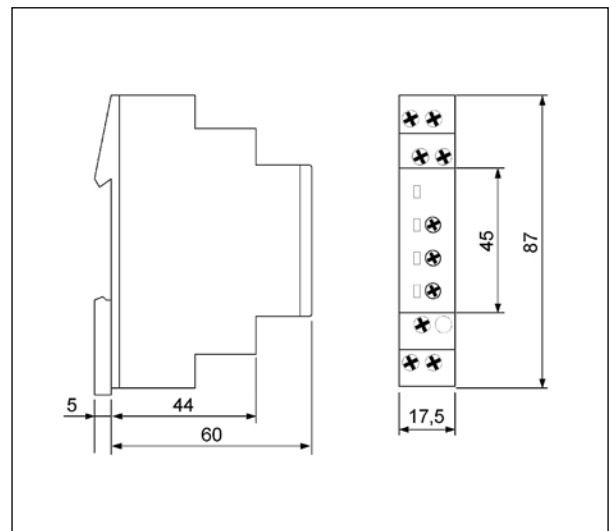


Connection diagrams

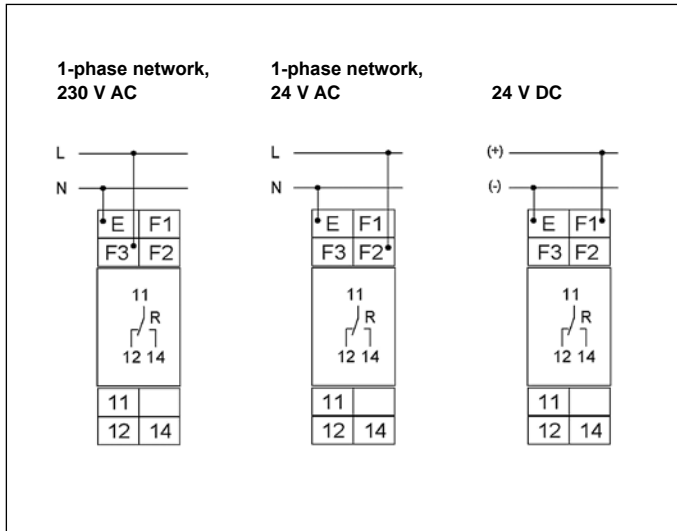

Mounting

Relays **MR-EU1W1P** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - any. **Terminals - cross section of the connection cables:** 1 x 0,5 ... 2,5 mm² with/without multicore cable end, 1 x 4 mm² without multicore cable end, 2 x 0,5 ... 1,5 mm² with/without multicore cable end, 2 x 2,5 mm² flexible without multicore cable end.

Ordering codes

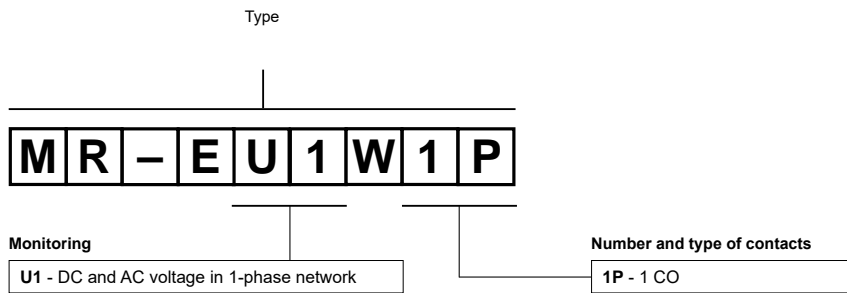

Example of ordering code:

MR-EU1W1P monitoring relay **MR-EU1W1P**, multifunction (relay perform 2 functions), cover - modular, width 17,5 mm, one changeover contact, rated monitoring voltages: AC - 230 V, 24 V; DC - 24 V



- **Multifunctions monitoring relays (AC voltage monitoring in 1-phase network and 3-phase - 3(N)~ 400/230 V, with adjustable thresholds)**
- Monitoring of phase sequence ❶ and phase failure • Connection of neutral wire (optional) • Timing adjustment of tripping delay
- Supply voltage = monitoring voltage • Output: 1 CO (1 changeover contact)
- Cover - modular, width 17,5 mm
- Direct mounting on 35 mm rail mount acc. to EN 60715
- Recognitions, certifications, directives: RoHS, CE

Output circuit - contact data


Number and type of contacts		1 CO
Rated voltage		250 V AC
Max. breaking capacity	AC1	1 250 VA (5 A / 250 V AC)
Max. operating frequency		3 600 cycles/hour
• at resistive load 100 VA		360 cycles/hour
• at resistive load 1 000 VA		
Input circuit		
Supply voltage		= monitoring voltage
Rated voltage	AC	230 V, 3(N)~ 400/230 V
Operating range of supply voltage		0,7...1,3 U _n
Rated power consumption	AC	8,0 VA / 1,0 W
Range of supply frequency	AC	48...63 Hz
Duty cycle		100%
Measuring circuit	<ul style="list-style-type: none"> • measuring variable • measuring inputs • overload capacity • swiching threshold 	3(N)~, sinus, 48...63 Hz = supply voltage AC: 230 V, 3(N)~ 400/230 V terminals (N)-L1-L2-L3 determined by tolerance specified for supply voltage MIN: 0,7...1,2 U _n MAX: 0,8...1,3 U _n
Insulation according to EN 60664-1		
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		2 if built-in: 3
General data		
Electrical life	• resistive AC1	> 2 x 10 ⁵ 1 000 VA
Mechanical life (cycles)		> 2 x 10 ⁷
Dimensions (L x W x H)		87 x 17,5 x 65 mm
Weight		72 g
Ambient temperature	• storage	-25...+70 °C
(non-condensation and/or icing)	• operating	-25...+55 °C
Cover protection category		IP 20 EN 60529
Relative humidity		15...85%
Shock resistance		15 g 11 ms
Vibration resistance		0,35 mm DA 10...55 Hz
Measuring circuit data		
Functions		UNDER, UNDER+SEQ, WIN, WIN+SEQ SEQ - monitoring of phase sequence ❶ and phase failure connection of neutral wire (optional)
Range of delay timing adjustment		tripping delay: 0...10 s
Base accuracy		± 5% (calculated from the final range values)
Setting accuracy		± 5% (calculated from the final range values)
Repeatability		± 2%
Temperature influence		± 0,05% / °C
Recovery time		500 ms
LED indicator		red LEDs MIN and MAX ON/OFF - indication of failure ❷ red LEDs MIN and MAX flashing - indication of tripping delay ❷ red LED SEQ ON - indication of the change of phase sequence yellow LED R ON/OFF - output relay status

❶ Phase sequence monitoring - selectable.
❷ Indication of relay status - according to the set threshold.

Functions


For all functions the LED's MIN and MAX are flashing alternating (the relay is fallen off), when the minimum value for the measured voltage was chosen to be greater than the maximum value. If a failure already exists, when the device is activated, the output relay R remains in off-position and the LED for the corresponding threshold is illuminated. The device includes separately every phase voltage (L-N) and monitors it according to the selected function (UNDER or WINDOW).

UNDER, UNDER+SEQ - Undervoltage monitoring, undervoltage monitoring with monitoring of phase sequence.

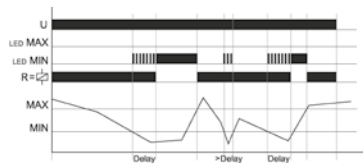


When the measured voltage (one of the phase voltages) falls below the value adjusted at the MIN-regulator, the set interval of the tripping delay (Delay) begins (red LED MIN flashes). After the interval has expired (red LED MIN illuminated), the output relay R switches into off-position (yellow LED not illuminated), when the measured voltage (all phase voltages) exceeds the value adjusted at the MAX-regulator.

WIN, WIN+SEQ - Voltage monitoring in windowfunction between MIN and MAX values, voltage monitoring in windowfunction between MIN and MAX values with monitoring of phase sequence.

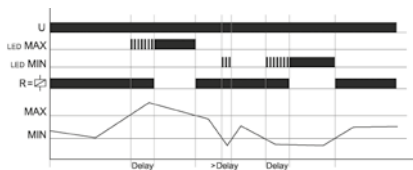

The output relay R switches into on-position (yellow LED illuminated), when the measured voltage (all phase voltages) exceeds the value adjusted at the MIN-regulator. When the measured voltage (one of the phase voltages) exceeds the value adjusted at the MAX-regulator, the set interval of tripping delay (Delay) begins (red LED MAX flashes). After the interval has expired (red LED MAX illuminated) the output relay R switches into off-position (yellow LED not illuminated). The output relay R switches into on-position again (yellow LED illuminated) when the measured voltage falls below the value adjusted at the MAX-regulator (red LED MAX not illuminated). When the measured voltage (one of the phase voltage) falls below the value adjusted at the Min-regulator, the set interval of tripping delay (Delay) begins again (red LED MIN flashes). After the interval has expired (red LED MIN illuminated), the output relay R switches into off-position (yellow LED not illuminated).


SEQ - Phase sequence monitoring.

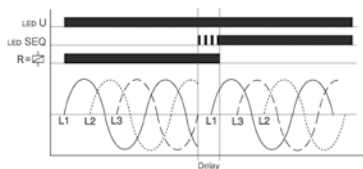

Phase sequence monitoring is selectable for all functions. In single phase circuit, the monitoring of phase sequence must be disconnected. If a change in phase sequence is detected (red LED SEQ illuminated), the output relay R switches into off-position after the set interval of tripping delay (Delay) has expired (yellow LED not illuminated).


U - supply voltage; **R** - output state of the relay; **MIN, MAX** - relay status; **SEQ** - phase sequence

Loss of neutral wire by means of evaluation of asymmetry.

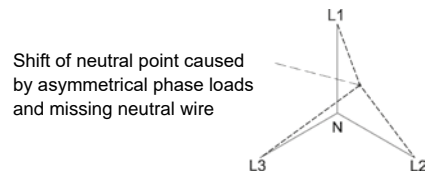


The device monitors every phase (L1, L2 and L3) against the neutral wire N. A shift of neutral point occurs by an asymmetrical phase load if the neutral wire breaks in the power line. If one of the phase voltages exceeds the value adjusted at the trip point, the set interval of tripping delay (Delay) begins (red LED MIN or MAX flashes). After the interval has expired (red LED MIN or MAX illuminated), the output relay R switches into off-position (yellow LED not illuminated).


Front panel description

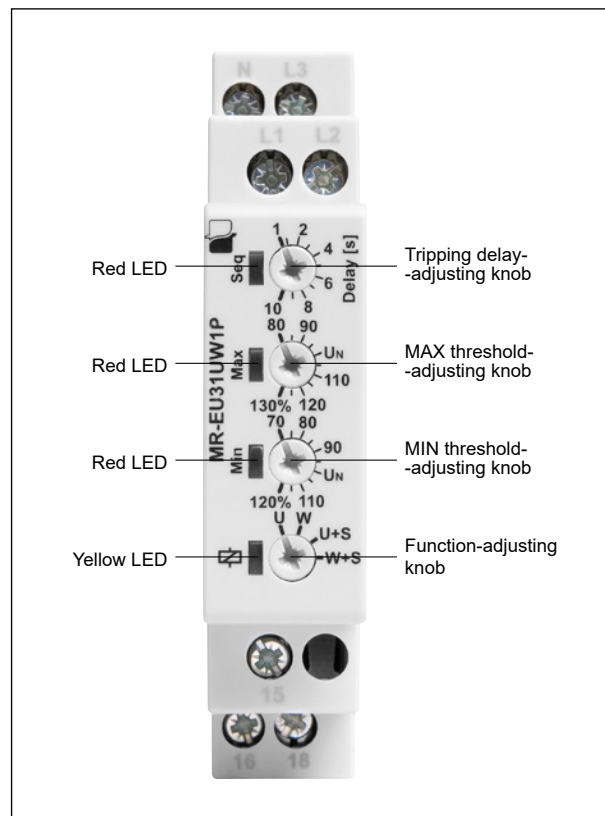

Dimensions

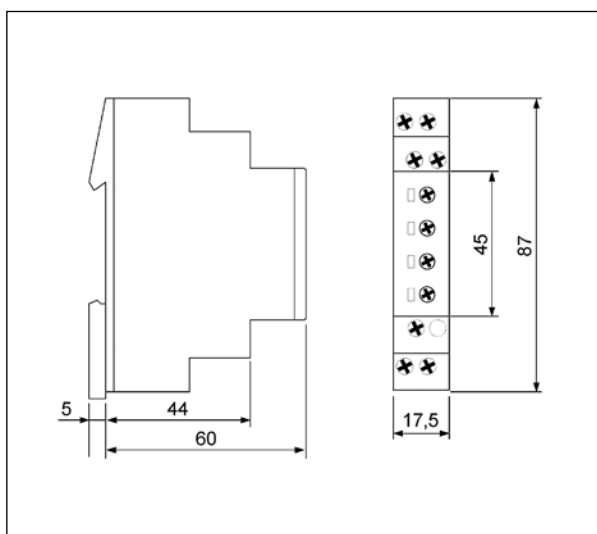


Connection diagrams

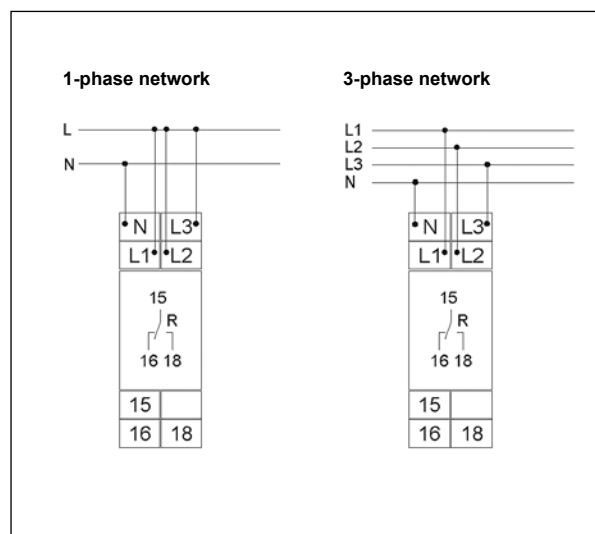

Mounting

Relays **MR-EU31UW1P** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - any. **Terminals - cross section of the connection cables:** 1 x 0,5 ... 2,5 mm² with/without multicore cable end, 1 x 4 mm² without multicore cable end, 2 x 0,5 ... 1,5 mm² with/without multicore cable end, 2 x 2,5 mm² flexible without multicore cable end.

Ordering codes

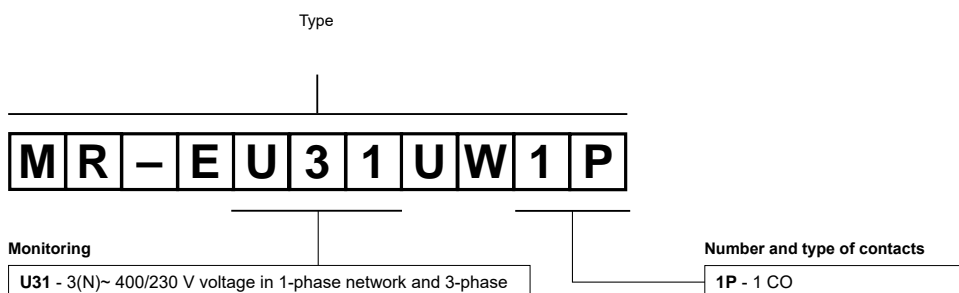

Example of ordering code:

MR-EU31UW1P monitoring relay **MR-EU31UW1P**, multifunction (relay perform 5 functions), cover - modular, width 17,5 mm, one changeover contact, rated monitoring voltages: AC - 230 V, 3(N)- 400/230 V




- **Multifunctions monitoring relays (AC voltage monitoring in 3-phase network - 3(N)~ 400/230 V)**
- Monitoring of phase sequence and phase failure • Asymmetry monitoring (adjustable) • Connection of neutral wire (optional)
- Supply voltage = monitoring voltage • Output: 1 CO (1 changeover contact)
- Cover - modular, width 17,5 mm
- Direct mounting on 35 mm rail mount acc. to EN 60715
- Recognitions, certifications, directives: RoHS,

Output circuit - contact data

Number and type of contacts		1 CO
Rated voltage		250 V AC
Max. breaking capacity	AC1	1 250 VA (5 A / 250 V AC)
Max. operating frequency		3 600 cycles/hour
• at resistive load 100 VA		360 cycles/hour
• at resistive load 1 000 VA		
Input circuit		
Supply voltage		= monitoring voltage
Rated voltage	AC	3(N)~ 400/230 V
Must release voltage		AC: $\geq 0,2 U_n$
Operating range of supply voltage		0,7...1,3 U_n
Rated power consumption	AC	8,0 VA / 0,8 W
Range of supply frequency	AC	48...63 Hz
Duty cycle		100%
Measuring circuit	<ul style="list-style-type: none"> • measuring variable • measuring inputs • overload capacity • asymmetry 	3(N)~, sinus, 48...63 Hz = supply voltage AC: 3(N)~ 400/230 V terminals (N)-L1-L2-L3 determined by tolerance specified for supply voltage adjustable: 5...25%
Insulation according to EN 60664-1		
Rated surge voltage		4 000 V 1,2 / 50 μ s
Overvoltage category		III
Insulation pollution degree		2 if built-in: 3
General data		
Electrical life	• resistive AC1	$> 2 \times 10^5$ 1 000 VA
Mechanical life (cycles)		$> 2 \times 10^7$
Dimensions (L x W x H)		87 x 17,5 x 65 mm
Weight		63 g
Ambient temperature	<ul style="list-style-type: none"> • storage • operating (non-condensation and/or icing)	-25...+70 °C -25...+55 °C
Cover protection category		IP 20 EN 60529
Relative humidity		15...85%
Shock resistance		15 g 11 ms
Vibration resistance		0,35 mm DA 10...55 Hz
Measuring circuit data		
Functions		SEQ - monitoring of phase sequence and phase failure ASYM - monitoring of asymmetry (adjustable) connection of neutral wire (optional)
Base accuracy		$\pm 5\%$ (calculated from the final range values)
Setting accuracy		$\pm 5\%$ (calculated from the final range values)
Repeatability		$\pm 2\%$
Temperature influence		$\pm 0,05\% / ^\circ\text{C}$
Recovery time		500 ms
LED indicator		green LED U ON - indication of supply voltage U yellow LED R ON/OFF - output relay status


Functions

SEQ - Phase sequence monitoring.




When all the phases are connected in the correct sequence and the measured asymmetry is less than the fixed value, the output relay R switches into on-position (yellow LED illuminated). When the phase sequence changes, the output relay R switches into off-position (yellow LED not illuminated).

SEQ - Phase failure monitoring.



The output relay R switches into off-position (yellow LED not illuminated), when one of the three phases fails.


ASYM - Asymmetry monitoring.




The output relay R switches into off-position (yellow LED not illuminated) when the asymmetry exceeds the value set at the ASYM-regulator. An asymmetry caused by the reverse voltage of a consumer (e.g. a motor which continues to run on two phases only) does not effect the disconnection.

U - supply voltage; **R** - output state of the relay


Front panel description

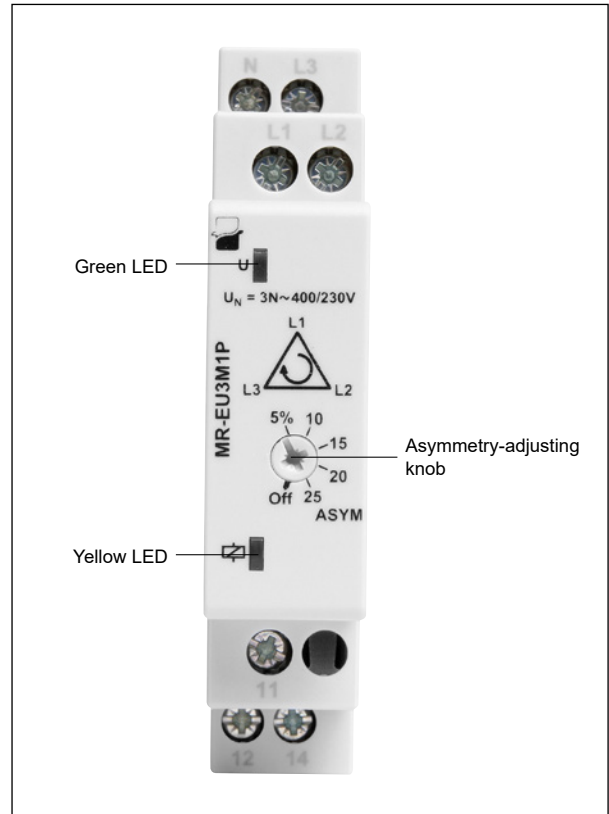

Dimensions

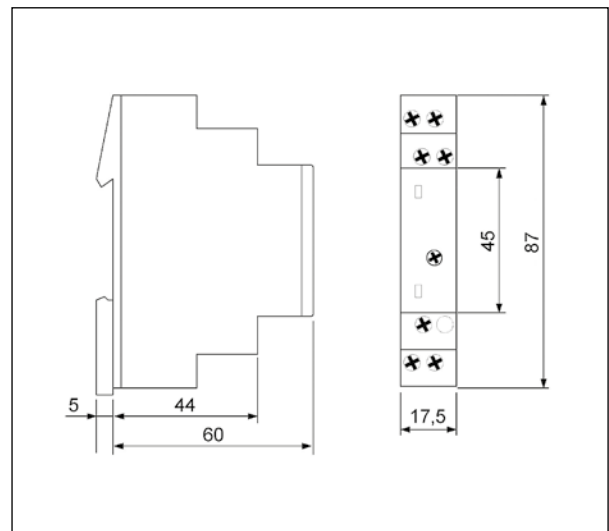


Connection diagram

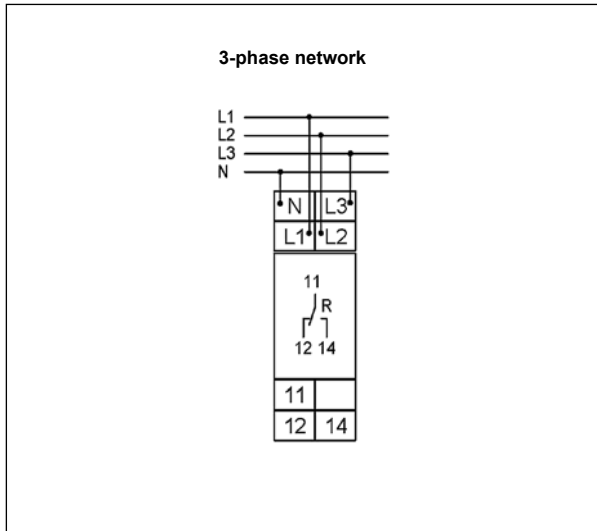

Mounting

Relays **MR-EU3M1P** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - any. **Terminals - cross section of the connection cables:** 1 x 0,5 ... 2,5 mm² with/without multicore cable end, 1 x 4 mm² without multicore cable end, 2 x 0,5 ... 1,5 mm² with/without multicore cable end, 2 x 2,5 mm² flexible without multicore cable end.

Ordering codes

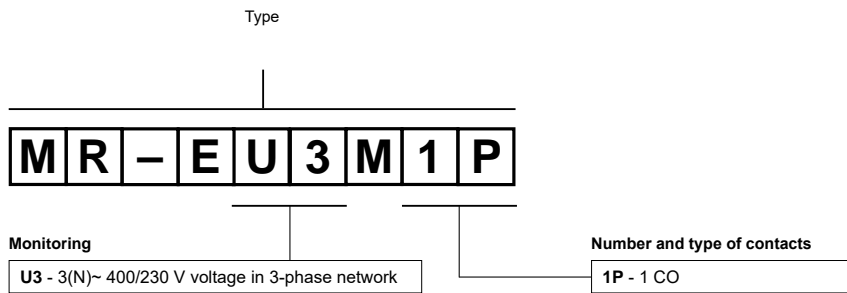

Example of ordering code:

MR-EU3M1P monitoring relay **MR-EU3M1P**, multifunction (relay perform 2 functions), cover - modular, width 17,5 mm, one changeover contact, rated monitoring voltages: AC - 3(N)~ 400/230 V



- **Multifunctions monitoring relays (AC current monitoring in 1-phase network, with adjustable thresholds and adjustable hysteresis)**
- Monitoring windowfunction and histeresis • Timing adjustment of tripping delay • Supply voltage = monitored phase voltage
- Output: 1 CO (1 changeover contact)
- Cover - modular, width 17,5 mm
- Direct mounting on 35 mm rail mount acc. to EN 60715
- Recognitions, certifications, directives: RoHS, **CE**


Output circuit - contact data

Number and type of contacts	1 CO	
Rated voltage	250 V AC	
Max. breaking capacity	AC1	1 250 VA (5 A / 250 V AC)
Max. operating frequency	3 600 cycles/hour	
• at resistive load 100 VA	360 cycles/hour	
• at resistive load 1 000 VA		
Input circuit		
Supply voltage	AC	230 V terminals (N)-Li
Rated voltage	AC	230 V
Must release voltage	AC: $\geq 0,2 U_n$	
Operating range of supply voltage	0,85...1,15 U_n	
Rated power consumption	AC	5,0 VA / 0,8 W
Range of supply frequency	AC	48...63 Hz
Duty cycle	100%	
Measuring circuit	<ul style="list-style-type: none"> • measuring variable • measuring inputs • overload capacity • starting current • input resistance • swiching threshold • hysteresis H 	AC sinus, 48...63 Hz AC: 10 A / 230 V AC terminals (N)-Li-Lk 13 A 1 s: 100 A 3 s: 50 A 3 m Ω MIN: 0,05...0,95 I_n MAX: 0,1...1,0 I_n adjustable setting
Insulation according to EN 60664-1		
Rated surge voltage	4 000 V 1,2 / 50 μ s	
Overvoltage category	III	
Insulation pollution degree	2	if built-in: 3
General data		
Electrical life	• resistive AC1	> 2 x 10 ⁵ 1 000 VA
Mechanical life (cycles)	> 2 x 10 ⁷	
Dimensions (L x W x H)	87 x 17,5 x 65 mm	
Weight	72 g	
Ambient temperature	<ul style="list-style-type: none"> • storage • operating 	-25...+70 °C -25...+55 °C
(non-condensation and/or icing)		
Cover protection category	IP 20	EN 60529
Relative humidity	15...85%	
Shock resistance	15 g 11 ms	
Vibration resistance	0,35 mm DA 10...55 Hz	
Meassuring circuit data		
Functions	OVER, OVER+LATCH, UNDER, UNDER+LATCH, WIN, WIN+LATCH monitoring windowfunction and histeresis	
Range of delay timing adjustment	tripping delay: 0,1...10 s	
Base accuracy	$\pm 5\%$ (calculated from the final range values)	
Setting accuracy	$\pm 5\%$ (calculated from the final range values)	
Repeatability	$\pm 2\%$	
Temperature influence	$\pm 1\%$ / °C	
Recovery time	500 ms	
LED indicator	green LED U ON - indication of supply voltage U red LEDs MIN and MAX ON/OFF - indication of failure ❶ red LEDs MIN and MAX flashing - indication of tripping delay ❶ yellow LED R ON/OFF - output relay status	

❶ Indication of relay status - according to the set threshold.

Functions


OVER, OVER+LATCH - Overcurrent monitoring, overcurrent monitoring with fault latch.

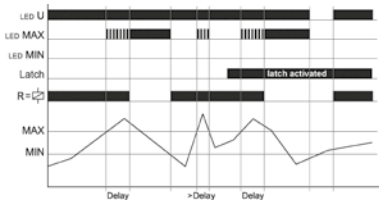

When the supply voltage U is applied, the output relay R switches into on-position, if the measured current is below the MAX-value. When the measured current exceeds the MAX-value, the output relay R switches into off-position after the interval of the tripping delay (Delay) has expired. **OVER**: the output relay R switches into on-position again, if the current falls below the MIN-value.

OVER+LATCH: the output relay R switches only into on-position again by interrupting and re-applying of the supply voltage, provided that the measured current is below the MAX-value.

UNDER, UNDER+LATCH - Undercurrent monitoring, undercurrent monitoring with fault latch.

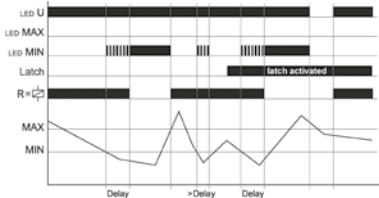


When the supply voltage U is applied, the output relay R switches into on-position, if the measured current is beyond the MIN-value. When the measured current falls below the MIN-value, the output relay R switches into off-position after the interval of the tripping delay (Delay) has expired. **UNDER**: the output relay R switches into on-position again, if the current exceeds the MIN-value.

UNDER+LATCH: the output relay R switches only into on-position again by interrupting and re-applying of the supply voltage, provided that the measured current is beyond the MIN-value.

U - supply voltage; **R** - output state of the relay; **MIN, MAX** - relay status; **SEQ** - phase sequence

WIN, WIN+LATCH - Current monitoring in windowfunction between MIN and MAX values, current monitoring in windowfunction between MIN and MAX values with fault latch.

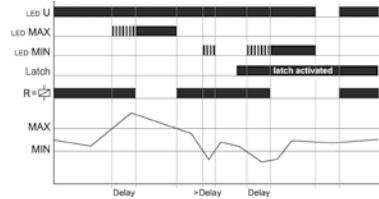


When the supply voltage U is applied, the output relay R switches into on-position, if the measured current is within the adjusted window. When the measured current leaves the window between MIN and MAX, the output relay R switches into off-position after the interval of the tripping delay (Delay) has expired.


WIN: the output relay R switches into on-position again, if the current re-enter the adjusted window.

WIN+LATCH: the output relay R switches only into on-position again by interrupting and re-applying of the supply voltage, provided that the measured current is within the threshold values.


Front panel description

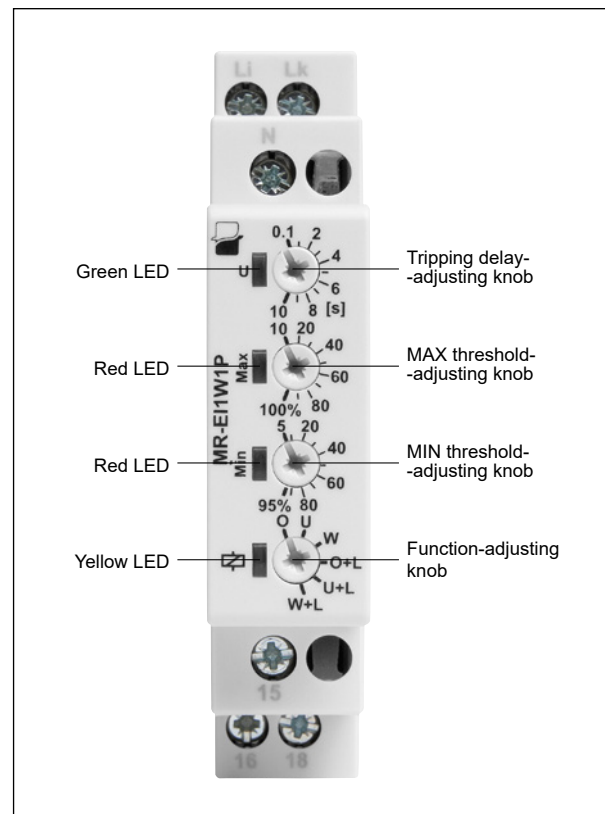

Dimensions

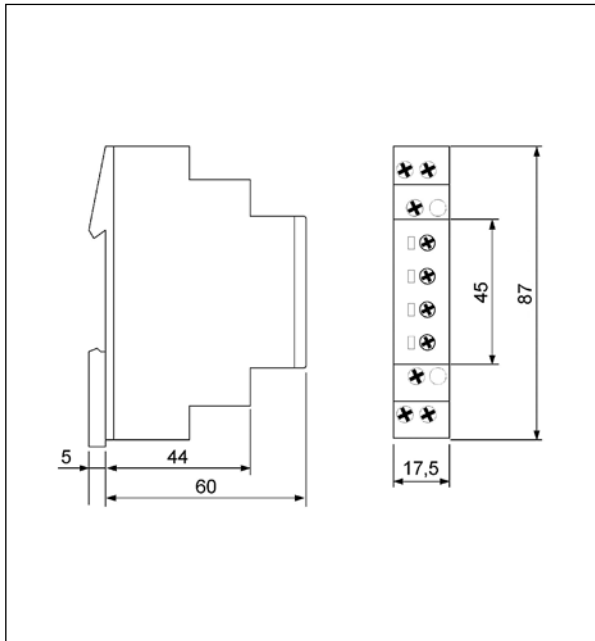


Connection diagrams

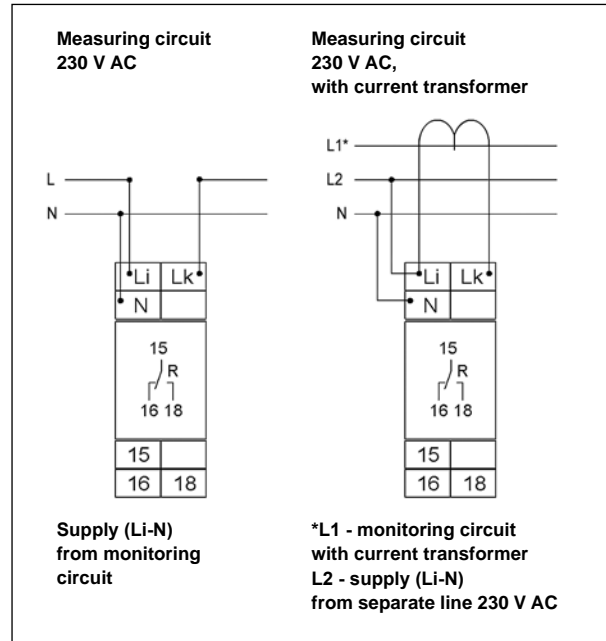

Mounting

Relays **MR-EI1W1P** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - any. **Terminals - cross section of the connection cables:** 1 x 0,5 ... 2,5 mm² with/without multicore cable end, 1 x 4 mm² without multicore cable end, 2 x 0,5 ... 1,5 mm² with/without multicore cable end, 2 x 2,5 mm² flexible without multicore cable end.

Ordering codes

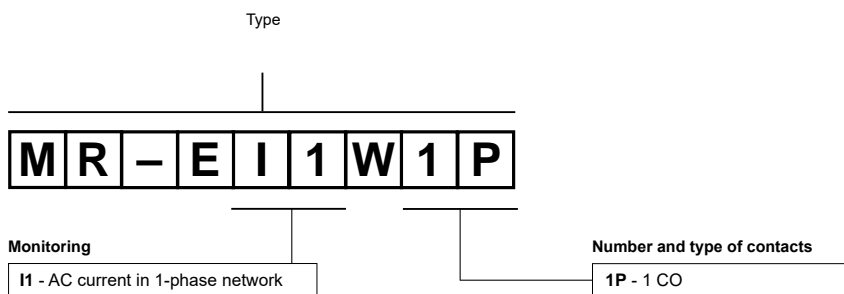

Example of ordering code:

MR-EI1W1P

monitoring relay **MR-EI1W1P**, multifunction (relay perform 6 functions), cover - modular, width 17,5 mm, one changeover contact, rated input voltage (supply): AC - 230 V; monitoring current: max. 10 A / 230 V AC



- **Single-functions monitoring relays (motor temperature monitoring)** • Short circuit monitoring of the thermistor line or thermal contact monitoring ❶ • Test functions: integrated Test/Reset key, connection of the external Reset key (optional)
- Insulation rated voltage on the sensor circuit: 690 V • Output: 1 CO (1 changeover contact) • Cover - modular, width 35 mm
- Direct mounting on 35 mm rail mount acc. to EN 60715
- Recognitions, certifications, directives: RoHS,

Output circuit - contact data

Number and type of contacts	1 CO	
Rated voltage	250 V AC	
Max. breaking capacity	AC1	1 250 VA (thermal constant current 5 A)
Max. operating frequency	3 600 cycles/hour	
• at resistive load 100 VA	360 cycles/hour	
• at resistive load 1 000 VA		
Input circuit		
Supply voltage	AC	230 V terminals A1-A2
Rated voltage	AC	230 V
Must release voltage	AC: $\geq 0,3 U_n$	
Operating range of supply voltage	0,85...1,1 U_n	
Rated power consumption	AC	1,3 VA / 1,0 W
Range of supply frequency	AC	48...63 Hz
Duty cycle	100%	
Measuring circuit	<ul style="list-style-type: none"> • terminals • initial resistance • response value • release value • disconnection ❷ • measuring voltage T1-T2 	T1-T2 or T1-T3 $< 1,5 \text{ k}\Omega$ relay in OFF-position: $\geq 3,6 \text{ k}\Omega$ relay in ON-position: $\leq 1,65 \text{ k}\Omega$ T1-T2: yes T1-T3: no $\leq 7,5 \text{ V}$ at $R \leq 4 \text{ k}\Omega$ EN 60947-8
Control contact	<ul style="list-style-type: none"> • function • loadable • max. line length • control pulse length • Reset 	connection of an external Reset key no R1-R2: 10 m (twisted pair) min. 50 ms contact 1 NO; terminals R1-R2 ❸
Insulation according to EN 60664-1		
Rated surge voltage	6 000 V 1,2 / 50 μs	
Overvoltage category	III	
Insulation pollution degree	2 if built-in: 3	
General data		
Electrical life	• resistive AC1	$> 2 \times 10^5$ 1 000 VA
Mechanical life (cycles)	$> 2 \times 10^7$	
Dimensions (L x W x H)	87 x 35 x 65 mm	
Weight	100 g	
Ambient temperature	<ul style="list-style-type: none"> • storage • operating 	-25...+70 °C
(non-condensation and/or icing)		-25...+55 °C
Cover protection category	IP 20 EN 60529	
Relative humidity	15...85%	
Measuring circuit data		
Functions	temperature monitoring of the motor winding, with fault latch (max. 6 PTC - temperature sensors DIN 44081) short circuit monitoring of the thermistor line or thermal contact ❶ test functions: integrated Test/Reset key, connection of the external Reset key (optional)	
Base accuracy	$\pm 5\%$ (calculated from the final range values)	
Repeatability	$\pm 1\%$	
Temperature influence	$\pm 0,15\% / ^\circ\text{C}$	
Recovery time	250 ms	
LED indicator	green LED U ON - indication of supply voltage U red LED ON/OFF - indication of failure	


❶ Only one of this circuit versions (either short circuit monitoring of the thermistor line or thermal contact monitoring) can be executed.
 ❷ At short circuit.
 ❸ Terminals R2-T2 are internal affiliated with each other.

Functions


Motor temperature monitoring with fault latch.

If the supply voltage U is applied (green LED illuminated) and the cumulative resistance of the PTC-circuit is less than $3,6\text{ k}\Omega$ (standard temperature of the motor), the output relay R switches into on-position. Pressing the Test/Reset key under this conditions forces the output relay R to switch into off-position. It remains in state as long as the Test/Reset key is pressed and thus the switching function can be checked in case of fault. The test function is not effective by using an external Reset key. When the cumulative resistance of the PTC-circuit exceeds $3,6\text{ k}\Omega$ (at least one of the PTCs has reached the cut-off temperature), the output relay R switches into off-position (red LED illuminated). The output relay R switches into on-position again (red LED not illuminated), if the cumulative resistance drops below $1,65\text{ k}\Omega$ by cooling down of the PTC and either a Reset key (internal or external) was pressed or the supply voltage was disconnected and re-applied.

Application of internal Test/Reset key.

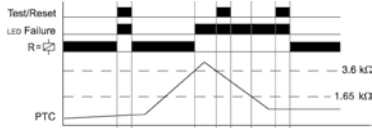


Application of an external Reset key.

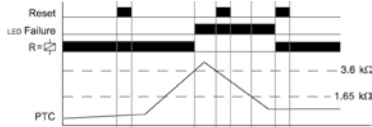


U - supply voltage; R - output state of the relay


Front panel description

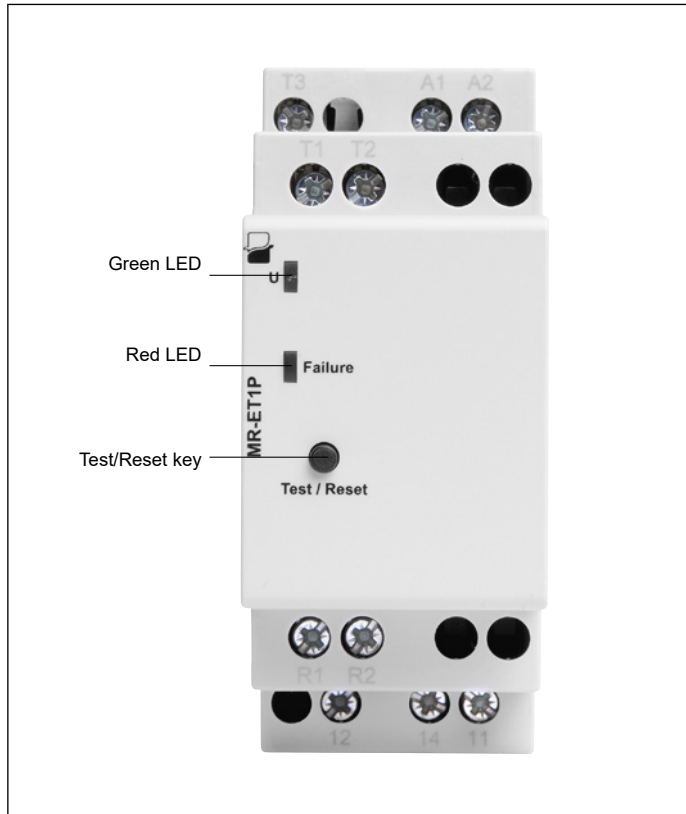

Dimensions

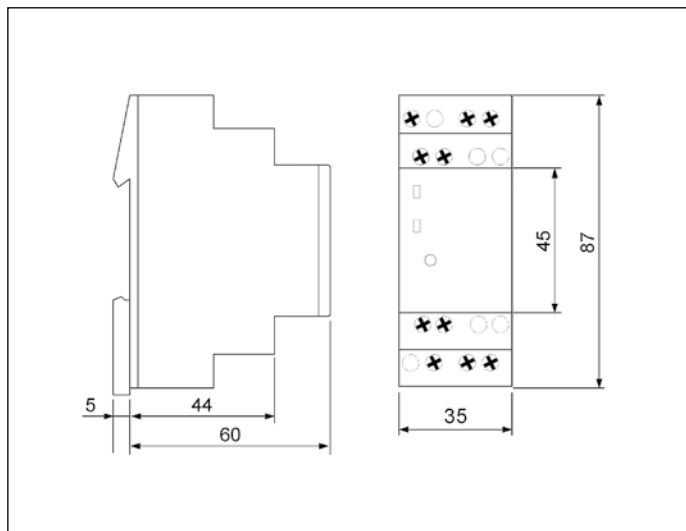

Connection diagrams

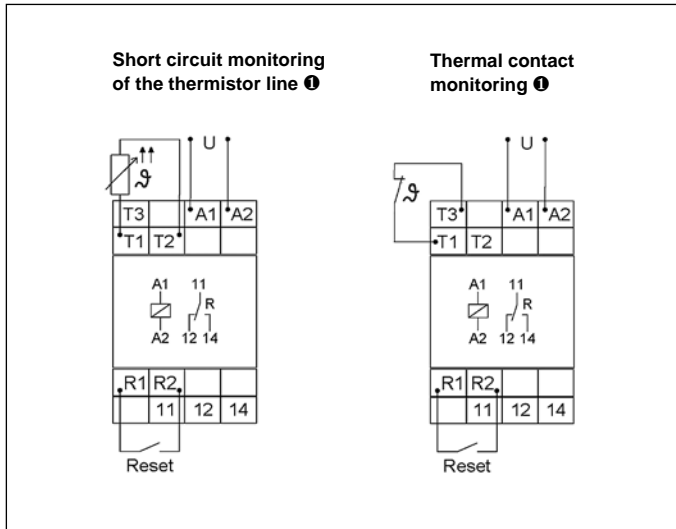


Mounting

Relays **MR-ET1P** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - any. **Terminals - cross section of the connection cables:** 1 x 0,5 ... 2,5 mm² with/without multicore cable end, 1 x 4 mm² without multicore cable end, 2 x 0,5 ... 1,5 mm² with/without multicore cable end, 2 x 2,5 mm² flexible without multicore cable end.

❶ Only one of this circuit versions (either short circuit monitoring of the thermistor line or thermal contact monitoring) can be executed.

Ordering codes

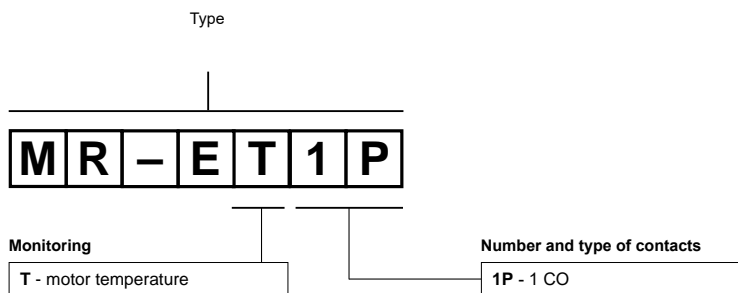

Example of ordering code:

MR-ET1P

monitoring relay **MR-ET1P**, single-function (relay monitors the motor temperature), cover - modular, width 35 mm, one changeover contact, rated input voltage (supply): AC - 230 V



- **Multifunctions monitoring relays (AC voltages monitoring in phases - 230 V, 3-phase network 3(N)~ 400/230 V, with adjustable thresholds)** • Fault latch mode • Connection of neutral wire (required)
- Timing adjustment of tripping delay • Supply via TR2 supply transformer ❶ • Measurement inputs: 230 V AC • Output: 2 CO (2 changeover contacts) • Industrial cover, width 22,5 mm
- Direct mounting on 35 mm rail mount acc. to EN 60715
- Recognitions, certifications, directives: RoHS,

Output circuit - contact data


Number and type of contacts		2 CO
Rated voltage		250 V AC
Max. breaking capacity	AC1	750 VA (3 A / 250 V AC) ❷ 1 250 VA (5 A / 250 V AC) ❸
Max. operating frequency		3 600 cycles/hour
• at resistive load 100 VA		360 cycles/hour
• at resistive load 1 000 VA		
Input circuit		
Supply voltage	AC	12, 24, 42, 48, 110, 127, 230, 400 V ❶ terminals A1-A2
Must release voltage		AC: $\geq 0,3 U_n$
Operating range of supply voltage		as per the specification of TR2 supply transformer ❶
Rated power consumption	AC	2,0 VA / 1,5 W
Range of supply frequency	AC	as per the specification of TR2 supply transformer ❶
Duty cycle		100%
Measuring circuit	<ul style="list-style-type: none"> • measuring variable • measuring inputs • overload capacity • input resistance • switching threshold 	AC sinus, 48...63 Hz AC: 230 V terminals N-L1, N-L2, N-L3 440 V AC 3(N)~ 400/230 V: 470 k Ω MIN: 0,7...1,2 U_n MAX: 0,8...1,3 U_n
Insulation according to EN 60664-1		
Rated surge voltage		4 000 V 1,2 / 50 μ s
Overvoltage category		III
Insulation pollution degree		3
General data		
Electrical life	• resistive AC1	$> 2 \times 10^5$ 1 000 VA
Mechanical life (cycles)		$> 2 \times 10^7$
Dimensions (L x W x H)		90 x 22,5 x 108 mm
Weight		100 g
Ambient temperature	<ul style="list-style-type: none"> • storage • operating (non-condensation and/or icing)	-25...+70 °C -25...+55 °C
Cover protection category		IP 20 EN 60529
Relative humidity		15...85%
Shock resistance		15 g 11 ms
Vibration resistance		0,35 mm DA 10...55 Hz
Measuring circuit data		
Functions		OVER, OVER+LATCH, UNDER, UNDER+LATCH, WIN, WIN+LATCH fault latch mode, connection of neutral wire (required)
Range of delay timing adjustment		tripping delay: 0,1...10 s
Base accuracy		$\pm 5\%$ (calculated from the final range values)
Setting accuracy		$\pm 5\%$ (calculated from the final range values)
Repeatability		$\pm 2\%$
Voltage influence		$\pm 0,5\%$
Temperature influence		$\pm 0,1\%$ / °C
Recovery time		500 ms
LED indicator		green LED U ON - indication of supply voltage U red LEDs MIN and MAX ON/OFF - indication of failure ❹ red LEDs MIN and MAX flashing - indication of tripping delay ❹ yellow LED R ON/OFF - output relay status

❶ Supply voltage depending on the TR2 transformer which shall be ordered as a separate product - see page 358. ❷ If the distance between the relays mounted side by side is less than 5 mm. ❸ If the distance between the relays mounted side by side is greater than 5 mm. ❹ Indication of relay status - according to the set threshold.

Functions


For all functions the LED's MIN and MAX are flashing alternating, when the minimum value for the measured voltage was chosen to be greater than the maximum value. If a failure already exists, when the device is activated, the output relay R remains in off-position and the LED for the corresponding threshold is illuminated.

OVER, OVER+LATCH - Overvoltage monitoring, overvoltage monitoring with fault latch.

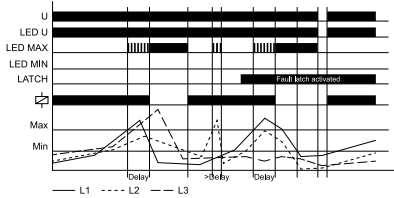


When the measured voltage of one of the phases exceeds the value adjusted at the MAX-regulator, the set interval of the tripping delay (Delay) begins (red LED MAX flashes). After the interval has expired (red LED MAX illuminated), the output relay R switches into off-position (yellow LED not illuminated). The output relay R again switches into on-position (yellow LED illuminated), when the measured voltage of all the phases falls below the value adjusted at the MIN-regulator (red LED MAX not illuminated). If the **fault latch** is activated (OVER+LATCH) and the measured voltage of one of the phases remains above the MAX-value longer than the set interval of the tripping delay, the output relay R remains in the off-position even if the measured voltage of all the phases falls below the value adjusted at the MIN-regulator. After resetting the failure (interrupting and re-applying the supply voltage), the output relay R switches into on-position.

Front panel description

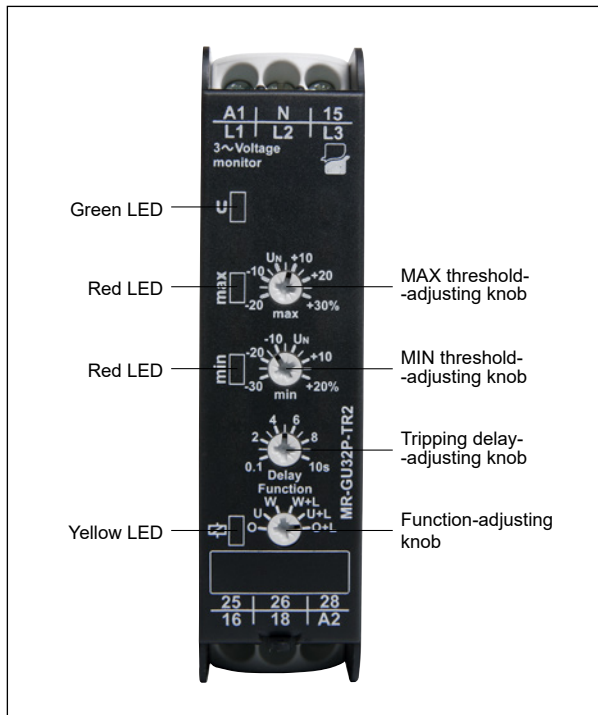

U - supply voltage; R - output state of the relay;
MIN, MAX - relay status; SEQ - phase sequence


UNDER, UNDER+LATCH - Undervoltage monitoring, undervoltage monitoring with fault latch.

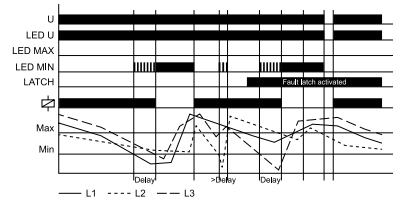


When the measured voltage of one of the phases falls below the value adjusted at the MIN-regulator, the set interval of the tripping delay (Delay) begins (red LED MIN flashes). After the interval has expired (red LED MIN illuminated), the output relay R switches into off-position (yellow LED not illuminated), when the measured voltage of all the phases exceeds the value adjusted at the MAX-regulator.

If the **fault latch** is activated (UNDER+LATCH) and the measured voltage of one of the phases remains below the MIN-value longer than the set interval of the tripping delay, the output relay R remains in the off-position even if the measured voltage of all the phases exceeds the value adjusted at the MAX-regulator. After resetting the failure (interrupting and re-applying the supply voltage), the output relay R switches into on-position.

WIN, WIN+LATCH - Voltage monitoring in windowfunction between MIN and MAX values, voltage monitoring in windowfunction between MIN and MAX values with fault latch.

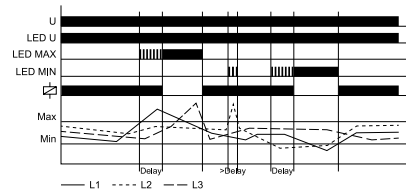


The output relay R switches into on-position (yellow LED illuminated) when the measured voltage of all the phases exceeds the value adjusted at the MIN-regulator. When the measured voltage of one of the phases exceeds the value adjusted at the MAX-regulator, the set interval of the tripping delay (Delay) begins (red LED MAX flashes). After the interval has expired (red LED MAX illuminated), the output relay R switches into off-position (yellow LED not illuminated). The output relay R again switches into on-position (yellow LED illuminated) when the measured voltage of all the phases falls below the value adjusted at the MAX-regulator (red LED MAX not illuminated). When the measured voltage of one of the phases falls below the value adjusted at the MIN-regulator, the set interval of the tripping delay (Delay) begins again (red LED MIN flashes). After the interval has expired (red LED MIN illuminated), the output relay R switches into off-position (yellow LED not illuminated).

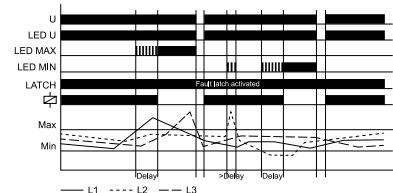

If the **fault latch** is activated (WIN+LATCH) and the measured voltage of one of the phases remains below the MIN-value longer than the set interval of the tripping delay, the output relay R remains in the off-position even if the measured voltage of all the phases exceeds the value adjusted at the MIN-regulator. If the measured voltage of one of the phases remains above the MAX-value longer than the set interval of the tripping delay, the output relay R remains in the off-position even if the measured voltage of all the phases falls below the value adjusted at the MAX-regulator. After resetting the failure (interrupting and re-applying the supply voltage), the output relay R switches into on-position.

Dimensions

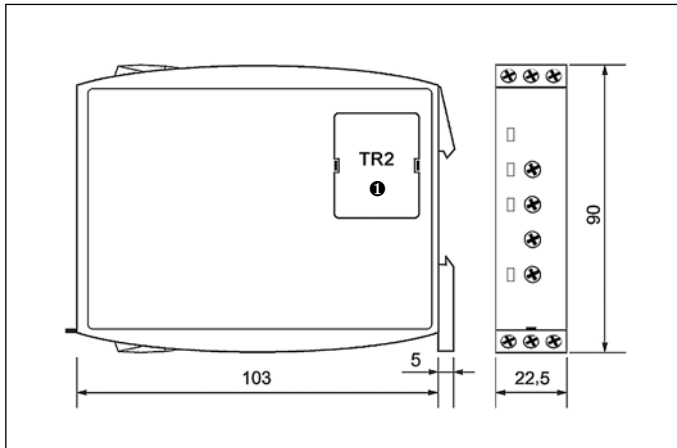


Mounting


Relays **MR-GU32P-TR2** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - any. **Terminals - cross section of the connection cables:** 1 x 0,5 ... 2,5 mm² with/without multicore cable end, 1 x 4 mm² without multicore cable end, 2 x 0,5 ... 1,5 mm² with/without multicore cable end, 2 x 2,5 mm² flexible without multicore cable end.

❶ Supply voltage depending on the TR2 transformer which shall be ordered as a separate product - see page 358.

Connection diagrams

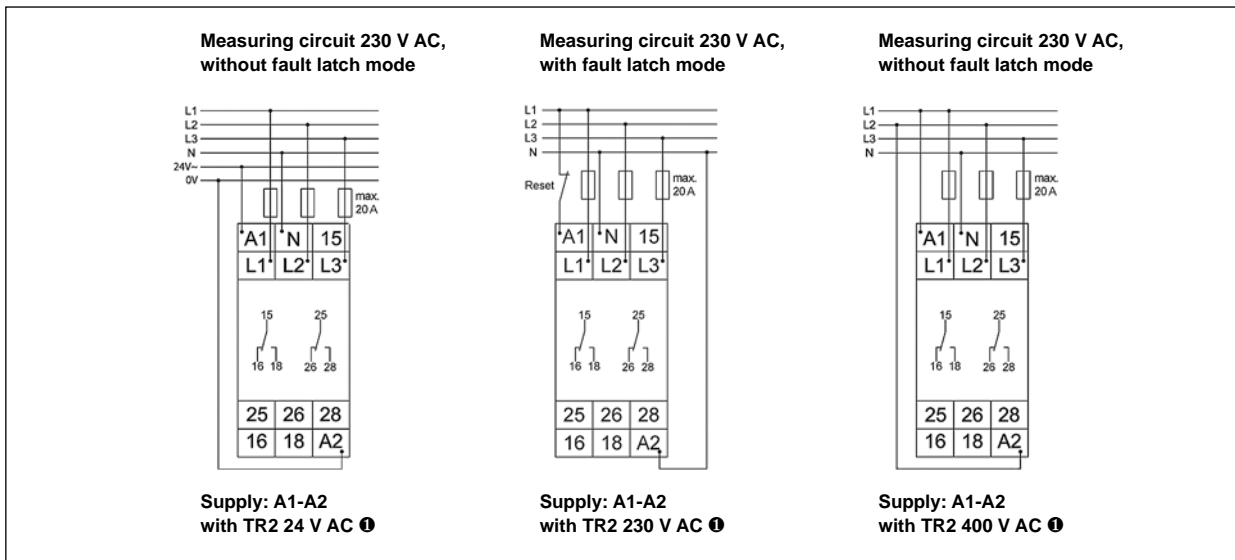

Ordering codes

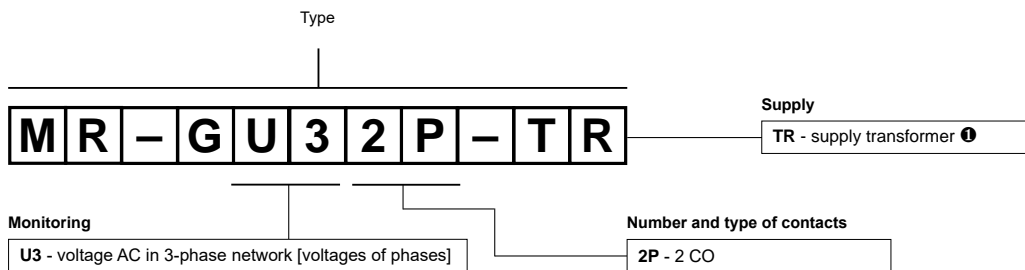

Example of ordering code:

MR-GU32P-TR2 monitoring relay **MR-GU32P-TR2**, multifunction (relay perform 6 functions), industrial cover, width 22,5 mm, two changeover contacts, rated input voltage (supply): AC - 12, 24, 42, 48, 110, 127, 230, 400 V AC ❶



- **Multifunctions monitoring relays (AC voltage monitoring in 3-phase network, with adjustable thresholds)** • Monitoring of phase sequence and phase failure • Asymmetry monitoring (adjustable)
- Connection of neutral wire (optional) ❶ • Timing adjustment of tripping delay • Supply via TR2 supply transformer ❷ • Output: 2 CO (2 change-over contacts) • Industrial cover, width 22,5 mm
- Direct mounting on 35 mm rail mount acc. to EN 60715
- Recognitions, certifications, directives: RoHS,

Output circuit - contact data


Number and type of contacts		2 CO
Rated voltage		250 V AC
Max. breaking capacity	AC1	750 VA (3 A / 250 V AC) ❸ 1 250 VA (5 A / 250 V AC) ❹
Max. operating frequency		3 600 cycles/hour
• at resistive load 100 VA		360 cycles/hour
• at resistive load 1 000 VA		
Input circuit		
Supply voltage	AC	12, 24, 42, 48, 110, 127, 230, 400 V ❷ terminals A1-A2
Must release voltage		AC: $\geq 0,3 U_n$
Operating range of supply voltage		as per the specification of TR2 supply transformer ❷
Rated power consumption	AC	2,0 VA / 1,5 W
Range of supply frequency	AC	as per the specification of TR2 supply transformer ❷
Duty cycle		100%
Measuring circuit	<ul style="list-style-type: none"> • measuring variable • measuring inputs • overload capacity • input resistance • switching threshold • asymmetry 	AC sinus, 48...63 Hz AC: 3(N)~ 400/230 V terminals (N)-L1-L2-L3 3(N)~ 600/346 V 3(N)~ 400/230 V: 1 M Ω MIN: 0,7...1,2 U _n MAX: 0,8...1,3 U _n adjustable: 5...25%
Insulation according to EN 60664-1		
Rated surge voltage		4 000 V 1,2 / 50 μ s
Overvoltage category		III
Insulation pollution degree		3
General data		
Electrical life	• resistive AC1	$> 2 \times 10^5$ 1 000 VA
Mechanical life (cycles)		$> 2 \times 10^7$
Dimensions (L x W x H)		90 x 22,5 x 108 mm
Weight		100 g
Ambient temperature	<ul style="list-style-type: none"> • storage • operating (non-condensation and/or icing)	-25...+70 °C -25...+55 °C
Cover protection category		IP 20 EN 60529
Relative humidity		15...85%
Shock resistance		15 g 11 ms
Vibration resistance		0,35 mm DA 10...55 Hz
Measuring circuit data		
Functions		UNDER, UNDER+SEQ, WIN, WIN+SEQ SEQ - monitoring of phase sequence and phase failure ASYM - monitoring of asymmetry (adjustable) connection of neutral wire (optional) ❶
Range of delay timing adjustment		tripping delay: 0,1...10 s
Base accuracy		$\pm 5\%$ (calculated from the final range values)
Setting accuracy		$\pm 5\%$ (calculated from the final range values)
Repeatability		$\pm 2\%$
Voltage influence		$\pm 0,5\%$
Temperature influence		$\pm 0,1\%$ / °C
Recovery time		500 ms
LED indicator		red LED ASYM ON/OFF - indication of asymmetry ❺ red LEDs MIN and MAX ON/OFF - indication of failure ❻ red LEDs MIN and MAX flashing - indication of tripping delay ❼ red LED SEQ ON/OFF - indication of phase sequence ❸ yellow LED R ON/OFF - output relay status

❶ Detection of neutral wire loss. ❷ Supply voltage depending on the TR2 transformer which shall be ordered as a separate product - see page 358.
 ❸ If the distance between the relays mounted side by side is less than 5 mm. ❹ If the distance between the relays mounted side by side is greater than 5 mm. ❺ Indication of relay status - according to the set threshold.

Functions


For all functions the LED's MIN and MAX are flashing alternating, when the minimum value for the measured voltage was chosen to be greater than the maximum value. If a failure already exists, when the device is activated, the output relay R remains in off-position and the LED for the corresponding threshold is illuminated.

UNDER, UNDER+SEQ - Undervoltage monitoring, undervoltage monitoring with monitoring of phase sequence.




When the measured voltage (mean value of phase-to-phase voltages) falls below the value adjusted at the MIN-regulator, the set interval of the tripping delay (Delay) begins (red LED MIN flashes). After the interval has expired (red LED MIN illuminated), the output relay R switches into off-position (yellow LED not illuminated). The output relay R again switches into on-position (yellow LED illuminated), when the measured voltage exceeds the value adjusted at the MAX-regulator.

WIN, WIN+SEQ - Voltage monitoring in windowfunction between MIN and MAX values, voltage monitoring in windowfunction between MIN and MAX values with monitoring of phase sequence.

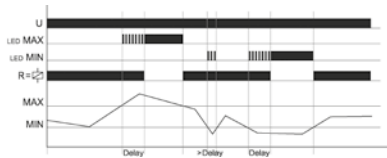


The output relay R switches into on-position (yellow LED illuminated) when the measured voltage (mean value of phase-to-phase voltages) exceeds the value adjusted at the MIN-regulator. When the measured voltage exceeds the value adjusted at the MAX-regulator, the set interval of the tripping delay (Delay) begins (red LED MAX flashes). After the interval has expired (red LED MAX illuminated), the output relay R switches into off-position (yellow LED not illuminated). The output relay R again switches into on-position (yellow LED illuminated) when the measured voltage falls below the value adjusted at the MAX-regulator (red LED MAX not illuminated). When the measured voltage falls below the value adjusted at the MIN-regulator, the set interval of the tripping delay (Delay) begins again (red LED MIN flashes). After the interval has expired (red LED MIN illuminated), the output relay R switches into off-position (yellow LED not illuminated).

SEQ - Phase sequence monitoring.




Phase sequence monitoring is selectable for all functions. If a change in phase sequence is detected (red LED SEQ illuminated), the output relay R switches into off-position immediately (yellow LED not illuminated).

SEQ - Phase failure monitoring.




If one of the phase voltages fails, the set interval of the tripping delay (Delay) begins (red LED SEQ flashes). After the interval has expired (red LED SEQ illuminated), the output relay R switches into off-position (yellow LED not illuminated). Reverse voltages of a consumer (e.g. a motor which continues to run on two phases only) do not effect the disconnection but can be monitored by using a proper value for the asymmetry.

ASYM - Asymmetry monitoring.



If the asymmetry of the phase-to-phase voltages exceeds the value set at the ASYM-regulator, the set interval of the tripping delay (DELAY) begins (red LED ASYM flashes). After the interval has expired (red LED ASYM illuminated), the output relay R switches into off-position (yellow LED not illuminated). If the neutral wire is connected to the device, the asymmetry of the phase voltages referred to the neutral wire (Y-voltage) is monitored also. In that case both values of the asymmetry are evaluated and if one of the values exceeds the value set at the ASYM-regulator, the set interval of the tripping delay (DELAY) begins (red LED ASYM flashes). After the interval has expired (red LED ASYM illuminated), the output relay R switches into off-position (yellow LED not illuminated).


Loss of neutral wire by means of evaluation of asymmetry.

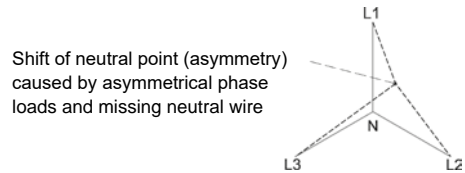


A break of the neutral wire between power line and machinery is detected as soon as asymmetry between phase-to-phase voltage and neutral wire occurs. If the asymmetry exceeds the value set at the ASYM-regulator, the set interval of the tripping delay (Delay) begins (red LED ASYM flashes). After the interval has expired (red LED ASYM illuminated), the output relay R switches into off-position (yellow LED not illuminated). A break of the neutral wire between our device and the machinery can not be detected.

U - supply voltage; **R** - output state of the relay; **MIN, MAX** - relay status; **SEQ** - phase sequence

Front panel description

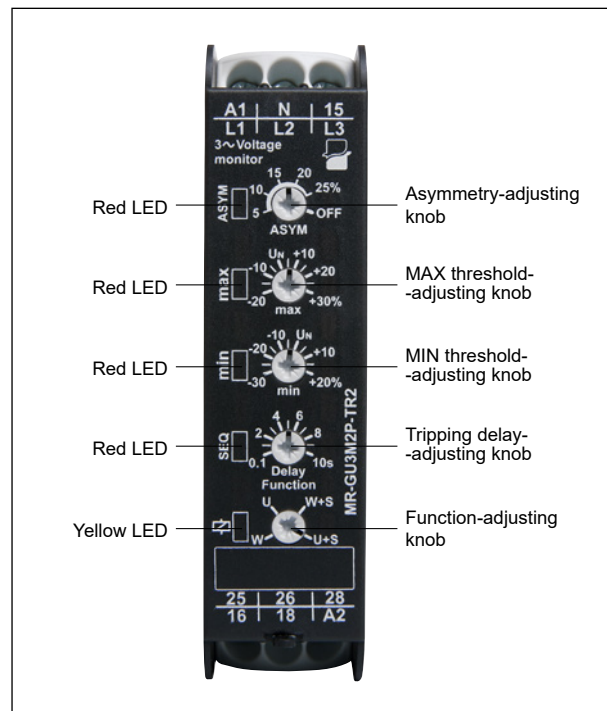

Dimensions

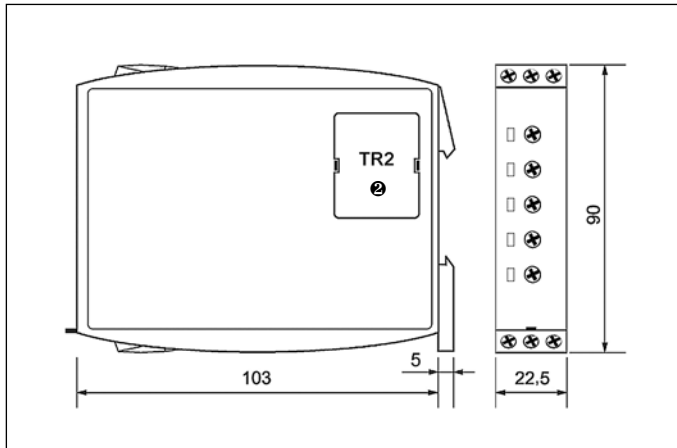


Mounting


Relays **MR-GU3M2P-TR2** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - any. **Terminals - cross section of the connection cables:** 1 x 0,5 ... 2,5 mm² with/without multicore cable end, 1 x 4 mm² without multicore cable end, 2 x 0,5 ... 1,5 mm² with/without multicore cable end, 2 x 2,5 mm² flexible without multicore cable end.

⊗ Supply voltage depending on the TR2 transformer which shall be ordered as a separate product - see page 358.

Connection diagrams

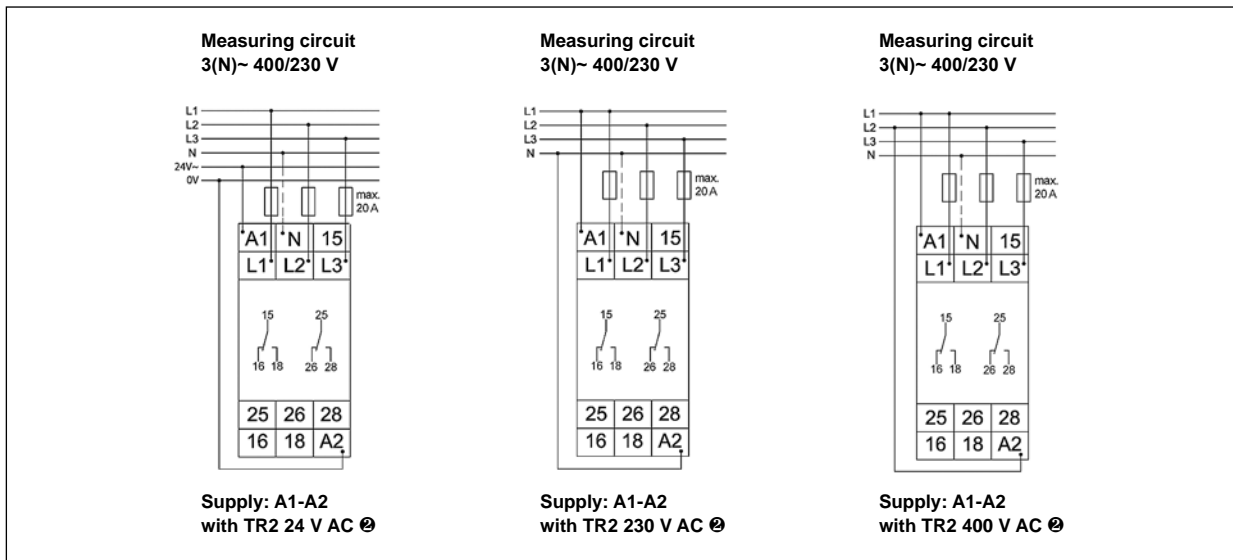

Ordering codes

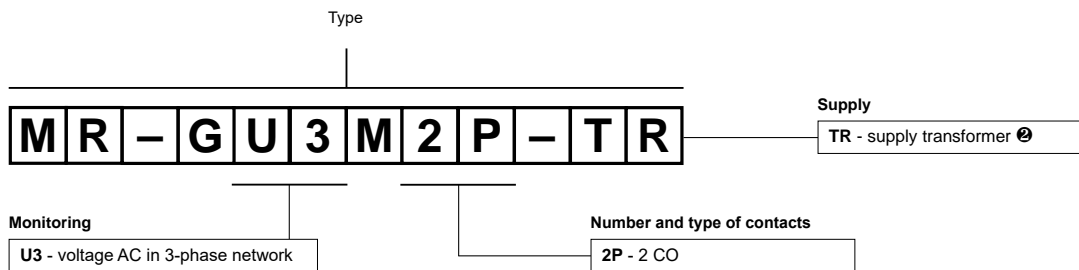

Example of ordering code:

MR-GU3M2P-TR2 monitoring relay **MR-GU3M2P-TR2**, multifunction (relay perform 6 functions), industrial cover, width 22,5 mm, two changeover contacts, rated input voltage (supply): AC - 12, 24, 42, 48, 110, 127, 230, 400 V AC ⊗



- **Multifunctions monitoring relays (AC voltage monitoring in 3-phase network)** • Monitoring of phase sequence and phase failure
- Detection of reverse voltage by means of asymmetry • Connection of neutral wire (optional)
- Supply voltage = monitoring voltage • Output: 2 CO (2 changeover contacts) • Industrial cover, width 22,5 mm
- Direct mounting on 35 mm rail mount acc. to EN 60715
- Recognitions, certifications, directives: RoHS,


Output circuit - contact data

Number and type of contacts	2 CO	
Rated voltage	250 V AC	
Max. breaking capacity	AC1	750 VA (3 A / 250 V AC) ^① 1 250 VA (5 A / 250 V AC) ^②
Max. operating frequency	3 600 cycles/hour	
• at resistive load 100 VA	360 cycles/hour	
• at resistive load 1 000 VA		
Input circuit		
Supply voltage	= monitoring voltage	terminals (N)-L1-L2-L3
Must release voltage	AC: $\geq 0,2 U_n$	
Operating range of supply voltage	3(N)~ 342...457 V	
Rated power consumption	AC	9,0 VA
Range of supply frequency	AC	48...63 Hz
Duty cycle	100%	
Measuring circuit	<ul style="list-style-type: none"> • measuring variable • measuring inputs • overload capacity • input resistance • asymmetry 	AC sinus, 48...63 Hz AC: 3(N)~ 400/230 V terminals (N)-L1-L2-L3 3(N)~ 457/264 V 3(N)~ 400/230 V: 15 k Ω fixed: typical value 30%
Insulation according to EN 60664-1		
Rated surge voltage	4 000 V 1,2 / 50 μ s	
Overvoltage category	III	
Insulation pollution degree	3	
General data		
Electrical life	• resistive AC1	> 2 x 10 ⁵ 1 000 VA
Mechanical life (cycles)	> 2 x 10 ⁷	
Dimensions (L x W x H)	90 x 22,5 x 108 mm	
Weight	100 g	
Ambient temperature	<ul style="list-style-type: none"> • storage • operating 	-25...+70 °C -25...+55 °C
(non-condensation and/or icing)		
Cover protection category	IP 20 EN 60529	
Relative humidity	15...85%	
Shock resistance	15 g 11 ms	
Vibration resistance	0,35 mm DA 10...55 Hz	
Measuring circuit data		
Functions	SEQ - monitoring of phase sequence and phase failure ASYM - detection of reverse voltage by means of asymmetry connection of neutral wire (optional)	
Range of delay timing adjustment	start-up suppression: fixed, max. 0,5 s tripping delay: fixed, max. 0,35 s	
Recovery time	100 ms	
LED indicator	green LED U ON - indication of supply voltage U yellow LED R ON/OFF - output relay status	

^① If the distance between the relays mounted side by side is less than 5 mm. ^② If the distance between the relays mounted side by side is greater than 5 mm.

Functions

SEQ - Phase sequence monitoring.




When all the phases are connected in the correct sequence and the measured asymmetry is less than the fixed value, the output relay R switches into on-position (yellow LED illuminated). When the phase sequence changes, the output relay R switches into off-position (yellow LED not illuminated).

SEQ - Phase failure monitoring.



The output relay R switches into off-position (yellow LED not illuminated), when one of the three phases fails.


ASYM - Detection of reverse voltage by means of asymmetry.




The output relay R switches into off-position (yellow LED not illuminated) when the asymmetry between the phase voltages exceeds the fixed value of the asymmetry. An asymmetry caused by the reverse voltage of a consumer (e.g. a motor which continues to run on two phases only) does not effect the disconnection.

U - supply voltage; **R** - output state of the relay


Front panel description

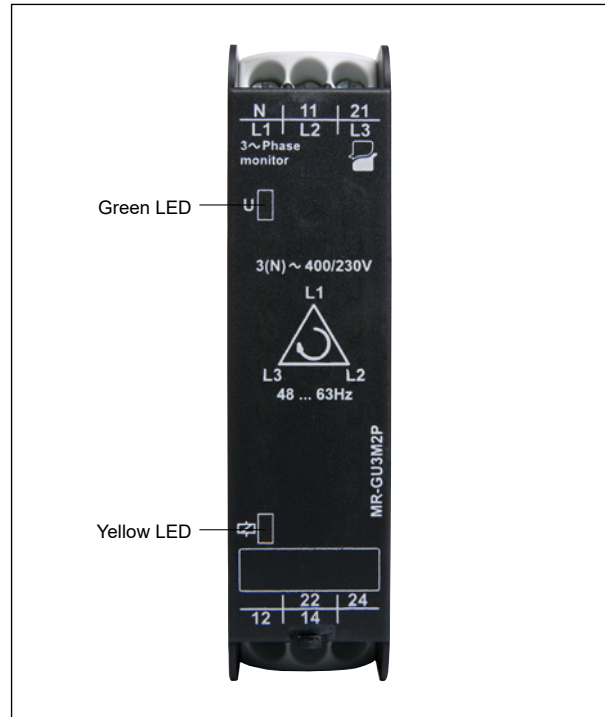

Connection diagram

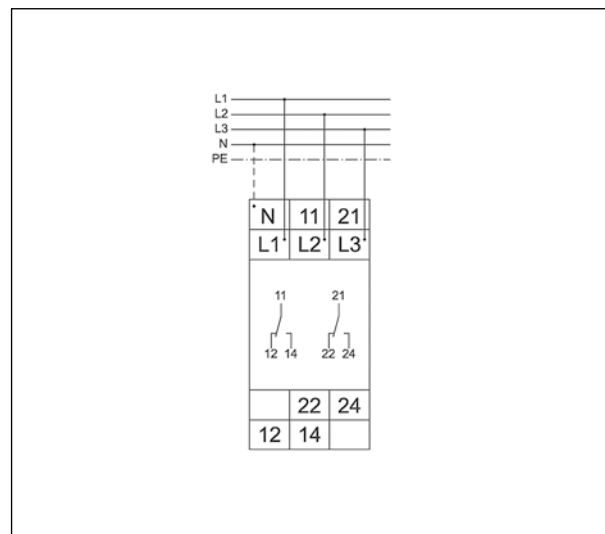


Dimensions

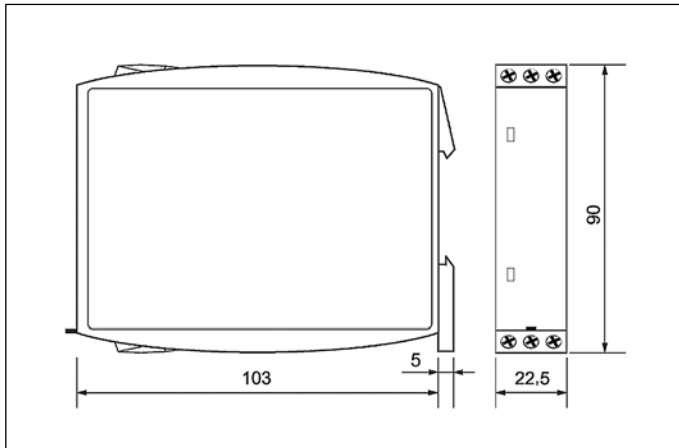

Mounting

Relays **MR-GU3M2P** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - any. **Terminals - cross section of the connection cables:** 1 x 0,5 ... 2,5 mm² with/without multicore cable end, 1 x 4 mm² without multicore cable end, 2 x 0,5 ... 1,5 mm² with/without multicore cable end, 2 x 2,5 mm² flexible without multicore cable end.

Ordering codes

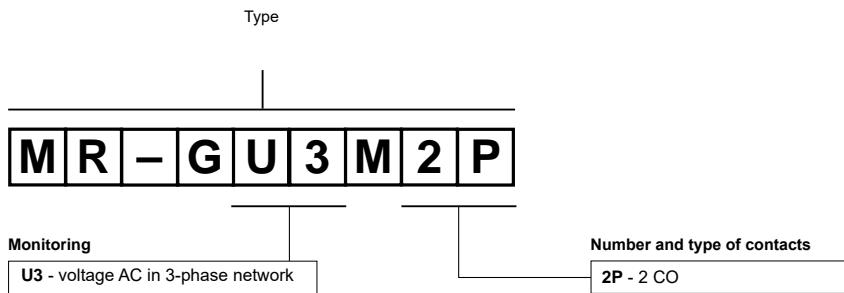

Example of ordering code:

MR-GU3M2P monitoring relay **MR-GU3M2P**, multifunction (relay perform 2 functions), industrial cover, width 22,5 mm, two changeover contacts, rated input voltage (supply): AC - 3(N)~ 400/230 V



- **Multifunctions monitoring relays (DC and AC current monitoring in 1-phase network, with adjustable thresholds)**
- Fault latch mode • Timing adjustment of start-up suppression and tripping delay ❶ • Supply via TR2 supply transformer ❷
- Frequency of supply voltage: 16,6...400 Hz • Output: 2 CO (2 change-over contacts) • Industrial cover, width 22,5 mm
- Direct mounting on 35 mm rail mount acc. to EN 60715
- Recognitions, certifications, directives: RoHS, CE

Output circuit - contact data

Number and type of contacts	2 CO
Rated voltage	250 V AC
Max. breaking capacity	AC1 750 VA (3 A / 250 V AC) ❸ 1 250 VA (5 A / 250 V AC) ❹
Max. operating frequency	3 600 cycles/hour
• at resistive load 100 VA	360 cycles/hour
• at resistive load 1 000 VA	

Input circuit

Supply voltage	AC 12, 24, 42, 48, 110, 127, 230, 400 V ❷ terminals A1-A2
Must release voltage	AC: $\geq 0,3 U_n$
Operating range of supply voltage	as per the specification of TR2 supply transformer ❷
Rated power consumption	AC 2,0 VA / 1,5 W
Range of supply frequency	AC as per the specification of TR2 supply transformer ❷
Duty cycle	100%

Measuring circuit

• measuring variable	DC or AC sinus, 16,6...400 Hz (frequency response: -10...+5%)
• measuring inputs	AC/DC: 0,1 A terminals K-I1
	AC/DC: 1 A terminals K-I2
	AC/DC: 10 A terminals K-I3
• overload capacity	0,1 A AC/DC: 0,8 A 1 A AC/DC: 3 A 10 A AC/DC: 12 A
• input resistance	0,1 A AC/DC: 470 mΩ 1 A AC/DC: 47 mΩ 10 A AC/DC: 5 mΩ
• switching threshold	MIN: 0,05...0,95 I _n MAX: 0,1...1,0 I _n

Insulation according to EN 60664-1

Rated surge voltage	4 000 V 1,2 / 50 μs
Overvoltage category	III
Insulation pollution degree	3

General data

Electrical life	• resistive AC1 > 2 x 10 ⁵ 1 000 VA
Mechanical life (cycles)	> 2 x 10 ⁷
Dimensions (L x W x H)	90 x 22,5 x 108 mm
Weight	100 g
Ambient temperature	• storage -25...+70 °C
(non-condensation and/or icing)	• operating -25...+55 °C
Cover protection category	IP 20 EN 60529
Relative humidity	15...85%
Shock resistance	15 g 11 ms
Vibration resistance	0,35 mm DA 10...55 Hz

Measuring circuit data


Functions	OVER, OVER+LATCH, UNDER, UNDER+LATCH, WIN, WIN+LATCH fault latch mode
Range of delay timing adjustment	start-up suppression: 0...10 s tripping delay: 0,1...10 s ❶
Base accuracy	± 5% (calculated from the final range values)
Setting accuracy	± 5% (calculated from the final range values)
Repeatability	± 2%
Voltage influence	± 0,5%
Temperature influence	± 0,1% / °C
Recovery time	500 ms
LED indicator	green LED U ON - indication of supply voltage U green LED U flashing - indication of start-up suppression time ❷ red LEDs MIN and MAX ON/OFF - indication of failure ❸ red LEDs MIN and MAX flashing - indication of tripping delay ❹ yellow LED R ON/OFF - output relay status

❶ Separately adjustable (two adjusting knobs). ❷ Supply voltage depending on the TR2 transformer which shall be ordered as a separate product - see page 358. ❸ If the distance between the relays mounted side by side is less than 5 mm. ❹ If the distance between the relays mounted side by side is greater than 5 mm. ❺ Indication of relay status - according to the set threshold.

Functions

When the supply voltage U is applied, the output relay R switches into on-position (yellow LED illuminated) and the set interval of the start-up suppression (Start) begins (green LED flashes). Changes of the measured current during this period do not affect the state of the output relay R . After the interval has expired the green LED is illuminated steadily. For all the functions the LEDs MIN and MAX are flashing alternatingly, when the minimum value for the measured current was chosen to be greater than the maximum value.


OVER, OVER+LATCH - Overcurrent monitoring, overcurrent monitoring with fault latch.

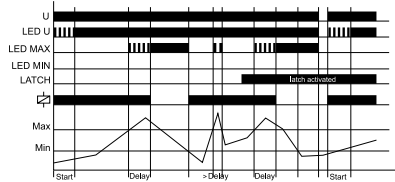

When the measured current exceeds the value adjusted at the MAX-regulator, the set interval of the tripping delay (Delay) begins (red LED MAX flashes). After the interval has expired (red LED MAX illuminated), the output relay R switches into off-position (yellow LED not illuminated). The output relay R again switches into on-position (yellow LED illuminated), when the measured current falls below the value adjusted at the MIN-regulator (red LED MAX not illuminated).


If the **fault latch** is activated (OVER+LATCH) and the measured current remains above the MAX-value longer than the set interval of the tripping delay, the output relay R remains in the off-position even if the measured current falls below the value adjusted at the MIN-regulator. After resetting the failure (interrupting and re-applying the supply voltage), the output relay R again switches into on-position and a new measuring cycle begins with the set interval of the start-up suppression (Start).

UNDER, UNDER+LATCH - Undercurrent monitoring, undercurrent monitoring with fault latch.

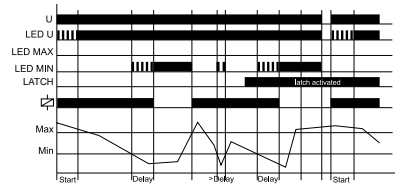


When the measured current falls below the value adjusted at the MIN-regulator, the set interval of the tripping delay (Delay) begins (red LED MIN flashes). After the interval has expired (red LED MIN illuminated), the output relay R switches into off-position (yellow LED not illuminated). The output relay R again switches into on-position (yellow LED illuminated), when the measured current exceeds the value adjusted at the MAX-regulator. If the **fault latch** is activated (UNDER+LATCH) and the measured current remains below the MIN-value longer than the set interval of the tripping delay, the output relay R remains in the off-position even if the measured current exceeds the value adjusted at the MAX-regulator. After resetting the failure (interrupting and re-applying the supply voltage), the output relay R switches into on-position and a new measuring cycle begins with the set interval of the start-up suppression (Start).

WIN, WIN+LATCH - Current monitoring in windowfunction between MIN and MAX values, current monitoring in windowfunction between MIN and MAX values with fault latch.

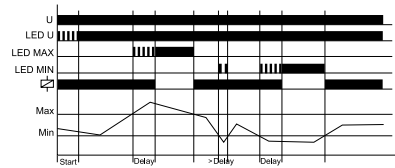


The output relay R switches into on-position (yellow LED illuminated) when the measured **current** exceeds the value adjusted at the MIN-regulator. When the measured current exceeds the value adjusted at the MAX-regulator, the set interval of the tripping delay (Delay) begins (red LED MAX flashes). After the interval has expired (red LED MAX illuminated), the output relay R switches into off-position (yellow LED not illuminated). The output relay R again switches into on-position (yellow LED illuminated) when the measured current falls below the value adjusted at the MAX-regulator (red LED MAX not illuminated). When the measured current falls below the value adjusted at the MIN-regulator, the set interval of the tripping delay (Delay) begins again (red LED MIN flashes). After the interval has expired (red LED MIN illuminated), the output relay R switches into off-position (yellow LED not illuminated).

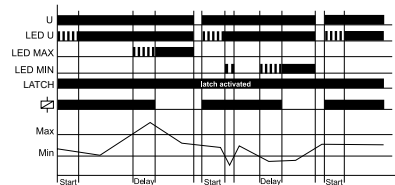


If the **fault latch** is activated (WIN+LATCH) and the measured current remains below the MIN-value longer than the set interval of the tripping delay, the output relay R remains in the off-position even if the measured current exceeds the value adjusted at the MIN-regulator. If the measured current remains above the MAX-value longer than the set interval of the tripping delay, the output relay R remains in the off-position even if the measured current falls below the value adjusted at the MAX-regulator. After resetting the failure (interrupting and re-applying the supply voltage), the output relay R switches into on-position and a new measuring cycle begins with the set interval of the start-up suppression (Start).

U - supply voltage; **R** - output state of the relay; **MIN, MAX** - relay status; **SEQ** - phase sequence

Front panel description

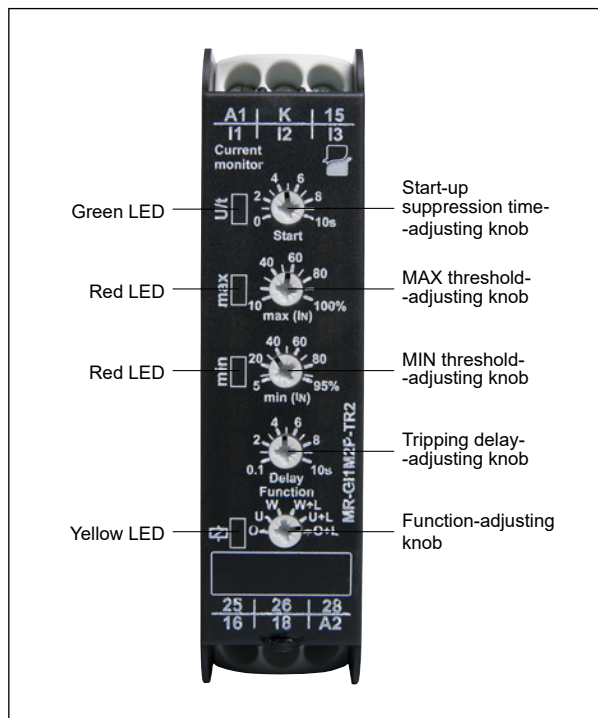

Dimensions

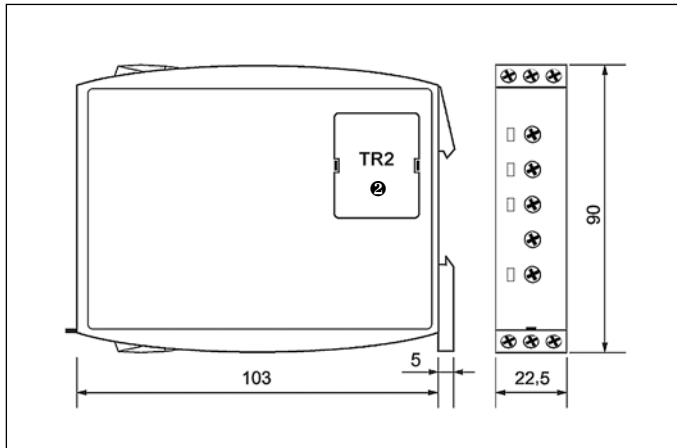


Mounting


Relays **MR-GI1M2P-TR2** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - any. **Terminals - cross section of the connection cables:** 1 x 0,5 ... 2,5 mm² with/without multicore cable end, 1 x 4 mm² without multicore cable end, 2 x 0,5 ... 1,5 mm² with/without multicore cable end, 2 x 2,5 mm² flexible without multicore cable end.

⊗ Supply voltage depending on the TR2 transformer which shall be ordered as a separate product - see page 358.

Connection diagrams

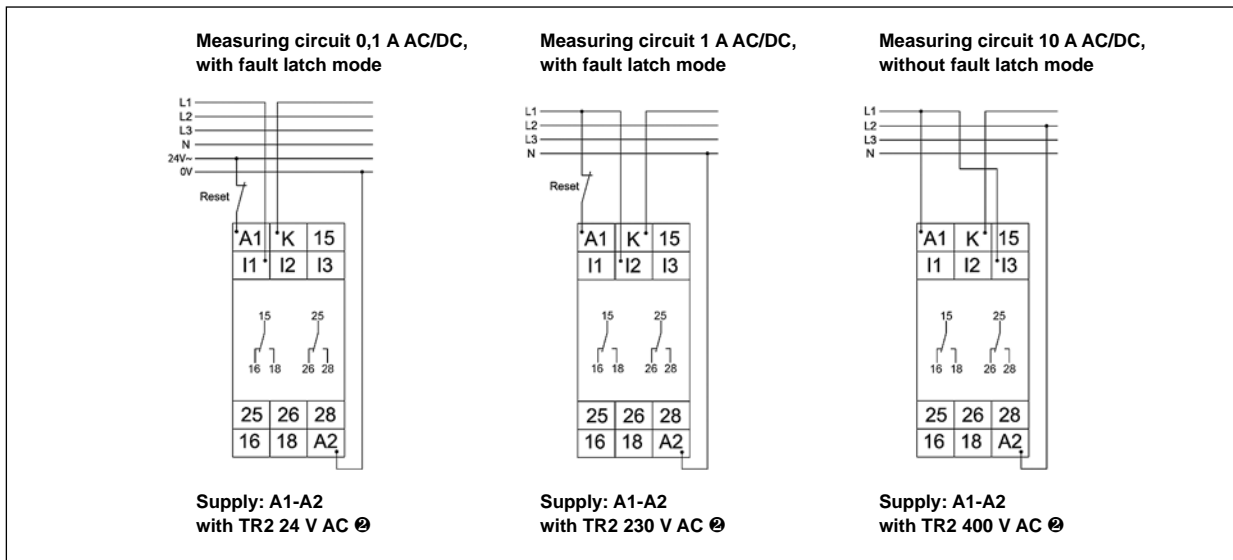

Ordering codes

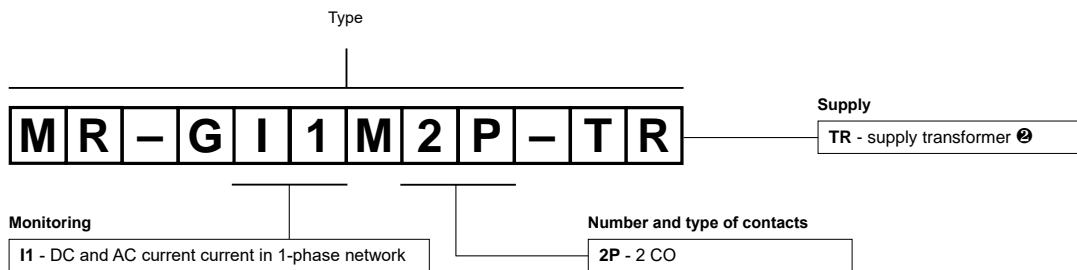

Example of ordering code:

MR-GI1M2P-TR2 monitoring relay **MR-GI1M2P-TR2**, multifunction (relay perform 6 functions), industrial cover, width 22,5 mm, two changeover contacts, rated input voltage (supply): AC - 12, 24, 42, 48, 110, 127, 230, 400 V AC ⊗



- **Single-functions monitoring relays (motor temperature monitoring)** • Test functions: integrated Test/Reset key, connection of the external Reset key (optional)
- Supply via TR2 supply transformer ❶
- Output: 2 CO (2 changeover contacts)
- Industrial cover, width 22,5 mm
- Direct mounting on 35 mm rail mount acc. to EN 60715
- Recognitions, certifications, directives: RoHS,

Output circuit - contact data

Number and type of contacts		2 CO
Rated voltage		250 V AC
Max. breaking capacity	AC1	750 VA (3 A / 250 V AC) ❷ 1 250 VA (5 A / 250 V AC) ❸
Max. operating frequency		3 600 cycles/hour 360 cycles/hour
		• at resistive load 100 VA • at resistive load 1 000 VA
Input circuit		
Supply voltage	AC	12, 24, 42, 48, 110, 127, 230, 400 V ❶ terminals A1-A2
Must release voltage		AC: $\geq 0,3 U_n$
Operating range of supply voltage		as per the specification of TR2 supply transformer ❶
Rated power consumption	AC	2,0 VA / 1,5 W
Range of supply frequency	AC	as per the specification of TR2 supply transformer ❶
Duty cycle		100%
Measuring circuit	<ul style="list-style-type: none"> • terminals • initial resistance • response value • release value • disconnection ❹ • measuring voltage T1-T2 	T1-T2 $< 1,5 \text{ k}\Omega$ relay in OFF-position: $\geq 3,6 \text{ k}\Omega$ relay in ON-position: $\leq 1,8 \text{ k}\Omega$ no $\leq 2,5 \text{ V}$ at $R \leq 4 \text{ k}\Omega$ EN 60947-8
Control contact	<ul style="list-style-type: none"> • function • loadable • max. line length • control pulse length • Reset 	connection of an external Reset key no R-T2: 10 m (twisted pair) min. 50 ms contact 1 NO; terminals R-T2
Insulation according to EN 60664-1		
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		3
General data		
Electrical life	• resistive AC1	$> 2 \times 10^5$ 1 000 VA
Mechanical life (cycles)		$> 2 \times 10^7$
Dimensions (L x W x H)		90 x 22,5 x 108 mm
Weight		100 g
Ambient temperature	<ul style="list-style-type: none"> • storage • operating (non-condensation and/or icing)	-25...+70 °C -25...+55 °C
Cover protection category		IP 20 EN 60529
Relative humidity		15...85%
Shock resistance		15 g 11 ms
Vibration resistance		0,35 mm DA 10...55 Hz
Measuring circuit data		
Functions		temperature monitoring of the motor winding, with fault latch (max. 6 PTC - temperature sensors DIN 44081) test functions: integrated Test/Reset key, connection of the external Reset key (optional)
Base accuracy		$\pm 10\%$ (calculated from the final range values)
Repeatability		$\pm 1\%$
Voltage influence		$\pm 2,2\%$
Temperature influence		$\pm 0,1\% / ^\circ\text{C}$
Recovery time		500 ms
LED indicator		green LED U ON - indication of supply voltage U red LED ON/OFF - indication of failure


❶ Supply voltage depending on the TR2 transformer which shall be ordered as a separate product - see page 358. ❷ If the distance between the relays mounted side by side is less than 5 mm. ❸ If the distance between the relays mounted side by side is greater than 5 mm. ❹ At short circuit.

Functions


Motor temperature monitoring with fault latch.

If the supply voltage U is applied (green LED illuminated) and the cumulative resistance of the PTC-circuit is less than $3,6\text{ k}\Omega$ (standard temperature of the motor), the output relay R switches into on-position. Pressing the Test/Reset key under this conditions forces the output relay R to switch into off-position. It remains in state as long as the Test/Reset key is pressed and thus the switching function can be checked in case of fault. The test function is not effective by using an external Reset key. When the cumulative resistance of the PTC-circuit exceeds $3,6\text{ k}\Omega$ (at least one of the PTCs has reached the cut-off temperature), the output relay R switches into off-position (red LED illuminated). The output relay R switches into on-position again (red LED not illuminated), if the cumulative resistance drops below $1,8\text{ k}\Omega$ by cooling down of the PTC and either a Reset key (internal or external) was pressed or the supply voltage was disconnected and re-applied.

Application of internal Test/Reset key.

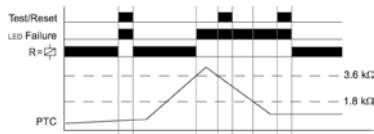


Application of an external Reset key.

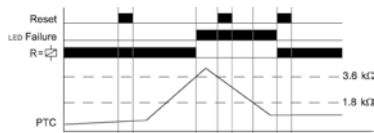


U - supply voltage; R - output state of the relay


Front panel description

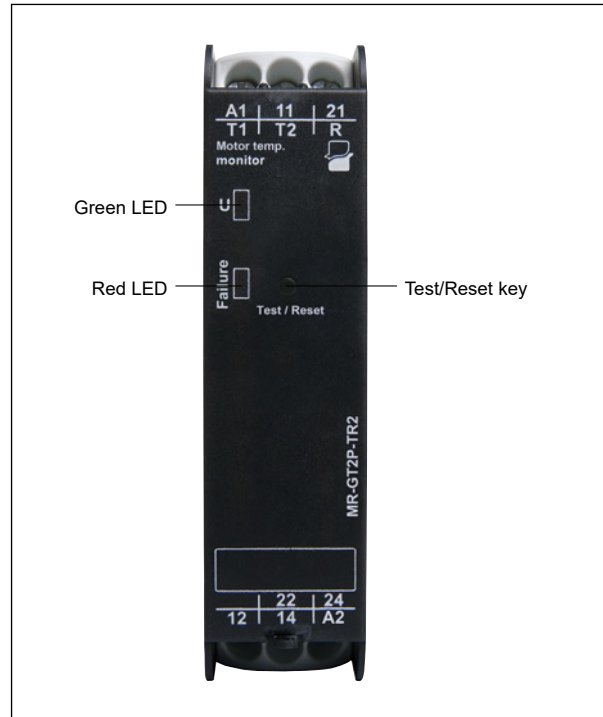

Connection diagram

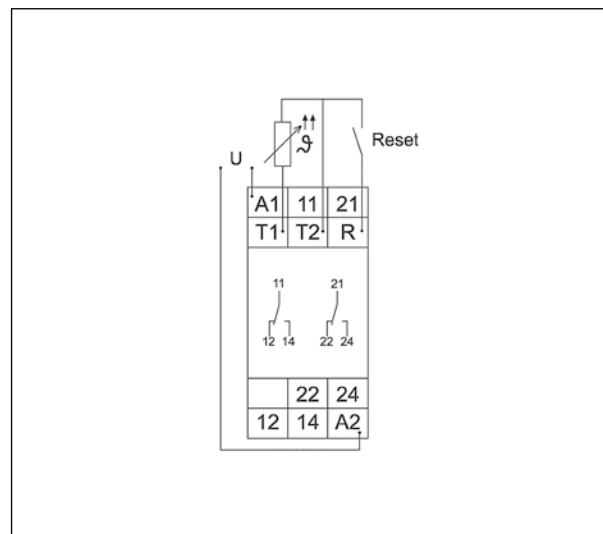

Dimensions

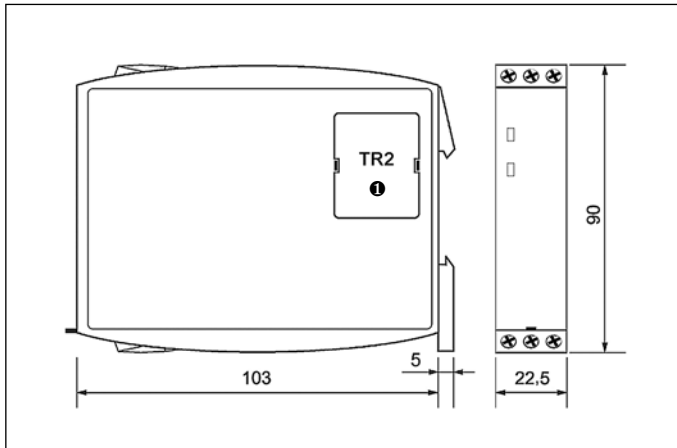


Mounting

Relays **MR-GT2P-TR2** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - any. **Terminals - cross section of the connection cables:** 1 x 0,5 ... 2,5 mm² with/without multicore cable end, 1 x 4 mm² without multicore cable end, 2 x 0,5 ... 1,5 mm² with/without multicore cable end, 2 x 2,5 mm² flexible without multicore cable end.

❶ Supply voltage depending on the TR2 transformer which shall be ordered as a separate product - see page 358.

Ordering codes

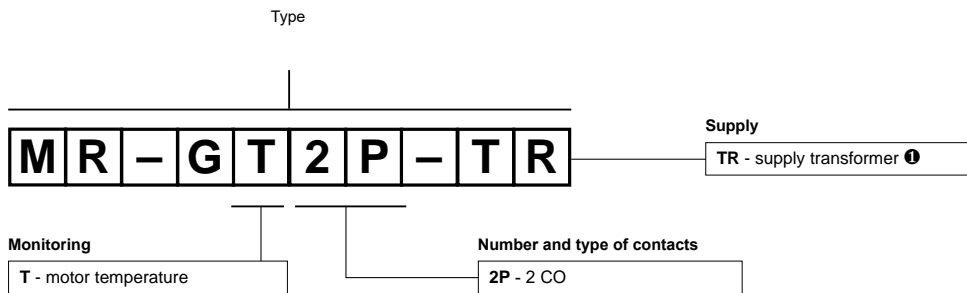

Example of ordering code:

MR-GT2P-TR2

monitoring relay **MR-GT2P-TR2**, single-function (relay monitors the motor temperature), industrial cover, width 22,5 mm, two changeover contacts, rated input voltage (supply): AC - 12, 24, 42, 48, 110, 127, 230, 400 V AC ❶

TR2

supply transformers for relays MR-G... series




- Separating TR2... supply transformers for the monitoring relays of MR-G... series to reduce the input voltage applied to the terminals A1 and A2 of monitoring relays to the level required by the internal system
- TR2 transformers shall be ordered as a separate product.

Input circuit


Supply voltage	50/60 Hz AC	12, 24, 42, 48, 110, 127, 230, 400 V
Operating range of supply voltage		0,85...1,1 U _n
Rated power consumption	AC	0,5...2,0 VA
Rated frequency	AC	50/60 Hz
Duty cycle		100%
General data		
Dimensions (L x W x H)		32 x 35 x 16 mm
Weight		40 g
Ambient temperature (non-condensation and/or icing)	• storage • operating	-25...+70 °C -25...+55 °C
Cover protection category		IP 20
Relative humidity		15...85%

Dimensions

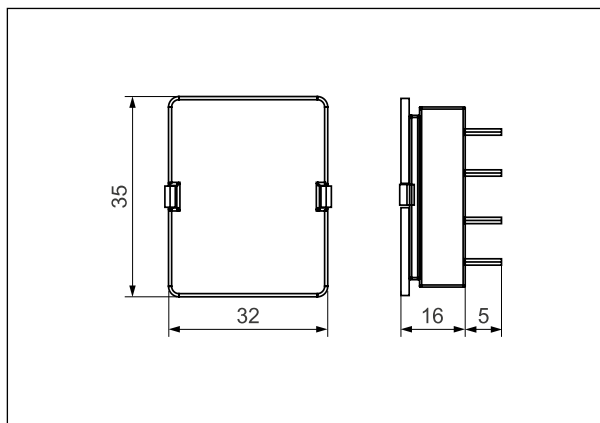


Mounting, mechanical design

TR2 supply transformers are designed for mounting in MR-G... monitoring relays and they are inseparable for their operation. MR-G... relays will not operate without the TR2... transformers. In order to mount the TR2... transformer in the monitoring relay, it is necessary to remove the protective cap ❶ from the relay, which protects the terminals of TR2... Then, TR2... shall be placed in the assembly opening of the MR-G... relay. The cover of TR2... is made of self-extinguishing plastic. When mounted, the tightness of TR2... is IP 20.



Ordering codes

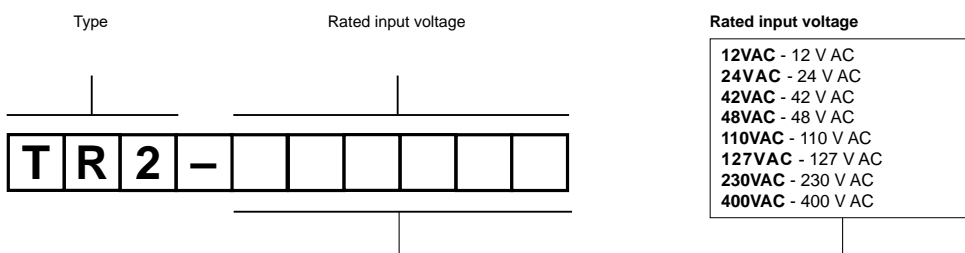

Example of ordering code:

TR2-230VAC supply transformer **TR2**, rated input voltage 230 V AC 50/60 Hz

Plug-in sockets and accessories



relpol® S.A.

Plug-in sockets are designed for miniature and industrial relays. They provide for mounting of the relays in printed circuits, on 35 mm rail mount acc. to EN 60715, and on panel mounting.

■ GZT..., GZM..., GZS..., GZF..., GZ..., GZU... series are the sockets with screw terminals for mounting on 35 mm rail mount acc. to EN 60715, and on panel mounting. GZMB... serie are the sockets with spring terminals for mounting on 35 mm rail mount acc. to EN 60715.

■ The sockets have the following features:
current circuits load: up to 12 A, available plug-in sockets with separation of input (coil) from output (contacts), i.e. coil terminals on one side of the socket, and contact terminals on another side, adapted for mounting signalling / protecting modules type M... - sockets of GZT..., GZM..., GZS..., GZMB..., ES 32 series.

■ They meet the requirements of REACH and RoHS Directive. The plug-in sockets are recognized and certified by:




GZT80, GZM80, GZS80	360
GZF80, GZMB80	361
EC 50, PW80, GD50, GZT92	362
GZM92, GZS92, EC 35, GD35	363
ES 32, EC 32, GZT2, GZM2	364
GZMB2, SU4/2D, SU4/2L	365
G4/2, GZT3, GZM3, GZT4	366
GZM4, GZMB4, GZ4	367
GS4, SU4D, SU4L, G4	368
GZY2G, GZ2, S2M, G2M	369
PZ8, GZU8, GZ8, GZP8	370
GOP8, PZ11, GZU11, GZ11	371
GZP11, GOP11, GZ14U, GZ14	372
GZ14Z, GOP14	373
GUC11, GUC11S, PI6W-1P	374
Mounting and sub-assemblies of the relay and accessories in the socket	375
Signalling / protecting modules type M...	376
Interconnection strips ZGGZ80	377
Interconnection strips ZGGZ4	378
Additional features for industrial relays	379
Test buttons (no latching) and plugs ...	380



GZT80

For RM84, RM85, RM85 inrush, RM85 105 °C sensitive, RM87L, RM87L sensitive, RM87P, RM87P sensitive

Screw terminals
Max. tightening moment for the terminal: 0,7 Nm
35 mm rail mount acc. to EN 60715 or on panel mounting
80 x 15,6 x 61(67) mm ②
Two poles, 5 mm pinout 12 A, 300 V AC



Connection diagrams ③

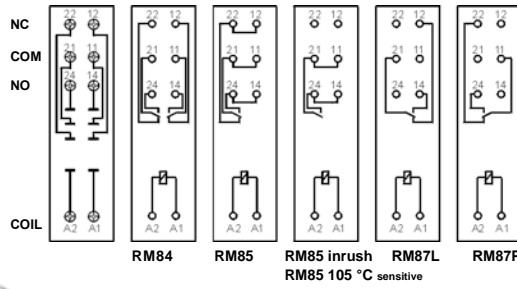


Accessories ①

ZGGZ80

GZM80-0041

Dimensions

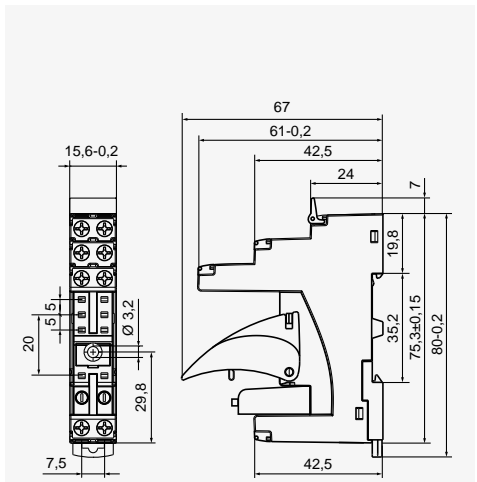



GZM80

For RM84, RM85, RM85 inrush, RM85 105 °C sensitive, RM87L, RM87L sensitive, RM87P, RM87P sensitive

Screw terminals
Max. tightening moment for the terminal: 0,7 Nm
35 mm rail mount acc. to EN 60715 or on panel mounting
81,6 x 15,9 x 61(67) mm ②
Two poles, 5 mm pinout 12 A, 300 V AC



Connection diagrams ③

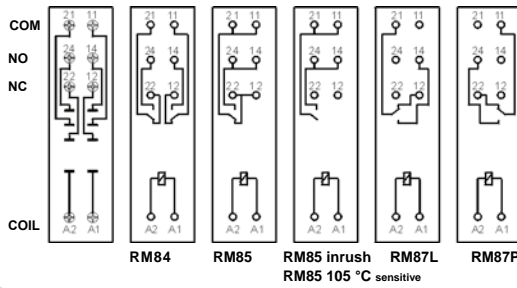


Accessories ①

ZGGZ80

GZM80-0041

Dimensions

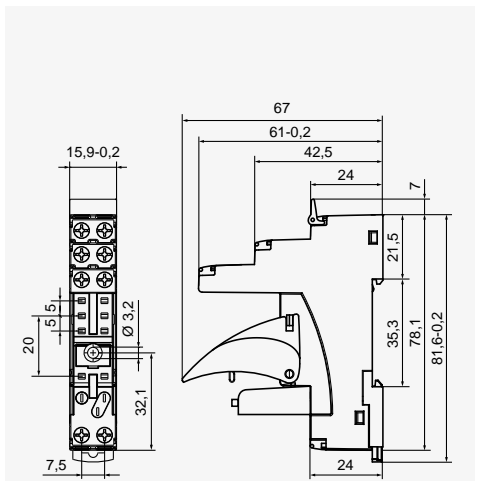



GZS80

For RM84, RM85, RM85 inrush, RM85 105 °C sensitive, RM87L, RM87L sensitive, RM87P, RM87P sensitive

Screw terminals
Max. tightening moment for the terminal: 0,5 Nm
35 mm rail mount acc. to EN 60715 or on panel mounting
76,8 x 15,8 x 42,5(57,1) mm ②
Two poles, 5 mm pinout 10 A, 300 V AC



Connection diagrams ③

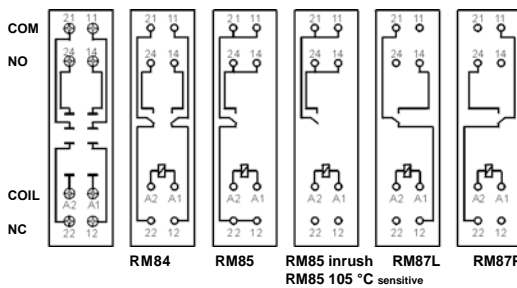


Accessories ①

ZGGZ80

GZM80-0041

Dimensions

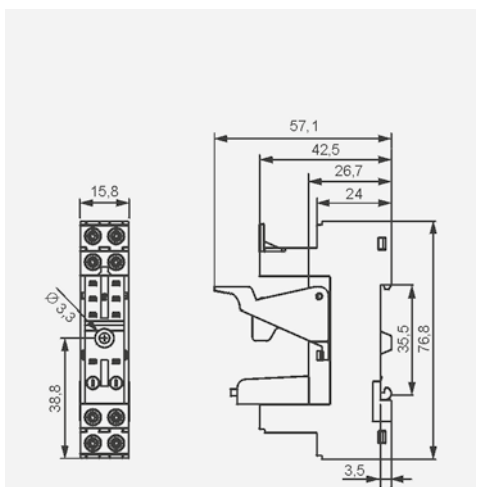

① Mounting and sub-assemblies of accessories in the socket - see page 375. Signalling / protecting modules type M... - see page 376. ② In the bracket the height of socket with retainer / retractor clip is shown. ③ For RM85..., RMP85: loads above 12 A (GZT80, GZM80) or 10 A (GZS80, GZF80, GZMB80) require bridging pairs of terminals: 11 with 21, 12 with 22, 14 with 24 - see pages 94, 102, 106, 131.


GZF80

For RM84, RM85, RM85 inrush, RM85 105 °C sensitive, RM87L, RM87L sensitive, RM87P, RM87P sensitive, RMP84, RMP85


Screw terminals
Max. tightening moment for the terminal: 0,5 Nm
35 mm rail mount acc. to EN 60715 or on panel mounting 67,2 x 15,5 x 36,5 mm
Two poles, 5 mm pinout 10 A, 250 V AC



Connection diagrams ⑥

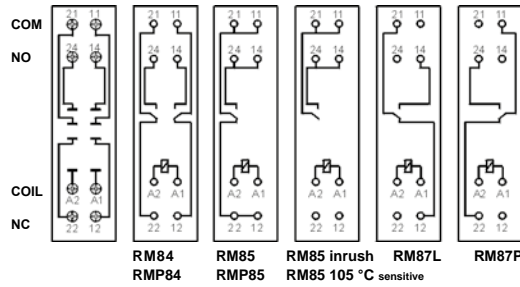

Dimensions

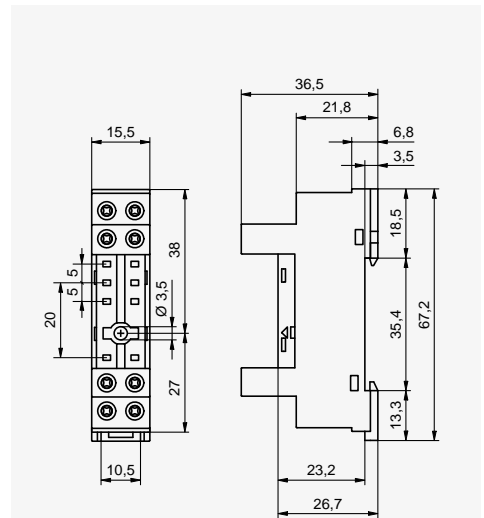

Accessories ①


GZM80-0041 GZ80-1001

GZMB80


For RM84, RM85, RM85 inrush, RM85 105 °C sensitive, RM87L, RM87L sensitive, RM87P, RM87P sensitive, RMP84, RMP85

Spring terminals
Max. cross section of the cables: 1 x 0,2...1,5 mm² (1 x 24...16 AWG)
Stripping length: 9...11 mm


35 mm rail mount acc. to EN 60715
97 x 16 x 45,2(69/78 ②) mm ②
Two poles, 5 mm pinout 10 A, 300 V AC





Connection diagrams ⑥

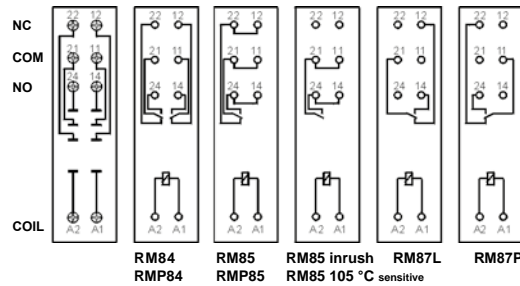

Dimensions

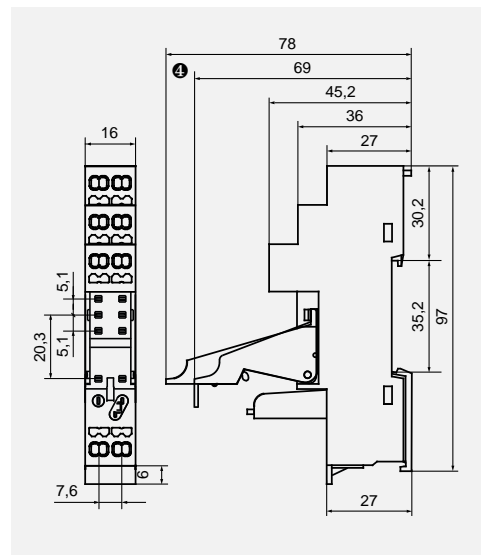

The drawings present the sequence of operations in course of inserting wires to the spring terminal, and the recommended screwdriver to be used for opening of case springs, comply with the DIN 5264 FORM "A".

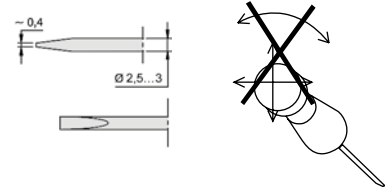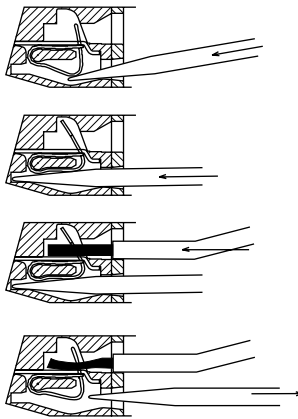

Accessories ① ④


Wire connection

① Mounting and sub-assemblies of accessories in the socket - see page 375. Signalling / protecting modules type M... - see page 376. ② In the bracket the height of socket with retainer / retractor clip is shown. ③ For RM85..., RMP85: loads above 12 A (GZT80, GZM80) or 10 A (GZS80, GZF80, GZMB80) require bridging pairs of terminals: 11 with 21, 12 with 22, 14 with 24 - see pages 94, 102, 106, 131. ④ Height of set: 69 mm (GZMB80-0040) or 78 mm (GZMB80-0025).



EC 50

For RM84, RM85, RM85 inrush, RM85 105 °C sensitive, RM87L, RM87L sensitive, RM87P, RM87P sensitive, RM83, RMP84, RMP85


For PCB
31,3 x 12,7 x 9 mm
Two poles, 5 mm pinout
12 A, 250 V AC



Pinout




Dimensions

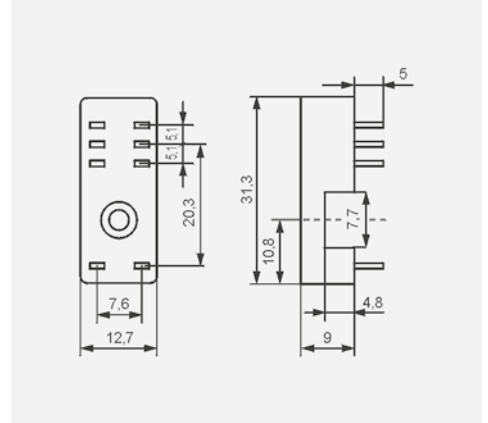


PW80

For RM84, RM85, RM85 inrush, RM85 105 °C sensitive, RM87L, RM87L sensitive, RM87P, RM87P sensitive, RM83


For PCB
34,6 x 12,9 x 6,6 mm
Two poles, 5 mm pinout
12 A, 250 V AC



Pinout



Dimensions

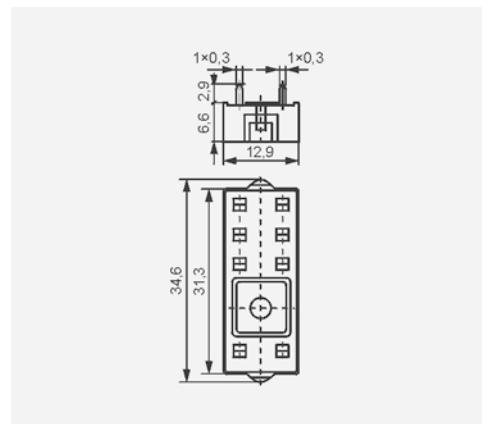



GD50

For RM84, RM85, RM85 inrush, RM85 105 °C sensitive, RM87L, RM87L sensitive, RM87P, RM87P sensitive, RM83, RMP84, RMP85


For PCB
31,5 x 13 x 9 mm
Two poles, 5 mm pinout
8 A, 300 V AC



Pinout




Dimensions

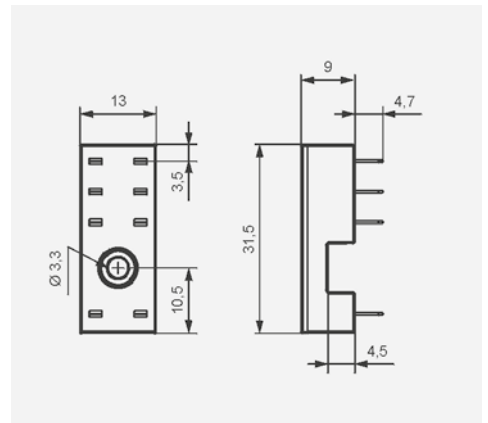


GZT92

For RM87N, RM87N sensitive


Screw terminals
Max. tightening moment for the terminal: 0,7 Nm
35 mm rail mount acc. to EN 60715 or on panel mounting
80 x 15,6 x 61(67) mm
One pole, 3,5 mm pinout
12 A, 300 V AC



Connection diagrams




Dimensions

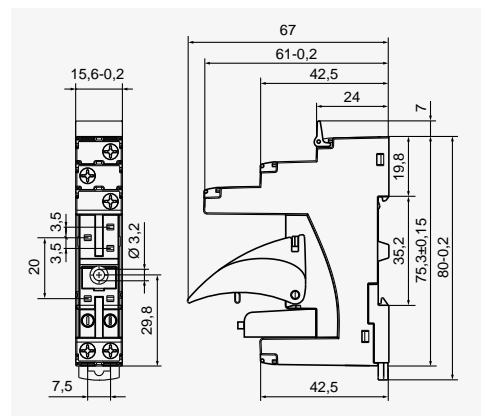

① Mounting and sub-assemblies of accessories in the socket - see page 375. Signalling / protecting modules type M... - see page 376.
② In the bracket the height of socket with retainer / retractor clip is shown.


GZM92

For RM87N, RM87N sensitive

Screw terminals
 Max. tightening moment for the terminal: 0,7 Nm
 35 mm rail mount acc. to EN 60715 or on panel mounting
 81,6 x 15,9 x 61(67) mm 
 One pole, 3,5 mm pinout
 12 A, 300 V AC



Connection diagrams




RM87N



GZT80-0035

Module type M...

Dimensions

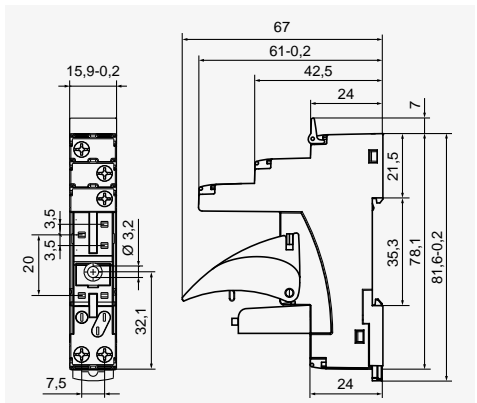


Accessories

ZGGZ80

GZM80-0041


GZS92

For RM87N, RM87N sensitive

Screw terminals
 Max. tightening moment for the terminal: 0,5 Nm
 35 mm rail mount acc. to EN 60715 or on panel mounting
 76,8 x 15,8 x 42,5(57,1) mm 
 One pole, 3,5 mm pinout
 12 A, 300 V AC



Connection diagrams




RM87N



TR

Module type M...

Dimensions

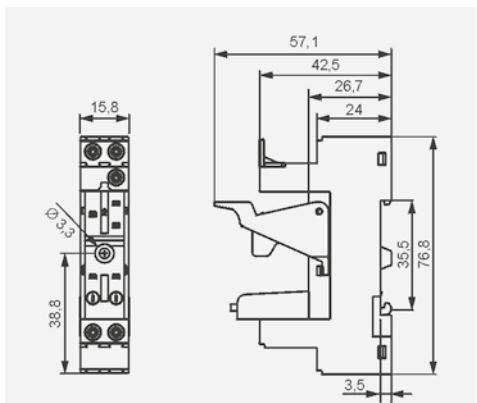

Accessories


ZGGZ80

GZM80-0041


EC 35

For RM87N, RM87N sensitive

For PCB
 31,3 x 12,7 x 9 mm
 One pole, 3,5 mm pinout
 12 A, 300 V AC




Pinout



MP16-2

MH16-2

Dimensions

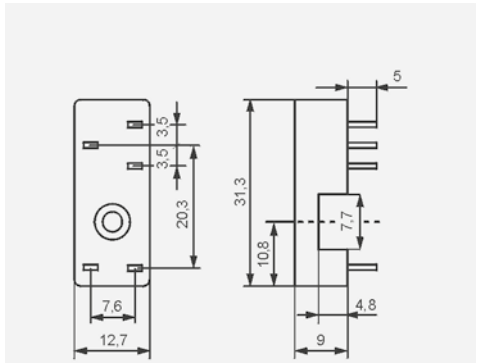

Accessories


GD35

For RM87N, RM87N sensitive

For PCB
 31,5 x 13 x 9 mm
 One pole, 3,5 mm pinout
 12 A, 300 V AC



Pinout






MP16-2

MH16-2

GD-0016

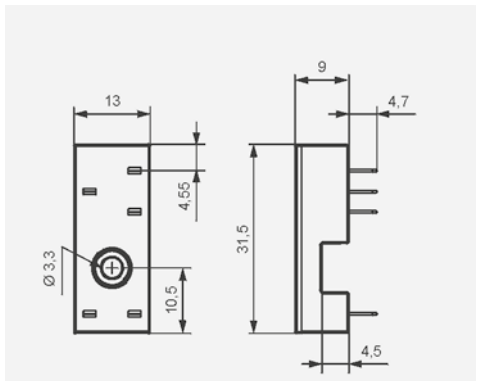Dimensions



 Mounting and sub-assemblies of accessories in the socket - see page 375. Signalling / protecting modules type M... - see page 376.
 In the bracket the height of socket with retainer / retractor clip is shown.


ES 32

For RM96 1 CO


Screw terminals
 Max. tightening moment for the terminal: 0,5 Nm
 35 mm rail mount acc. to EN 60715 or on panel mounting
 75 x 15,5 x 42,5(59) mm ②
 One pole, 3,2 mm pinout
 12 A, 300 V AC



Connection diagrams



Dimensions

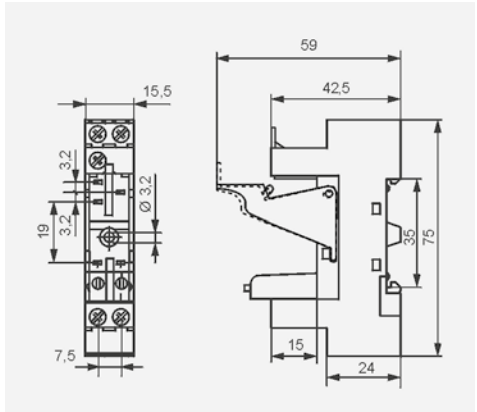

Accessories ①


ZGGZ80 GZM80-0041

EC 32


For PCB
 31 x 12,7 x 9 mm
 One pole, 3,2 mm pinout
 12 A, 300 V AC



Pinout



Dimensions

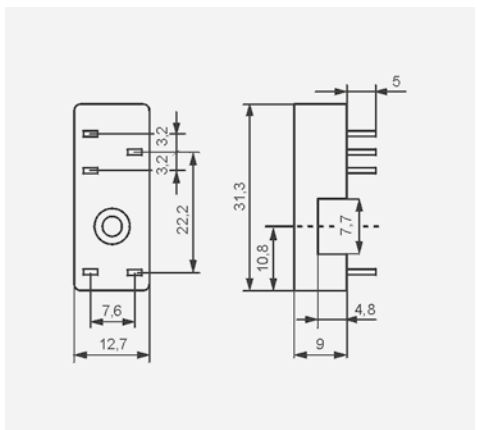


Accessories


GZT2

For R2N


Screw terminals
 Max. tightening moment for the terminal: 0,7 Nm
 35 mm rail mount acc. to EN 60715 or on panel mounting
 76,3 x 27 x 42,5(80) mm ②
 Two poles
 12 A, 300 V AC



Connection diagram



Dimensions

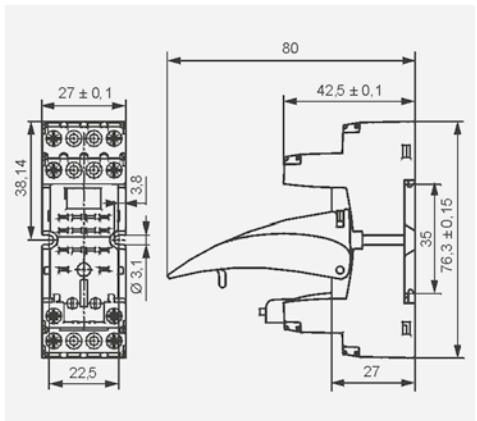

Accessories ①


GZM2

For R2N


Screw terminals
 Max. tightening moment for the terminal: 0,7 Nm
 35 mm rail mount acc. to EN 60715 or on panel mounting
 75 x 27 x 61(82) mm ②
 Two poles
 12 A, 300 V AC



Connection diagram



Dimensions

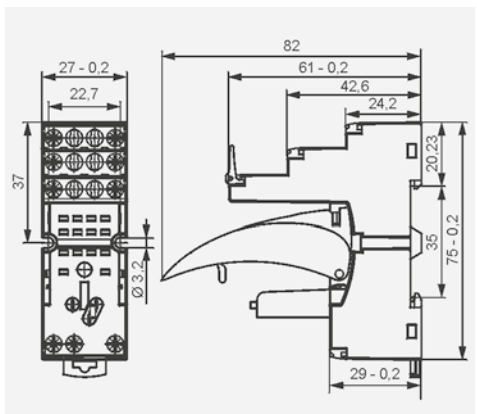

Accessories ①

① Mounting and sub-assemblies of accessories in the socket - see page 375. Signalling / protecting modules type M... - see page 376.
 ② In the bracket the height of socket with retainer / retractor clip is shown.

GZMB2

For R2N

Spring terminals
Max. cross section of the cables:
1 x 0,2...1,5 mm²
(1 x 24...16 AWG)
Stripping length: 9...11 mm

35 mm rail mount
acc. to EN 60715
95 x 31 x 42,5(80) mm ②
Two poles
10 A, 300 V AC



GZMB4-0040



TR






Module type M...




G4 1052


Connection diagram

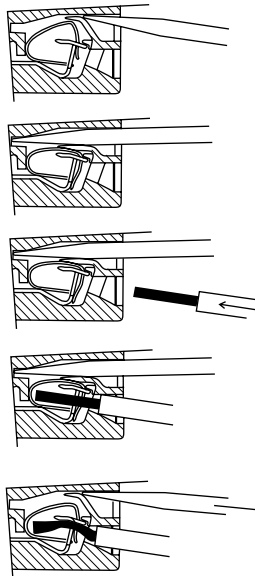

Dimensions

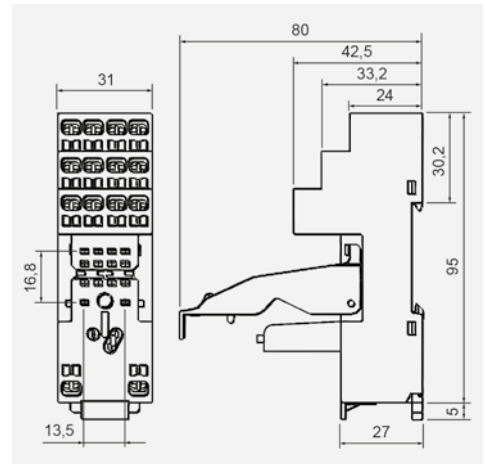

The drawings present the sequence of operations in course of inserting wires to the spring terminal, and the recommended screwdriver to be used for opening of case springs, comply with the DIN 5264 FORM "A".

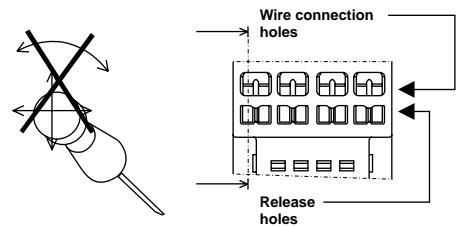

Accessories ①

Wire connection


SU4/2D

For R2N

For PCB
29,6 x 21,5 x 11 mm
Two poles
12 A, 250 V AC




Pinout



G4 1053

Dimensions

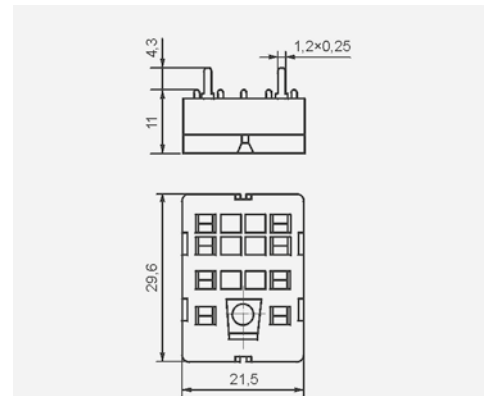

Accessories


SU4/2L

For R2N

Solder terminals
29,6 x 21,5 x 18,1 mm
Two poles
12 A, 250 V AC



Dimensions of opening on panel mounting




G4 1053



G4 1040

Dimensions

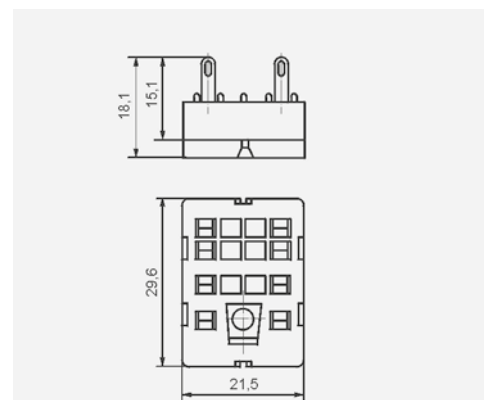


① Mounting and sub-assemblies of accessories in the socket - see page 375. Signalling / protecting modules type M... - see page 376.
② In the bracket the height of socket with retainer / retractor clip is shown.


G4/2

For R2N

Solder terminals
40,5 x 21,5 x 18,1 mm
Two poles
12 A, 250 V AC




Pinout of openings on panel mounting



G4 1053

Dimensions

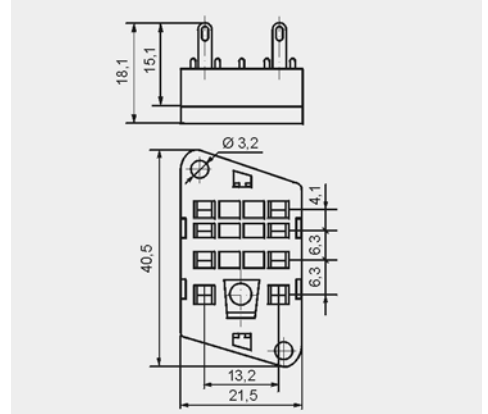

Accessories


GZT3

For R3N

Screw terminals
Max. tightening moment for the terminal: 0,7 Nm
35 mm rail mount
acc. to EN 60715
or on panel mounting
76,3 x 27 x 42,5(80) mm ②
Three poles
10 A, 300 V AC



Connection diagram



ZGGZ4



GZT4-0040


G4 1052



GZT4-0035

Module type M...

Dimensions

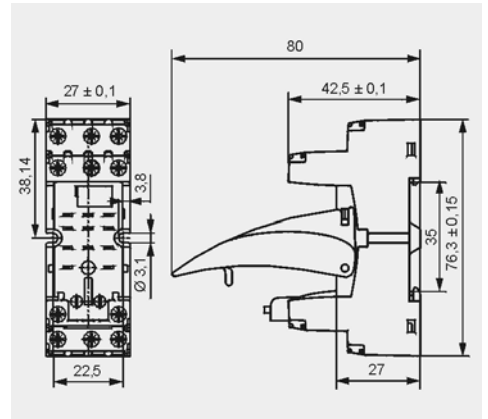

Accessories ①


GZM3

For R3N

Screw terminals
Max. tightening moment for the terminal: 0,7 Nm
35 mm rail mount
acc. to EN 60715
or on panel mounting
75 x 27 x 61(82) mm ②
Three poles
10 A, 300 V AC



Connection diagram



ZGGZ4



GZT4-0040


G4 1052



GZT4-0035

Module type M...

Dimensions

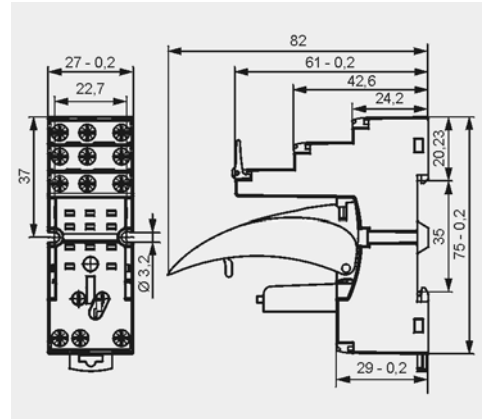

Accessories ①


GZT4 ⑥

For R4N, T-R4

Screw terminals
Max. tightening moment for the terminal: 0,7 Nm
35 mm rail mount
acc. to EN 60715
or on panel mounting
76,3 x 27 x 42,5(80) mm ②
Four poles
6 A, 300 V AC



Connection diagram



ZGGZ4



TR4-2000

GZT4-0040


G4 1052



GZT4-0035

Module type M...

Dimensions

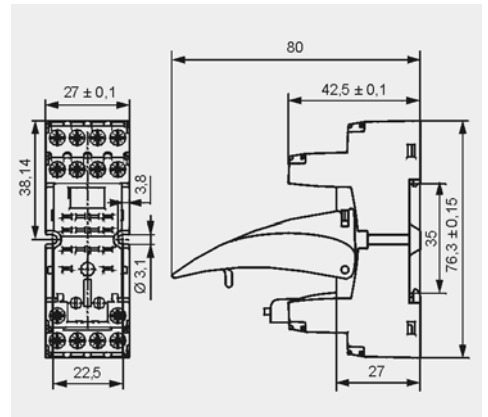


Accessories ① ⑥

① Mounting and sub-assemblies of accessories in the socket - see page 375. Signalling / protecting modules type M... - see page 376. ② In the bracket the height of socket with retainer / retractor clip is shown. ③ Have obtained LR Type Approval Certificate (Lloyd's Register). ④ For R4N relays: G4 1052, GZT4-0040, GZM3-0040, GZT4-0035, TR, module type M...; for T-R4 relays: TR4-2000, GZT4-0035, TR.



GZM4

For R4N, T-R4

Screw terminals
 Max. tightening moment for the terminal: 0,7 Nm
 35 mm rail mount acc. to EN 60715 or on panel mounting
 75 x 27 x 61(82) mm 
 Four poles
 6 A, 300 V AC




Connection diagram



TR4-2000 ZGGZ4 GZT4-0040 G4 1052

Dimensions

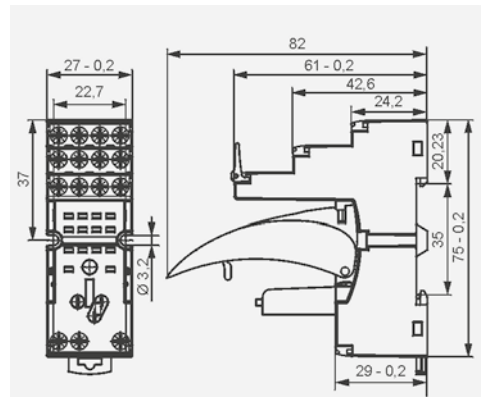


Accessories

GZT4-0035 Module type M...

GZMB4



For R4N, T-R4

Spring terminals
 Max. cross section of the cables:
 1 x 0,2...1,5 mm²
 (1 x 24...16 AWG)
 Stripping length: 9...11 mm


35 mm rail mount acc. to EN 60715
 95 x 31 x 42,5(80) mm 
 Four poles
 10 A, 300 V AC



Connection diagram

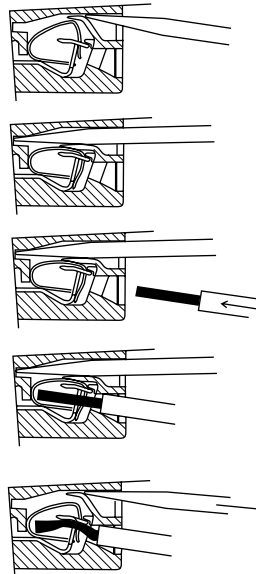

Dimensions

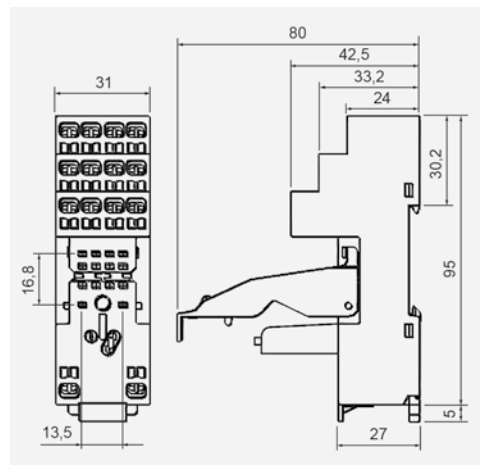

The drawings present the sequence of operations in course of inserting wires to the spring terminal, and the recommended screwdriver to be used for opening of case springs, comply with the DIN 5264 FORM "A".



GZMB4-0040



TR



Module type M...




G4 1052



TR4-2000

Accessories


Wire connection




GZ4

For R4N

Screw terminals
 Max. tightening moment for the terminal: 0,7 Nm
 35 mm rail mount acc. to EN 60715 or on panel mounting
 66,4 x 29,5 x 29 mm
 Four poles
 10 A, 300 V AC




Connection diagram





G4 1052

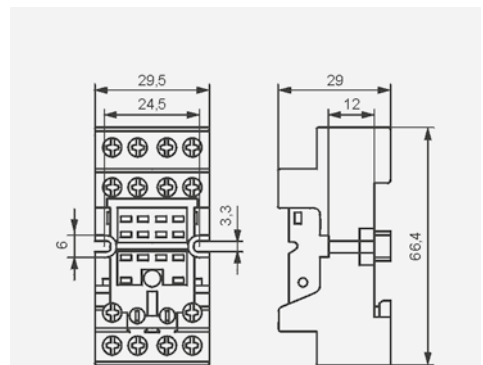Dimensions




Accessories

 Mounting and sub-assemblies of accessories in the socket - see page 375. Signalling / protecting modules type M... - see page 376.  In the bracket the height of socket with retainer / retractor clip is shown.  For R4N relays: G4 1052, GZT4-0040, GZMB-0040, GZT4-0035, TR, module type M...; for T-R4 relays: TR4-2000, GZT4-0035, TR.



GS4

For R4N

Screw terminals
 Max. tightening moment for the terminal: 0,7 Nm
 35 mm rail mount acc. to EN 60715 or on panel mounting
 67 x 30,8 x 30 (~63,7) mm 
 Four poles
 10 A, 300 V AC




Connection diagram



Accessories


Dimensions

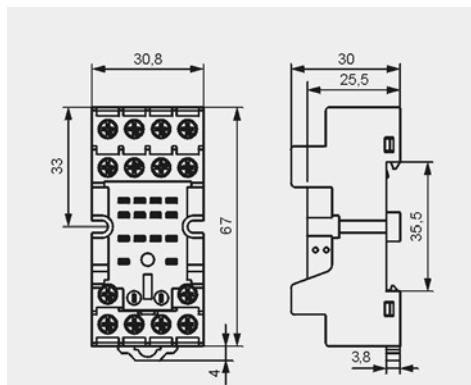


SU4D

For R4N

For PCB
 29,6 x 21,5 x 11 mm
 Four poles
 6 A, 250 V AC




Pinout



Accessories

G4 1053

Dimensions

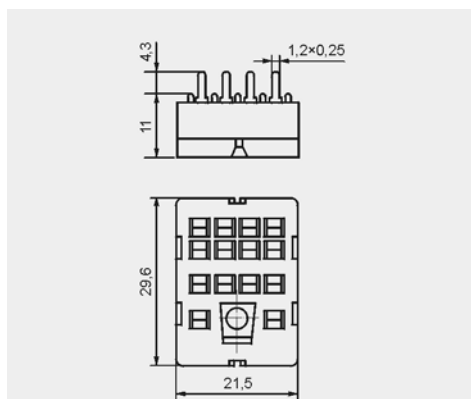


SU4L

For R4N

Solder terminals
 29,6 x 21,5 x 18,1 mm
 Four poles
 6 A, 250 V AC



Dimensions of opening on panel mounting




Accessories

G4 1053



G4 1040


Dimensions

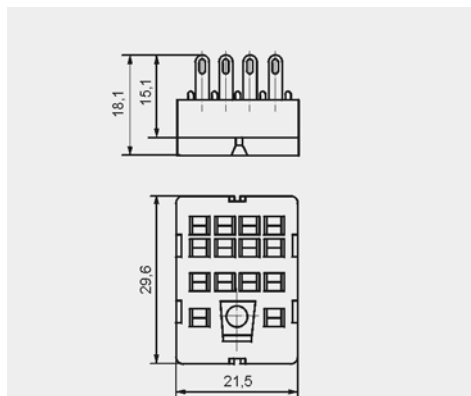


G4

For R4N

Solder terminals
 40,5 x 21,5 x 18,1 mm
 Four poles
 6 A, 250 V AC




Pinout of openings on panel mounting



Accessories

G4 1053

Dimensions

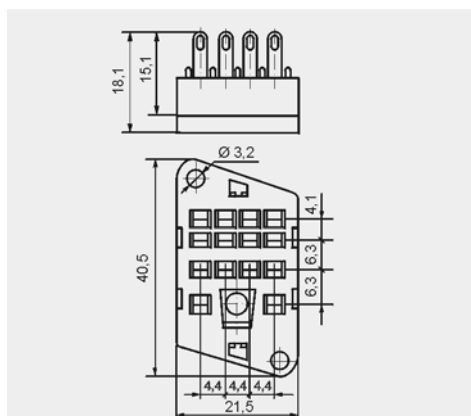

 In the bracket the height of socket with spring wire clip is shown.


GZY2G

For RY2

Screw terminals
 Max. tightening moment
 for the terminal: 0,7 Nm
 35 mm rail mount
 acc. to EN 60715
 or on panel mounting
 78,7 x 28 x 32,4 mm
 Two poles
 12 A, 250 V AC




Connection diagram



Accessories

GZY2G-0041


Dimensions

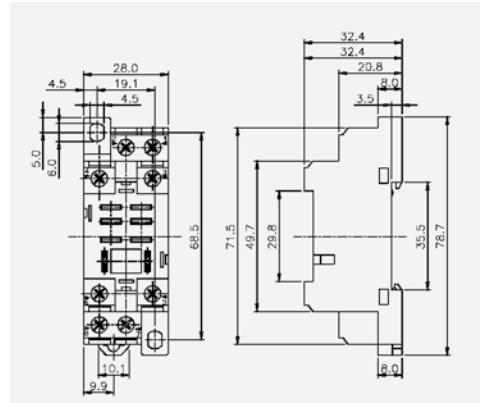



GZ2

For R2M

Screw terminals
 Max. tightening moment
 for the terminal: 0,7 Nm
 35 mm rail mount
 acc. to EN 60715
 or on panel mounting
 65,2 x 20 x 25 mm
 Two poles
 7 A, 250 V AC




Connection diagram



Accessories

GZ2 1060


Dimensions

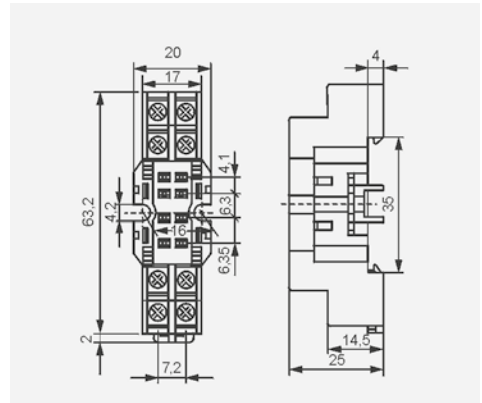


S2M

For R2M

For PCB
 29,6 x 14 x 10,5 mm
 Two poles
 5 A, 250 V AC




Pinout



Accessories

G4 1050


Dimensions

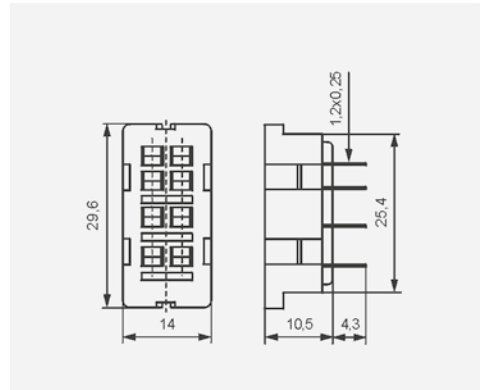


G2M

For R2M

Solder terminals
 40,5 x 14 x 10,5 mm
 Two poles
 5 A, 250 V AC



Dimensions

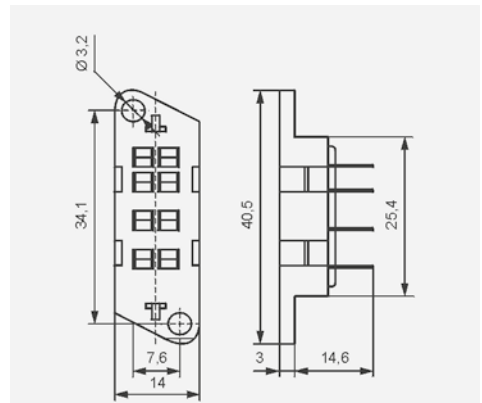

Accessories

G4 1050

G2M 1020


PZ8

For R15 - 2 CO

Screw terminals
 Max. tightening moment
 for the terminal: 0,7 Nm
 35 mm rail mount
 acc. to EN 60715
 or on panel mounting
 68,2 x 38 x 24,2 mm
 Two poles
 10 A, 250 V AC




Connection diagram



PZ11 0031

Dimensions

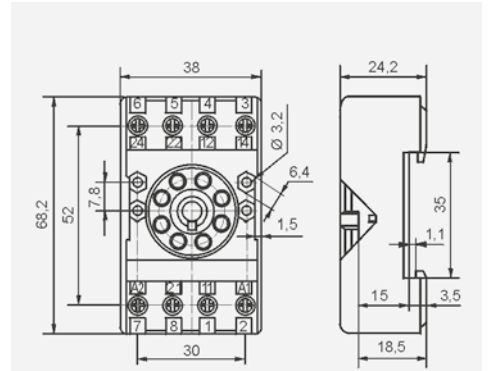

Accessories


GZU8

For R15 - 2 CO

Screw terminals
 Max. tightening moment
 for the terminal: 0,7 Nm
 35 mm rail mount
 acc. to EN 60715
 82 x 35,5 x 25,7 mm
 Two poles
 10 A, 250 V AC




Connection diagram




GZU 1052

Adaptor



Dimensions

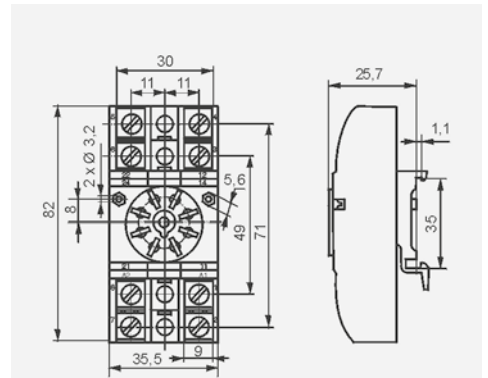


Accessories


GZ8

For R15 - 2 CO

Screw terminals
 Max. tightening moment
 for the terminal: 0,7 Nm
 On panel mounting
 82,8 x 35,5 x 22,5 mm
 Two poles
 10 A, 250 V AC




Connection diagram




GZ 1050

Mounting dimensions



Dimensions

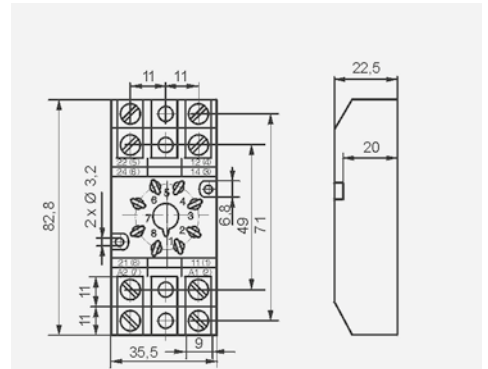

Accessories


GZP8

For R15 - 2 CO

Screw terminals
 Max. tightening moment
 for the terminal: 0,5 Nm
 35 mm rail mount
 acc. to EN 60715
 or on panel mounting
 73 x 38,2 x 27,2 mm
 Two poles
 12 A, 300 V AC



Connection diagram



GZP-0054




Time module COM3



GZP-0035

Dimensions

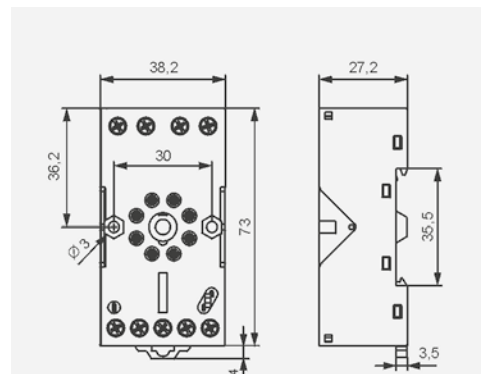

Accessories

® Have obtained LR Type Approval Certificate (Lloyd's Register).

GOP8

For R15 - 2 CO


Solder terminals
47,2 x 32 x 22 mm
Two poles
10 A, 250 V AC



Accessories

R159 1051


Dimensions

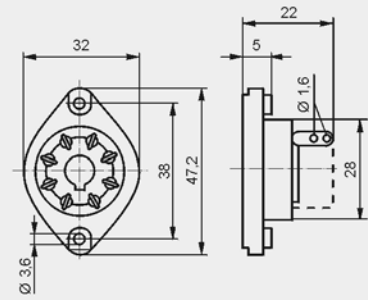


PZ11 ⑥

For R15 - 3 CO

Screw terminals
Max. tightening moment for the terminal: 0,7 Nm
35 mm rail mount acc. to EN 60715 or on panel mounting
68,2 x 38 x 24,2 mm
Three poles
10 A, 250 V AC




Connection diagram



Accessories

PZ11 0031

Dimensions

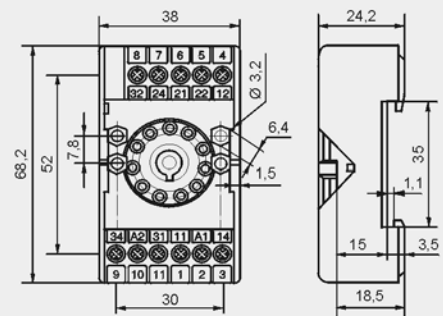


GZU11

For R15 - 3 CO

Screw terminals
Max. tightening moment for the terminal: 0,7 Nm
35 mm rail mount acc. to EN 60715
82 x 35,5 x 25,7 mm
Three poles
10 A, 250 V AC




Connection diagram




Accessories

GZU 1052

Adaptor



Dimensions

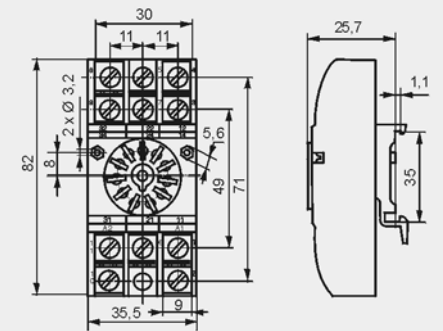


GZ11

For R15 - 3 CO

Screw terminals
Max. tightening moment for the terminal: 0,7 Nm
On panel mounting
82,8 x 35,5 x 22,5 mm
Three poles
10 A, 250 V AC




Connection diagram




Accessories

GZ 1050

Mounting dimensions



Dimensions

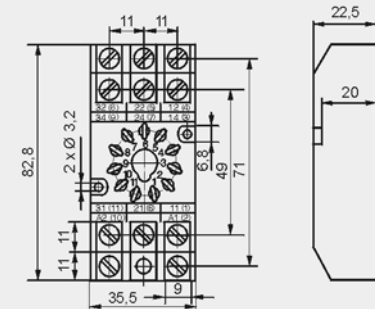


⑥ Have obtained LR Type Approval Certificate (Lloyd's Register).

GZP11

For R15 - 3 CO

Screw terminals
 Max. tightening moment
 for the terminal: 0,5 Nm
 35 mm rail mount
 acc. to EN 60715
 or on panel mounting
 73 x 38,2 x 27,2 mm
 Three poles
 12 A, 300 V AC

**Connection diagram**


Time module COM3



GZP-0054



GZP-0035

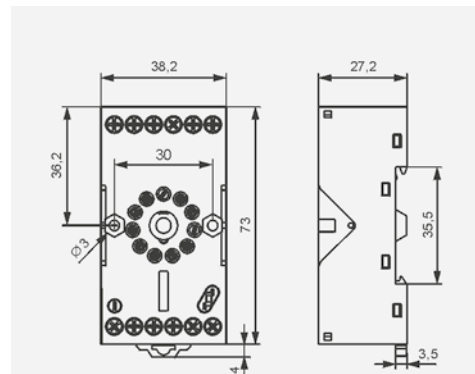
Accessories**Dimensions****GOP11**

For R15 - 3 CO

Solder terminals
 47,2 x 32 x 22 mm
 Three poles
 10 A, 250 V AC



**Accessories**

R159 1051

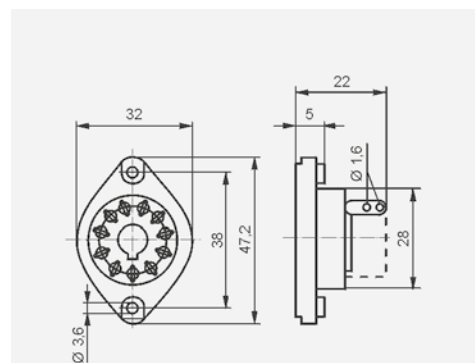
Dimensions**GZ14U**

For R15 - 4 CO

Screw terminals
 Max. tightening moment
 for the terminal: 0,7 Nm
 35 mm rail mount
 acc. to EN 60715
 96,8 x 46,4 x 33,3 mm
 Four poles
 10 A, 250 V AC


**Connection diagram****Adaptor**

GZ14 0737

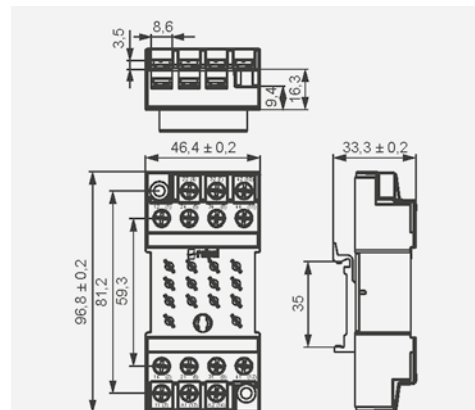
Accessories**Dimensions****GZ14**

For R15 - 4 CO

Screw terminals
 Max. tightening moment
 for the terminal: 0,7 Nm
 On panel mounting
 96,8 x 46,4 x 24,5 mm
 Four poles
 10 A, 250 V AC

**Connection diagram****Mounting dimensions**

GZ14 0737

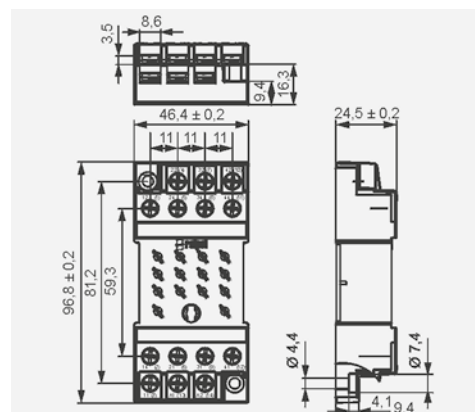Accessories**Dimensions**


GZ14Z

For R15 - 4 CO


Screw terminals
 Max. tightening moment
 for the terminal: 0,7 Nm
On panel mounting, behind
 92,2 x 46 x 23 mm
 Four poles
 10 A, 250 V AC



Connection diagram




Mounting dimensions



GZ14 0737

Accessories


Dimensions

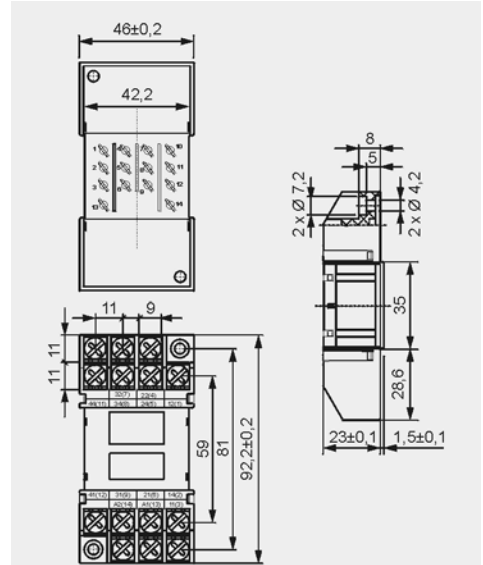


GOP14

For R15 - 4 CO

Solder terminals
 50 x 42 x 23 mm
 Four poles
 10 A, 250 V AC



Dimensions

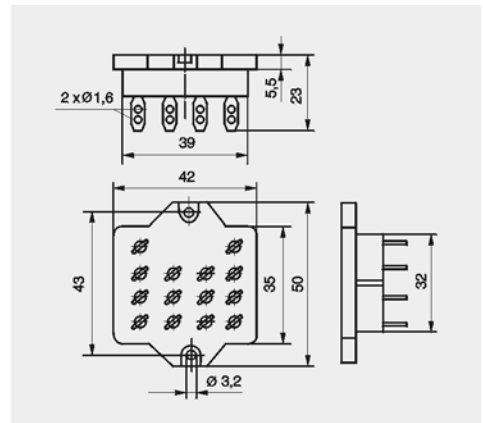

R15 0736




R15 5922

Accessories



GUC11 

For RUC faston 4,8x0,5, RUC-M

Screw terminals


Cross section of the cables: max. 1 x 4 mm²
/ 2 x 2,5 mm² (1 x 12 / 2 x 14 AWG),
min. 1 x 0,25 mm² (1 x 23 AWG)Max. tightening moment
for the terminal: 0,7 Nm35 mm rail mount
acc. to EN 60715
or on panel mounting
81,5 x 42,2 x 26,5 mm
Three poles
16 A, 250 V AC**Connection diagram****Accessories**

MBA

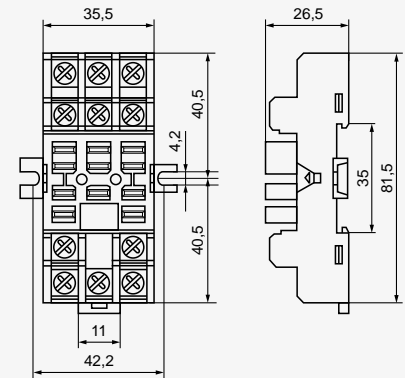
Dimensions**GUC11S** 

For RUC faston 4,8x0,5, RUC-M



Screw terminals

Cross section of the cables: max. 1 x 4 mm²
/ 2 x 2,5 mm² (1 x 12 / 2 x 14 AWG),
min. 1 x 0,25 mm² (1 x 23 AWG)Max. tightening moment
for the terminal: 0,7 Nm35 mm rail mount
acc. to EN 60715
81,5 x 35,5 x 26,5 mm
Three poles
16 A, 250 V AC**Connection diagram****Accessories**

MBA

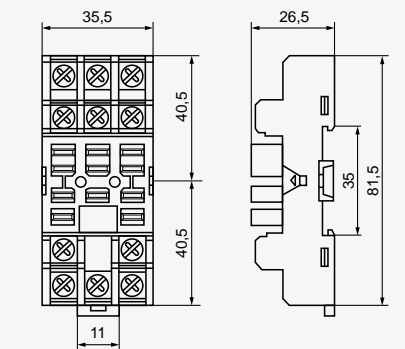Dimensions**PI6W-1P** For RM699BV, RSR30 

Screw terminals

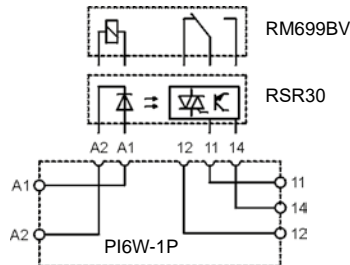
Max. tightening moment
for the terminal: 0,3 Nm35 mm rail mount
acc. to EN 60715
98,5 x 6,2 x 85,5 mm
One pole
6 A, 250 V AC**Connection diagram****Accessories**

ZG20


PI6W-1246

Dimensions**Ⓢ** For RUC faston 4,8 x 0,5 and RUC-M, with GUC11 or GUC11S socket, max. switching voltages and coil voltages of relays are limited to 250 V AC / DC.**Ⓢ** Solid state relays type **RSR30** - see www.repol.com.pl

■ Miniature relays

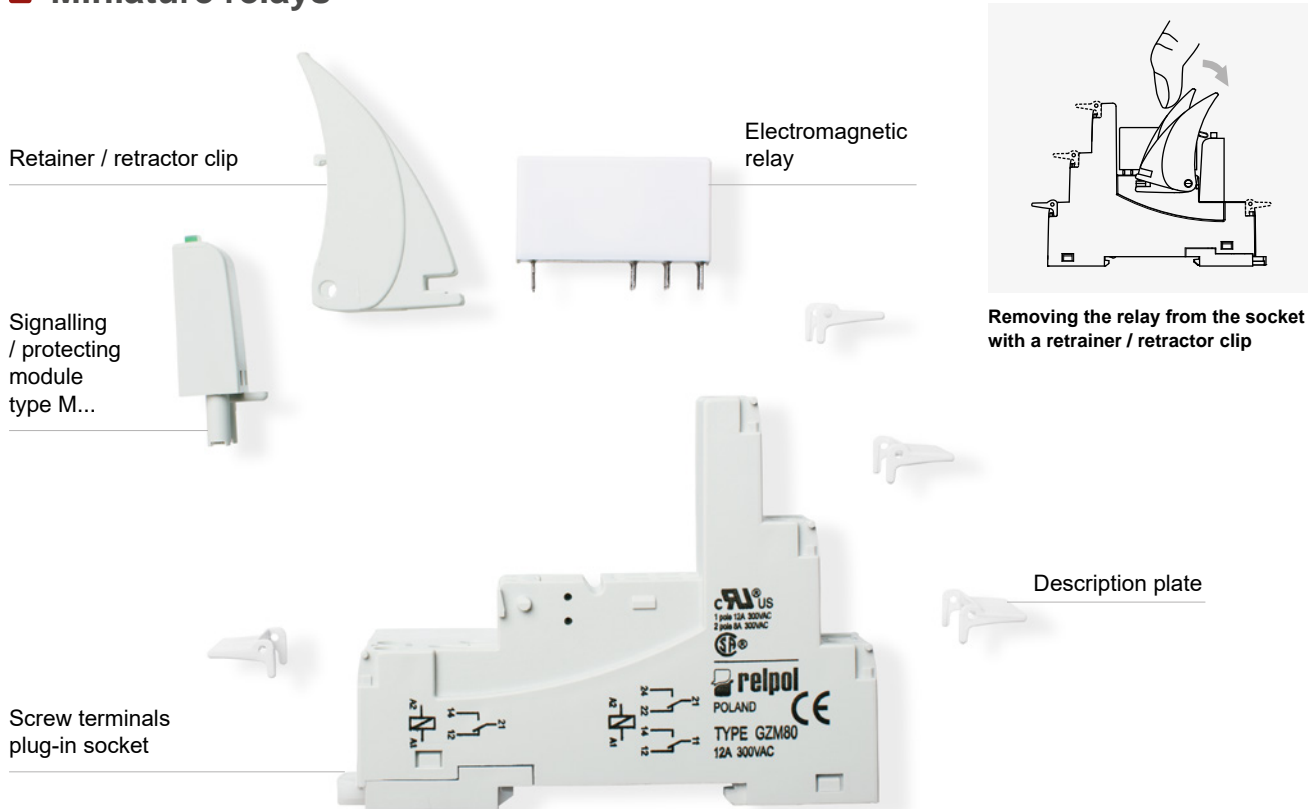

■ Miniature industrial relays

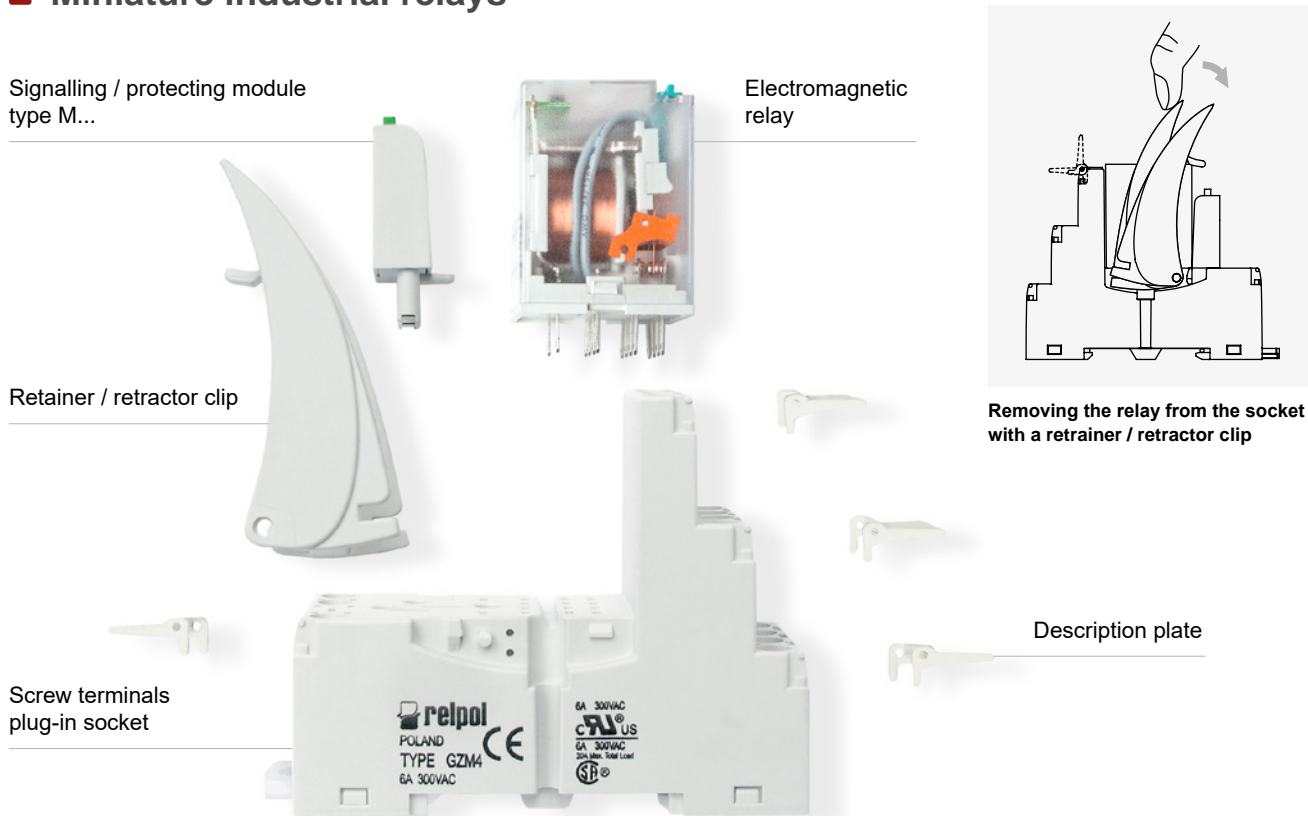


For sockets type:

GZT80, GZM80, GZS80, GZMB80, GZT92, GZM92, GZS92, ES 32,
GZT2, GZM2, GZMB2, GZT3, GZM3, GZT4, GZM4, GZMB4

Modules type M... are parallelly connected with relay coil.


Polarity P: -A1/+A2. Polarity N: +A1/-A2.

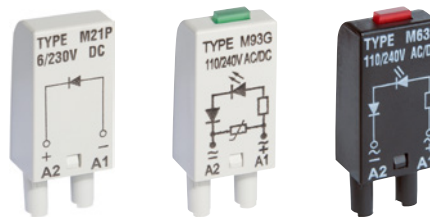

Modules type M...	Layout	Voltage	Type of module ① ②
Module D (polarization P) It limits overvoltage on DC coils.		6/230 V DC	M21P
Module D (polarization N) It limits overvoltage on DC coils.		6/230 V DC	M21N
Module LD (polarization P) It limits overvoltage on DC coils. Coil energizing indication.		6/24 V DC 24/60 V DC 110/230 V DC	M31R, M31G M32R, M32G M33R, M33G
Module LD (polarization N) It limits overvoltage on DC coils. Coil energizing indication.		6/24 V DC 24/60 V DC 110/230 V DC	M41R, M41G M42R, M42G M43R, M43G
Module RC It protects against EMC disturbance. It limits overvoltage.		6/24 V AC/DC 24/60 V AC/DC 110/240 V AC/DC	M51 M52 M53
Module L Coil energizing indication.		6/24 V AC/DC 24/60 V AC/DC 110/240 V AC/DC	M61R, M61G M62R, M62G M63R, M63G
Module LV It limits overvoltage on AC and DC coils. Coil energizing indication.		6/24 V AC/DC 24/60 V AC/DC 110/240 V AC/DC	M91R, M91G M92R, M92G M93R, M93G
Module V It limits overvoltage on AC coils. No indication.		6/24 V AC 110/130 V AC 220/240 V AC	M71 M72 M73
Module R It limits harmful voltage on AC coils induced in long lines which causes unwanted making of the relay.		110/240 V AC	M103

① M...R - LED red, M...G - LED green

② When ordering modules indicate their color: gray or black.

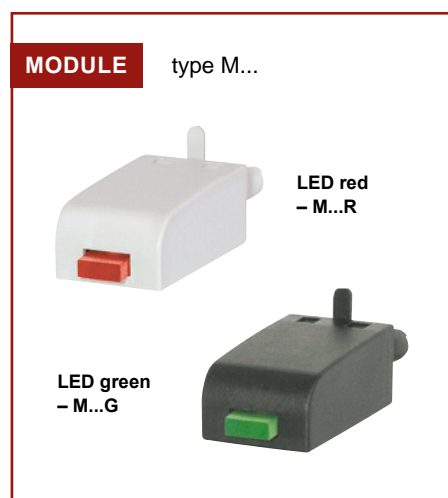



PI85-...-MS-...
(RM85 + GZM80)

ZGGZ80



■ ZGGZ80 for:

Plug-in sockets	Relays for plug-in sockets	Interface relays Ⓢ
GZT80	RM84, RM85, RM85 inrush, RM85 105 °C sensitive, RM87L Ⓢ, RM87P Ⓢ, RM87N Ⓢ	PI84-...-TS-... (RM84 + GZT80)
GZM80		PI84-...-MS-... (RM84 + GZM80)
GZS80		PI85-...-TS-... (RM85 + GZT80) (RM85 inrush + GZT80)
GZT92		PI85-...-MS-... (RM85 + GZM80)
GZM92		
GZS92		
ES 32	RM96 1 CO	

Ⓢ Interface relay PI84 (PI85) is offered as a set: plug-in socket GZT80 or GZM80 + miniature relay RM84 (RM85) + signalling / protecting module type M... + retainer / retractor clip GZT80-0040 + description plate GZT80-0035. Ⓢ Also versions RM87. sensitive

■ Interconnection strip ZGGZ80

- designed for the co-operation with plug-in sockets of miniature relays and with interface relays PI84 and PI85, which are equipped with screw terminals; sockets and relays are mounted on 35 mm rail mount acc. to EN 60715,
- bridges common input signals (coil terminals A1 or A2) or output signals - see photo at the top,
- maximum permissible current is 10 A / 250 V AC,
- possibility of connection of 8 sockets or relays,
- colours of strips: ZGGZ80-1 grey, ZGGZ80-2 black.

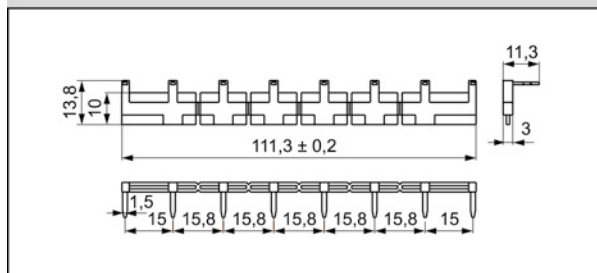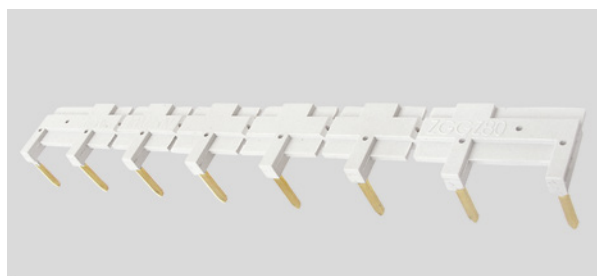

SOCKETS



PIR2-...-00L.
(R2N + GZM2)

ZGGZ4


■ ZGGZ4 for:



Plug-in sockets	Relays for plug-in sockets	Interface relays ⑥
GZT2	R2N	PIR2-...-00L. (R2N + GZM2)
GZM2		PIR3-...-00L. (R3N + GZM3)
GZT3	R3N	PIR4-...-00L. (R4N + GZM4)
GZM3		
GZT4	R4N	
GZM4		

⑥ Interface relay **PIR2 (PIR3, PIR4)** is offered as a **set**: plug-in socket **GZM2 (GZM3, GZM4)** + miniature industrial relay **R2N (R3N, R4N)** + signalling / protecting module **type M...** + retainer / retractor clip **GZT4-0040** + description plate **GZT4-0035**.

■ Interconnection strip ZGGZ4

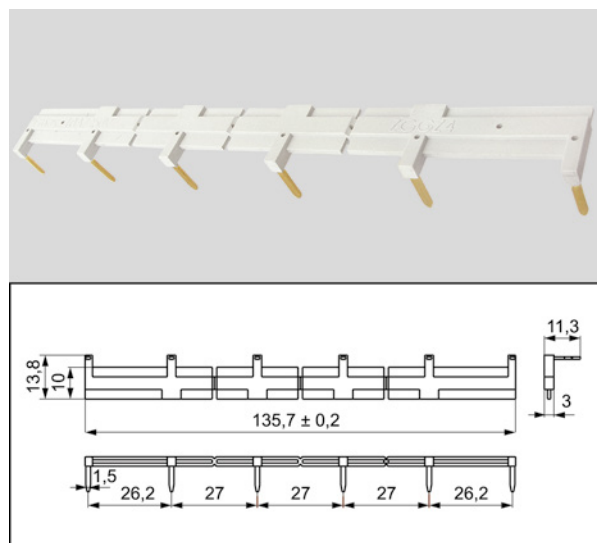






- designed for the co-operation with plug-in sockets of miniature industrial relays and with interface relays PIR2, PIR3 and PIR4, which are equipped with screw terminals; sockets and relays are mounted on 35 mm rail mount acc. to EN 60715,
- bridges common input signals (coil terminals A1 or A2) or output signals - see photo at the top,
- maximum permissible current is 10 A / 250 V AC,
- possibility of connection of 6 sockets or relays,
- colours of strips: **ZGGZ4-1** grey, **ZGGZ4-2** black.




Industrial relays for plug-in sockets: R2N, R3N, R4N, R15 - 2 CO , R15 - 3 CO  with **WT features as standard** (**W** - mechanical indicator + **T** - lockable front test button). **Detailed information** on additional features of individual relays can be found in the data sheets on the side of "Ordering codes".

Note:

While the relay operates, the test button of the **T** type becomes heated. In order to push the test button manually, you should first turn the supply voltage off, and wait some time until the button becomes colder (or push the button immediately using a protective glove or an insulated tool). The button shall be pushed smoothly and quickly. The normally open contacts are closed with the button for the time during which the button is pushed. Releasing the button opens the normally open contacts. Normally open contacts may be closed with the blocking function of the button (it shall be turned by 90°). When the button is turned back, the normally open contacts are opened.

Type 	Description	For industrial relays
W	mechanical indicator	R2N, R3N, R4N, (R15 - 2 CO, 3 CO )
T	lockable front test button, orange colour - AC coils, green colour - DC coils	R2N, R3N, R4N, (R15 - 2 CO, 3 CO )
L	light indicator (LED diode), located inside the relay	R2N, R3N, R4N, RY2, (R15 - 2 CO, 3 CO, 4 CO ) RUC, RUC-M
D	surge suppression element (diode) - only for DC coils	R2N, R3N, R4N, RY2, (R15 - 2 CO, 3 CO, 4 CO )
V	surge suppression element (varistor) - only for AC coils	(R15 - 2 CO, 3 CO )
K	test button without block function	(R15 - 4 CO ), RUC

 Available combinations:

WT, WTL, WTD, WTLD - in relays R2N, R3N, R4N for plug-in sockets


L, D, LD - in relays RY2 for plug-in sockets



WT, WTL, WTD, WTLD, WTV, WTLV - in relays R15 - 2 CO, 3 CO for plug-in sockets

K, L, D, KL, KD, LD, KLD - in relays R15 - 4 CO for plug-in sockets


K, L, KL - in relays RUC

L - in relays RUC-M


 Voltage versions, in covers

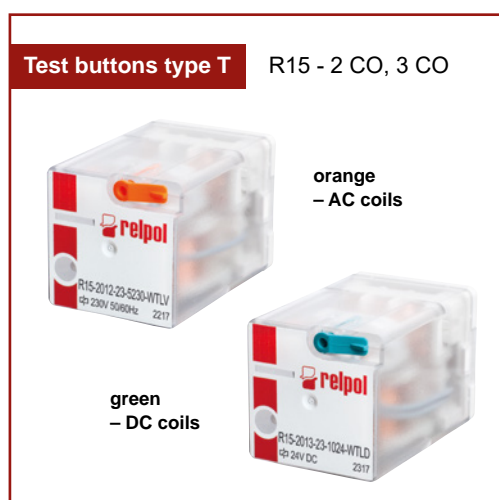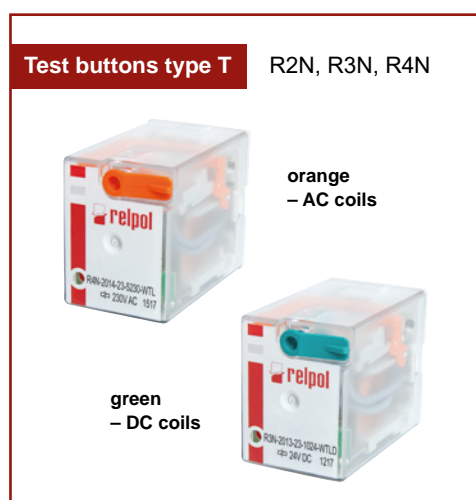

Test buttons (no latching) and plugs


Test buttons (no latching) are recommended for R2N...WT, R3N...WT, R4N...WT, R15...WT 2 CO, R15...WT 3 CO relays - **for applications that do not allow permanent contact latching**. By manual operation (pressing the button) relay contacts can get switched for as long time as long the button is pressed. Contacts return to initial position as soon as pressure is released from the button. Those operations can be done while the coil is deenergized .

Button **R4P-0001** or **R15-M404** can be easily inserted by the Customer after removal of button type **T** (see Fig. 2). Button type **T** can be removed with screwdriver as shown on Fig. 1.


 While the relay operates, the test button becomes heated. In order to push the test button manually, you should first turn the supply voltage off, and wait some time until the button becomes colder (or push the button immediately using a protective glove or an insulated tool). The button shall be pushed smoothly and quickly.



Dimensions - test button R4P-0001 for R2N...WT, R3N...WT, R4N...WT

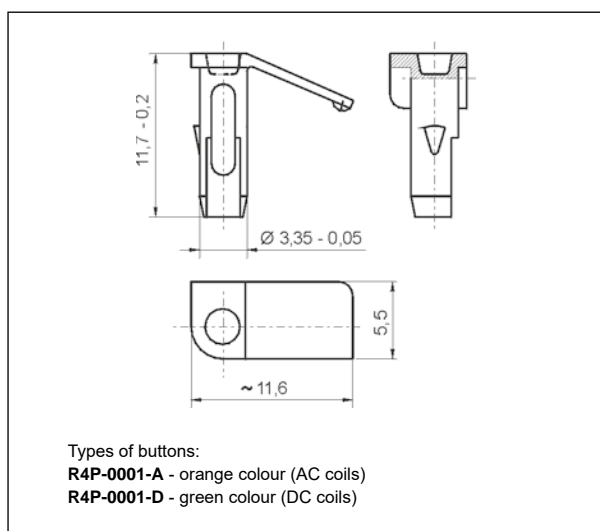


Dimensions - test button R15-M404 for R15...WT 2 CO, R15...WT 3 CO

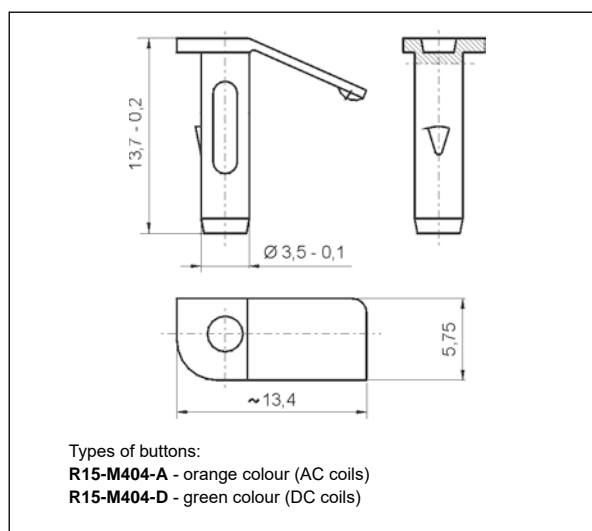


Plugs R4W-0003 or **R15-M203** can substitute button type **T** if **manual operation (latching and testing) is not allowed**. Changing button type **T** for plug can be done by Customer themselves in the same way as changing button type **T** for button (no latching).

Dimensions - plug R4W-0003 for R2N...WT, R3N...WT, R4N...WT

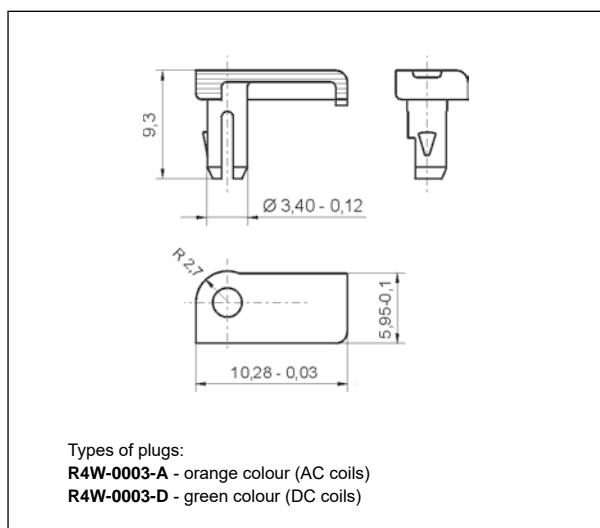

Dimensions - plug R15-M203 for R15...WT 2 CO, R15...WT 3 CO

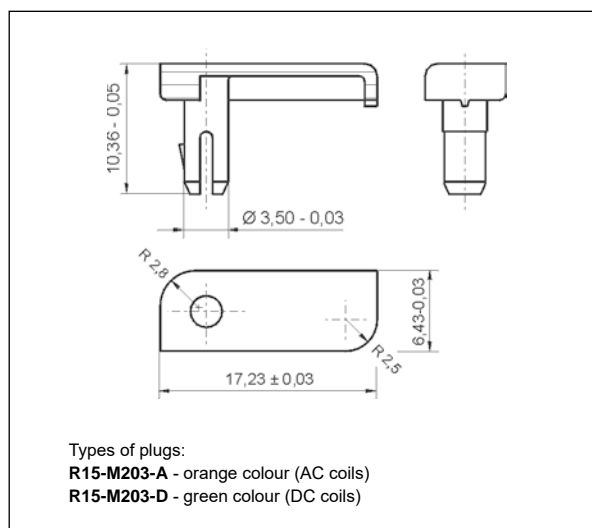

Relays

basic information

Function of the relay	382
Main parts of the relay	382
Types of relays	383
Terminology	387
Coil operating voltage range	388
Coils - overvoltage protection	388
Switching section: main diagrams and mechanical solutions	390
Contacts and shapes of contacts	391
Contact materials	393
Electric life of relays	396
Switching at alternating and direct current	397
Arc breaking	397
Suppressing circuits	398
Special loads	399
Switching time and contact bounce	400
Sinusoidal vibrations	401
Current surges	401
Hermetic relays - soldering and cleaning	402
Types of relay terminals	404
International standards	405



According to USASI (United States of America Standards Institute) a relay may be defined as an electrically controlled device which opens and closes an electrical circuit in order to affect the operation of other devices in the same or another circuit. Relays are a significant element in the contemporary industrial processes.



Dozens of billions of relays operate nowadays in the world as an interface between control circuits and electrical load. The technological development has brought miniaturization of mono- and bi-stable relays which need a low or even no supply voltage to carry a high power through the contacts.



Relpol S.A. - 60 years of experience in production of highest-quality relays.

Function of the relay

The relay performs two crucial tasks:

1. Galvanic separation (isolation) of the control section and switching section.
2. Switching of high-power loads with high voltage and/or current of high intensity at low energy consumption (low voltage / low current intensity) even at low electrical signals.


There are numerous applications of relays. Whenever satisfactory operation is needed in electronic and electromechanical conditions, a relay is necessary, e.g. for control equipment, time relays, temperature control, etc.

Main parts of the relay

The electromechanical relay consists of an electromagnetic switch and an electric one.

The former is the control section, and the latter is the switching section which is directly connected to the electrical load.

The electromagnet transforms the electrical current into a magnetic stream that generates the force which moves the switching part.

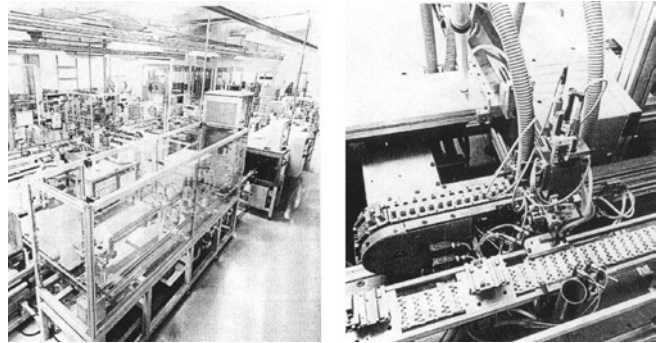

Electromagnet

Fig. 1. Classic electromagnet unit

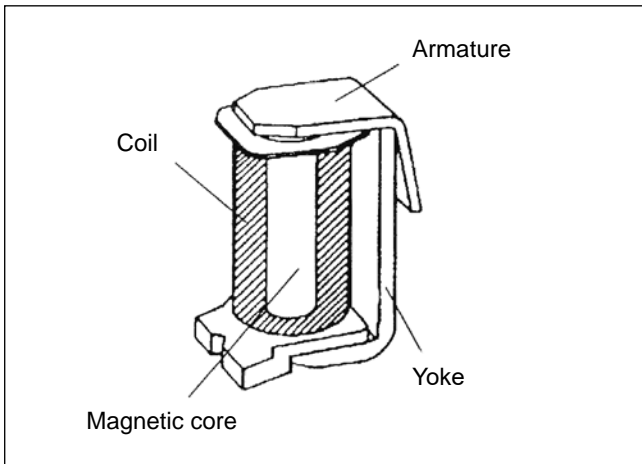


Fig. 1 shows a classic electromagnet unit which consists of four basic parts:


The coil which consists of one or more windings of a copper wire that is usually wound around a spool made of insulating material.

Ferromagnetic core.

Ferromagnetic yoke.

Movable ferromagnetic armature.

Fig. 2. Classic design of a relay

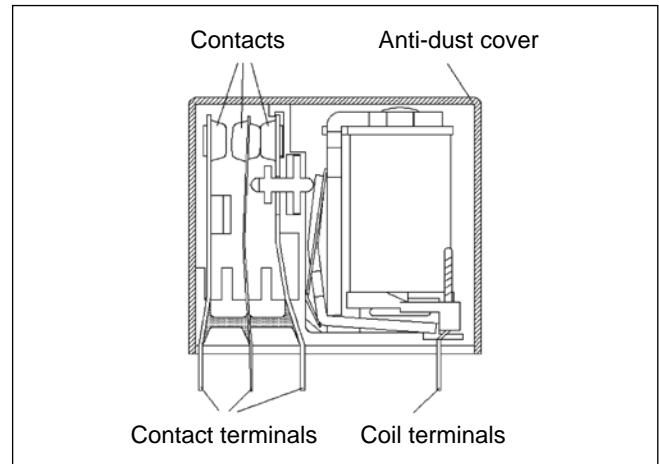

Additional parts:

- Fixed and movable contact springs.
- Contacts.
- Pusher.
- Mounting terminals and coil terminals.
- Contact plate.
- Anti-dust cover.

Switching section


A classic arrangement of the switching section refers to a diagram of one changeover contact. It has been used in the explanation below as it is a basic diagram referred to by all other diagrams.

Fig. 3 shows the switching section of a relay with one changeover contact.

The figure presents the following parts:

- fixed normally closed (NC) contact unit,
- movable contact unit,
- fixed normally open (NO) contact unit,
- pusher,
- contact plate,
- soldering terminals.

Fig. 3. Switching section of a relay

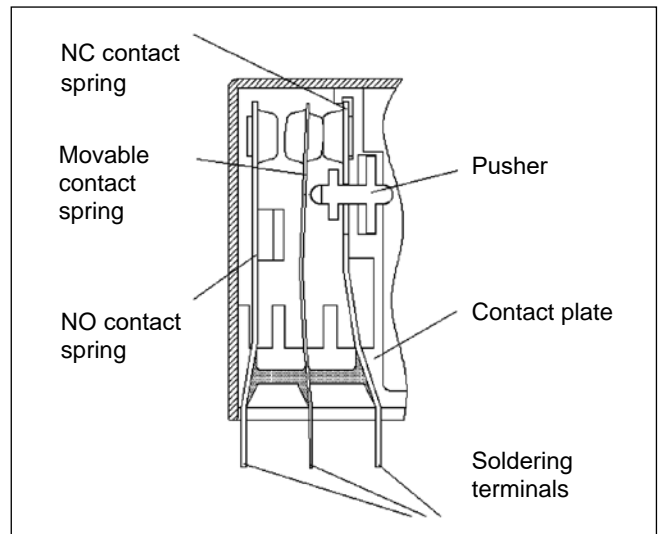


Types of relays

There are two kinds of the device, i.e. **electromechanical relay** and **solid-state relay (SSR)**.

Electromagnetic and solid-state (SSR) relays

Operation of solid-state relays is very similar to that of electromagnetic relays - it consists in switching the load circuit, which is controlled with a low voltage signal of an insulated input circuit. In an **electromagnetic relay**, the electromagnetic force which moves the yoke and causes switching of the contacts

is generated when input voltage is applied to the coil. When the supply voltage is interrupted, the return spring pushes the contacts away from each other, i.e. opens the contacts and disconnects the power circuit.

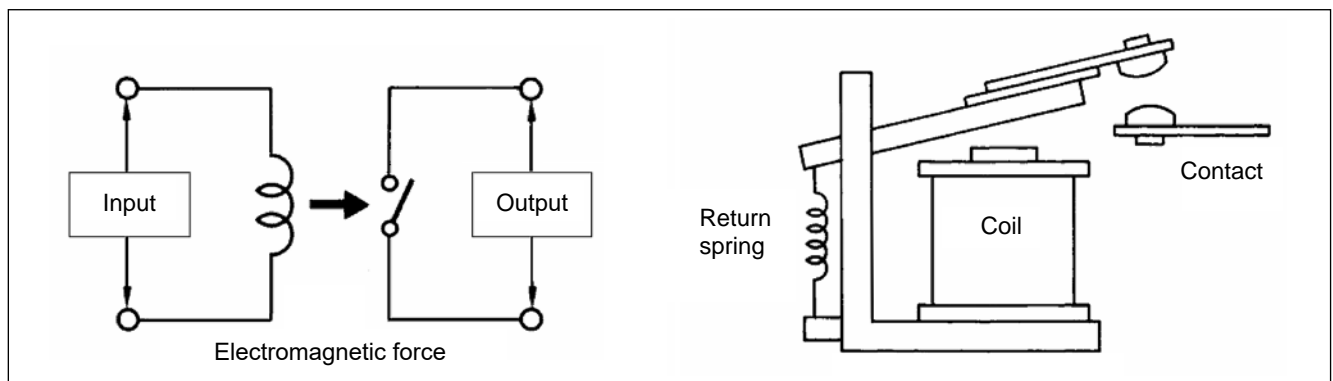


Solid-state relays use an opto-isolator to disconnect the input and output circuits. The opto-isolator changes electrical signal to optic ones and transfers them through the distance which is a galvanic insulation between the input and output sections. SSR's are electronic devices which do not have any movable parts, and the switching elements are thyristors, triacs or transistors.

The input current flows through a light-emitting diode which is usually made of gallium arsenide and it emits radiation in infrared. The diode illuminates the photovoltaic cell which generates voltage to control the output element.

In the opto-isolator, a photodiode, photo-transistor or a photo-thyristor may be the photodetector.

The opto-isolator carries both direct-current signals and alternating-current ones (analog and digital signals).

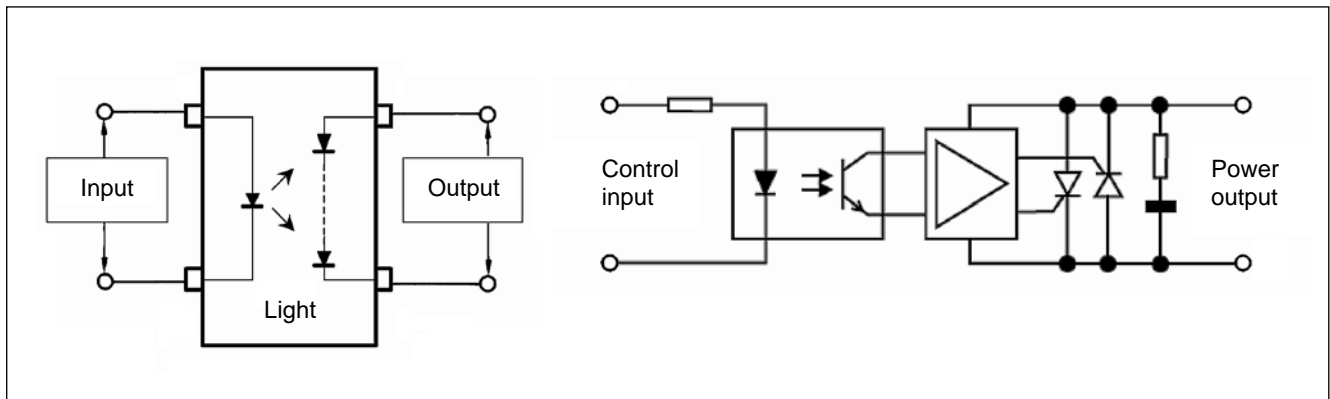

Advantages of solid-state relays:

1. Absence of movable parts due to which their operation is completely noiseless, which is of high importance in dwelling rooms, offices, etc.
2. There is no electric arc in the course of switching operation which takes place inside the semiconductor material, the function of making high starting currents, long life and reliable operation.
3. High resistance to shock, vibrations and environmental pollution.
4. No electromagnetic interference owing to completely electronic control.
5. High operation speed and high operation frequency.
6. Low power necessary to control the relay.

Disadvantages:

1. High resistance in switching on state, which causes generation of heat and necessity to use radiators.
2. Considerable voltage drop on the interface (1 - 1,6 V).
3. Sensitivity to overvoltage, necessity to use a varistor or RC circuit.

As compared to solid-state relays, **electromagnetic relays** bear the stamp of negligible small voltage drop (the contact resistance in switching state is on the average about 10 mΩ), and zero leakage current, they are also highly resistant to overvoltage. Due to the mechanical system of contacts and their wear and tear, their life is definitely shorter, and the response time is long and prevents the use of higher operation frequency. The capability of switching surge currents is also considerably smaller.

SSR's provide the possibility of switching at "zero" for resistive load and, then the voltage on the load increases gradually, which, in some cases, e.g. an electric bulb, affects significantly the period of life. This limits surge currents too. For inductive loads, relays which switch at maximum voltage are useful - conduction occurs at supply voltage peak value, then the surge current is minimized.

Among the basic types of electromechanical relays, monostable and bistable relays should be considered separately.

Mono- and bistable relays

Monostable relays

A monostable relay is an electrical relay which changes its status due to a supply value of the appropriate parameters and returns to the previous status when the parameter ceases or changes.

Bistable relays

A bistable relay changes its status as affected by the appropriate supply value of the appropriate parameters and remains in the changed state even after the value has ceased. Another application of the appropriate supply value is necessary for the relay to change its status again and return to the previous state.

Further classification of relays may be based upon the functions they perform, e.g. all-or-nothing relays, step relays, latching relays, polarized relays, reed relays.

All-or-nothing and step relays

All-or-nothing relays

The term identifies the relays designed for operation at the value that is:

- higher than the make value, or
- lower than the return value.

This type of relays must be supplied by a particular range of voltage (or current).

They may be energized by supply or disconnection of voltage (or current) within a given range.

Step relays

The relays have two or more rotational positions, and they move from one step to another in consecutive operations with the use of energizing pulse. They usually move the contacts with the use of cams.

Latching relays


The latching relay is a non-polarized bistable relay. It changes its state at the supply value and remains in the position after the value has ceased. In order to change the state of the relay again, another actuation is necessary. The crucial part of the latching relay is the core made of special magnetic iron which remains magnetized ever after a voltage pulse has been applied. The core consists of a nickel base with aluminum, titanium or niobium added (55-85% Co, 10-12% Ni).

Function

Energizing condition: OFF state

As the wiring is supplied with a voltage pulse of direct current V_1 (selected from the recommended supply voltage range) for the duration of t_i , the electromagnetic field grows immediately, the core becomes magnetized and the relay is energized (the normally open contact closes). When the pulse declines, the relay remains in the ON state owing to the permanently magnetized core (Fig. 4).

Fig. 4. Latching relay, electrical circuit

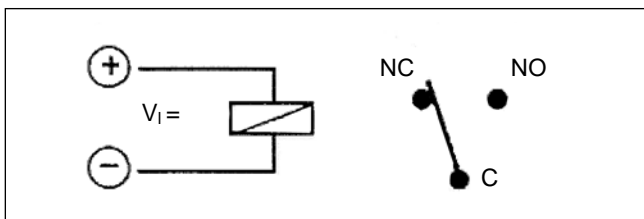


Thus, the magnetic polarization of the relay depends on the polarity of the supply voltage. The relay switches to the OFF state on supply of the voltage of the opposite polarity which changes the magnetic polarization of the core. The sole change of the supply polarity will not cause the release of the relay. This requires a change of the polarity, and the value of the energy supply must be within the range of the actuation (energizing) values.

The circuit applied

There are two different types of the latching relays:

- **single winding** latching relays with the external release resistance to limit the current intensity (Fig. 5).


Fig. 5. Circuits with single winding latching relays

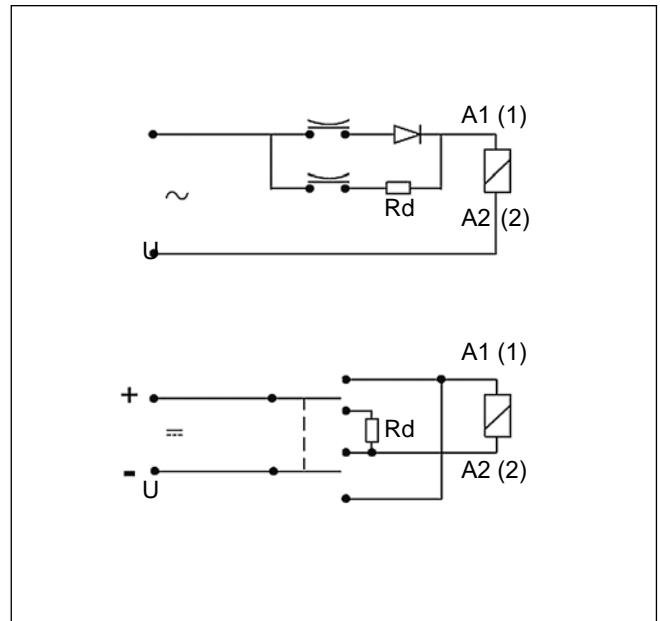

- latching relays with **two windings** and two different voltage ranges for ON / OFF operation (Fig. 6).

It is important to bear in mind that for the appropriate operation the relays require a **minimum pulse** of 10 ms. In order to avoid overheating, the maximum time of supply is usually limited, too. The aforementioned relays may also be supplied with alternating voltage owing to the external diode which rectifies the alternating current to the pulses of minimum duration of 10 ms (half of the period). The applications of latching relays are the same as the applications of the normal version relays.

Fig. 6. Circuits with two winding latching relay

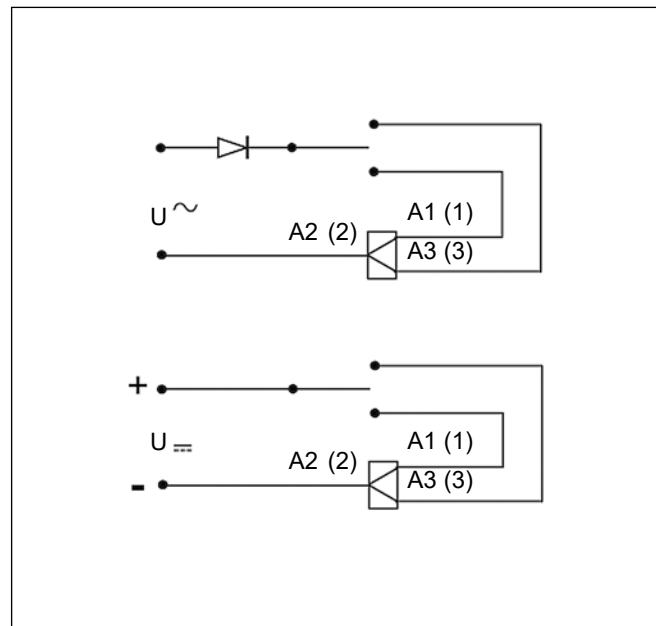

Polarized relays

Polarized relay is a relay with permanent magnet which provides additional magnetic force that reduces the energy consumption. The magnetic field required for pulling the armature is partly generated by the coil and partly by the magnet.

The magnetic streams overlap. The supply value must be of the appropriate polarity, i.e. the same as the polarity of the magnet. There are mono- and bistable versions of these relays.


Reed relays

The remarkable advantage of the reed relays is that they are hermetically sealed and, thus, resistant to atmospheric corrosion. They are very fast (10 to 20 times faster than electromechanical relays) and at the range of the rated contact load they offer highly reliable switching operations, and extremely long life. The fundamental part of a reed relay is a hermetic glass tube, commonly called the magnetic (reed) contact.

The magnetic (reed) contact consists of two flat, ferromagnetic lap contacts of the reed relay separated by a small air-clearance, hermetically closed in a glass tube. The contacts of the reed relay are fixed to the ends of the glass tube and, thus, they serve as supports. If the free ends of the reed contacts are exposed to the magnetic field, the stream in the clearance between the reed contacts will make them cooperate.

When the magnetic field ceases, the reed contacts will part from each other as a result of the stress of the spring placed in the contacts. This way, the contacts provide an operating magnetic clearance, and they close and open the electrical circuit.

Fig. 7. Hermetic contact

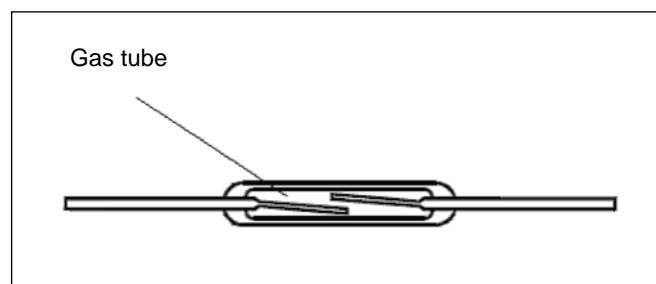

Terminology

Actuation condition - in case of a monostable relay: specific status of a relay while it is supplied with a given supply value which has been energized; in case of a bistable relay: a status opposite to rest condition indicated by the manufacturer.

Actuation - change from rest condition to actuation condition.

Return - in case of a monostable relay: change from actuation condition to rest condition.

Reset - in case of a bistable relay: change from actuation condition to rest condition.

Constant operation - operation during which a relay remains actuated for the time long enough to reach heat balance.

Cycle operation - operation during which a relay performs several make cycles, where intervals of actuation and absence of actuation are defined; actuation time of the relay is such that heat balance of the relay is impossible to be achieved.

Coil thermal resistance - the ratio of increment of the coil temperature and the input power, measured after the time sufficient for achieving heat balance.

Make voltage - the coil voltage value at which the relay is actuated.

Return voltage - the coil voltage value at which a monostable relay returns to the previous condition.

Reset voltage - the coil voltage value at which a bistable relay is reset.

Normally open contact - a contact which is closed when the relay is actuated, and open when the relay does not operate.

Normally closed contact - a contact which open when the relay operates, and closed when the relay does not operate.

Changeover contact - a set of two contact circuit made of three members of which one is common for two contact circuits; when one of the circuits is open, the other is closed.

Contact gap - a gap between contacts at open contact circuit.

Making capacity - the highest value of electric current which may be connected by a contact when specific conditions are met, e.g. making voltage, number of operations, power factor, time constant.

Maximum continuous current - the maximum value of the current which may flow through a closed contact continuously in specific conditions.

Isolating air gap - the minimum distance in the air between two conductive parts or between a conductive part and exposed surface of the relay.

Isolating surface gap - the minimum distance on the surface of the isolating material between two conductive parts.

PTI - indicator of resistance to creeping current - numerical value of proof voltage expressed in Volts, which may be resisted to by the isolating material without formation of conductive tracks, defined in specific conditions of experiments.

CTI - a comparative indicator of resistance to creeping current - numerical value equal to maximum voltage expressed in Volts, which may be resisted to by the isolating material without formation of conductive tracks, defined in specific conditions of experiments.


Coil operating voltage range

The admissible operating voltage range for the coil as the function of the ambient temperature is shown in the chart for RM85 relay.

The maximum operating voltage of the coil is limited by the increase of the coil temperature caused by the heating of the winding. The increase shall not exceed the admissible temperature defined for insulation materials.

The make voltage is the minimum operating voltage of the coil. The make voltage grows along with the increase of the winding temperature. Since the resistance of the copper wire changes by 0,4% per Centigrade, the growth of the coil temperature caused by a higher ambient temperature or by contact load results in the drop of the coil current and, thus, the increase of the voltage required for the relay electromagnet to operate.

Fig. 8. Coil operating range - DC

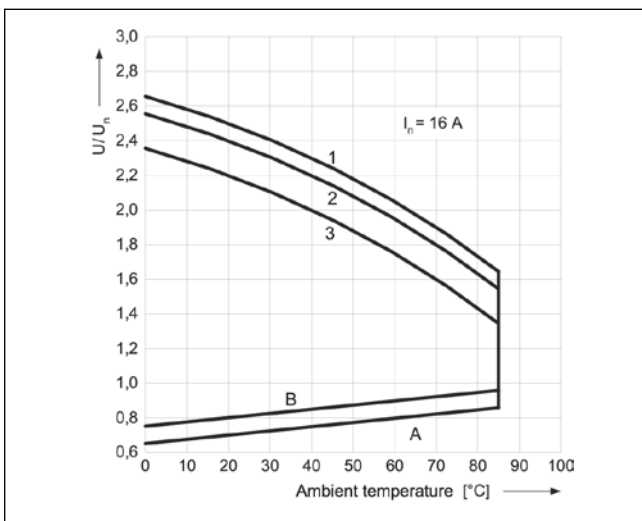

A - relations between make voltage and ambient temperature at no load on contacts. Coil temperature and ambient temperature are equal before coil energizing. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).
B - relations between make voltage and ambient temperature after initial coil heating up with $1,1 U_n$, at continues load of I_n on contacts. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).
1, 2, 3 - values on Y axis represent allowed overvoltage on coil at certain ambient temperature and contact load:
1 - no load
2 - 50% of rated load
3 - rated load

Coils - overvoltage protection

While using electromagnetic relays in electric circuits, it should be borne in mind that coils are the source of significant overvoltage which may disturb the operation of the equipment in which electromagnetic relays are applied. Furthermore, due to overvoltage the equipment in which electromagnetic relays are used may not meet the requirements of electromagnetic compatibility.

Relay coils have high inductance during operation, which causes a rapid increase of the coil voltage on switching off. Such a situation occurs in both DC and AC voltage coils. If, for example, the coil is switched off by a transistor, the latter may be damaged. Moreover, such pulse disturbances may affect negatively the nearby electronic systems.

Fig. 9. DC coil voltage during switching off


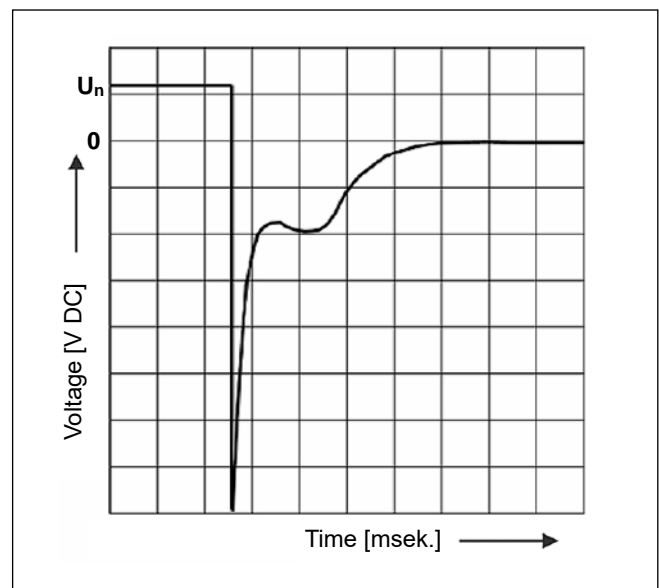


Fig. 10. AC coil voltage during switching off

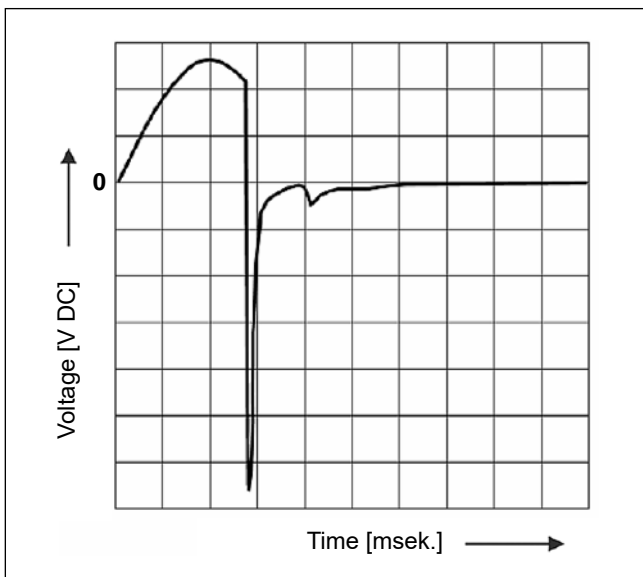

For coils supplied with DC voltage, the best and simplest solution of the problem is a parallel connection of a standard rectifying diode to the coil terminals. During the current flow, the diode has a reversed bias due to the voltage drop on the coil. On switching off the coil voltage, the diode starts conducting which results in the coil voltage increase merely by the voltage drop on the conducting diode. Designers of electronic systems with electromagnetic relays practically always use suppressing diodes connected in parallel to the relay coil. The 1N4007 diode is a perfect solution in most of such cases. Diodes remove overvoltage extremely efficiently, they are a cost-effective and reliable way of suppressing coil self-induction voltage, which does not involve complicated calculations. The only weak point of the diode system is a remarkable (threefold) increase of the relay release time. The release time may be reduced by connecting an additional resistor in serial to the diode in which case, however, the overvoltage value grows while the coil is being switched off.

The **diode protection** cannot obviously be used with AC coil relays. In such cases, two types of protection are commonly used, i.e.:

- varistor protection, and
- R-C two-terminal network protection.

Metal-oxide **varistors** have similar current-voltage characteristics to that of a bidirectional Zener diode. When the voltage between the varistor terminals exceeds a given limit value, it starts conducting, and, thus, it shunts the inductive load (the relay coil) with its differential resistance. The maximum overvoltage value on switching off depends on the limit voltage of the varistor.

Furthermore, when the varistor is supplied from the mains, the varistor protects also the relay coil from being damaged by the voltage pulses that occur in the mains. The varistor protection may be also applied in DC coil relays. However, the overvoltage values on switching off are much higher than in the case of protection with the use of a suppressing diode.

Another way to limit the overvoltage values during coil switching off is a parallel connection of an **R-C two-terminal network** to the coil. The network limits the overvoltage well, it is inexpensive, and it only slightly increases the relay release time.

No ceramic **capacitors** should be used whereas it is recommended to use foil capacitors. On selection of a **resistor**, it should be taken into consideration that quite a large amount of power dissipates on it during the transition process and, thus, the resistor's power shall not be less than 0,5 W.

Relpol S.A. offers both relays with integrated **overvoltage protection elements** (diodes or varistors) and ready-to-use **overvoltage protection modules** to be mounted in plug-in sockets.

R2N, R3N and R4N relays with DC coils are also in the version with suppressing diode mounted inside the relay. However, varistors are not mounted inside these relays. Ready-to-use overvoltage protection modules of M series may be used with the relays and then the modules are mounted in GZT., GZM. and GZMB. series plug-in sockets. Modules with a diode (DC coils) or with a varistor (DC or AC/DC coils) are available.

R15 relays are manufactured solely with the overvoltage protection element integrated, i.e. with the suppressing diodes for DC coils (two-, three-, and four-pole versions) and with varistors for AC coils (two-, and three-pole versions). In the case of a suppressing diode as the overvoltage protection element, the coil supply polarity must be as follows: A1 terminal "+", A2 terminal "-". note: the specified polarity does not refer to the relays R15 4 CO – four-pole for which the coil supply polarity must be as follows: A1 terminal "-", A2 terminal "+".

Ordering codes of the overvoltage protection elements integrated in the relays (as add-on equipment) are as follows:

- D** - suppressing diode;
- V** - varistor.

While using an overvoltage protection element, the user may be assured that the overvoltage that occurs on switching the coil off will not affect negatively the coil control circuits or any other electric and electronic circuits.

Switching section: main diagrams and mechanical solutions

There are various contact configuration diagrams related with different application requirements, i.e. normally open contacts (NO), normally closed contacts (NC) and changeover contacts. These are the basic configurations used for designing all the contact diagrams of relays. With the use of the basic contacts, many relay circuits may be built in order to apply relays successfully. The only theoretical limitations are the dimensions of relays, electromagnetic energy, switching energy and the complexity of drawings. The contact configurations available in a relay are determined by the number of poles, type of the contacts (changeover or normally open/closed), and normal position of the contacts (normally open or normally closed). In table next are listed **symbols depicting exact type of contacts**.

Contact type	Marking		
	Relpol S.A.	Zettler	USA
CO	1	C	SPDT
NO	2	A	SPST-NO
NC	3	B	SPST-NC

SP = single pole
 ST = single contact (normally open or normally closed)
 NO = normally open contact
 NC = normally closed contact
 DP = two contacts
 DT = changeover contact

Other manufacturers of relays apply also different ways of defining the configuration of contacts. They may be found in catalogs and catalog cards published by the companies.

Terminals marking




Terminals marking under Polish Standard EN 50005.

Contacts terminals are always marked numerically with two digits, where:

- the unit digit is the number of functions,
- the decimal digit is the number of sequences.

Coil terminals are always literal-numerical.

The scheme of marking of terminals of contacts and coil for a four-track relay (see below).

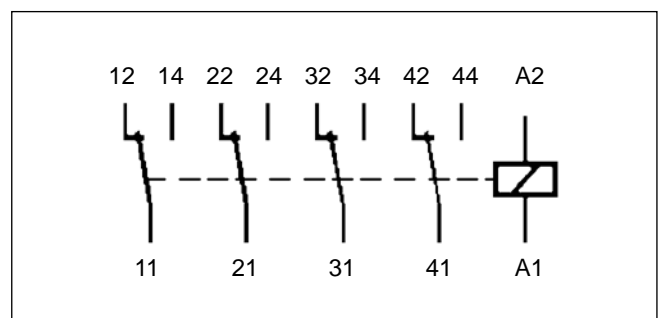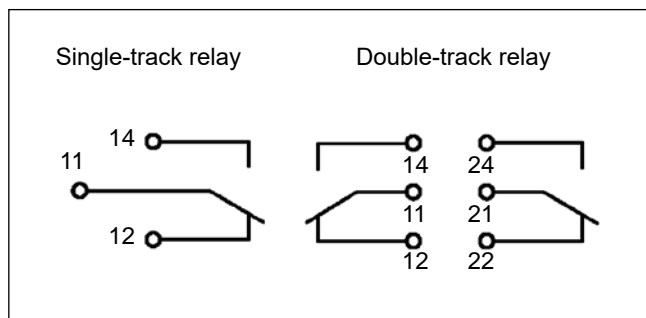

Contacts and shapes of contacts

Contact pressure

When two contacts come together to close the electrical circuit, they touch each other within the area that depends on the shape of the contacts. The force (N) with which the contacts push against each other as measured on the contact axis, divided by the area of the contact (mm²) equals the contact pressure (N/mm²). It is practically impossible to determine the real contact area as it depends also on the roughness of the contact surface. The contact pressure is determined by the contact force. In order to obtain a large contact area, the contact force must be increased so that the contact area roughness may be deformed. A low force means a few effective contact points and a small area of the contact (i.e. a high contact resistance). On the other hand, a stronger force increases the number of contact points and the total contact area (lower contact resistance). The contact force may be increased only to the limit defined by the mechanical strength of the parts and as much as it is allowed by the supply voltage sensitivity.

Manufacturers of relays use **different shapes** of contacts according to the relay designs and applications.

Fig. 11. Effect of the contact force


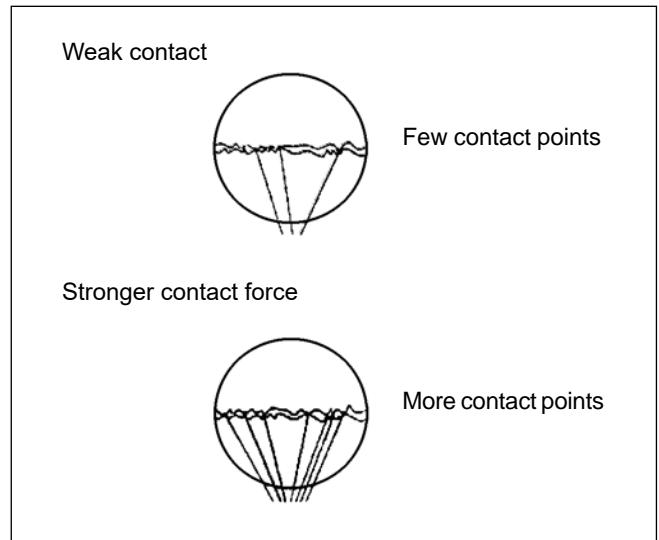



Fig. 12. Shapes of contact rivets

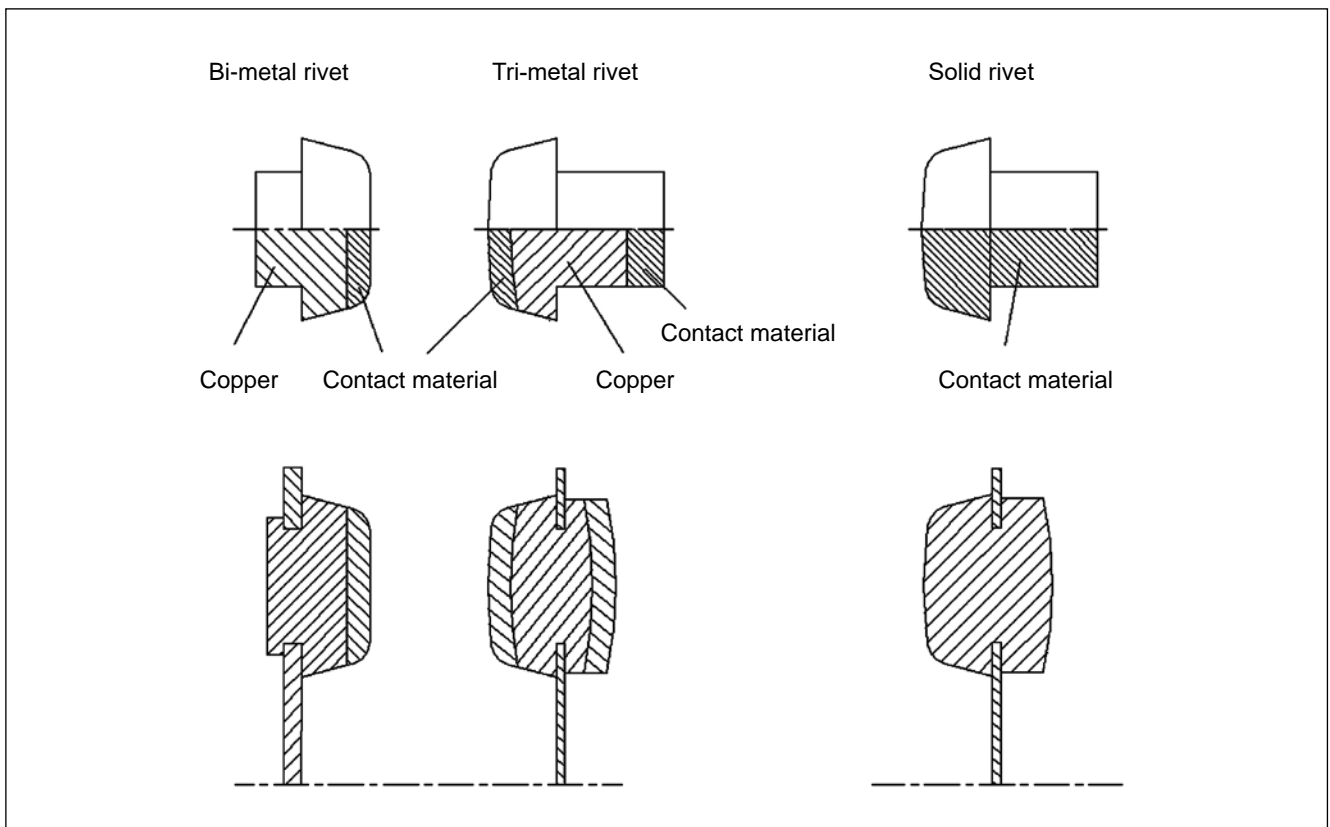

Cylindrical contact rivets

Cylindrical contact rivets are usually used in their bimetallic, solid or other versions, similarly to the contact parts of miniature relays owing to their optimal switching capabilities and easy assembly. Normally, the contacts are connected between the flat surface of the fixed contact and the spherical surface of the movable contact (the common contact). Principally, the common contact is a solid one whereas the fixed contacts (NC and NO, when in switching operation) are bimetallic ones (Fig. 12). The head of the central solid contact is ready to use on one side, and it is shaped during assembly on the other side. The flat-spherical connection between the contact surfaces is necessary for the reduction of the area of connection with the simultaneous increase of the contact pressure. Moreover, relative surface movement (roll) occurs then, which is useful in terms of enhanced contact performance (Fig. 13).


Fig. 13. Contact movement

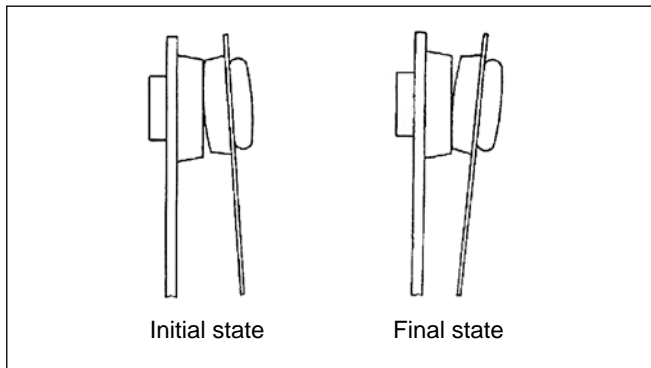

Small-profile contact

A pressed strip of metal or contact alloy is automatically welded to the spring material prior to the cutting process. During the cutting process, the spring strip is cut together with the contacts, and the contact is formed to the required shape (Fig. 14). This solution is useful as it provides avoiding a dangerous voltage drop on the spring-contact connection. This allows the appropriate selection of the contact shape.


Fig. 14. Small-profile contact

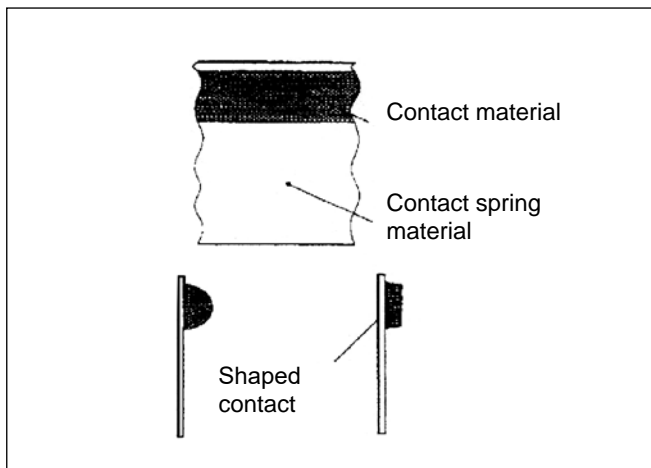

Cross contacts

While using small-profile contacts it is possible to design a contact coupling with cylindrical surfaces and perpendicular axes. This way, a limited contact area and high contact pressure may be obtained. Moreover, during switching, two contacts operate like "two knives", thus maintaining a very clean contact surface.


Fig. 15. Cross contact

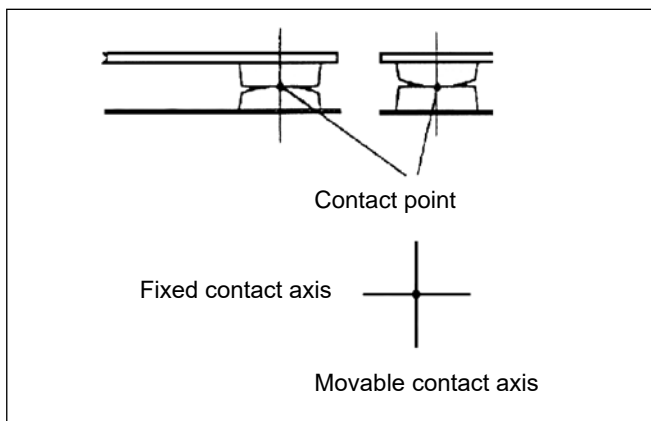

Twin contacts

For some applications (e.g. low-level signals - safety systems), in order to enhance the contact reliability, twin contacts are used. Small-profile rivets or contacts are placed one next to another on the same forked spring (springs of fixed and movable contacts). Thus, duplication of the contact points may reduce the probability of error occurrence by half.

Fig. 16. Twin contact

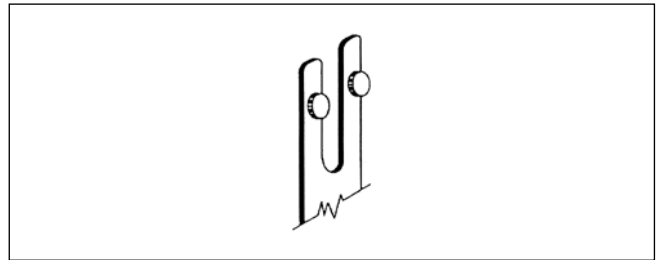

Contact materials

In the issues related with switching, contact materials and special alloys play an important role, and each application requires the appropriate assessment of the electric load, ambient conditions and other information in order to make the proper choice.

Surface finishing

Precious contact materials are widely used due to their high conductivity. However, it is silver and its alloys that are exposed to the effects of the surface corrosion caused by sulfur contaminations in the atmosphere (SO₂ - sulfur dioxide). Layers of sulfur deposit on the contact surfaces, which is highly harmful

to the contact resistance. The aforementioned materials may be plated with gold or another noble metal (metals that are more resistant to corrosion and/or oxidation, i.e. platinum, palladium, etc.).

Cleaning

Cleanliness is very important for the process of relay assembly due to the necessity to keep the internal parts of relays free of dust and other particles which may affect the area between the contacts and disturb the proper course of switching operations.

That is why contacts, working parts and (in some applications) the whole relay without a dust cover are cleaned immediately prior to their enclosing.

Plastic contaminants

Due to temperature, internal parts of the relay made of plastic may produce gases and vapors. If they are not removed from the relay, they may deposit on the contact surface, which will increase the contact resistance. This is often the case in tight relays where it may appear extremely dangerous if the plastic has not been previously treated in a special manner.

The treatment consists in high-temperature degassing process in which, at low atmospheric pressure, plastics emit gases and vapors. The process ends with stabilization of the ambient pressure which allows avoiding reactions inside the relay that might occur in the presence of humidity and oxygen.

Contact resistance and influencing factors

The main function of electric contacts is to close an electric circuit to provide flow of current (I) at voltage (U). This "simple" operation requires certain special characteristics of contacts, which depend on materials, shapes, mechanical parameters, etc. When current (I) flows through an electric circuit, the circuit resistance (R) reacts against the current flow according to the following rule: $U = R \times I$

The value of R consists of two different resistances: **circuit resistance R_c and contact resistance R_r** .

Thus:

$$R = R_c + R_r \text{ and } U = I \times (R_c + R_r)$$

The dissipated power P_w in the entire circuit equals:

$$P_w = P_c + P_r = (R_c + R_r) \times I^2$$

The value of the circuit resistance R_c usually spreads evenly along the length of the circuit (cables, wires, printed circuits, etc.), and P_c dissipates in the same manner (low increase of temperature); on the other hand, however, R_r is entirely concentrated inside the relay (problems related with the temperature rise). This proves the extremely important role of maintaining the relay contact resistance on as low a level as possible. This is important in applications of both high and low power. In the first instance, there is the problem of temperature rise inside the relay whereas in the second case high contact resistance may disturb the proper operation of the device.

Question:

Find the values of power (W) dissipation in the relay contact circuit under the following circumstances:

- electric load: $I = 5 \text{ A}$, $U = 250 \text{ V AC}$,
- relay contact resistance ($m\Omega$):


- a) $10 \text{ m}\Omega$
- b) $50 \text{ m}\Omega$
- c) $300 \text{ m}\Omega$

Solution:

- a) $R_c \times I^2 = 10 \text{ m}\Omega \times (5 \text{ A})^2 = 0,25 \text{ W}$
- b) $R_c \times I^2 = 50 \text{ m}\Omega \times (5 \text{ A})^2 = 1,25 \text{ W}$
- c) $R_c \times I^2 = 300 \text{ m}\Omega \times (5 \text{ A})^2 = 7,50 \text{ W}$

Based on the above, it may be stated that the power dissipation inside the relay reaches undesirable levels at high contact resistance.

Fig. 17. Basic circuit

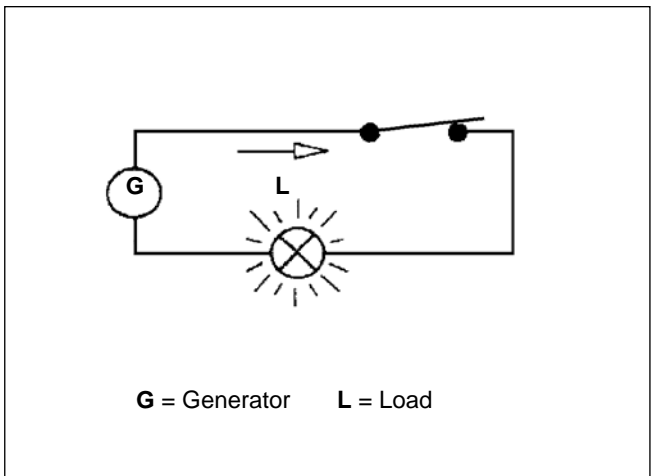

Question:

Find the value of the voltage drop caused by the relay contact resistance in the next circuit under the following circumstances:

- electric load: $I = 1 \text{ mA}$, $U = 5 \text{ mV}$,
- relay contact resistance ($m\Omega$):

- d) $10 \text{ m}\Omega$
- e) $100 \text{ m}\Omega$
- f) $400 \text{ m}\Omega$

Solution:

The voltage drop on the contact equals:

- d) $R_c \times I = 0,01 \times 0,001 = 0,01 \text{ mV}$
- e) $R_c \times I = 0,10 \times 0,001 = 0,10 \text{ mV}$
- f) $R_c \times I = 0,40 \times 0,001 = 0,40 \text{ mV}$

High values of resistance cause a significant percentage of voltage drop which may be dangerous in some devices. This is important because high contact resistance usually means instability of the contact resistance. In applications of low-level signals (measurements, etc.) the capability of reaction to the contact resistance is a fundamental requirement. The following factors affect the contact resistance:

- contact pressure,
- materials,
- surface finishing,
- cleaning,
- internal contaminations of the plastic relay parts.

Each individual influence must be taken into account.

Alloys and contact materials

The choice of the contact material depends on the application. The following are the most commonly used materials:

Silver Ag

Pure silver (99% Ag) is of the highest electrical and thermal conductivity as compared to any other known metal, and it proves good resistance to oxidation but it is affected by the presence of sulfur in the atmosphere. The sulfur forms silver sulfide which increases the contact resistance. In order to avoid the problem, the contact surface is plated with gold (5 μm) as the latter remains free of silver sulfide (no chemical reaction). This is a good version of the contact widely used for switching low-level loads from μV to 24 V DC and AC, and from μA to 0,2 A, and in any case with no electric arc as it might damage the layer of gold and expose silver to the harmful presence of sulfur.

Silver - cadmium oxide AgCdO

This compound (90% Ag - 10% CdO) has a wide range of applications in power loads owing to its good resistance to welding and the effect of electric arc suppression. The compound may be used from 12 to 380 V AC and from 100 mA to 30 A. It is used particularly for resistive and inductive applications such as motor loads, heating resistors, lamp loads, solenoids, etc. The material is a standard one to meet most of the requirements of the customers. The problems related to sulfur do affect it but the presence of electric arc and relatively high voltage and intensity of current make the problem imperceptible (the electric arc and voltage pierce the sulfide layers).

Silver - nickel AgNi

The alloy (90% Ag - 10% Ni) is the most suitable one for switching DC loads and avoiding material transfer that appears at DC and at medium voltage and intensity of current (1-10 A; 6-60 V DC). This is a physical phenomenon of moving the material from one contact to the other (from cathode (-) to anode (+)). This results in quick wear of contacts and dangerous reduction of the contact clearance.

Tungsten

This is the hardest material, highly resistant to sticking. It has, however, a relatively high contact resistance. Because of these characteristics it is usually used in electric circuits where short current peaks appear, and where the material prevents the contacts from welding to each other: leading loads, motor loads, lamp loads (especially fluorescent lamps), etc. The range of applications starts from 60 V and 1 A.

Silver + tin oxide (tin dioxide) - AgSnO₂

The AgSnO₂ material is of similar properties to those of AgCdO. However, the former has a higher thermal stability and better resistance to transfer of material from one contact to the other, which provides longer life in DC applications. The AgSnO₂ contacts wear evenly and they are recommended for applications at the loads that create inrush current and at inductive loads.

The contact ratings depend to a great extent on the level of the oxide in the compound, the manufacture method and the presence of admixtures which are used by contact materials manufacturers mainly to reduce the contact resistance and to enhance the resistance to material transfer.


The AgSnO₂ material offered by Relpol S.A. in miniature relays contains a low admixture of indium oxide (In₂O₃) which is a universal material. Apart from good results achieved at lamp loads, the material performs perfectly at resistive loads and switching currents up to 16 A.

Gilding - Au

Contact gilding with 0,2-0,5 μm gold layer is usually applied in order to protect the basic material from oxidation during product storage. The protective gilding is not resistant to mechanical wear and it is quickly destroyed in course of the relay switching. Contact gilding with 3-5 μm layer of gold is used as protection from corrosion and to enhance signal circuits switching. Thick gilding provides the lack of microscopic pores, perfect resistance to corrosion and to formation of non-conductive layers.

However, gold is very soft, easily becomes mechanically worn, and its low melting point may limit the electric life of the contacts which switch high currents.

Fig. 18. Transfer of contact material

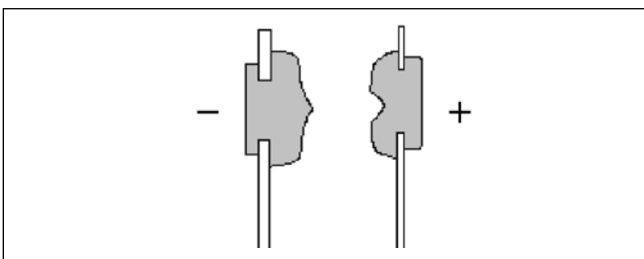


Electric life of relays

The electric life or switching capacity is expressed as the minimum number of cycles which the relay may perform at a given load and under certain circumstances. The "cycle" means a full switching operation from OFF state to ON state and to OFF state again. The electric life ends when the contacts are no longer capable of switching electric load within the range of

the contact resistance (or contact voltage drops) which stops the switching operations after it has reached a higher value (the limits depend on the application). The specifications of relays indicate the electric life as the number of cycles at rated current and voltage, and at constant frequency and ambient temperature.


For example, the electric life of the RM85 relay is:
 Number of cycles: 7×10^4 at 16 A and 250 V AC - 50 Hz, resistive load, 600 cycles/hour - ambient temperature 85 °C.
 In practice, customers require electric life also at lower values of current intensity. Thus, on the basis of tests, the curve of electric life is defined and the curve shows the dependence of electric life (number of cycles) on switching capacity (Fig. 19).

Fig. 19. Chart of electric life of a relay

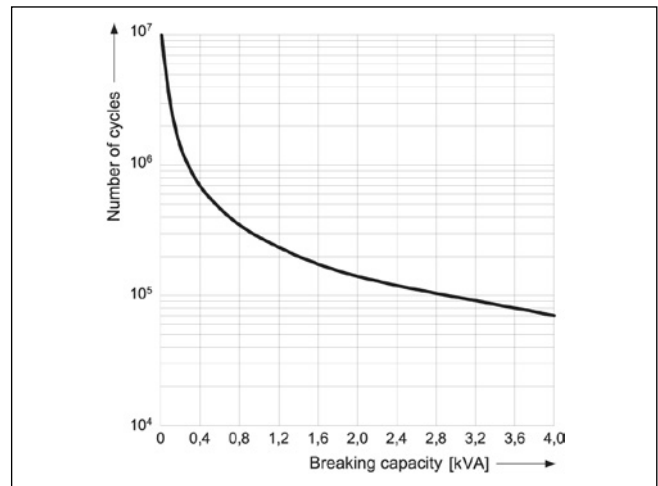

Inductive loads cause high contact wear which reduces the relay life. The reduction has been defined on the basis of tests, and it is expressed as the correction factor for resistive electric life (depending on the load power factor) which should be used to define the projected life.

Fig. 20. Ratio of correction coefficient to power coefficient

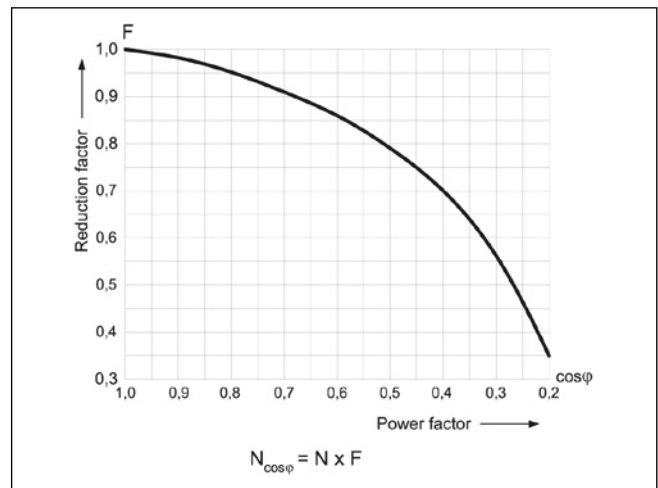

Question:

What is electric life of the RM85 type relay for the following electric load: 8 A / $\cos \varphi = 0,4$ / 250 V AC; 600 cycles/hour. The chart in Figure 19 shows that the projected life is approximately 150 000 cycles at resistive load (cosine = 1).
 The chart presented in Fig. 20 proves that at the cosine power factor which equals 0,4 the correction factor is 0,7. Thus, the projected electric life under the aforementioned conditions is $150\ 000 \times 0,7 = 105\ 000$ cycles.

Reliability

Charts of electric life of a relay in the function of load power are useful in estimating the reliability parameters. The value found in such charts may be used for defining the statistical parameter of B10 life, i.e. the number of cycles following which 10% of the relays population will fail. Electromagnetic relays are unreparable elements and, thus, any damage to them

in a device means the necessity of replacement. Given the frequency of operations of a relay in a device and the number of cycles defining its life, the mean time to failure (MTTF) may be estimated, which may then be used for calculation of MTBF for the device.

Switching at alternating and direct current

Various problems occur at switching AC and DC loads of high power, and various aspects shall be taken into account in order to understand the nature of the phenomenon. In AC current circuits (of the frequency approx. 50 - 60 Hz), the relay contacts may open in two possible states of the operating voltage due to the course of the voltage and the phenomenon of the electric arc (see Fig. 21).


Switching at point I:

Voltage value is close to zero.
No electric arc occurs.

Switching between points I and II:

There may be two situations in which the voltage grows or drops. In both cases, arc discharge occurs but it is suppressed due to the transfer of the voltage via the zero value. The electric arc discharge depends on the voltage value, contact clearance, current intensity, shape of contacts and on materials. Due to

Fig. 21. Switching states (I, II) at the frequency of 50 Hz of alternating current

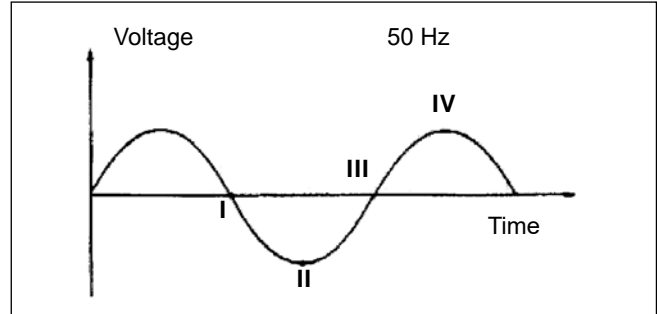

these reasons, in miniature relays there are physical limits related to the above parameters, which reduce the maximum AC switching voltage to approximately 380 V. The inductive loads of AC are worse as compared to the resistive loads due to contacts wear since the load inductance grows and, thus, a constant arc appears together with its harmful effects.

Arc breaking


In DC devices, the arc breaking is a crucial problem because the voltage does not transfer via the zero value as it does at alternating current. Thus, when the electric arc appears, only the contact clearance and the properties of the contact materials contribute to the arc suppression. Relays usually have a physical limit that depends on the above parameters which make the relays incapable of switching the load at current intensity and voltage higher than the specified values. The values are expressed in the form of a curve which defines the maximum switching energy ($U \times I$) at the constant time value L/R of resistive and inductive loads while L (inductance) is expressed in henries and R (resistance) in ohms.

L/R is principally expressed as a value that equals 40 ms (milliseconds) for inductive loads, i.e. a mean value for devices.

Example (Fig. 22):

The maximum admissible switching intensity of direct current for the R3N relay at 230 V DC at resistive and impedance loads are 210 mA and 120 mA respectively. The values assure the arc suppression. Suppressing circuits are also useful for alternating current devices.

Fig. 22. Maximum switching capacity at direct current

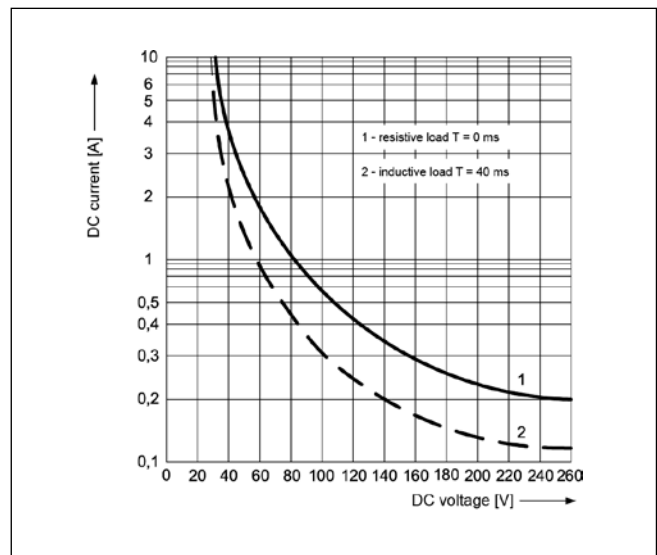

Suppressing circuits


In order to protect contacts against their damage by electric arc, protection circuits are used which are fitted in parallel to contacts of the relay or to the load. Appropriate suppressing elements may also be connected both to the contacts and the load.

The most common method of arc suppression in DC circuits is using a **diode** in parallel to the load. This is an efficient and cost-saving solution applicable at various values of the load. The inverse voltage of the diode should be at least 10 times higher than the rated voltage of the circuit, and the conduction current should be equal to or higher than the load current. It

must be emphasized that diodes prolong the time of switching off the relay considerably, which delays opening of the contacts and this is conducive to their burnout.

In order to decrease the effect of the arc suppressing circuit, on switching off the load, **two Zener diodes** may be used instead of the diode parallel to the load. In such a circuit, the inverse voltage is limited by Zener diode do the regulated voltage. The breakdown voltage of the Zener diode must be higher than the supply voltage of the circuit. The disadvantage of this solution is its lower effectiveness and higher cost.

Fig. 23. Protection circuits

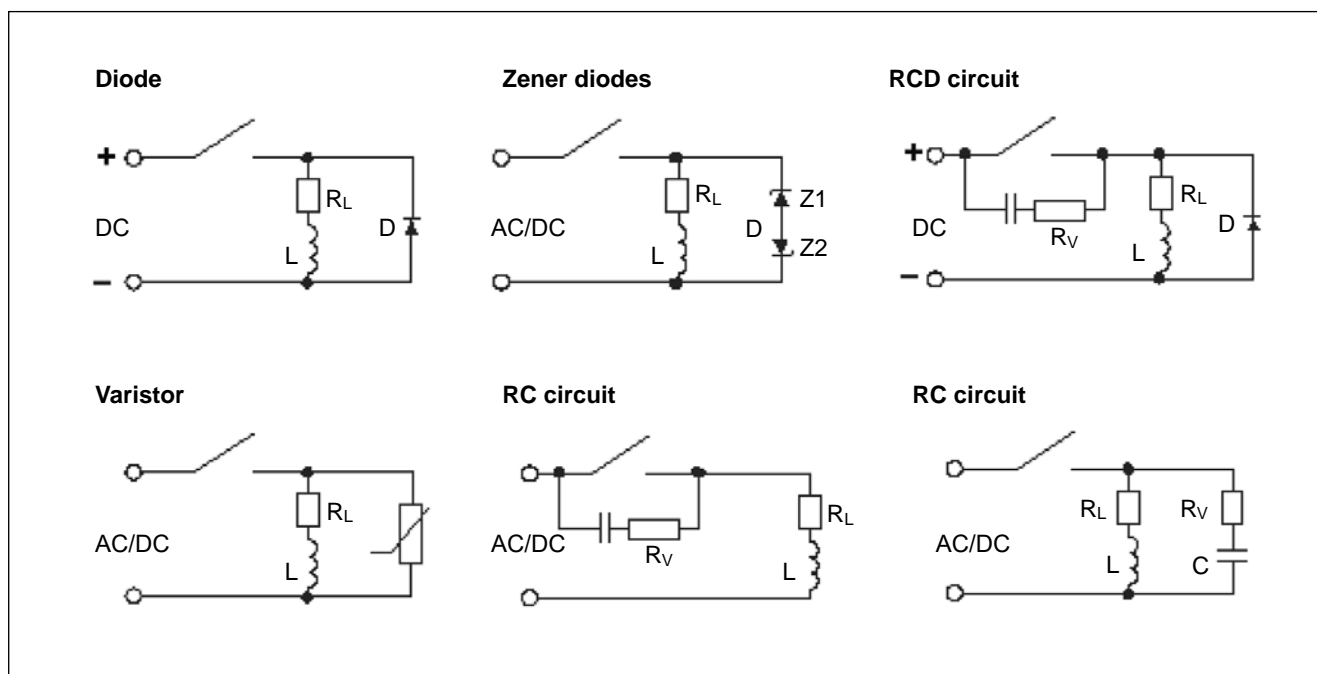


A **varistor** is another protection element of current-voltage characteristics similar to Zener diode. For low voltages it shows high resistance and, then, it is practically disconnected from the circuit whereas when the voltage exceeds certain voltage, characteristic for the given varistor, its resistance decreases quickly and, then, it shunts the inductive load with its internal resistance.

Unlike diode and varistor circuits, **RC circuits** may be connected in parallel both to the load and to the contacts of the relay. When the contact opens, the capacitor connected in parallel starts charging itself and its voltage grows at the time constant of R and C values.

This helps to maintain low voltage on the relay contacts and, thus, diminish the effect of the electric arc. Ehen the contact closes, the capacitor connected in parallel to the capacitor consists limitation of current. Thus, the RC circuit optimizes all the intermittent processes in the course of opening and closing of the contacts. At AC voltages the load impedance must be lower than the RC circuit impedance.

In order to enhance the effectiveness of arc suppression in direct current circuits of high inductiveness of the load, **RCD circuits** may be used, where the RC element is connected in parallel to the relay contact and the diode - in parallel to the load.

Fig. 24. Nomogram for defining optimal values of R and C

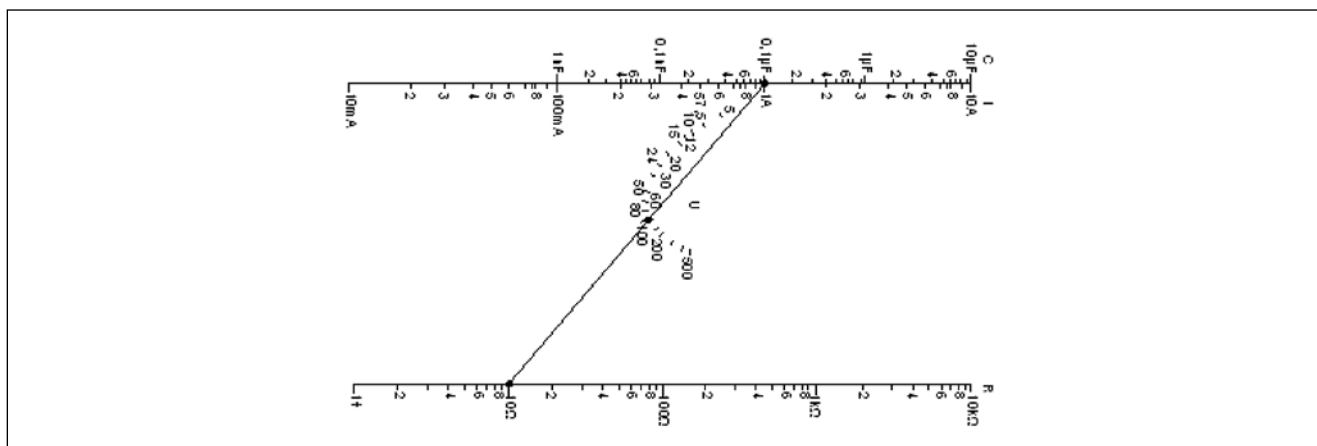

Special loads

Bulb load

Closing of the contact with bulb loads (a lamp with tungsten fiber) causes problems due to high current peaks related with the low resistance of the fiber when it is cold. For example, a 60 W - 220 V AC bulb has the "cold" resistance of approximately 60 Ω which corresponds with a current intensity of 3,66 A (for a few milliseconds). On the other hand, the current intensity of a hot bulb is 0,273 A (the ratio is then 1:15). This illustrates the high load that occurs on the contacts during the bulb switching (a hazard of contact welding or sticking).

The following must be taken into account for bulb load switching:

- maximum load of the bulb,
- contact material.

For example, for the RM96 relay with AgCdO contacts the maximum admissible bulb load is some 1,000 W which corresponds with the current intensity of 4,5 A and the alternating current voltage of 220 V. In other relays of higher loads the contacts are made of AgSnO₂.

Motor loads

The motor loads are inductive loads which operate in a particular manner while switching on. A current peak occurs as a result of the motor inertia which is related to the mechanical load used in the motor, and which in the starting phase is 5-10 times higher than the current in the steady state. Furthermore, when the motor is being switched off, harmful action related with impedance loads occurs. Thus, the correct choice of contact

material is related with the aforementioned load characteristics, especially when the capacitor is connected to the motor. In such particular cases, the contacts are made of tungsten and AgSnO₂. The motor load is usually expressed in HP (horsepower) where 1 HP equals approximately 745 W.

Example: R15 relay - the rated motor power of the contact is 1/2 HP.

Capacitance loads

This is the worst contact load as for switching on due to a sudden increase of the current intensity peak which occurs when the capacitor is discharged (a phenomenon similar to a short circuit). The current intensity at the peak to be switched on may reach the values of hundreds of Amperes in a very short time (microseconds).

The problem of contact welding may be avoided in two ways:

- via using the AgSnO₂ contacts,
- via reduction of the current intensity peak by introduction of a resistor to limit the current.

The same problem occurs at contacts closing with a charged capacitor, i.e. a rapid discharge occurs.

Switching time and contact bounce

On the relay coil supply during opening and/or closing, the operation lasts in time depending on the electric and mechanical inertia of the parts. The delay between the coil supply

impulse and the preset closing and/or opening of the contacts is the sum of the effect of the electromagnetic system and the switching section.

Electromagnetic system

The current flows through the coil with the delay caused by the coil inductance which resists to the current stream. Further-


more, the movable parts such as the armature and the pusher react to the movement due to the action of the magnetic stream.

Switching section

The elastic forces stored in the contacts and springs, and their elastic strain, react to the movement of the relay parts. The phenomenon is also affected by the inertia of the contacts mass. The delay times of the miniature relays usually reach the value of a few milliseconds (5-15 ms) during the switching


phase. During the release phase the operating time is shorter due to the absence of the magnetic circuit delay. It is really so that on removing the supply voltage from the terminal, the current that flows through the coil wire stops suddenly and the relay is released with the elastic energy stored in the contacts.

Fig. 25. Switching time

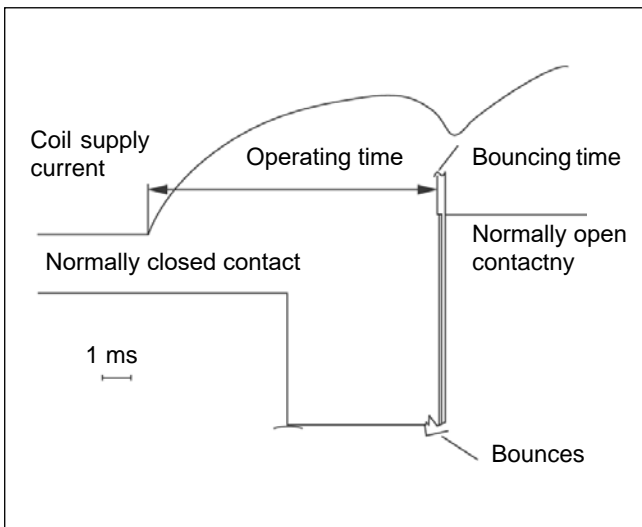

The **operating time** of an inactive relay is the time interval from the moment of the supply of the voltage to the relay coil to the time of the first closing (or opening) of the contact. If the relay has more than one contact, the time of closing (or opening) of the last of the contacts is taken into account. The operating time includes the time of opening the normally closed contact and the time of closing the normally open contact.

Fig. 26. Release time

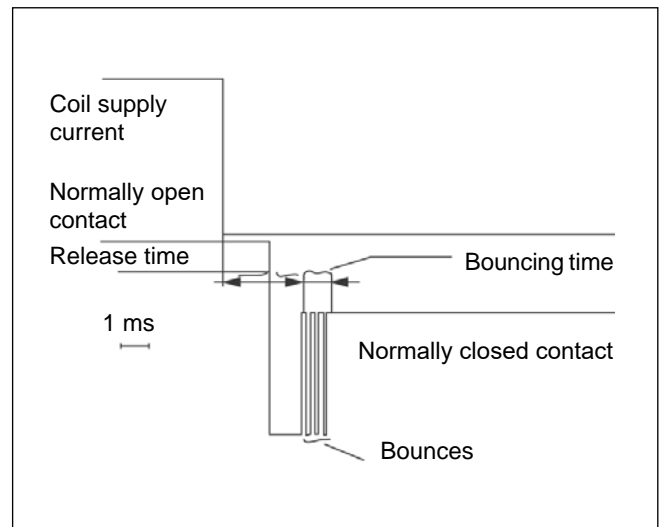

The **release time** of the active relay is the time interval from the absence of the supply voltage to the first opening (or closing) of the contact. If the relay has more than one contact, the time of opening (or closing) of the last of the contacts is taken into account. The release time includes the time of opening of the normally open contact and the time of closing the normally closed contact.

Bouncing

In the phases of switching and release, when the contacts close, they never perform the operation at the same time but the clash between two contacts makes the contacts bounce.

The "contact bouncing" cause constant closing and opening of the contacts. This particularly affects the contact ratings such as electric life and signal switching.

Sinusoidal vibrations

The electromechanical relay is strongly affected by dynamic phenomena which may change its projected characteristics constantly or temporarily. The devices in which vibrations occur must be thoroughly tested so that we might find out the quality and essence of the stress. Machine tools, automotive devices, assembly machines, and principally every instrument in which the electronics of the drive is affected by the presence of movable parts (motors, vibrators, valves, etc.), may be exposed to the consequences of the problem. Relpol S.A. usually tests the relays via exposing them to sinusoidal vibrations at the constant acceleration (G) within a particular range of frequency. Moreover, the relays are tested along the main axes (x, y, z) and in two basic directions for each axis. As a rule, the relays are tested with the printed circuit board mounted (sockets, materials, etc.).

The tests are made in two stages, i.e. resonant test and fatigue test. The relays are tested at the states where the coil voltage

is on or off. The contact continuity is monitored with an oscilloscope at a low-level load on the contacts. The test allows defining of the frequency range [Hz] and maximum value of the acceleration, at which the relay may operate with no loss of contact continuity (interval of 10 μ s) or without any durable damage. The standard values (which meet the requirements of a wide line of devices) for miniature relays reach 10 G at the frequency range from 25 to 100 Hz. The values refer to the worst case which usually occurs in the most critical test conditions (the relay with no supply in a given axis of vibrations). For tests at a low frequency range (a few hertz), instead of the constant acceleration, a constant movement is simulated which corresponds with a given value of acceleration (e.g. from 10 to 25 Hz for the amplitude of 2,5 mm). The tested frequency at which the constant movement changes into the constant acceleration is called the "transition frequency", e.g. at 55 Hz 10 G it corresponds with 1,5 mm.

Current surges

The maximum value for miniature relays is 10 G for maximum peak acceleration and 11 ms of the impulse duration. As for the sinusoidal vibrations, the sample shall be subject to an ohm test for surge both at the ON and OFF states within the arrangement

of the three main axes (x, y, z), in two basic directions for each axis. Three surges shall be applied to each state. The tested relay shall not open the contacts (10 μ s interval), and it must operate perfectly at the end of the test.

Hermetic relays - soldering and cleaning

The necessity to use tightly closed and hermetic parts in devices arises from two different reasons, i.e. protection of the internal parts (contacts, mechanisms, wires) from penetration

of the stream in the process of soldering and cleaning, and protection of the internal parts from atmospheric contamination.

Relay handling during PCB assembly, soldering, cleaning and PCB coating

Handle the relays carefully. Any hitting the relay or dropping of the relay, even from a small height onto a hard surface generate very strong mechanical shock, can cause permanent damage, change of mechanical parameters and improper operation. If the relay has fallen, we recommend you reject it and apply a new one.

Mounting the relay: bending the relay pins is forbidden because it can damage the relay.

Manual soldering: soldering iron power max. 60 W, max. iron tip temperature 360 °C, soldering time max. 3 s. Exceeding the given process parameters may damage the relay.

Flux application: it is recommended to use modern fluxes (no-clean type) to eliminate the need to wash the PCB after assembly. Be careful careful when applying flux. Make sure that the flux is applied in the minimum necessary amount, only from the bottom of the PCB on the pin side and does not flow onto the top of PCB. Failure to follow this precaution may result in damage the relay.

Wave soldering: applies to relays with protection class RTII and RTIII. The level of solder wave should be set so that it does not overflow onto the surface of the PCB. The solder temperature must not exceed 270 °C and the soldering time must not exceed 5 seconds. During pre-heating, the temperature on the component side should not exceed 100 °C. After automatic soldering, the PCB with the relays should be cooled down before the washing operation. The cooling speed should not exceed 5 °C/s to not damage the relay sealing due to thermal shock.

The PCB cleaning process: is only allowed for relays with RTIII protection class with a closed vent hole. Avoid cleaning in a cold liquid immediately after the soldering process because thermal shock causes the relay to become unsealed as a result of the pressure difference and the cleaning liquid and/or flux can get into the relay inside. The penetration of the flux into the relay inside may result in sticking of the armature or contamination of the contacts, which leads to incorrect work of the product. Additional care should also be taken to avoid penetration of the liquid inside the relay - too high washing pressure can damage the sealing of the relay. Recommended cleaning solvent temperature max. +40 °C.

It is forbidden to wash in ultrasonic washers, it may cause damage to the coil or welding contacts as a result of ultrasound.

It is recommended to use alcohol-based or aqueous cleaning solvents for PCB cleaning. When using other cleaning solvents, the user should ensure that they do not have a negative impact on the materials from which the relay is built. Unsuitable cleaning solvents include: acetone, ethyl acetate, solutions based on solvents or chlorine.

Application of conformal coatings: applies only to relays with RTIII protection level. Conformal coatings for unsealed relays (including relays with RTII protection level) should not be used. The materials for conformal coatings should be carefully selected - some materials are chemically active and have a destructive impact on the relays, eg. they can penetrate inside the relay or damage the relay seal, cause the relay to malfunction. Avoid silicone-based coatings.


Environmental contamination

The environment of the relay may adversely affect its operation. Humidity, industrial air, dust and particles that penetrate the inside of the relay may affect the contacts, internal parts and isolation. The environmental conditions in which the relay and the device will be used shall be analyzed in order to avoid such problems as resistance growth and corrosion of the metallic parts.

If the ambient conditions are not arduous and/or the electric load of the contacts is not critical (cleaning presence of the arc), it is better to open the relay following the soldering and cleaning processes to allow the useful exchange of the air with the external atmosphere.

What is important for the thermal exchange (high switching power) is the gas emission caused by the electric arc and the residual contaminations with plastics. As explained before, the process of sealing the relay includes degassing of plastics, filling the relay with inert gas (nitrogen), and the process of label closing or other methods.

Fig. 27. Opening of the relay

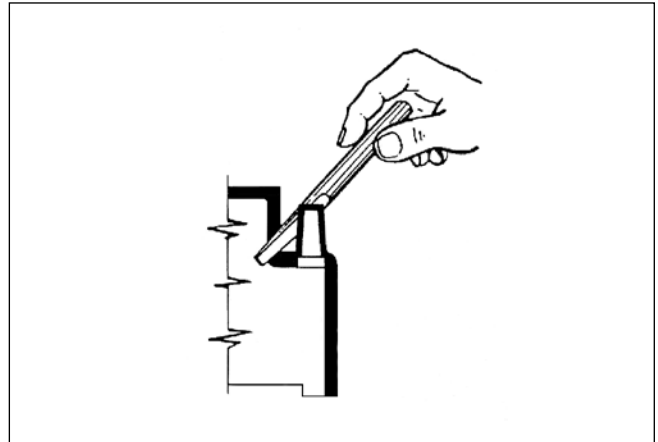

Lead-free soldering

Eliminating of the lead used in the solders required both changing of the material and the production process which had to be adapted to different properties of the lead-free materials. The differences between the physical properties of lead alloys and their lead-free equivalents available on the market are significant and, thus, the applicable features of soldering alloys shall be thoroughly considered, and the flux must be precisely selected in order to provide optimal conditions for the process. Generally, lead-free alloys have slightly higher melting point, higher surface tension and lower moistening than SnPb. This may cause production problem, i.e. damages to components due to thermal impacts, deforming of the PCB's, flux splashes, extending of the operation time to good joining, deforming of plastics, etc.

Sn97Cu3 and Sn99Cu1 are good materials for soldering internal elements and for covering the terminals. They are modern alloys widely applied in electronics owing to their good physical properties. They are also a good and popular alternative for Sn60Pb40 and Sn63Pb37.

In order to provide good tin-plating and soldering of the terminals, it is important to select appropriate flux. Higher melting point of lead-free alloys results in higher oxidation and lower moistening and, thus, appropriate flux must be selected and its quantity shall be adapted to the temperature profile of the process. Too much heat delivered may cause evaporation of flux before it moistens the solder, and use of stronger, aggressive fluxes in higher quantities may require introduction of the operation of washing away the residues of the soldering process.

Types of relay terminals


Surface mounted terminals (SMT)	
THT mounted terminals	
Terminals to solder wires and for sockets	
Terminals for flat slide-in (faston) connections	

In miniature relays of high power to be mounted on printed boards universal terminals are made so to provide fitting the relays also in sockets mounted **on 35 mm rail mount**. Then, relay terminals are connected to wires with screw terminals of the socket. This allows mounting miniature relays on a mounting board and enhances technical service of the device. Sockets are fitted with retractor / retractor clips which facilitate dismounting of the relay and, when it is mounted in the socket, the lever serves as a reliable latch which secures the relay on the mounting board.

Electrical connections to voltage and current sources are made with appropriate joints and wires of cross-sections specified in the table aside.


While mounting relays **on printed boards**, the openings on the board must match the raster of the relay terminals and have appropriate diameter, which shall enable its easy connection. Otherwise, terminals may be bent, contacts deformed or the cover tightness may be disturbed. Printed paths from the relay contacts should be as wide as possible, which results in lower losses in the course of current flow and good removal of heat from the contacts. For the purpose of providing good insulation strength, it is necessary to arrange the circuits appropriately on the board and to apply protection mask.

Fig. 28. In course of mounting of the relay in the socket, the clip functions also as a relay protective latch.

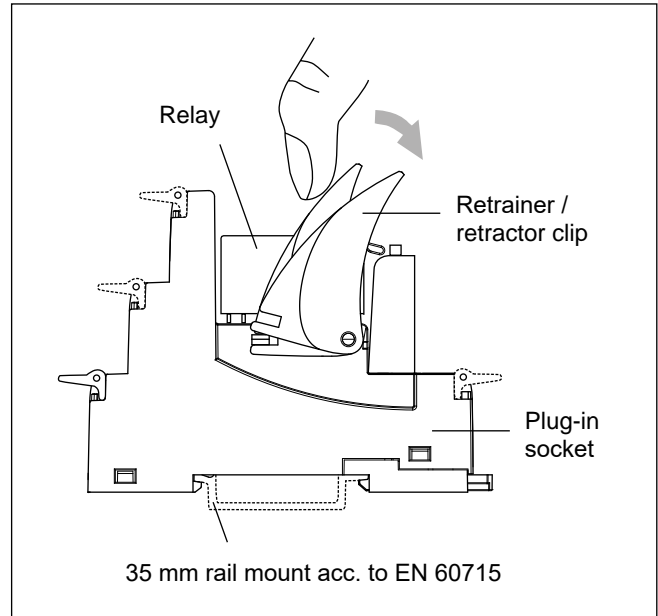

Current flowing via terminal [A]		Wire and stranded conductors cross-section [mm ²]
above	including up to	
-	3	0,5
3	6	0,75
6	10	1
10	16	1,5
16	25	2,5
25	32	4
32	40	6
40	63	10

Fig. 29. Typical rasters of terminals of miniature relays

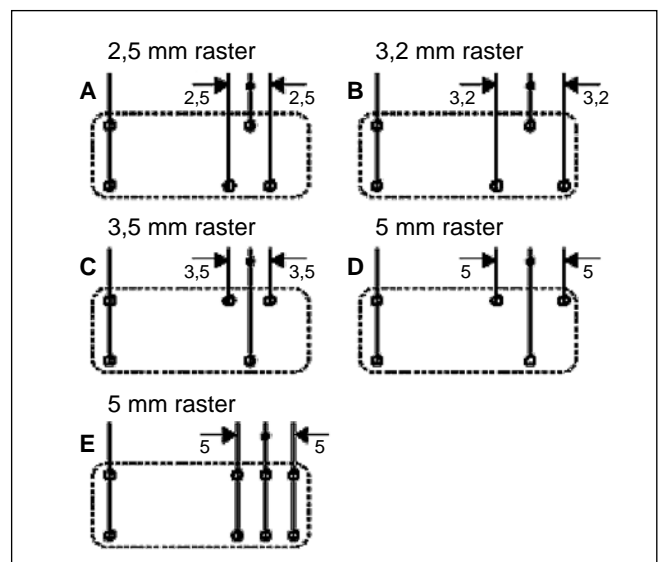

The table shows various **limiting currents** of printed circuits of different thickness of the copper layer and with various conducting paths.

Load current [A]	Width of the copper printed path [mm]			
	Copper thickness 70 µm		Copper thickness 35 µm	
	Single-side path	Double-side path	Single-side path	Double-side path
16	8	5	inadmissible	inadmissible
14	6,5	4	inadmissible	inadmissible
12	5	3	7,5	5
10	3,5	2	6	4
8	2,5	1	4	2,5
6	1,5	is not applied	2,5	1,5
4	1	is not applied	1,5	1
2	0,7	is not applied	1	is not applied

International standards

Relays manufactured by Relpol S.A. are designed and tested in compliance with the requirements of the following international standards:

EN 61810-1 Electromechanical non-specified time all-or-nothing relays. Part 1: General requirements.

EN 61810-7 Electromechanical elementary relays. Part 7: Test and measurement procedures.

EN 60664-1 Insulation coordination for equipment within low-voltage systems. Part 1: Principles, requirements and tests.

EN 61812-1 Adjustable time relays for industrial purposes - Requirements and tests.

EN 61131-2 Programmable controllers. Part 2: Requirements and equipment tests.

Plug-in sockets manufactured by Relpol S.A. are designed and tested in compliance with the requirements of the following international standard:

EN 61984 Connectors - Safety requirements and tests.

Insulation

The classification of insulation groups to define the properties of insulation of the device in compliance with the insulation coordination was previously done according to the VDE 0110 Standard.

Electric devices were classified in insulation categories A, B, C or D due to their application and possible reduction of the insulation properties caused by the impact of the environment, i.e. dust, humidity, aggressive gases, insulation clearance and creepance.

The insulation category was indicated together with the reference voltage which was the basis for defining of the requirements related to the insulation distances for rated voltage up to the reference voltage value.

At present, while dimensioning the insulation distances in accordance with the EN 60664-1 Standard, the overvoltage category and the ambient pollution degree must be defined. The latter indicates the expected pollution of the microenvironment. The transient overvoltage values are the basis for defining the rated surge voltage which determines the minimum contact clearance related with the insulation coordination.

The following **overvoltage categories** are defined:

- IV** - devices at the front of the installation,
- III** - devices in fixed installation in cases where reliability and availability of the device is subject to special requirements,
- II** - receiving devices supplied from the fixed installation,
- I** - devices connected to circuits where measures have been taken (either in fixed installation or in the equipment) to limit transient overvoltage to the appropriately low level.

Four **pollution degrees** have been defined to estimate the contact creepance and clearance:

- 1 - no pollution or only dry and non-conducting pollution; the pollution has no effect,
- 2 - only non-conducting pollution occurs; the vapor condensation, however, may be expected to cause temporary conductivity of the pollution from time to time,

- 3 - conductive pollution or dry and non-conductive pollution occurs which may become conductive due to condensation,
- 4 - the pollution proves constant conductivity caused by the conductive dust, rain or snow.

The **rated surge voltage** is defined on the basis of the overvoltage category and the rated voltage of the device.

The rated voltage of the supply system according to PN-IEC 60038		Phase voltage defined on the basis of AC or DC nominal voltages up to the value of	Rated surge voltage			
			Overvoltage category			
Three-phase	Single-phase		I	II	III	IV
	120-240	150	800	1500	2500	4000
230/400		300	1500	2500	4000	6000

The **insulation creepance** are dimensioned on the basis of the following factors:

- root-mean-square value of rated voltage,
- pollution degree,
- group of insulation materials.

Insulation materials are divided into four groups with reference to the value of the indicator of resistance to creeping current:

- Group I** $600 \leq CTI$
- Group II** $400 \leq CTI \leq 600$
- Group IIIa** $175 \leq CTI \leq 400$
- Group IIIb** $100 \leq CTI \leq 175$

Insulation materials testing

1. Glow wire test

The test simulates exposure to heat originating from such heat sources as glowing parts or overloaded subassemblies in order to assess fire hazard.

The consistency with the requirements for resistance to heat and fire is checked in glow wire test at the temperature of 650 °C.

Some applications of the relay extort more strict requirements. The EN 60335-1 Standard: "Household and similar electrical appliances", provides that the insulation parts supporting elements which conduct current higher than 0,2 A must meet the following requirements as for resistance to fire:

- a) GWFI (Glow Wire Flammability Index) with a value 850 °C according to the EN 60695-2-12 Standard.
- b) GWIT (Glow Wire Ignition Temperature) with a value 775 °C according to the EN 60695-2-13 Standard.

2. Ball pressure test

The purpose of the test is to assess the resistance of the material to mechanical pressure at higher temperature with no significant deformations.

The test is performed in a heating chamber at higher temperature, where a steel ball of 5 mm diameter is pressed to the surface of the sample with the force of 20 N. The diameter of the indentation shall not exceed 2 mm. The test is made under EN 60695-10-2 Standard.

3. Resistance to proof tracking

The test shows relative resistance of solid insulation materials to proof tracking for voltages up to 600 V when the surface of the insulation, at electrical tension, is exposed to contaminated water.

Proof tracking is probable between parts of different potential and between live parts and earthed metal parts.

Compliance with the requirements is checked under the EN 60112 Standard for PTI index.

In case the type of the relay application requires more strict requirements, PTI 250V, PTI 400V or PTI 600V proof tracking resistance indices shall be assumed.

Electromagnetic compatibility


Electromagnetic compatibility is the ability of an electric or electronic appliance to operate correctly in a given electromagnetic environment and not to emit disturbances not tolerated by other appliances which operate in the same environment. The relay is insensitive to high frequency disturbances but presence of high power electromagnetic fields in the proximity of the relay coil may affect making and releasing voltages of the relay. On installation of a relay in the proximity of transformers, electromagnets and electric motors, it is recommended to check making and releasing of the relay.

An electromagnetic relay may initiate disturbances, particularly when operating with inductive load of contacts. An electric arc occurring while switching, and overvoltage cause emission of disturbances which may affect the operation of a sensitive electronic appliance in the proximity of the relay. In such cases, circuits of protection of contacts shall be applied, which will allow decreasing the level of disturbances to a safe level. Relays, as components, are not covered with the **EMC** Directive. However, each electric appliance which includes relays is covered with the Directive and subject to its requirements.


EMC test	Standard
Resistance to electrostatic discharges	EN 61000-4-2
Resistance to electromagnetic field of radio frequency	EN 61000-4-3
Resistance to quick pulse beams	EN 61000-4-4
Resistance to surges	EN 61000-4-5
Resistance to conductive disturbances induced by fields of radio frequency	EN 61000-4-6
Resistance to voltage dips, short breaks and changes	EN 61000-4-11
Measurements of radiated and conducted emissions	EN 55011

The most frequent disturbances in installations are quick, repeatable transient states - beams of electric disturbances called **BURST**. These are transient disturbances occurring in supply, signal and control connections. They origin from transient switching states and occur on switching by the contact of

inductive loads - electromagnets, motors, etc. They have the form of a beam of high voltage and low power pulses, as the pulse increment time is merely 5 ns and its duration is 50 ns. In tests the duration of a pulse beam is defined as 15 ms, and the period - 300 ms.

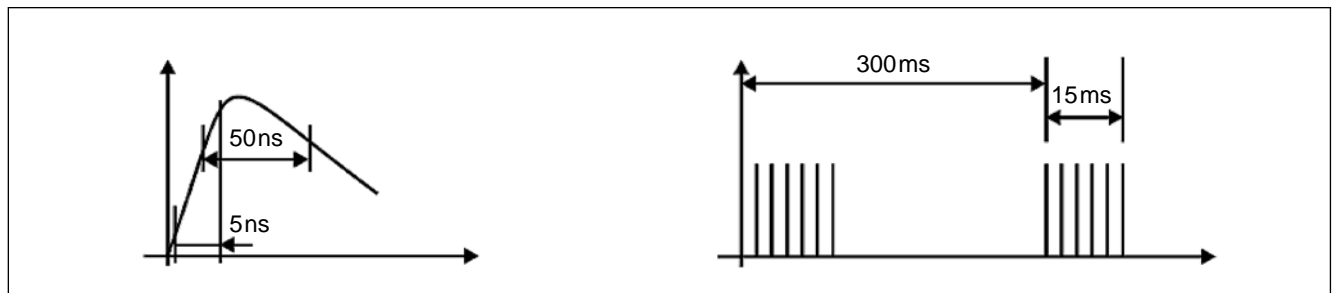

Another type of disturbances occurring frequently, due to atmospheric discharges, in low voltage installations are surges (**SURGE**) in supply lines. Similar disturbances may be also caused by connection processes of high power, e.g. switching of leading loads, etc. Surge pulses are of definitely higher power than burst pulses due to much longer duration - 50 μ s.

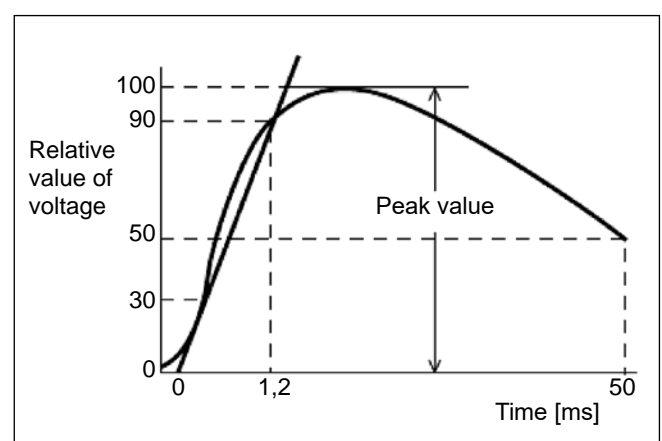

Protection against ambient effect

As for the protection from **ambient effect**, the EN 61810-7 Standard distinguishes the following types of relays:

- RT0** - open relay - a relay without protective cover.
- RTI** - dust protected relay - a relay with cover to protect its mechanism from dust.
- RTII** - flux proof relay - a relay adapted to automatic soldering process without allowing the migration of solder fluxes beyond the intended areas.
- RTIII** - washable relay - a relay adapted to automatic soldering process and then subject to washing process for the purpose to remove flux residues without allowing the ingress of flux or washing solvents. Note: the relays shall not be washed in ultrasonic cleaners. RTIII relays are tested to evaluate sealing acc. to EN 60068-2-17, Qc test.
- RTIV** - sealed relay - relay provided with a case which has no venting to the outside atmosphere and having a time constant better than 2×10^4 s in acc. with EN 60068-2-17.
- RTV** - hermetic relay - a tight relay of enhanced tightness level, in a metal cover, terminals sealed with glass, gas-filled.

Cover protection degrees according to EN 60529 Standard. The first digit refers to the protection from foreign solids penetration. The second digit refers to the protection from water penetration.

Examples of indications:

- IP 20** - protection against solids of the diameter of 12,5 mm and larger, with no protection against water penetration.
- IP 40** - protection against penetration of solids of 1 mm diameter and larger, with no protection from water penetration.
- IP 50** - protection against dust; dust penetration is not excluded entirely but dust shall not penetrate in quantities which might disturb correct operation of the appliance or reduce safety.
- IP 64** - dustproof protection, protection against water splashes - water splashed onto the cover from any direction does not cause harmful effects.
- IP 67** - dustproof protection, protection against the effects of momentary submersion in water.

Ambient conditions

Storage and use of the relays is not allowed in the conditions which may cause steam condensation and/or icing.

The relays shall be stored and used at temperatures specified in catalog cards of individual products.

Admissible relative humidity for storage and operation within the range of 5...85% (with no condensation and/or icing).

Atmospheric pressure: 86...106 kPa

Climatic resistance:

Cold: 16 h at minimum temperature defined for the product according to the Standard EN 60068-2-1.

Dry heat: 16 h at maximum temperature defined for the product according to the Standard EN 60068-2-2.

Humid heat: 2 cycles 12 h each at temperature of +25...+55 °C and at humidity 90...95%, according to the Standard EN 60068-2-30.

Electric load

Electromagnetic auxiliary relays manufactured by Relpol S.A. are designed for a wide range of applications and for switching several loads of diversified characteristics.

Electric loads are classified according to their nature (resistive, capacitive or inductive loads), type of supply (DC or AC), load value and the current curve course shape (lamp, motor, electromagnetic, etc. loads).

Contact application categories according to EN 61810-7 Standard

Application category	Voltage [V]	Current [A]
0 (CA 0)	< 0,03	< 0,01
1 (CA 1)	0,03 < U < 60	0,01 < I < 0,1
2 (CA 2)	5 < U < 250	0,1 < I < 1
3 (CA 3)	5 < U < 600	0,1 < I < 100

Application categories according to EN 60947-4-1 and EN 60947-5-1 Standards

Application category	Typical application
AC-1	Resistive or slightly inductive loads, resistance furnaces
AC-2	Slip-ring motors: start-up, switching off
AC-3	Squirrel-cage motors: start-up, switching off motors during running time
AC-4	Squirrel-cage motors: start-up, reversing (countercurrent braking), pulsing
AC-5a	Discharge lamps
AC-5b	Electric bulbs
AC-6a	Transformers
AC-6b	Capacitor banks

Application categories according to EN 60947-4-1 and EN 60947-5-1 Standards

Application category	Typical application
AC-7a	Slightly inductive loads in household appliances and similar applications
AC-7b	Motors in household appliances
AC-8a	Hermetic refrigerant compressor motors with manual overload resetting
AC-8b	Hermetic refrigerant compressor motor control with automatic overload resetting
AC-12	Control of resistive loads and solid state loads with opto-isolators
AC-13	Control of solid state loads with transformer isolation
AC-14	Control of small electromagnetic loads (≤ 72 VA)
AC-15	Control of AC electromagnetic loads (> 72 VA)
DC-1	Resistive or slightly inductive loads
DC-3	Shunt-motors: start-up, breaking
DC-5	Series-motors: start-up, countercurrent braking, pulsing. Dynamic switching-off of DC motors
DC-6	Bulbs
DC-12	Control of resistive loads and solid state loads with opto-isolators
DC-13	Control of DC electromagnets
DC-14	Control of DC resistive loads having economy resistors in the circuit

Certifications

Compliance with national and international standards provides for safe use of the product, and proves high quality and durability of the product. In some countries (e.g. USA, Canada, Russia), the product certification to prove its compliance with the requirements of appropriate national standards is obligatory, and the product must undergo the procedure of compliance assessment at certifying agencies in order to be approved for sale. In other countries it is the manufacturer's responsibility to provide the compliance of the design and production with the requirements of appropriate standards (e.g. the countries of the European Union).

Certification agencies carry out the testing procedure in accordance to applicable standards, and then they regularly audit the production process in order to confirm that the requirements are observed in current production of the certified product. The European Union applies European Standards (EN) as set forth by the European Committee for Electrotechnical Standardiza-

tion (CENELEC), and international standards set forth by the International Electrotechnical Commission (IEC).

The products manufactured and offered by Relpol S.A. have numerous certifications issued by renowned research institutions such as VDE, UL or CSA International

The electromagnetic relays have been certified to comply with the following standards: EN 61810-1 - VDE, UL 508 - Underwriters Laboratories, C22.2 - CSA International, GB14048.5 - China Quality Certification Centre.

Apart from the certifications which prove the safety and high durability of the products, some of Relpol's products have certifications required for applications of relays in special conditions, e.g. Lloyd's Register certification which acknowledges compliance with the requirements for electrotechnical products to be used on vessels and in devices which operate in adverse climatic conditions, or certificates of AUCOTEAM GmbH, Berlin or Railway Institute to confirm meeting of railway requirements.





subminiature and
miniature relays



industrial and
installation relays



interface relays



programmable relays




time relays



monitoring relays



relays for railroad
industry



plug-in sockets
for relays



installation contactors



signal lamps



power supplies



overvoltage arresters



solid state relays



softstarts




protection relays



radiation portal
monitors

Declaration of conformity RoHS

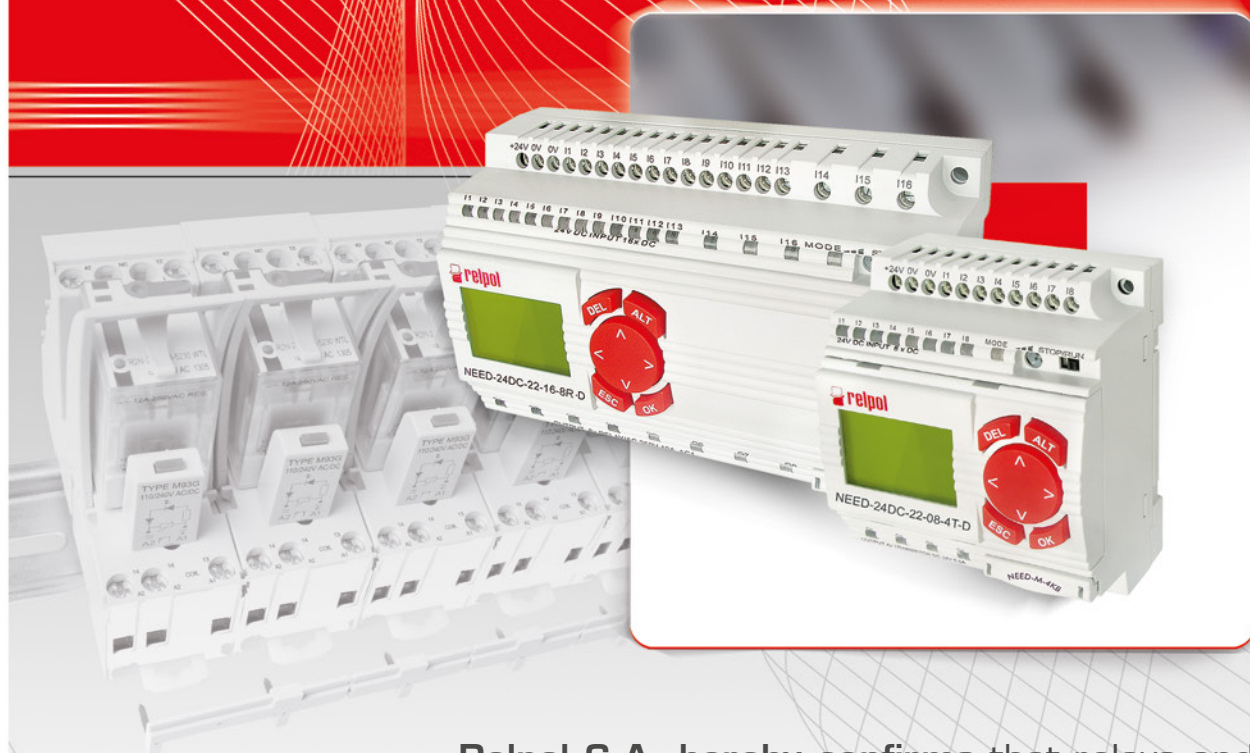

Relpol S.A. hereby confirms that relays and plug-in sockets for relays supplied by our company meet the requirements of the Directive on the restriction of the use of certain hazardous substances in electrical and electronic equipment – **RoHS 2011/65/EU**.

01.10.2014

Date

Quality and Environmental
Management
Department Director
Sylwia Sochoń-Miezió

 **repol**® S.A.



www.repol.com.pl

The offer of Relpol S.A. includes the following products:

subminiature signal relays

rated switching capacity: from 0,5 A to 3 A, coil voltage range: from 3 V to 48 V DC

miniature relays

rated switching capacity: from 5 A to 20 A

industrial relays

rated switching capacity: from 5 A to 48 A, mounting: to plug-in sockets on 35 mm rail mount acc. to EN 60715 or on panel mounting, for PCB

interface relays

rated switching capacity: from 0,05 A to 16 A, number of contacts: from 1 to 4

programmable relays

versions: 8 inputs / 4 outputs, 16 inputs / 8 outputs, with LCD display, without display, supply voltages: 12, 24, 220 V DC, 230 V AC, programming: LAD, STL, LED indicators of the relay and input / output status

time relays

single- and multifunction time relays, wide range of time adjustments

monitoring relays

monitoring of current, voltage, temperature

relays for railroad industry

for rail-vehicles and railroad tractions, rated switching capacity: from 6 A to 16 A, number of contacts: from 1 to 4

plug-in sockets for relays

for PCB, for 35 mm rail mount acc. to EN 60715 or on panel mounting

installation contactors

rated switching power: from 2,2 kW to 15 kW (at 400 V AC3)

signal lamps

single-phase 130...260 V AC/DC (one LED), three-phase 3(N)~ 400/230 V AC (three LEDs)

power supplies

for automation systems, output circuit: 12, 24 V DC, rated currents: from 0,42 A to 20 A

overvoltage arresters

classes I, II and III, available with changeover signal contact

solid state relays

rated load currents: from 1 A to 100 A, switching at zero or at any time

protection relays CZIP®-PRO

digital protection, automation, measurement, control and communication system for MV switchgears

systems SMP

radiation portal monitors

Due to the permanent development policy, Relpol S.A. reserves the right to introduce changes of data and characteristics of the products. The devices shall be operated by skilled personnel in accordance with the regulations in force pertaining to electrical systems. The technical data are of informational nature. Thus, Relpol S.A. does not accept any liability for inappropriate use of the presented products.

PRECAUTIONS

1. Ensure that the parameters of the product described in its specification provide a safety margin for the appropriate operation of the device or system and never use the product in circumstances which exceed the parameters of the product.
2. Never touch any live parts of the device.
3. Ensure that the product has been connected correctly. An incorrect connection may cause malfunction, excessive heating or risk of fire.
4. In case of any risk of any serious material loss or death or injuries of humans or animals, the devices or systems shall be designed so to equip them with double safety system to guarantee their reliable operation.

02/2018



Export Sales Department

Phone +48 68 47 90 832, 951

Fax +48 68 47 90 837

e-mail: export@relpol.com.pl

Marketing Department

e-mail: marketing@relpol.com.pl

RELPOL S.A.

ul. 11 Listopada 37

68-200 Żary, Poland

e-mail: relpol@relpol.com.pl

www.relpol.com.pl

